
Raspberry Pi DAC Pro

Source: https://github.com/raspberrypi/documentation/blob/7376533ab86ea07acc77ef6a9f3c3e57fcff833d/documentation/asciidoc/accessories/audio/dac_pro.adoc (CC BY-SA 4.0; adapted for this benchmark)
Image source: https://raw.githubusercontent.com/raspberrypi/documentation/7376533ab86ea07acc77ef6a9f3c3e57fcff833d/documentation/asciidoc/accessories/audio/images/DAC_Pro_Board_Diagram.jpg (CC BY-SA 4.0)

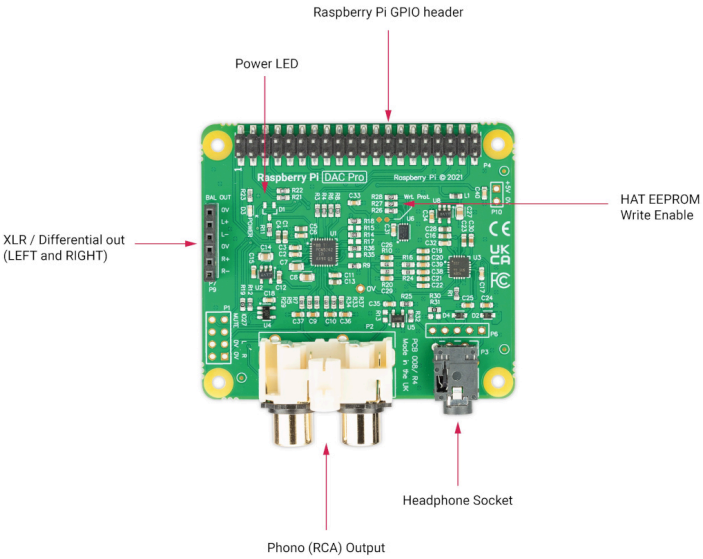

Raspberry Pi DAC Pro

Raspberry Pi DAC Pro

The Raspberry Pi DAC Pro HAT is our highest-fidelity digital to analogue converter (DAC).

With the Texas Instruments PCM5242, the DAC Pro provides outstanding signal-to-noise ratio (SNR)

and supports balanced/differential output in parallel to phono/RCA line-level output. It also includes a

dedicated headphone amplifier. The DAC Pro is powered by a Raspberry Pi through the GPIO header.

As part of the DAC Pro, two three-pin headers (P7/P9) are exposed above the Raspberry Pi device's USB and Ethernet ports for use by the optional XLR board, allowing differential/balanced output.

Pinouts

P1 | Analogue out (0-2V RMS), carries GPIO27, MUTE signal (headphone detect), left and right

audio and left and right ground.

P6 | Headphone socket signals (1: LEFT, 2: GROUND, 3: RIGHT, 4: GROUND, 5: DETECT).

P7/9 | Differential (0-4V RMS) output (P7: LEFT, P9: RIGHT).

P10 | Alternative 5V input, powering Raspberry Pi in parallel.

Optional XLR Board

The Pi-DAC PRO exposes a 6 pin header used by the optional XLR board to provide Differential / Balanced output exposed by XLR sockets above the Raspberry Pi device's USB/Ethernet ports.

An XLR connector is used in Studio and some hi-end hifi systems. It can also be used to drive ACTIVE "monitor" speakers as used at discos or on stage.