

RF-Informed Graph Neural Networks for Accurate and Data-Efficient Circuit Performance Prediction

Anahita Asadi

*Electrical and Computer Engineering
University of Illinois Chicago
Chicago, Illinois
aasadi5@uic.edu*

Leonid Popryho

*Electrical and Computer Engineering
University of Illinois Chicago
Chicago, Illinois
lpopry2@uic.edu*

Inna Partin-Vaisband

*Electrical and Computer Engineering
University of Illinois Chicago
Chicago, Illinois
vaisband@uic.edu*

Abstract—Accurately predicting the performance of active radio frequency (RF) circuits is essential for modern wireless systems but remains challenging due to highly nonlinear, layout-sensitive behavior and the high computational cost of traditional simulation tools. Existing machine learning (ML) surrogates often require large datasets to generalize across various topologies or are not accurate on unseen circuits. This work presents a lightweight, data-efficient, and topology-aware graph neural network (GNN) framework for predicting key performance metrics of active RF circuit classes, such as low-noise amplifiers (LNAs), mixers, voltage-controlled oscillators (VCOs), and power amplifiers (PAs). The proposed framework employs RFIC domain-informed feature indexing to enable cross-topology adaptability by cheap encoding of functional device semantics (e.g., differential pair and varactor transistors) and efficient knowledge transfer. The surrogate model represents circuits using device-terminal graph abstractions to preserve fine-grained connectivity and transistor-level symmetry. The final model is generalized to a wide variety of classes by being trained in parallel. Experimental results demonstrate accurate modeling of multimodal and heavy-tailed RF performance distributions, achieving an average mean relative error (MRE) of 3.45%, an improvement of $9.2\times$ compared to state-of-the-art. Furthermore, the method improves class-level generalization performance by $\sim 161\times$ compared to prior art, demonstrating its effectiveness for scalable and deployment-ready RF design automation.

Index Terms—Graph neural network (GNN), RF circuit modeling, electronic design automation (EDA), topology-aware machine learning.

I. INTRODUCTION

With the growing importance of modern wireless systems (e.g., the Internet of Things [1], 5G [2] RADAR [3], and LiDAR [4]) accurate modeling and optimization of RF integrated circuits (RFICs) is more critical than ever. The performance of key building blocks of such systems, ranging from power amplifiers (PA) to transmitters, directly affects the fidelity, efficiency, and robustness of modern systems. However, their operation in highly nonlinear and layout-sensitive regimes makes accurate modeling particularly challenging.

While highly accurate, traditional simulators (e.g., SPICE, ANSYS) are computationally expensive, especially when

performing extensive design-space exploration. Existing circuit simulators rely on computationally intensive numerical methods, such as trapezoidal, Gear integration, and Newton-Raphson methods [5] while electromagnetic (EM) simulations typically use finite element method (FEM) analysis. Both approaches scale poorly with advancing technologies, particularly when accounting for heterogeneous integration and packaging effects [6]. Substantial expert effort is therefore required to design advanced analog and RF circuits, including topology selection and device sizing, highlighting the need for accurate and fast automation methods.

A broad spectrum of heuristic methods has been explored in the area of RFIC optimization. Simple local-search heuristics, such as direct binary search (DBS), have been used in [7] for a dual-band filter. However, such greedy approaches are not scalable and are prone to getting trapped in FoM local optima. To escape this issue, meta-heuristic optimizers such as evolutionary algorithms (EAs) [8], [9] and Bayesian optimization (BO) [10] have been proposed. In higher dimensional RF problems, however, EAs become sample-inefficient and exhibit poor reproducibility. BO also struggles to scale, as Bayesian acquisition function maximization leads to long run-times and premature convergence.

An alternative strategy is to learn a surrogate model for fast prediction of circuit FoMs and integrate it into the optimization process. Classical deterministic surrogates, such as partial least-squares (PLS) regression [11], offer weighted combination of all inputs that perform well when the response surface is nearly linear but do not capture the strong nonlinearities and complex FoM distributions inherent in RFICs. On the other hand, machine learning (ML) methods can leverage intrinsically nonlinear models and GPU acceleration, making them well-suited for a broader range of modeling tasks.

Traditional ML regressors, such as k-nearest neighbors (kNNs), random forests, and support vector regressors (SVRs), have been used for inferring circuit parameters that produce a desired output or performance (i.e., inverse design). Some of these methods achieve mean relative errors (MRE) as low as 0.23% for receiver components consisting of voltage amplifiers (VA), LNAs, and mixers, at a single frequency [12]. However, errors rise to $\sim 50\%$ in nonlinear circuits such as power amplifiers (PAs). In contrast, neural surrogates

This work was supported in part by the CogniSense: Center on Cognitive Multi-spectral Sensors, one of seven centers in Joint University Micro-electronics Program (JUMP) 2.0, a Semiconductor Research Corporation (SRC) program sponsored by the Defense Advance Research Project Agency (DARPA).

equipped with techniques such as Monte Carlo dropout or deep ensembles can capture complex nonlinear interactions better, making them more suitable for generalizable modeling and downstream optimization.

As a result, a growing body of work has applied neural networks (NNs) in RF domains to model various FoMs from sizing parameters or perform inverse design by predicting parameter sets that meet specified performance targets [13]. One of the simplest NN architectures, feed-forward neural networks have been widely used for modeling passive RF circuits [14], [15]. Alternatively, for more complex circuits with nonlinear active components, such as PAs, both local and global interactions play an important role in circuit behavior, making convolution neural networks (CNNs) an intuitive choice.

As an example, in [16], the S-parameters of a post-layout PA matching circuit are modeled and the circuit layout is generated using a genetic algorithm (GA) as the generator and a CNN as the verifier of the insertion loss S-parameter. This approach achieves approximately $4,500\times$ speedup in the inverse design process. However, this models generalize only to circuits within the same distribution the CNN was trained on. New circuits exhibiting significantly different physics, such as ones with active components, often require exhaustive retraining, potentially offsetting the benefits of automation. Moreover, this work still requires a large dataset (over 300,000 simulations) and substantial computational and memory resources.

Enforcing physics laws within learning-based models is another primary concern. While existing NN-based approaches achieve high accuracy in modeling S-parameters, they often fail to satisfy fundamental physical laws, such as causality and passivity. To address this, [17] applies physical constraints directly into the surrogate model and introduces two custom NN layers. One layer enforces consistency with the Kramers-Kronig relations (fundamental causal constraints that link the real and imaginary parts of a system’s frequency) via Hilbert transform. The other layer enforces passivity using a differentiable minimum-phase filter constructed during training. This is exemplified in [18] where a causality-aware UNet CNN surrogate trained on only $\sim 4,000$ Ansys HFSS simulations is combined with BO to design an impedance-transforming network. The surrogate replaces EM simulations, while the Bayesian optimizer efficiently explores a 28-parameter multilayer design space. However, how to incorporate RFIC domain-informed device functionality into ML models to enable generalization across different circuit topologies remains an open question.

Recent work explores reinforcement learning (RL) as another approach to RF circuit design. RL is used in [19] to guide architecture selection and sizing of PAs. However, RL methods typically require extensive simulations, making them less suitable for large-scale systems. Generation of a 35,000 dataset in [19] required ~ 3.3 days on a 192-core cluster. Furthermore, these approaches require substantial retraining or adaptation while generalizing across circuit classes with

different reward or FoM distribution. Thus, despite their early promise, RL-based methods, like other ML approaches, require data-intensive retraining, transfer learning, or redesigned physics-informed reward functions [20].

A way to circumvent topology-awareness is to characterize circuits, such as in [21], where modular analysis of passive electrical networks is purposed with fully-connected NNs, achieving an average R^2 of 95% on LNAs and VAs with an $\sim 11\times$ reduction in training data. However, the approach struggles to generalize to highly nonlinear circuits like mixers and PAs, the behavior of which cannot be captured by S-parameters at the fundamental frequency. Moreover, changing the number of electrical networks and their ports requires retraining of the network, highlighting the importance of considering topology.

To address the issue of generalization, graph neural networks (GNNs) have emerged as a promising modeling approach that naturally captures circuit topology—an important step toward reducing or eliminating the need for retraining when adapting to new circuit designs. Existing GNN-based approaches have shown promising results in modeling small-signal analog blocks and passive RF circuits [22]–[26]. Zero- or few-shot methods, which require no retraining or minimal fine-tuning or transfer learning, have further improved generalization across technologies and FoMs, highlighting the potential of GNNs to generalize beyond a single circuit topology [25]–[28] in voltage amplifiers (VAs).

Existing GNN frameworks, however, are tailored to analog circuits and fail to generalize across a broad range of RFIC classes and performance metrics. To date, the only GNN-based study focused on RF circuits, reported in [29], presents a unified GNN for modeling LNAs, mixers, VCOs, and PAs, achieving $R^2 > 80\%$ across evaluated FoMs. However, the unified model in [29] requires substantial training time due to heavy encoder usage (~ 4 days), relies on an excessively large dataset to distinguish among circuit types (a dataset of about 36,000 circuits¹), and demonstrates limited accuracy on unseen topologies compared to class-specific models. In typical RFIC design workflows, the circuit classes (e.g., VCO, LNA) are selected a priori, after which topologies and sizing variations are explored within the individual classes. As a result, unified cross-class models provide limited practical advantage relative to their substantial training overhead. Furthermore, various circuits show FoM distribution conflict; therefore, unified models struggle with optimization instability.

While the aforementioned approaches offer valuable design automation capabilities, each exhibits specific limitations that constrain their broader applicability to RFIC design. These include high data and compute requirements, inefficient models, limited generalization to new topologies, poor scalabil-

¹Per-circuit dataset sizes are not reported in [29]. To enable a fair sample-efficiency comparison, the dataset size is estimated and experimentally verified by inspection of the released data-splitting script, which employs a 70%/15%/15% train/validation/test partition on a unified model. Based on the reported training set size of 1 million samples, an implied dataset size of approximately 36,000 samples per topology is obtained. This estimate is used consistently throughout the paper.

ity to large or irregular circuits, and the need for manual adaptation such as retraining, reward redesign, or topology-specific augmentation. Consequently, the problem remains open, motivating continued exploration of computationally-feasible, generalizable, and topology-aware solutions. Unlike unified surrogate frameworks that aim to reuse a single model across a broad range of RFIC classes, this work establishes class-specific, scalable surrogate modeling, aligned with practical RFIC design paradigm. This is the first GNN framework that generalizes the topology-awareness to a variety of classes accurately and efficiently. The main contributions are:

- **Conceptual approach for class-specific RF surrogate modeling.** Class-specific modeling framework is introduced that aligns surrogate modeling with practical RFIC design workflows. Prioritizing intra-class generalization reduces training overhead and enables accurate and rapid adaptation to new topologies relative to unified cross-class models compared to unified surrogate models.
- **RF-informed GNN architecture.** Device functionality is embedded directly into the graph representation through an RF-aligned feature indexing. Unlike prior approaches that rely on auxiliary encoder networks, teacher models, or large datasets to infer device roles implicitly, the proposed representation enables the GNN to learn transferable electrical interactions directly. This improves sample efficiency and enables accurate knowledge transfer to unseen circuit topologies within a class via lightweight fine-tuning.
- **Data-efficient training methodology for RF surrogate models.** The proposed approach achieves an average MRE of 3.45% across five RFIC classes and multiple topologies while reducing required SPICE compared to prior state-of-the-art methods, demonstrating improved sample efficiency.

The remainder of this paper is organized as follows. Recent advances in GNN-assisted RF circuit modeling are reviewed in Section II, with an emphasis on task focus and abstraction level. The proposed GNN-based framework, including graph representations and model architecture, is detailed in Section III. The experimental setup is described in Section IV, and results with comparative analyses are presented in Section V. Conclusions and directions for future work are provided in Section VI.

II. RELATED WORK ON GNNs

GNNs are a class of deep learning models specifically designed to operate on graph-structured data by learning node, edge, or graph-level representations via message passing mechanisms. In their earliest form, recurrent GNNs propagate information iteratively across the graph until convergence, but incur high memory and computational cost. Algorithms such as gated GNNs were developed to address scalability issues by using GRUs to limit message propagation to a fixed number of steps [35]. Multi-layer perceptron (MLP) with LeakyReLU is used to model S-parameters of circuits with up to six

resonators with a significant accuracy degradation in unseen circuits [22].

Spatial GCNs, such as graph isomorphism networks, are used in [26], [36] to capture transistor-level topology features of four operational-amplifier variants and transfer them in zero- and few-shot settings for performance prediction. While spatial GCNs, such as graph attention network (GAT), offer lower computational cost and better accuracy for digital circuits (e.g., in evaluating transistor degradation and threshold voltage shifts in digital circuits [37]), they are found to be less competitive than spectral GCNs for analog and RF circuit modeling. For example, [23] applies GCNs in combination with RL for transistor sizing optimization. However, as the network depth increases, these GCNs tend to suffer from vanishing gradients, over-smoothing, and overfitting, leading to degraded performance.

To stabilize the learning process of deep GCNs, pre-activation of residual connections and message normalization allow models such as generalized graph convolution (GENConv) layers [24] to unify message aggregation operations and enable task-specific tuning. In [25], GENConv are combined with TL to transfer knowledge from DC voltage prediction to AC output voltage and gain prediction via node-level regression, thereby reducing the required dataset size. TL has demonstrated up to $10\times$ data reduction in tasks such as GNN generalization across different technologies [23], [27], process, voltage, and temperature (PVT) variations [28], and circuit topologies [26], albeit with some trade-off in accuracy. However, these approaches either do not generalize to a broad range of unseen circuits with different graph structures or require a separate computationally expensive encoder.

Alternatively, a topology-aware representation in [30] is proposed to reduce dataset size. With that approach, a GNN is combined with text embeddings of circuit components and a subcircuit-wise multi-head self-attention layer. The normalized Euclidean distance between every pair of devices in custom-designed FinFET analog layouts is computed in self-supervised manner. As a result, the learned latent-space distances mimic real spatial distances, with a wire-length prediction accuracy of $R^2 \sim 57\%$ and net parasitic-capacitance prediction with sMAPE of 11.8%. Ultimately, the dataset size is reduced from 1,000 – 10,000 to about 450 simulated layout samples. Furthermore, lumped capacitance of voltage regulators, amplifiers, and serial link interconnects are modeled in [38], achieving an R^2 score of 77.2%. Coupling capacitance and parasitic resistance are incorporated in [39], improving the R^2 score by up to 87%. Chip-scale interconnect capacitance has been extracted in [40] with absolute average relative errors of less than 10%.

Applying existing GNNs developed for analog circuits to RF systems presents several challenges, including strong nonlinear behavior and tight component dependencies (e.g., matched pairs, feedback loops) which give rise to high-tailed, skewed and multimodal distributions of FoMs that are difficult to model with simple NNs. To address the heavy-tailed distribution of parasitic capacitance values, a logarithmic normal-

ization to stabilize variance and improve learning is applied in [41]. Even with this preprocessing, the GNN model trained to predict net-level parasitic capacitances of a VCO exhibits a relative error of 20%, underscoring the need for more accurate modeling techniques. The most representative ML-based techniques, along with their strengths and limitations, are summarized in Table I. Based on the qualitative comparison, [29] is the most promising approach for fast and accurate performance prediction in RFICs. An impressive $R^2 > 80\%$ in predicting key performance metrics across a variety of RF circuits, including LNAs, VCOs, mixers, and PAs is achieved in [29]. However, this performance comes at the cost of training on $\sim 36,000$ samples of simulated circuits—a prohibitively high computational cost. It is worth noting that the large dataset size in [29] stems from its circuit-to-graph embedding scheme—a significant limitation addressed in this paper by the embedding scheme, as described in Sec. III.

III. PROPOSED FRAMEWORK

The proposed end-to-end framework for predicting RF circuit performance metrics directly from netlist-derived graph representations is described in this section. First, the translation of RF circuits into annotated graphs is formalized to capture both inter-component relationships and global structure. Then, the GNN architecture designed to process these graphs is presented, enabling scalable, multi-hop aggregation of circuit context.

A. Graph Representation of RF Circuits

Each RF circuit is represented as an undirected graph where graph nodes correspond to component terminals, and graph edges encode electrical connectivity. Terminals of the same component (e.g., transistor source, drain, gate, and body bias terminals) are fully connected, forming a subgraph, easily distinguishable for future divide-and-conquer simulation attempts, as explained in Sec. II.

Each graph node (i.e., component terminal) is annotated with a feature vector, encoding physical parameters such as transistor width $\times$ fingers and length, power supply levels, as well as resistor, capacitor, and inductor impedances. Each circuit component is assigned a unique index in the feature vector space, while functionally similar components are intentionally mapped onto the same indices to preserve design equivalence and reduce redundancy. This indexing scheme embeds RFIC domain knowledge (i.e., the functional roles and design semantics of circuit components) into the model representation, introducing RF-informed inductive biases that improve learning efficiency and intra-class generalization. For example, differential pair transistors (see M1 and M2 in Fig. 1) serve a different purpose than NMOS varactors (M3 and M4 in Fig. 1). This difference is captured by positioning the individual devices' features in different feature vector indices. Similarly, tank circuit inductors (L1 and L2 in CCVCO and L3 and L4 in IFVCO) have the same index position and different index than choking inductors (L1 and L2 in CCVCO). This tailored feature engineering imparts circuit design intuition to the model and facilitates cross-topology generalization. One-

TABLE I
COMPARISON OF STATE-OF-THE-ART ML FRAMEWORKS.

Work	Key Architectural Features	Target Circuits	Average Training Size	Circuit Limitations	Other Limitations
This work	GNN	LNA, Mixer, VCO, PA, VA	$\sim 15k$ per circuit	—	—
[29]	GNN	LNA, Mixer, VCO, PA, VA	$\sim 36k$ per circuit	—	Prohibitive data size; Struggles with cross-topology generalization; Overhead of an Extra Encoder before GNN
[25]	GNN + TL	Resistor ladders, VA	20k + 126k	simple analog	Mediocre accuracy in heterogeneous RF circuit training; Struggles with cross-topology generalization;
[30]	GNN + Text Embedding + Attn	VA	1,177	simple analog	Mediocre accuracy; Inaccurate for complex RF metrics; Overhead of Extra Encoders
[31]	CNN + LSTM	two-port RF filters	8k per circuit	passive	Prohibitive data size; Struggles with cross-topology generalization
[32]	Convolutional AE + Regressor	Band-pass filter	5,929 + 916	passive	Struggles with cross-topology generalization
[16]	CNN + GA	PA matching networks	500k + 170k	passive	Prohibitive data size; Struggles with cross-topology generalization
[33]	DeepGRU + Dropout	VA, VCDL, DLL	~ 9 waveforms per circuit	analog	Inaccurate for complex RF metrics; Struggles with cross-topology generalization
[34]	DeepRNN	High-speed interconnects	45 waveforms	passive	Struggles with cross-topology generalization
[17]	Topology-aware S-TCNN	High-speed digital interconnects	~ 550 -750 per circuit	passive	Struggles with cross-topology generalization

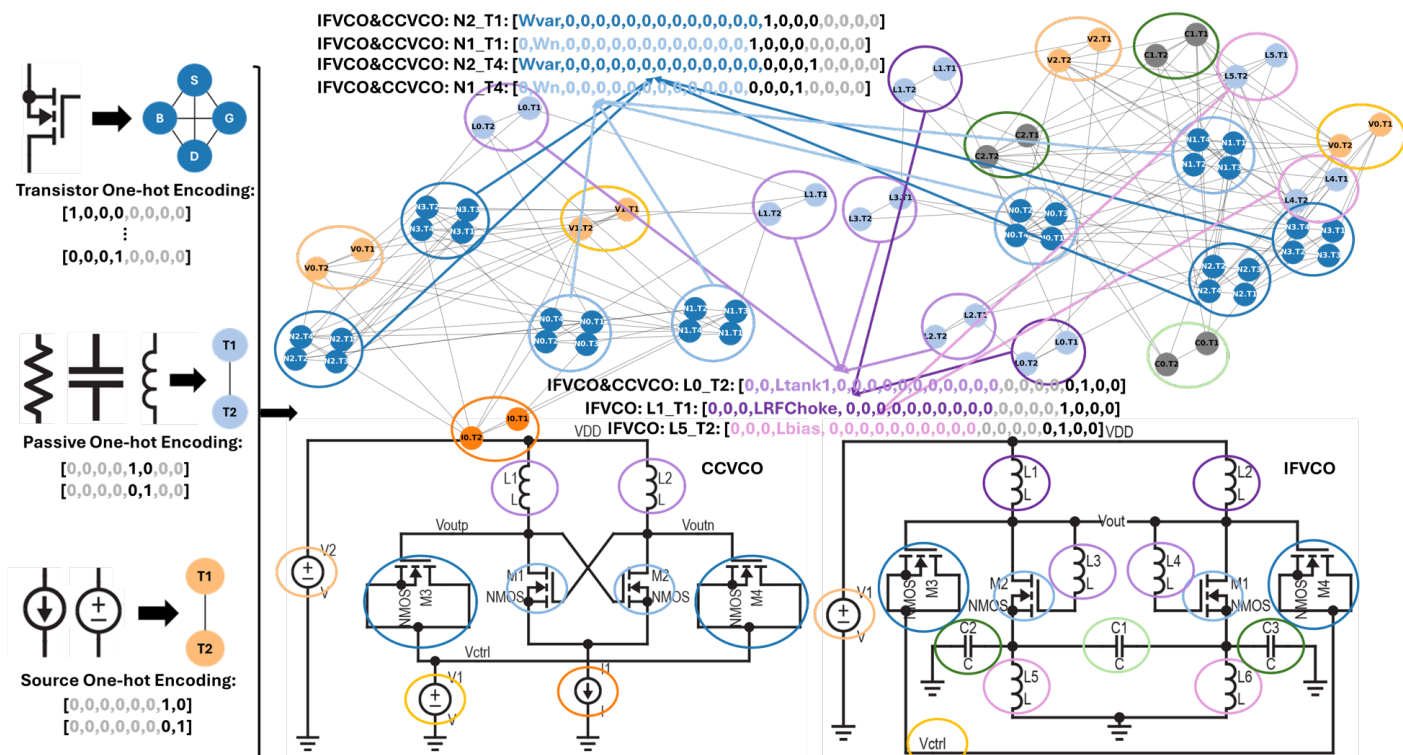


Fig. 1. Proposed Circuit-to-Graph Conversion and Feature Extraction Method with Functionality-aware Feature Indexing.

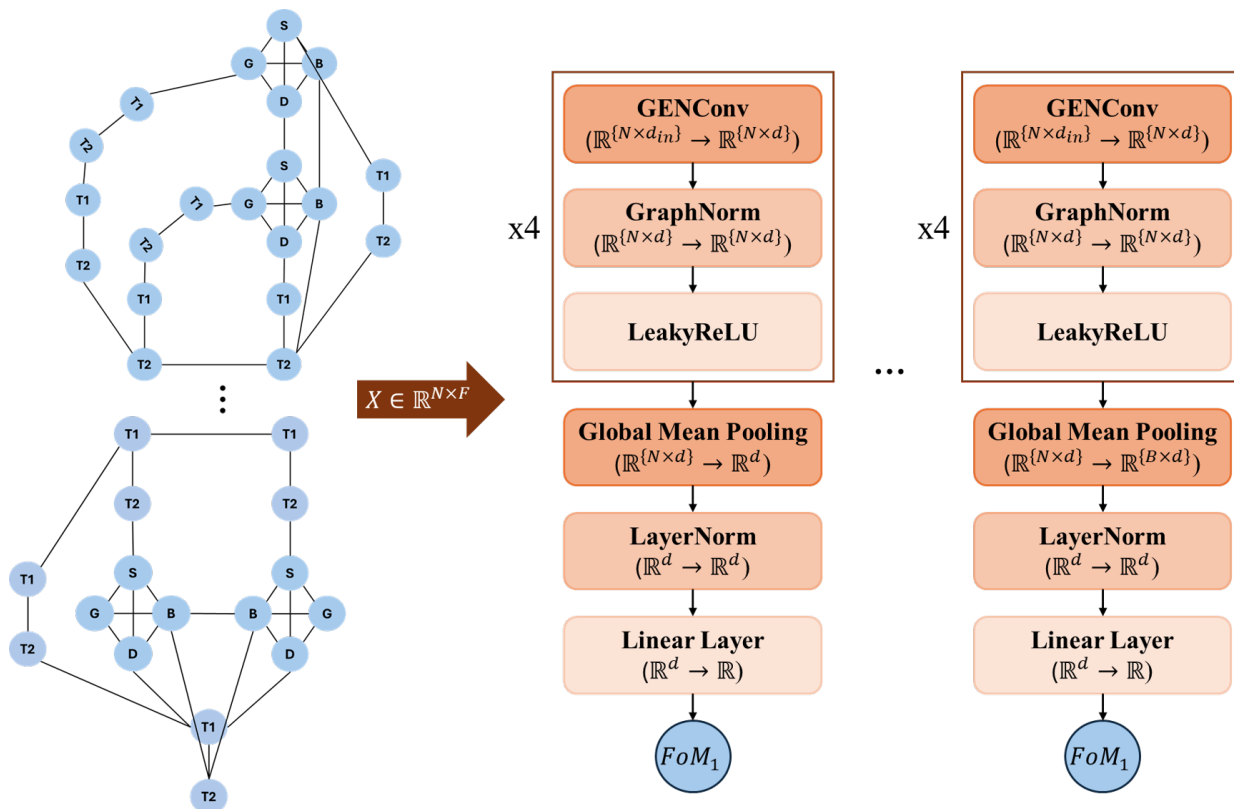


Fig. 2. Model Architecture: GENConv layers mimic KVL and KCL, while GraphNorm enables graph structure-awareness and numerical stability.

hot encoding is employed to represent terminal position within a transistor (first four positions, e.g., '10000000' for gate, '01000000' for source), passive element (second two positions, e.g., '00001000' and '00000100' for each terminal), and current or voltage source (third two positions, e.g., '00000010' for the positive and '00000001' negative pole), allowing the model to distinguish current flow direction and identify the functional roles of terminals, such as source, gate, drain, and body.

B. GNN Architecture

The architecture of the proposed model is shown in Fig. 2. The netlist-derived graph $G = (V, E)$ is used as input to the GNN, which consists of four GENConv layers followed by linear prediction heads for each circuit performance. Nodes carry an initial feature vector $h_v \in \mathbb{R}^d$. For multi-metric prediction, an independent GENConv stack and head is instantiated per-output metric:

- **First layer (1-hop neighborhood):** A terminal aggregates signals from other terminals of the same component and from directly connected nets. This supports transistor-level property inference (e.g., drive strength, capacitive loading).
- **Second layer (2-hop neighborhood):** Through an additional message-passing step, the terminal receives information from adjacent components, enabling the modeling of inter-component interactions such as matching networks and load-pull behavior.
- **Third layer (3-hop neighborhood):** At this stage, information propagates across short multi-stage paths, local feedback loops, or cascaded gain blocks. This captures subcircuit-level effects such as inter-stage loading, peaking networks, and first-order crosstalk.
- **Forth layer (4-hop neighborhood):** The receptive field expands to encompass components and nets involved in longer functional chains or distributed networks, providing context for block-level behavior such as biasing or matching networks, power-supply routing, and far-end impedance in RF microstrip lines. At this range, the model captures system-level couplings that affect timing closure, supply-induced noise, and stability margins.

Let $h_v^{(\ell,i)}$ denote the hidden representation of node v at layer ℓ for output i . To model multiple circuit performance metrics simultaneously, the proposed framework employs a multi-head architecture in which each output metric i is associated with an independent GENConv stack and prediction head. This design allows each performance metric to learn metric-specific feature interactions and sensitivity patterns while operating on the same input graph. The message passed from node u to node v at layer ℓ and output i , a given circuit metric, is

$$m_{uv}^{(\ell,i)} = \phi_{\text{msg}}^{(\ell,i)}(h_u^{(\ell,i)}), \quad (1)$$

where ϕ_{msg} is a learnable transformation in an L -layer GNN ($\ell = 0, \dots, L-1$). The message denotes an incremental stimulus propagated from terminal represented by $u \in V$

to its adjacent terminal $v \in V$. Neighbor contributions are modulated by attention-like coefficients computed via softmax,

$$\alpha_{uv}^{(\ell,i)} = \frac{\exp\left(a^{(\ell,i)}(h_u^{(\ell,i)}, h_v^{(\ell,i)})\right)}{\sum_{k \in \mathcal{N}(v)} \exp\left(a^{(\ell,i)}(h_k^{(\ell,i)}, h_v^{(\ell,i)})\right)}, \quad (2)$$

where $\mathcal{N}(v)$ is the set of neighboring nodes of v , and $a(\cdot, \cdot)$ is a learned scoring function. Intuitively, the attention weight $\alpha_{uv}^{(\ell,i)}$ plays the role of a normalized admittance $g_{uv} / \sum g_{uv}$, whereby neighbors with higher effective conductance (and thus, higher current) exert greater influence on the aggregation. The aggregated message at node v is, therefore,

$$M_v^{(\ell,i)} = \sum_{u \in \mathcal{N}(v)} \alpha_{uv}^{(\ell,i)} m_{uv}^{(\ell,i)}. \quad (3)$$

This perspective mirrors circuit principles such as superposition and locality: interactions are accumulated from adjacent elements and then transformed by learnable update operators. This is similar to simulating circuit behavior during Newton-Raphson iterations. In these solvers, Kirchhoff's current law (KCL) is enforced by iteratively adjusting node voltages to minimize the total current mismatch at each node. The net mismatch refers to the residual current that remains after evaluating all branch currents based on the current voltage estimate—an indicator of how far the solution is from satisfying KCL. In the context of message passing in GNNs, a coefficient ($\alpha(\cdot, \cdot)$) regulates how strongly one node information (m) influences another M is the mismatch in aggregated messages at a node before being resolved by the model's update function, and M resembles the net current mismatch before a Newton update. Thus, just as the Newton update uses the mismatch to refine voltage values, the learnable functions in the GNN refine node embeddings to better encode local electrical behavior and global circuit context.

Formally, the node-wise pre-activation produced by GENConv at layer ℓ for output i is defined as

$$z_v^{(\ell,i)} = \text{GENConv}^{(\ell,i)}(h_v^{(\ell,i)}, E)_v. \quad (4)$$

GraphNorm is then applied independently as in

$$\tilde{z}_v^{(\ell,i)} = \text{GN}(z_v^{(\ell,i)}), \quad (5)$$

to normalize node features after each message passing. GraphNorm follows a formulation similar to standard feature scaling, but the normalization statistics (mean and variance) are computed independently for each graph. GraphNorm is beneficial for enabling cross-topology generalization: it stabilizes internal representations (i.e., message magnitudes) while preserving circuit-level independence. From a physical perspective, GraphNorm can be interpreted as removing a graph-level common-mode component from the learned signals and rescaling their effective gain, similar to bias referencing and automatic gain control in circuit analysis.

The GraphNorm normalization is followed by a nonlinear activation,

$$h_v^{(\ell+1,i)} = \text{LeakyReLU}(\tilde{z}_v^{(\ell,i)}). \quad (6)$$

The LeakyReLU activation is similar to piecewise-linear I-V characteristic: the positive-slope region resembles the forward-conducting path of a device, while the small negative-slope “leak” term prevents node isolation, functionally similar to a large shunt resistance that stabilizes otherwise floating nodes.

Stacking L such layers is analogous to cascading L successive linearization-and-update steps, similar to the iterative procedures used in nonlinear AC small-signal solvers. The node-level embeddings produced by the final layer are then aggregated to form a single graph-level embedding,

$$h_G^{(i)} = \text{MeanPool}\{h_v^{(L,i)} : v \in V\} = \frac{1}{|V|} \sum_{v \in V} h_v^{(L,i)}, \quad (7)$$

where MeanPool takes the average of all terminal-level embeddings, effectively representing the entire circuit’s metric with a single vector $h_G^{(i)}$. Prediction vectors are then normalized through LayerNorm to form $\text{LN}(h_G^{(i)})$, which forms the final output scalar $y^{(i)}$,

$$\hat{y}^{(i)} = \mathbf{w}^{(i)\top} \text{LN}\left(h_G^{(i)}\right) + b^{(i)}. \quad (8)$$

IV. EXPERIMENTAL SETUP

All experiments are performed on a single NVIDIA GeForce RTX 4090 GPU using floating-point 32 precision. The framework employs GENConv and GraphNorm from PyTorch Geometric [42]. Reproducibility is ensured by fixing random seeds across all relevant libraries and disabling residual nondeterminism in CUDA Deep Neural Network kernels. Further details, including the training strategy, loss formulations, data preprocessing and augmentation, and computational settings are presented in this section. The framework components are designed to enable robust training, effective regularization, and reproducible results.

A. Dataset Description

A publicly available dataset first introduced in [29] is used. Approximately 4.5% of the dataset, consisting of duplicate and contradictory entries (identical sizing values associated with different output metrics), is removed. All reported sample counts refer to the cleaned dataset. The dataset comprises over one million Cadence-simulated analog and RF circuits of various classes and topologies such as single- and double-balanced active (SBAMixer, DBAMixer) and passive (SBP-Mixer, DBPMixer) mixers; cross-coupled (CCVCO), Colpitts (ColVCO), inductive-feedback (IFVCO), and ring (RVCO) VCOs; common-source (CSLNA), common-gate (CGLNA), and differential (DLNA) LNAs; as well as class-B (ClassBPA), class-E (ClassEPA), differential (DPA), and Doherty (DohPA) PAs. The average train/validation/test ratio between all circuits is 30%/35%/35%, leading to an average training dataset of 14,948 per a circuit topology. All circuit classes are trained independently but concurrently using GPU-parallel workloads, allowing multiple specialized surrogates to be optimized simultaneously rather than sequentially within a unified model.

Each data point includes netlists, parameter sweeps, and simulation results spanning key performance metrics such

as power gain (P_{Gain}), conversion gain (C_{Gain}), bandwidth (BW), noise figure (NF), DC power consumption (P_{dc}), drain efficiency (DE), saturation power (P_{SAT}), oscillation frequency (f_{osc}), tuning range (TR), output power (P_{out}), phase noise (PN), voltage swing (V_{swg}), power-added efficiency (PAE), and S-parameters at the fundamental frequency.

B. Initialization

Node features are min-max-scaled while the prediction targets are z-standardized. Statistics are computed on the training subset only and reused for validation and test, eliminating leakage of unseen data.

C. Hyperparameters

Each individual GNN comprises four layers with 128 hidden features. LeakyReLU activations have a slope of 0.1. Graphs are fed to train and test pipelines in batches of 128. The data is augmented with Gaussian noise drawn from $\mathcal{N}(0, 0.01)$ to discourage overfitting. The weighted Adam (AdamW) optimizer is used. The learning rate is reduced by a factor of two with the ReduceLROnPlateau scheduler if the median validation loss does not improve for five consecutive epochs. Early stopping is applied individually to each output (i.e., per FoM) head: a given prediction head is frozen if it shows no improvement for ten consecutive epochs, while training continues for the remaining heads. This strategy accommodates varying convergence rates across different performance metrics, preserving model capacity for more challenging targets while avoiding overfitting on simpler ones.

D. Loss Function

The GNN outputs are trained to minimize SmoothL1Loss after applying min-max normalization and z-score standardization.

E. Computational Cost

For a batch of graphs with a total of N_b nodes and E_b edges, the computational complexity of the GNN-based framework scales as $\mathcal{O}(D [E_b L H + N_b (F H + (L - 1) H^2)])$, where D is the number of predicted FoMs (outputs), L is the number of message-passing layers, F is the input feature dimension, and H is the hidden dimensionality. Among the 20 topologies, the average per-topology number of nodes, edges, degree, and feature dimensions are 33, 100, 3, and 23, respectively.

F. Evaluation Metrics

The framework accuracy is evaluated using standard relative benchmarks such as (i) average MRE and MRE reported within 2% and 5% error thresholds and for 75th and 90th percentiles (P75 and P90) and (ii) symmetric mean absolute percentage error (sMAPE). The accuracy benchmarks are determined based on the non-scaled (i.e., inverse-transformed as needed), actual target values.

The reported weighted MRE is computed as the sample-count-weighted average of per-metric mean relative error across circuit classes. Specifically, for each metric and class,

MRE is first computed as the mean absolute relative error over all valid test samples:

$$\text{MRE}_{c,k} = \frac{1}{N_{c,k}} \sum_{i \in \mathcal{V}_{c,k}} \left| \frac{\hat{y}_{c,i,k} - y_{c,i,k}}{y_{c,i,k}} \right|, \quad (9)$$

where $\mathcal{V}_{c,k}$ denotes the set of valid samples and $N_{c,k}$ its size. The final reported weighted MRE is then computed as

$$\text{MRE}_k^{\text{ave}} = \frac{\sum_{c=1}^C N_{c,k} \cdot \text{MRE}_{c,k}}{\sum_{c=1}^C N_{c,k}}, \quad (10)$$

ensuring that each test sample contributes proportionally to the final error. Samples with non-finite targets or $|y_{c,i,k}| \leq 10^{-6}$ are excluded to ensure numerical stability. Alternatively, the sMAPE is computed as

$$\text{sMAPE}_{c,k} = \frac{1}{N_{c,k}} \sum_{i \in \mathcal{V}_{c,k}} \frac{2 |\hat{y}_{c,i,k} - y_{c,i,k}|}{|y_{c,i,k}| + |\hat{y}_{c,i,k}|}. \quad (11)$$

Unlike MRE, which scales the error only by the true value and may disproportionately penalize over-estimation, sMAPE normalizes by both true and predicted magnitudes, providing a symmetric error measure and treating over- and under-estimation equally. The reported weighted sMAPE is computed analogously to (10) by replacing MRE with sMAPE.

Note that RFIC performance metrics are often multimodal and are therefore rarely well characterized by a single mean value. Therefore, mean-based evaluation benchmarks such as R^2 and NRMSE can be misleading and are not reported.

V. EXPERIMENTAL RESULTS

The experimental evaluation examines four complementary aspects of the proposed framework: (i) predictive accuracy under topology-specific training, (ii) robustness and RF-informed inductive bias under intra-class joint training and architectural ablations, (iii) cross-topology knowledge transfer through lightweight fine-tuning within a circuit class, and (iv) predictive inference latency relative to conventional circuit simulations. Collectively, these experiments assess the modeling fidelity, representation stability, generalization capability, and practical deployment efficiency of the proposed surrogate.

A. Topology-Specific Results

The proposed framework is trained on one topology and tested on different sizing values of the same topology. The empirical distributions of ground-truth FoMs obtained from Spectre simulations and those predicted by the surrogate are presented in Tables II–IV as kernel density estimate (KDE) plots². Across all circuit topologies, the predicted densities closely follow the ground-truth distributions, demonstrating the model’s ability to capture heavy-tailed, skewed, and multimodal FoM characteristics typical in nonlinear RF circuits. Quantitatively, the proposed framework achieves a weighted MRE of 1.79% under topology-specific training, confirming

²A KDE is a non-parametric estimate of a probability density function obtained by centering smooth kernel functions (e.g., Gaussian) on every sample and summing their contributions.

that terminal-level graph representations enable faithful modeling of both device-level (e.g., NF) and block-level (e.g., phase noise, tuning range) circuit behaviors.

B. Intra-Class Ablation Study

To evaluate the effectiveness of the proposed RF-informed inductive bias, the accuracy of the proposed framework is compared with that of modified variants employing alternative circuit embedding and normalization schemes (Table VII). The evaluated variants include: (i) the proposed functionality-aware terminal-level representation with GraphNorm, (ii) functionality-agnostic random feature indexing that

TABLE II
AVERAGE PERFORMANCE AND KDE ON UNSEEN POWER AMPLIFIER SIZES. AVERAGE TRAINING SIZE: 21,087 SAMPLES PER TOPOLOGY.

Benchmark	P _{DC}	S ₁₁	S ₂₂	P _{Gain}	DE	PAE	P _{SAT}
Avg. MRE	0.11%	1.35%	1.07%	1.10%	1.04%	2.93%	2.97%
sMAPE	0.11%	1.36%	1.07%	1.04%	1.04%	2.49%	2.22%
MRE P75	0.15%	1.80%	1.39%	1.00%	1.26%	2.18%	1.74%
MRE P90	0.23%	2.98%	2.21%	2.24%	2.49%	5.24%	3.76%
MRE <2%	100.00%	78.57%	87.41%	88.23%	86.00%	72.99%	78.36%
MRE <5%	100.00%	97.28%	98.74%	97.10%	97.55%	89.40%	93.11%
MRE >20%	0.00%	0.08%	0.01%	0.31%	0.02%	1.67%	1.30%
RMSE	0.00	0.27	0.21	0.07	0.11	0.08	0.06
MAE	0.00	0.08	0.08	0.05	0.07	0.05	0.04

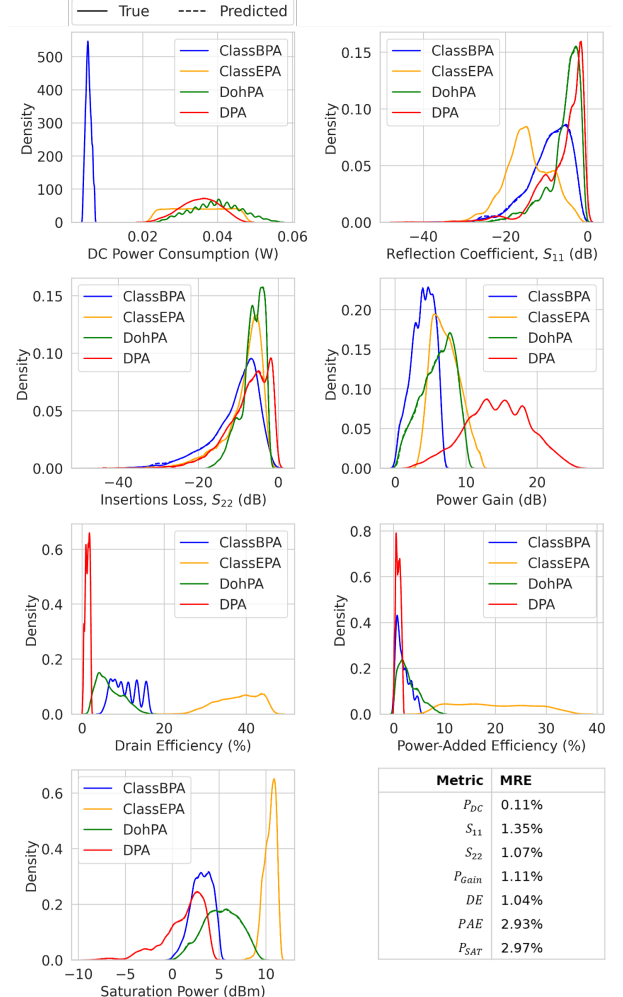


TABLE III

AVERAGE PERFORMANCE AND KDE ON UNSEEN VOLTAGE-CONTROLLED OSCILLATOR SIZES. AVERAGE TRAINING SIZE: 17,482 SAMPLES PER TOPOLOGY.

Benchmark	P_{DC}	f_{osc}	TR	P_{out}	PN
Avg. MRE	0.11%	0.45%	4.98%	4.10%	1.09%
sMAPE	0.11%	0.45%	3.92%	1.81%	1.07%
MRE P75	0.15%	0.39%	1.14%	0.44%	0.79%
MRE P90	0.25%	0.97%	7.61%	2.77%	2.44%
MRE <2%	100.00%	96.23%	81.87%	87.54%	88.10%
MRE <5%	100.00%	99.32%	87.68%	93.54%	94.95%
MRE >20%	0.00%	0.10%	5.40%	1.66%	0.32%
RMSE	0.00	0.52	0.28	0.83	2.35
MAE	0.00	0.13	0.07	0.14	0.95

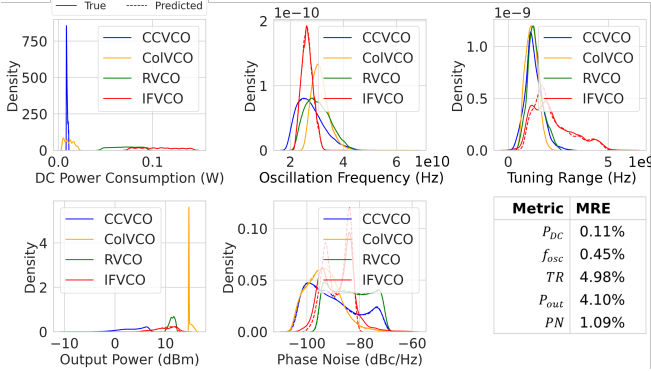


TABLE IV

AVERAGE PERFORMANCE AND KDE ON UNSEEN VOLTAGE AMPLIFIER SIZES. AVERAGE TRAINING SIZE: 21,087 SAMPLES PER TOPOLOGY.

Benchmark	BW	P_{DC}	V_{Gain}
Avg. MRE	1.59%	2.03%	4.56%
sMAPE	1.60%	2.14%	2.99%
MRE P75	1.63%	1.13%	1.68%
MRE P90	4.14%	2.80%	5.28%
MRE <2%	78.93%	86.02%	78.23%
MRE <5%	92.05%	93.83%	89.55%
MRE >20%	0.35%	1.97%	2.23%
RMSE	0.01	0.00	0.18
MAE	0.04%	0.00	0.10

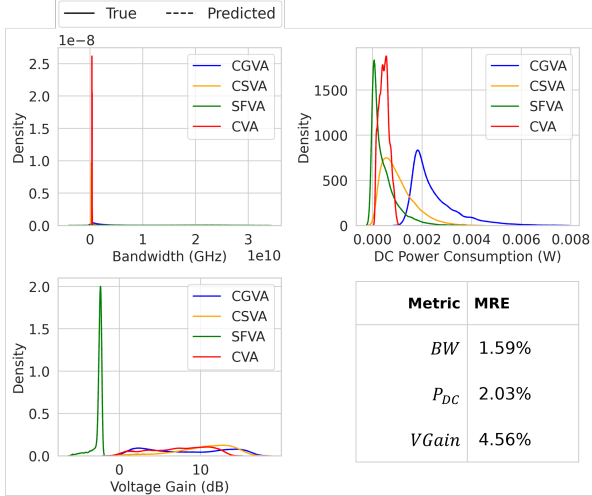


TABLE V

AVERAGE PERFORMANCE AND KDE ON UNSEEN LOW NOISE AMPLIFIER SIZES. AVERAGE TRAINING SIZE: 14,828 SAMPLES PER TOPOLOGY.

Benchmark	BW	P_{DC}	S_{11}	NF	P_{Gain}
Avg. MRE	0.68%	0.24%	2.67%	0.37%	3.17%
sMAPE	0.69%	0.24%	2.65%	0.37%	2.39%
MRE P75	0.83%	0.18%	2.53%	0.39%	1.20%
MRE P90	1.48%	0.38%	6.02%	0.71%	4.55%
MRE <2%	93.95	97.60%	68.08%	98.00%	81.68%
MRE <5%	99.31%	99.56%	87.94%	99.35%	90.90%
MRE >20%	0.00%	0.00%	2.01%	0.01%	1.84%
RMSE	0.10	0.00	0.94	0.04	0.09
MAE	0.06	0.00	0.31	0.01	0.05


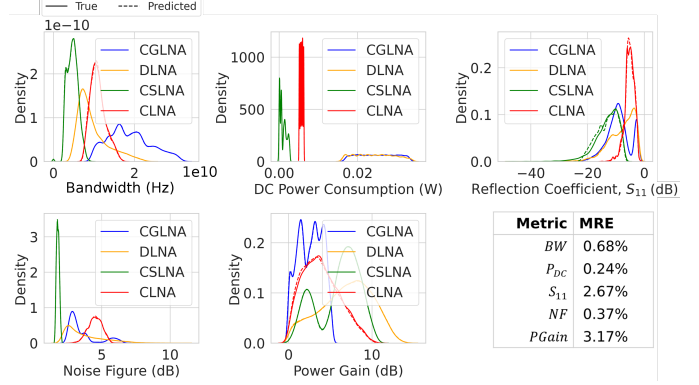


TABLE VI

AVERAGE PERFORMANCE AND KDE ON UNSEEN MIXER SIZES. AVERAGE TRAINING SIZE: 13,481 SAMPLES PER TOPOLOGY.

Benchmark	P_{DC}	C_{Gain}	NF	V_{swg}
Avg. MRE	0.19%	3.90%	0.08%	0.59%
sMAPE	0.19%	1.37%	0.08%	0.59%
MRE P75	0.27%	0.89%	0.10%	0.74%
MRE P90	0.38%	1.92%	0.16%	1.56%
MRE <2%	100.00%	90.51%	100.00%	93.59%
MRE <5%	100.00%	96.59%	100.00%	99.58%
MRE >20%	0.00%	0.78%	0.00%	0.00%
RMSE	0.00	0.93	0.01	0.00
MAE	0.00	0.13	0.01	0.00

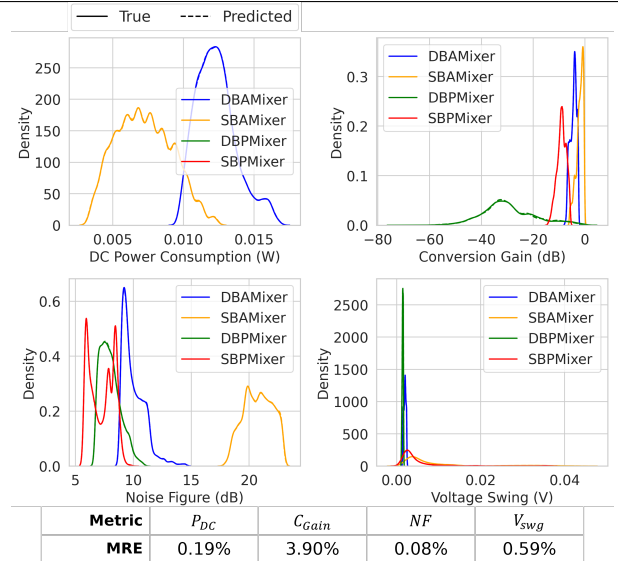

ignores the functional roles of individual circuit components, (iii) component-level abstraction, (iv) LayerNorm, and (v) BatchNorm. Note that in component-level abstraction, the circuit components (e.g., transistors, passive devices, power sources) are embedded as the individual graph nodes. Edges are constructed between component nodes whenever the corresponding components share an electrical connection through a common net. Component-level node features preserve device parameters such as transistor width, length, and passive element values, while omitting explicit terminal identity (e.g., source or drain in transistors, negative or positive pole of a voltage source).

All models in this section are trained on all circuit topologies within a given RFIC class and evaluated on the same class using unseen sizing values. The performance of the proposed framework is compared against a retrained state-of-the-art model, FALCON [29]. Since FALCON does not report per-class performance, the original model is retrained separately for each RFIC class using the same dataset sizes to ensure a fair comparison. Additional details on the per-class FALCON results are provided in the following subsection.

Functionality-awareness: Across all circuit classes, removing functionality-aware feature indexing leads to substantial degradation in prediction accuracy. This confirms that consistent and physics-aware encoding of device roles is critical for learning transferable circuit representations.

Graph Abstraction: Changing the graph abstraction from terminal-level to component-level degrades accuracy, with the extent of degradation depending on the underlying physical sensitivity of each FoM. Metrics governed by local current flow, impedance transformation, and device-level matching (e.g., P_{Gain} and BW) exhibit larger degradation, as these behaviors rely on fine-grained terminal interactions (e.g., bias asymmetry and parasitic loading) that are not explicitly preserved in component-level abstraction.

Compared to net-level abstraction such as FALCON [29], both terminal-level and component-level representations achieve higher accuracy for FoMs dominated by device-level signal transformations (e.g., S_{11} , PAE, and NF). However, both underperform net-level abstraction for C_{Gain} , a voltage-transfer metric defined between electrical nodes. In terminal-level representations, voltage nets are modeled implicitly as collections of terminals rather than explicit nodes, requiring the GNN to infer voltage relationships indirectly. These results indicate that prediction accuracy is primarily governed by how well the graph abstraction aligns with the dominant physical quantity of the target FoM.

Normalization: Normalization ablations demonstrate comparable performance between GraphNorm, LayerNorm, and BatchNorm. LayerNorm achieves slightly lower error in smaller or more structurally uniform circuits such as VAs, as it preserves relative differences among devices by normalizing features independently at each node. GraphNorm, in contrast, normalizes features at the graph level, improving robustness when training across circuits with varying graph sizes and connectivity patterns, such as LNAs and PAs. Overall, the

TABLE VII
AVERAGE TEST MRE ACROSS VARIOUS RF CIRCUIT CLASSES.

Average Test MRE (%) Across the PA Class.								
Average Training Size: 21,087 Samples per Topology.								
Set	P _{DC}	S ₁₁	S ₂₂	P _{Gain}	DE	PAE	P _{SAT}	Avg.
This work	0.1	1.7	1.5	2.3	1.5	5.7	2.7	2.2
Random features	9.5	64.7	55.9	40.9	37.0	99.8	93.8	57.4
Component-based	0.1	2.0	2.0	2.2	2.5	5.8	3.5	2.6
LayerNorm	0.1	1.6	1.4	2.2	1.8	6.5	3.4	2.4
BatchNorm	0.1	2.5	1.9	2.4	3.0	8.9	4.5	3.3
FALCON	1.7	22.8	22.6	14.0	28.2	64.7	31.9	26.6
Average Test MRE (%) Across the Mixer Class.								
Average Training Size: 13,481 Samples per Topology.								
Set	P _{DC}	C _{Gain}		NF	V _{swg}		Avg.	
This work	0.4	14.9		0.8	2.0		4.5	
Random features	2.9	64.6		6.6	49.7		31.0	
Component-based	0.7	18.6		1.2	2.1		5.6	
LayerNorm	0.4	15.2		0.8	2.1		4.6	
BatchNorm	0.4	17.2		0.9	2.1		5.1	
FALCON	0.6	11.1		1.8	4.0		4.4	
Average Test MRE (%) Across the VCO Class.								
Average Training Size: 17,482 Samples per Topology.								
Set	P _{DC}	f _{osc}	TR	P _{out}	PN	Avg.		
This work	0.2	0.7	5.4	4.4	1.2	2.4		
Random features	5.6	8.5	23.5	83.8	5.5	25.4		
Component-based	0.3	1.1	6.2	5.1	1.4	2.8		
LayerNorm	0.2	0.7	5.5	4.5	1.2	2.4		
BatchNorm	0.3	1.0	5.9	4.7	1.3	2.6		
FALCON	5.2	1.1	6.9	5.1	1.6	4.0		
Average Test MRE (%) Across the LNA Class.								
Average Training Size: 14,728 Samples per Topology.								
Set	BW	P _{DC}	S ₁₁	NF	P _{Gain}	Avg.		
This work	2.4	1.2	6.5	1.6	15.1	5.4		
Random features	19.6	3.7	42.2	14.5	215.7	59.2		
Component-based	9.9	2.3	9.5	2.1	134.3	31.6		
LayerNorm	2.4	1.2	6.5	1.6	16.6	5.6		
BatchNorm	2.7	2.9	7.0	1.7	18.4	6.5		
FALCON	27.8	40.8	62.2	18.3	343.3	98.5		
Average Test MRE (%) Across the VA Class.								
Average Training Size: 10,669 Samples per Topology.								
Set	BW	P _{DC}	V _{Gain}		Avg.			
This work	3.9	2.2	11.5		5.8			
Random features	35.7	29.0	88.2		51.0			
Component-based	5.8	4.1	19.5		9.8			
LayerNorm	3.2	1.9	9.7		5.0			
BatchNorm	6.1	3.8	54.1		21.3			
FALCON	36.1	14.9	25.7		25.6			

differences are modest, indicating that the primary accuracy improvement arises from the functionality-aware feature engineering.

Parity Plots: Calibration, bias, and error distribution are illustrated through representative high- and lower-accuracy parity plots in Fig. 3. For well-predicted metrics (e.g., mixer P_{DC}), predictions closely follow the $y = x$ line across the full dynamic range, confirming accurate scaling and the absence of systematic bias. In contrast, mixer C_{Gain} and VA V_{Gain}

TABLE VIII
PER-METRIC SMAPE OF THE PROPOSED FRAMEWORK AND FALCON [29], TRAINED WITH THE SAME TRAINING DATASET SIZE OF 300K.

Work	Dataset	Performance Metrics																Weighted Avg.
		P _{DC}	V _{Gain}	P _{Gain}	C _{Gain}	S ₁₁	S ₂₂	NF	BW	f _{osc}	TR	P _{out}	P _{SAT}	DE	PAE	PN	V _{swg}	
This work	Per-class	0.7%	8.0%	5.2%	6.1%	3.9%	1.5%	1.2%	3.0%	0.7%	4.1%	2.1%	2.0%	1.6%	4.9%	1.2%	2.0%	2.58%
FALCON [29]	Reduced	10.2%	5.8%	8.6%	6.6%	11.5%	4.5%	5.1%	11.1%	0.9%	7.6%	5.6%	7.2%	11.0%	17.7%	1.6%	3.2%	8.19%

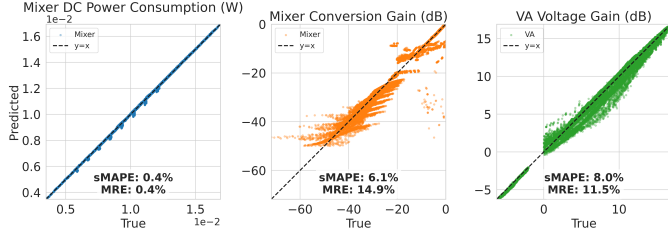


Fig. 3. Parity plots, MRE, and sMAPE for a well-performing FoM, mixer P_{DC} (blue shade), and two worse-performing FoMs, mixer C_{Gain} (orange shade) and VA V_{Gain} (green shade).

TABLE IX
AVERAGE TEST MRE COMPARISON FOR KNOWLEDGE TRANSFER.

MRE (%) with Knowledge Transfer from ClassBPA, DPA, and DohPA to ClassEPA								
Set	P _{DC}	S ₁₁	S ₂₂	P _{Gain}	DE	PAE	P _{SAT}	Avg.
This work	0.1	0.7	1.9	0.3	0.6	0.9	0.1	0.7
FALCON	7.4	29.7	45.5	14.3	30.5	38.9	16.3	26.1
MRE (%) with Knowledge Transfer from SBPMixer, SBAMixer, and DBPMixer to DBAMixer								
Set	P _{DC}	C _{Gain}	NF	V _{swg}	Avg.			
This work	0.2	0.5	0.2	0.2	0.3			
FALCON	4.3	32.2	5.6	32.5	18.7			
MRE (%) with Knowledge Transfer from IFVCO, CCVCO, and CoIVCO to RVCO								
Set	P _{DC}	f _{osc}	TR	P _{out}	PN	Avg.		
This work	0.1	0.2	0.5	0.0	0.3	0.2		
FALCON	3.1	2.5	4.5	2.2	1.4	2.7		
MRE (%) with Knowledge Transfer from CGLNA, CLNA, and DLNA to CSLNA								
Set	BW	P _{DC}	S ₁₁	NF	P _{Gain}	Avg.(%)		
This work	1.0	2.1	7.2	0.2	1.6	2.4		
FALCON	198.7	4099.6	24.7	43.1	136.9	903.28		
MRE (%) with Knowledge Transfer from CSVA, CGVA, and SFVA to CVA								
Set	BW	P _{DC}	V _{Gain}	Avg.				
This work	0.2	0.6	16.2	5.7				
FALCON	252.8	411.2	289.5	317.9				

exhibit increased scatter (notably in DBAMixer) and localized deviations (notably in SFVA), consistent with the outlier distributions observed in the KDE plots in Tables VI and IV. Despite the increased variance, predictions remain centered around the $y = x$ line, indicating that the model captures the overall physical trend but exhibits reduced precision in regimes with topology-dependent gain distributions.

The relatively lower accuracy for gain-related metrics is partly attributable to the definition of MRE, which penalizes overprediction more severely when true values are small (see (9)). Thus, although C_{Gain} predictions are generally well aligned with the $y = x$ line, a small number of overpredicted

outliers (see circled samples) disproportionately increases the MRE. While MRE is used for fair comparison with prior work, it has known limitations. To provide additional perspective, a symmetric metric (sMAPE) is also reported in Table VIII. Compared to FALCON, the proposed framework achieves lower sMAPE for C_{Gain} (6.1% vs 6.6%) and slightly higher sMAPE for V_{Gain} (8.0% vs 5.8%). These results confirm that the framework maintains balanced predictive accuracy without directional bias, demonstrating improved overall symmetric performance.

Conclusion: Overall, the proposed configuration achieves the lowest or near-lowest MRE across all classes and FoMs, with a weighted per number of sample MRE of 3.45%. The limited sensitivity to node abstraction and normalization selection indicates that performance improvements primarily stem from the proposed functionality-aware representation rather than fragile architectural tuning.

C. Comparison with the State-of-the-Art

The performance of the proposed framework is compared to the most comparable work in the state-of-the-art, FALCON [29]. FALCON is retrained separately on individual RFIC classes (per-class) for a fair comparison, as well as retrained on all circuits jointly (uniform) with different dataset sizes. The results for the proposed framework, original FALCON model trained on 70% of all circuits except for the held-out RVCO (36k per-circuit or a total 19×36k circuits), FALCON model trained on 30% of all circuits (15k per-circuit or a total 20×36k circuits), and trained per-class FALCON models (15k per-circuit or a total 4×15k circuits per-class) are listed in Table X.

As a general rule of thumb, GNN performance benefits from representations that align with the dominant physical interactions governing each metric. Accordingly, solutions that map voltage nets to graph nodes, such as [29], perform better for metrics driven primarily by net-level aggregation and loop-level signal propagation (e.g., C_{Gain} and V_{Gain}). In contrast, this work maps device terminals to graph nodes and therefore better captures terminal-level current flow, device operating regions, impedance transformation, and local parasitic coupling. This representation is particularly beneficial for power, matching, and efficiency-related metrics (e.g., P_{DC}, S₁₁, NF, and PAE). As summarized in Table X, a majority of RF FoMs are influenced by terminal-level device interactions, leading to improved overall electrical accuracy and a lower weighted MRE for the proposed framework.

TABLE X
PER-METRIC MRE AND TRAINING EFFICIENCY OF THE PROPOSED FRAMEWORK, FALCON [29], AND FALCON-DERIVED MODELS.

Work	Training				Performance Metrics																Weighted Avg.
	Dataset ^a	Models	Samples	Hours	P _{DC}	V _{Gain}	P _{Gain}	C _{Gain}	S ₁₁	S ₂₂	NF	BW	f _{osc}	TR	P _{out}	P _{SAT}	DE	PAE	PN	V _{swg}	
This work	Per-class	5	60k×5	2	0.7%	11.5%	8.1%	14.9%	3.9%	1.5%	1.2%	3.0%	0.7%	5.4%	4.4%	2.7%	1.5%	5.7%	1.2%	2.0%	3.45%
FALCON	Complete	1	684k×1	~100	11.2%	2.6%	19.0%	6.1%	11.4%	1.9%	4.5%	6.5%	0.6%	6.5%	4.6%	4.4%	4.6%	11.0%	1.3%	1.4%	9.09%
FALCON	Reduced	1	60k×5	~100	25.6%	9.8%	25.2%	10.2%	14.3%	4.4%	5.4%	10.6%	0.9%	7.6%	5.6%	11.2%	10.6%	27.3%	1.6%	3.3%	13.72%
FALCON	Per-class	5	60k×5	~50	15.6%	25.7%	163.8%	11.1%	25.1%	22.6%	9.7%	30.8%	1.1%	6.9%	5.1%	31.9%	28.2%	64.7%	1.6%	4.0%	31.74%

^aThe training set consists of 684k samples (70%) from five RF circuit classes in the publicly available dataset [29]: (i) Complete uses the full training set, (ii) Reduced uses a random 60k subset, and (iii) Per-class uses individual 60k subsets for each circuit class.

In conclusion, while unified frameworks such as [29] offer deployment simplicity, the proposed class-specialized framework achieves superior accuracy and efficiency. The per-class FALCON model attains a weighted MRE of 31.74% with approximately 50 hours of training, whereas the proposed framework achieves a substantially lower weighted MRE of 3.45% ($9.2\times$ improvement) with only 2 hours of training ($25\times$ faster). Even in its intended unified setting, FALCON achieves 9.09% weighted MRE with over 100 hours of training, still under-performing the proposed method in both total accuracy and computational cost. These results indicate that functionality-aware feature indexing and class-specialized training improve the model's ability to learn circuit behavior in general while reducing data and computational requirements.

D. Cross-Topology Knowledge Transfer

To evaluate cross-topology generalization, selected circuit topologies (RVCO, ClassEPA, DBAMixer, CSLNA, and CVA) are excluded during class training and treated as unseen targets. The model is first trained using 30%/35%/35% train/validation/test splits on the remaining RFICs within the individual classes and subsequently fine-tuned on the held-out topology by updating only the first GNN convolution layer, in charge of learning unseen device functionality and sizing. The knowledge transfer performance is shown in Table IX, exhibiting strong transferability with an average test MRE of 1.2%, compared to 216.7% as reported by FALCON with equivalent evaluation setup, an improvement of $\sim 161\times$. The substantial performance gap indicates that functionality-aware feature indexing concentrates topology-specific information in the early layers, enabling efficient adaptation through lightweight fine-tuning without requiring auxiliary encoders of [29].

E. Timing Results

Test latency is shown in Fig. 4 and is measured as average per-sample inference time under batched evaluation. The reported latency includes CPU-GPU transfer of precomputed graph data and model inference latency but excludes offline preprocessing steps such as netlist parsing and graph construction. Compared to an average Spectre simulation runtime of 9.384 s per circuit, the proposed surrogate reduces evaluation time to 1.687 ms on CPU and 0.225 ms on GPU, corresponding to speedups of approximately 5.6×10^3 and 4.2×10^4 , respectively.

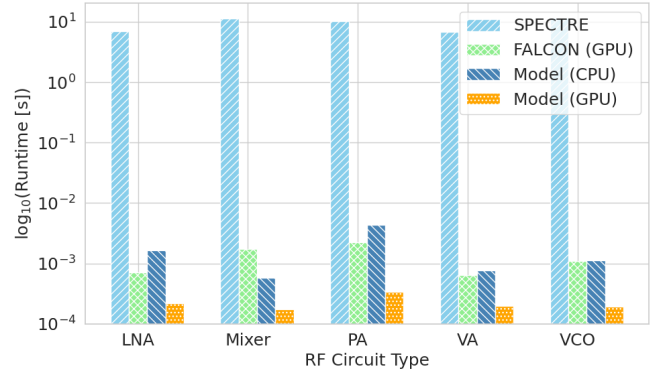


Fig. 4. Comparison of per-circuit average inference latency for different RF circuits (LNA, Mixer, PA, VA, and VCO) with the model on CPU (0.57-4.37 milliseconds) and GPU (0.17-0.34 milliseconds) versus per-circuit average Spectre simulations runtime (6.73-11.69 seconds) and FALCON inference latency on GPU (0.63-2.22 milliseconds).

VI. CONCLUSION AND FUTURE WORK

A topology-aware transistor-level GNN framework is presented for accurate and data-efficient prediction of RFIC performance metrics across LNAs, mixers, VCOs, PAs, and VAs. By representing circuit netlists at the terminal level and incorporating functionality-aware feature indexing, the proposed approach preserves functional device distinctions and enables scalable learning of nonlinear RF behavior. As a result, the framework accurately models multimodal, skewed, and heavy-tailed FoM distributions, achieving an average test MRE of 3.45%.

Rather than pursuing a single universal surrogate, this work demonstrates that class-specialized GNN models provide a favorable balance between predictive accuracy, sample efficiency, inference latency, and cross-topology adaptability. Compared to prior state-of-the-art approaches, in intra-class prediction, the proposed framework improves accuracy by $9.2\times$ and generalization by $\sim 161\times$ through lightweight transfer learning. The architecture further enables parallel GPU training of specialized surrogates, aligning naturally with practical RF design workflows that focus on exploring alternative topologies within a target circuit class.

As a future work, this work can be combined with subcircuit identification approaches such as [43] and [44] to enable parallelized modeling and through circuit partitioning. The

terminal-to-node graph model aligns well with such works, enabling scaling to real-world designs.

REFERENCES

- [1] O. Khan, A. Niknejad, and K. Pister, "Ultra low-power transceiver SoC designs for IoT, NB-IoT applications," in *Proceedings of the IEEE Custom Integrated Circuits Conference (CICC)*, 2018, pp. 1–77.
- [2] W. Hong, Z. H. Jiang, C. Yu, D. Hou, H. Wang, C. Guo, Y. Hu, L. Kuai, Y. Yu, Z. Jiang, Z. Chen, J. Chen, Z. Yu, J. Zhai, N. Zhang, L. Tian, F. Wu, G. Yang, Z.-C. Hao, and J. Y. Zhou, "The role of millimeter-wave technologies in 5G/6G wireless communications," *IEEE Journal of Microwaves*, vol. 1, no. 1, pp. 101–122, 2021.
- [3] S. H. Dokhanchi, B. S. Mysore, K. V. Mishra, and B. Ottersten, "A mmWave automotive joint radar-communications system," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 55, no. 3, pp. 1241–1260, 2019.
- [4] H. Zheng, R. Ma, M. Liu, and Z. Zhu, "A linear-array receiver analog front-end circuit for rotating scanner lidar application," *IEEE Sensors Journal*, vol. 19, no. 13, pp. 5053–5061, 2019.
- [5] M. M. Gourary, S. G. Rusakov, S. L. Ulyanov, M. M. Zharov, and B. J. Mulvaney, "Circuit distortion analysis based on the simplified newton's method," *Journal of Electrical and Computer Engineering*, vol. 2011, no. 1, p. 540305, 2011.
- [6] X. Yang, Y.-S. Huang, L. Zhou, Z. Zhao, D.-X. Ni, C.-R. Zhang, J.-F. Mao, J.-A. Han, X. Cheng, and X.-J. Deng, "Low-loss heterogeneous integrations with high output power radar applications at W-band," *IEEE Journal of Solid-State Circuits (JSSC)*, vol. 57, no. 6, pp. 1563–1577, 2022.
- [7] J. Lee, W. Jia, B. S. Rodriguez, and J. S. Walling, "Pixelated RF: Random metasurface based electromagnetic filters," in *IEEE Interregional NEWCAS Conference (NEWCAS)*, 2023, pp. 1–5.
- [8] P. Vancorenland, C. De Ranter, M. Steyaert, and G. Gielen, "Optimal RF design using smart evolutionary algorithms," in *Proceedings of the IEEE/ACM Design Automation Conference (DAC)*, 2000, p. 7–10.
- [9] T. Pessoa, N. Lourenço, R. Martins, R. Póvoa, and N. Horta, "Enhanced analog and RF IC sizing methodology using PCA and NSGA-II optimization kernel," in *Proceedings of the Design, Automation & Test in Europe Conference & Exhibition (DATE)*, 2018, pp. 660–665.
- [10] Y. Hong, J. Huang, and J. Cai, "Design of broadband RF PAs using an improved bayesian optimization algorithm," *IEEE Transactions on Microwave Theory and Techniques*, pp. 1–13, 2025.
- [11] M. Larbi, R. Trincherio, F. G. Canavero, P. Besnier, and M. Swaminathan, "Analysis of parameter variability in an integrated wireless power transfer system via partial least-squares regression," *IEEE Transactions on Components, Packaging and Manufacturing Technology*, vol. 10, no. 11, pp. 1795–1802, 2020.
- [12] A. Mehradfar, X. Zhao, Y. Niu, S. Babakniya, M. Alesheikh, H. Aghasi, and S. Avestimehr, "Supervised learning for analog and RF circuit design: Benchmarks and comparative insights," 2025.
- [13] H. Chae, S. H. Chai, T. Chi, S. Li, and D. Z. Pan, "ML-assisted RF IC design enablement: the new frontier of AI for EDA," in *Proceedings of the Asia and South Pacific Design Automation Conference (ASP-DAC)*, 2025, p. 683–689.
- [14] K. Scharff, C. M. Schierholz, C. Yang, and C. Schuster, "ANN performance for the prediction of high-speed digital interconnects over multiple PCBs," in *IEEE Conference on Electrical Performance of Electronic Packaging and Systems (EPEPS)*, 2020, pp. 1–3.
- [15] A. Sánchez-Masís, R. Rimolo-Donadio, K. Roy, M. Sulaiman, and C. Schuster, "FNNs models for regression of S-parameters in multilayer interconnects with different electrical lengths," in *2023 IEEE MTT-S Latin America Microwave Conference (LAMC)*, 2023, pp. 82–85.
- [16] E. A. Karahan, Z. Liu, and K. Sengupta, "Deep-learning-based inverse-designed millimeter-wave passives and power amplifiers," *IEEE Journal of Solid-State Circuits (JSSC)*, vol. 58, no. 11, pp. 3074–3088, 2023.
- [17] H. M. Torun, A. C. Durgun, K. Aygün, and M. Swaminathan, "Causal and passive parameterization of S-parameters using neural networks," *IEEE Transactions on Microwave Theory and Techniques*, vol. 68, no. 10, pp. 4290–4304, 2020.
- [18] H. Chae, H. Yu, S. Li, and D. Z. Pan, "PulseRF: Physics augmented ml modeling and synthesis for high-frequency RFIC design," in *Proceedings of the IEEE/ACM International Conference on Computer-Aided Design*, ser. ICCAD '24, 2025.
- [19] J. Zhou, E. A. Karahan, S. Ghoszy, Z. Liu, H. Jalili, and K. Sengupta, "25.3 AI-enabled design space discovery and end-to-end synthesis for RFICs with reinforcement learning and inverse methods demonstrating mm-Wave/sub-THz PAs between 30 and 120GHz," in *IEEE International Solid-State Circuits Conference (ISSCC)*, vol. 68, 2025, pp. 1–3.
- [20] A. Asadi and I. Partin-Vaisband, "Topology-aware AI for transistor-level modeling of RF circuits: Opportunities and challenges," in *2025 IEEE 68th International Midwest Symposium on Circuits and Systems (MWSCAS)*, 2025, pp. 533–537.
- [21] M. Fayazi, M. T. Taba, A. Tabatabavakili, E. Afshari, and R. Dreslinski, "FuNToM: Functional modeling of RF circuits using a neural network assisted two-port analysis method," in *Proceedings of the IEEE/ACM International Conference on Computer Aided Design (ICCAD)*, 2023, pp. 1–8.
- [22] G. Zhang, H. He, and D. Katabi, "Circuit-GNN: Graph neural networks for distributed circuit design," in *Proceedings of the International Conference on Machine Learning (ICML)*, ser. Proceedings of Machine Learning Research, K. Chaudhuri and R. Salakhutdinov, Eds., vol. 97, 2019, pp. 7364–7373.
- [23] H. Wang, K. Wang, J. Yang, L. Shen, N. Sun, H.-S. Lee, and S. Han, "GCN-RL circuit designer: Transferable transistor sizing with graph neural networks and reinforcement learning," in *ACM/IEEE Design Automation Conference (DAC)*, 2020, pp. 1–6.
- [24] G. Li, C. Xiong, A. Thabet, and B. Ghanem, "DeeperGCN: All you need to train deeper GCNs," 2020.
- [25] K. Hakhamaneshi, M. Nassar, M. Phielipp, P. Abbeel, and V. Stojanovic, "Pretraining graph neural networks for few-shot analog circuit modeling and design," *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems (TCAD)*, vol. 42, no. 7, pp. 2163–2173, 2023.
- [26] Z. Wu and I. Savidis, "Transfer of performance models across analog circuit topologies with graph neural networks," in *Proceedings of the ACM/IEEE Workshop on Machine Learning for CAD (MLCAD)*, ser. MLCAD '22, 2022, p. 159–165.
- [27] Z. Wu and I. Savidis, "Transfer learning for reuse of analog circuit sizing models across technology nodes," in *2022 IEEE International Symposium on Circuits and Systems (ISCAS)*, 2022, pp. 1033–1037.
- [28] H. Zhou, Y. Li, X. Xiong, and P. Zhou, "A transferable GNN-based multi-corner performance variability modeling for analog ICs," in *Asia and South Pacific Design Automation Conference (ASP-DAC)*, 2024, pp. 411–416.
- [29] A. Mehradfar, X. Zhao, Y. Huang, E. Ceyani, Y. Yang, S. Han, H. Aghasi, and S. Avestimehr, "FALCON: An ML framework for fully automated layout-constrained analog circuit design," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2025.
- [30] K. Zhu, H. Chen, W. J. Turner, G. F. Kokai, P.-H. Wei, D. Z. Pan, and H. Ren, "TAG: Learning circuit spatial embedding from layouts," in *Proceedings of the IEEE/ACM International Conference on Computer-Aided Design (ICCAD)*, 2022.
- [31] S. Qi and C. D. Sarris, "Deep neural networks for rapid simulation of planar microwave circuits based on their layouts," *IEEE Transactions on Microwave Theory and Techniques*, vol. 70, no. 11, pp. 4805–4815, 2022.
- [32] R. Shibata, M. Ohira, and Z. Ma, "A novel convolutional-autoencoder based surrogate model for fast s-parameter calculation of planar bpf," in *IEEE/MTT-S International Microwave Symposium (IMS)*, 2022, pp. 498–501.
- [33] A. Faraji, S. A. Sadrossadat, W. Na, F. Feng, and Q.-J. Zhang, "A new macromodeling method based on deep gated recurrent unit regularized with gaussian dropout for nonlinear circuits," *IEEE Transactions on Circuits and Systems I (TCAS I)*, vol. 70, no. 7, pp. 2904–2915, 2023.
- [34] S. Zebhi, S. A. Sadrossadat, W. Na, and Q.-J. Zhang, "Macromodeling of nonlinear high-speed circuits using novel hybrid bidirectional high-order deep recurrent neural network," *IEEE Transactions on Circuits and Systems I (TCAS I)*, vol. 71, no. 8, pp. 3740–3753, 2024.
- [35] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and P. S. Yu, "A comprehensive survey on graph neural networks," *IEEE Transactions on Neural Networks and Learning Systems (NeurIPS)*, vol. 32, no. 1, pp. 4–24, 2021.
- [36] D. Utyamishev and I. Partin-Vaisband, "Netwise detection of hardware trojans using scalable convolution of graph embedding clouds," *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems (TCAD)*, vol. 43, no. 10, pp. 3116–3128, 2024.
- [37] T. Mohamed, V. M. van Santen, L. Alrahis, O. Sinanoglu, and H. Amrouh, "Graph attention networks to identify the impact of transistor

- degradation on circuit reliability,” *IEEE Transactions on Circuits and Systems I (TCAS I)*, vol. 71, no. 7, pp. 3269–3281, 2024.
- [38] H. Ren, G. F. Kokai, W. J. Turner, and T.-S. Ku, “ParaGraph: Layout parasitics and device parameter prediction using graph neural networks,” in *Proceedings of the IEEE/ACM Design Automation Conference (DAC)*, 2020, pp. 1–6.
 - [39] M. Liu, W. J. Turner, G. F. Kokai, B. Khailany, D. Z. Pan, and H. Ren, “Parasitic-aware analog circuit sizing with graph neural networks and Bayesian optimization,” in *Proceedings of the Design, Automation & Test in Europe Conference & Exhibition (DATE)*, 2021, pp. 1372–1377.
 - [40] L. Liu, F. Yang, L. Shang, and X. Zeng, “GNN-Cap: Chip-scale interconnect capacitance extraction using graph neural network,” *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems (TCAD)*, vol. 43, no. 4, pp. 1206–1217, 2024.
 - [41] C. Li, D. Hu, and X. Zhang, “Pre-layout parasitic-aware design optimizing for RF circuits using graph neural network,” *Electronics*, vol. 12, no. 2, 2023.
 - [42] M. Fey and J. E. Lenssen, “Fast graph representation learning with PyTorch Geometric,” in *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019.
 - [43] K. Kunal, T. Dhar, M. Madhusudan, J. Poojary, A. Sharma, W. Xu, S. M. Burns, J. Hu, R. Harjani, and S. S. Sapatnekar, “GANA: Graph convolutional network based automated netlist annotation for analog circuits,” in *Design, Automation & Test in Europe Conference & Exhibition (DATE)*, 2020, pp. 55–60.
 - [44] M. Fayazi, M. T. Taba, E. Afshari, and R. Dreslinski, “AnGeL: Fully-automated analog circuit generator using a neural network assisted semi-supervised learning approach,” *IEEE Transactions on Circuits and Systems I (TCAS I)*, vol. 70, no. 11, pp. 4516–4529, 2023.