

EE3900 Gate Assignment - 2

Adhvik Mani Sai Murarisetty - AI20BTECH11015

Download latex-tikz codes from

https://github.com/adhvik24/EE3900/blob/main/Gate_A2/main.tex

Download python codes from

https://github.com/adhvik24/EE3900/blob/main/Gate_A2/codes

1 EC 2007/Q.48

A Hilbert transformer is a

- 1) non-linear system
- 2) non-casual system
- 3) time-varying system
- 4) low-pass system

2 SOLUTION

Definition 1. The Hilbert transform $\mathcal{H}(x(t))$ of a signal $x(t)$ is defined as

$$\hat{x}(t) = \mathcal{H}(x(t)) = \left(\frac{1}{\pi t}\right) * x(t) \quad (2.0.1)$$

Definition 2. We say that a system is **linear** if and only if it follows the Principle of Superposition, i.e Law of Additivity and Law of Homogeneity.

Definition 3. A system is said to be **casual** if and only if its output is independent of the future value of the input. So, A casual system output depends only on the past and present values of the system. That implies, **For a non casual system the impulse response $h(t)$ should be non zero i.e., $h(t) \neq 0$ for $t < 0$.**

Definition 4. A system is said to be **time invariant** if the output signal does not depend on the absolute time, i.e a time delay on the input signal directly equates to the delay in the output signal.

Definition 5. A system is said to be **low-pass** if it filter the signals with a frequency lower than a selected cutoff frequency and attenuates signals with frequencies higher than the cutoff frequency.

Lemma 2.1. A Hilbert transformer is a non-causal, linear, time-invariant and non low-pass filter.

$$\hat{x}(t) = \left(\frac{1}{\pi t}\right) * x(t) \quad (2.0.2)$$

Proof. 1) **Linearity**

From (2), we can say the system is linear if it follows both the laws of Additivity and Homogeneity.

Law of Additivity:

Let the two input signals be $x_1(t)$ and $x_2(t)$, and their corresponding output signals be $y_1(t)$ and $y_2(t)$, then:

$$\hat{x}_1(t) = \left(\frac{1}{\pi t}\right) * x_1(t) \quad (2.0.3)$$

$$\hat{x}_2(t) = \left(\frac{1}{\pi t}\right) * x_2(t) \quad (2.0.4)$$

$$\hat{x}_1(t) + \hat{x}_2(t) = \left(\frac{1}{\pi t}\right) * x_1(t) + \left(\frac{1}{\pi t}\right) * x_2(t)$$

$$\hat{x}_1(t) + \hat{x}_2(t) = \left(\frac{1}{\pi t}\right) * (x_1(t) + x_2(t)) \quad (2.0.5)$$

Now, consider the input signal of $x(t) = x_1(t) + x_2(t)$, then the corresponding output signal is given by $\hat{x}(t)$:

$$\hat{x}(t) = \left(\frac{1}{\pi t}\right) * (x(t)) \quad (2.0.6)$$

$$\Rightarrow \hat{x}(t) = \left(\frac{1}{\pi t}\right) * (x_1(t) + x_2(t)) \quad (2.0.7)$$

Clearly, from (2.0.5) and (2.0.7):

$$\hat{x}(t) = \hat{x}_1(t) + \hat{x}_2(t) \quad (2.0.8)$$

Thus, the Law of Additivity holds.

Law of Homogeneity:

Consider an input signal $cx(t)$, where k is any constant. Let the corresponding output be given

by $\hat{x}(t)$, then:

$$\hat{x}_1(t) = \left(\frac{1}{\pi t}\right) * (cx(t)) \quad (2.0.9)$$

$$= c \left(\frac{1}{\pi t}\right) * x(t) \quad (2.0.10)$$

$$= c\hat{x}(t) \quad (2.0.11)$$

Clearly, from (2.0.11),

$$\hat{x}_1(t) = c\hat{x}(t) \quad (2.0.12)$$

Thus, the Law of Homogeneity holds.

Since both the Laws hold, the system satisfies the Principle of Superposition, and is thus, a **linear system**.

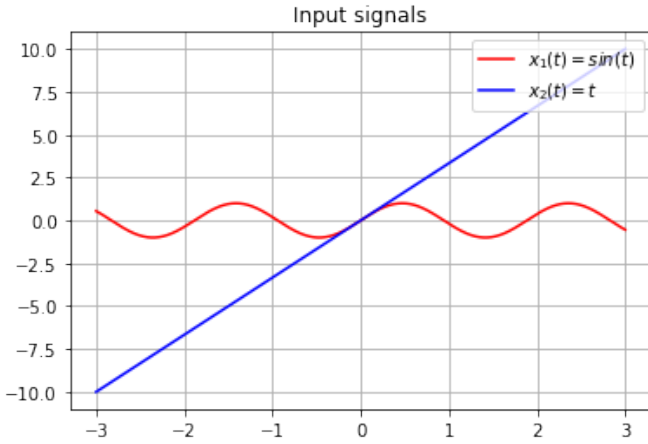


Fig. 1: $x_1(t)$ and $x_2(t)$

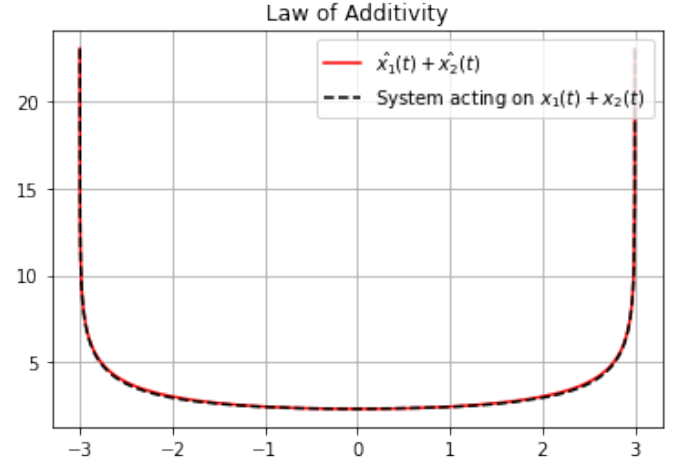


Fig. 3: Law of Additivity

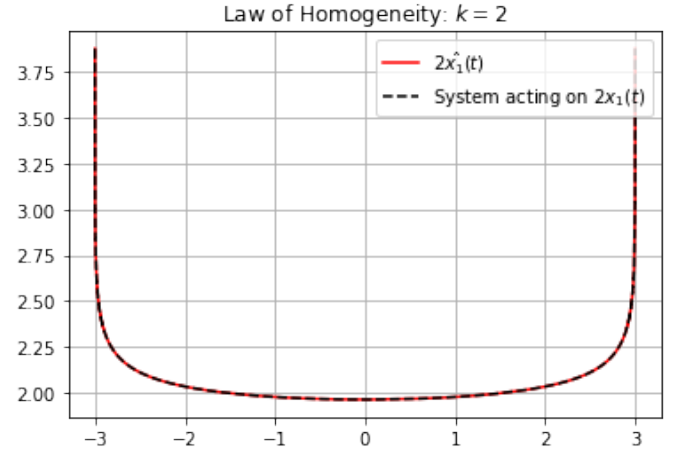


Fig. 4: Law of Homogeneity

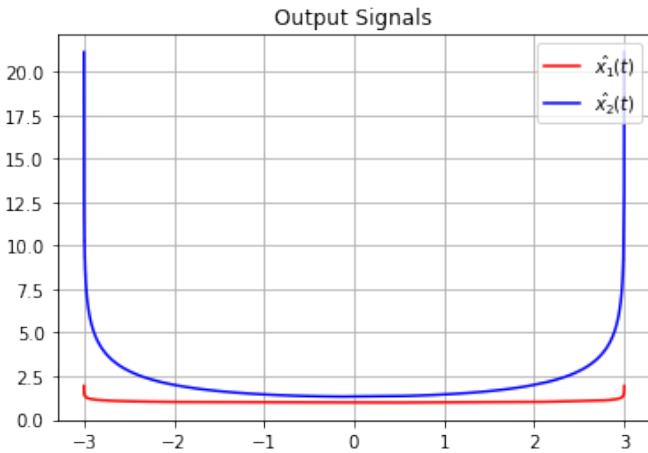


Fig. 2: $\hat{x}_1(t)$ and $\hat{x}_2(t)$

2) Time invariance

From (4), to check for time-invariance, we would introduce a delay of t_0 in the output and

input signals.

Now, we consider an input signal with a delay of t_0 , given by $x(t - t_0)$, and let the corresponding output signal be given by $\hat{x}(t - t_0)$, then:

$$\hat{x}(t - t_0) = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{x(k)}{t - t_0 - k} dk \quad (2.0.13)$$

$$= \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{x(u - t_0)}{t - t_0 - (u - t_0)} du \quad (2.0.14)$$

$$= \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{x(u - t_0)}{t - u} du \quad (2.0.15)$$

Now, Delay the input signal and apply the

system, then We can write $\hat{x}_1(t)$,

$$\hat{x}_1(t) = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{x(k - t_0)}{t - k} dk$$

Using (2.0.16) in (2.0.15),

$$\hat{x}(t - t_0) = \hat{x}_1(t) \quad (2.0.16)$$

Thus, the system is **time-invariant**.

\therefore The hilbert transform is a **linear time invariant system(LTI)**.

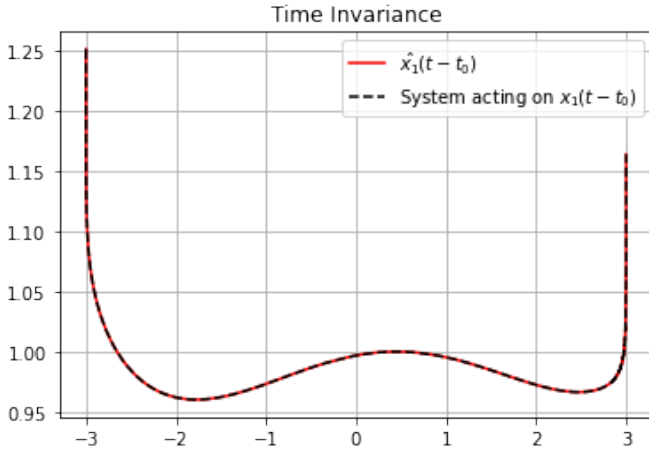


Fig. 5: Time Invariant

3) Impulse response and non casual system

Since the given system is an LTI system, it would possess an impulse response $h(t)$, which is the output of the system when the input signal is the Impulse function, given by $\delta(t)$. Thus,

$$h(t) = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{\delta(k)}{t - k} dk \quad (2.0.17)$$

The Impulse function can be loosely defined as:

$$\delta(t) = \begin{cases} \infty & t = 0 \\ 0 & \text{otherwise} \end{cases} \text{ and } \int_{-\infty}^{\infty} \delta(t) dt = 1$$

$$\int_{-a}^a f(x) \delta(x - a) dx = f(a) \quad (2.0.18)$$

By using (2.0.18) in (2.0.17),

$$h(t) = \frac{1}{\pi t} \quad (2.0.19)$$

Here $h(t)$ is non zero for $t < 0$.

Using (3), That implies Hilbert transform is non casual system.

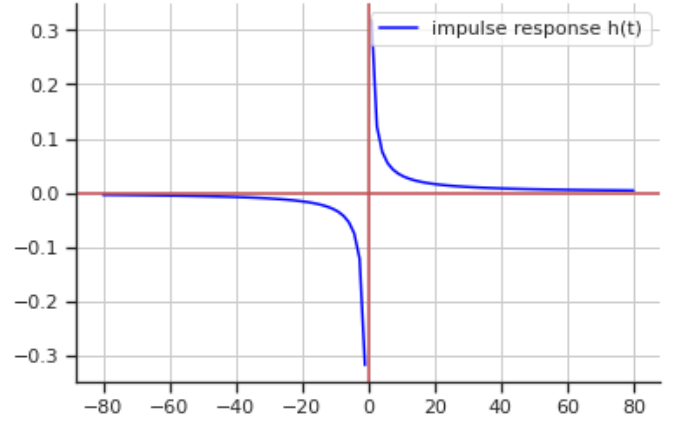


Fig. 6: Impulse response $h(t)$

\therefore Hilbert transformer is a non casual system.

4) Low-pass system

Using (5) and by observing the Fig.8, We can observe that the output signal consists of signal component corresponds to all frequencies i.e., there is no such cutoff frequency observed.

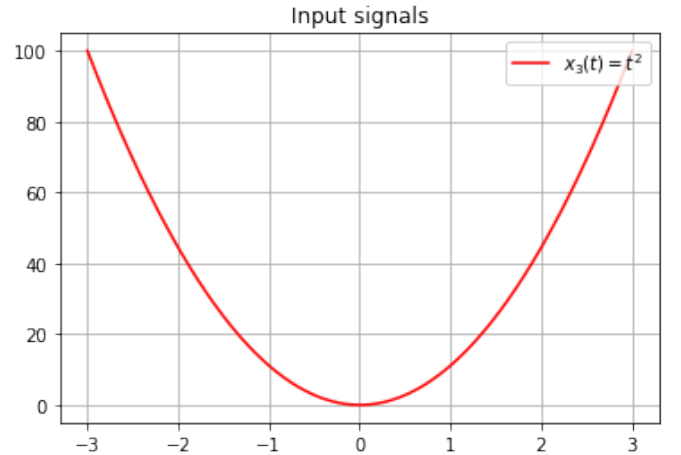


Fig. 7: Input signal $x_3(t) = t^2$

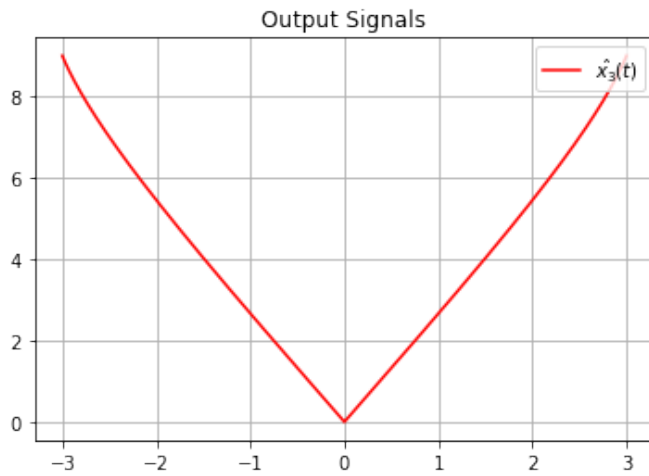


Fig. 8: Output signal $\hat{x}_3(t)$

\therefore We can say that the hilbert transform is **not a low-pass system**.

\therefore Correct option is **2) Non casual system**. \square