Queueing analysis of a battery-backed electrical vehicle charging system

Andres Ferragut
Universidad ORT Uruguay
Montevideo, Uruguay
ferragut@ort.edu.uy

Sebastián Bibiloni *
Universidad de la República
Montevideo, Uruguay
sebastianbibiloni@ingener.com

ABSTRACT

We study a battery-buffered electric vehicle fast charging station modeled as a piecewise-deterministic Markov process. A battery mediates between the grid connection and one or more chargers, enabling fast service when the battery is charged and falling back to the grid rate when depleted. For the single-server loss system we derive the stationary distribution in closed form, uncovering a decoupling property whereby the charger state and battery level are independent in steady state, and obtain explicit formulas for several performance metrics. We extend the analysis to the multi-server loss system, showing that the stationary densities retain an exponential form with occupancy weights governed by a simple recurrence, and that the classical Erlang-B formula is recovered at the critical load where the mean battery drift vanishes.

Keywords

Piecewise deterministic Markov processes, Electrical Vehicles.

1. INTRODUCTION

The rapid adoption of electric vehicles (EVs) is placing increasing demands on electrical infrastructure. A key challenge is the provisioning of public *fast charging*: modern DC fast chargers can deliver 150 kW or more per port, requiring grid connections sized for their peak output. Yet in practice a charging station is not used continuously; vehicles arrive stochastically, and the chargers are idle most of the time. Sizing the grid connection for worst-case simultaneous demand is therefore wasteful, civil infrastructure becomes costly, and utility demand charges (fees based on peak power draw) can represent the dominant operating cost of a fast charging site [**?**]. A battery, acting as an energy buffer, placed between the grid and the chargers resolves this mismatch: the battery gradually charges from the grid at a steady, lower rate and discharges at high power during the brief intervals a vehicle is present, enabling a much smaller and cheaper grid connection. While battery storage at EV stations has been studied before, it has been done primarily in the context of renewable energy integration, where the battery smooths intermittent solar or wind supply [**?**, **?**, **?**]. However, with the advent of fast DC chargers available in highways and remote areas, using a battery buffer in these low-utilization regimes has become equally compelling for purely grid-connected stations.

The central analytical question this raises is a queueing one: given that vehicles arrive randomly and the battery recharges during idle or low utilization periods, how often does a vehicle arrive to find the battery depleted, forcing service at the slower grid rate? This coupling between the continuous battery state and the discrete service rate is what distinguishes the battery-buffered station from a standard queue, and it has not been captured in the existing EV charging literature, which models charging with a fixed service rate [**?**, **?**, **?**].

In this paper, we propose a station model using a Piecewise-Deterministic Markov Process (PDMP) [**?**, **?**]: the battery level evolves deterministically between random events, while car arrivals and departures trigger instantaneous switches. The state is then the pair (n, x) of system occupancy and battery level. We derive the generator of this process, and compute the stationary distribution in closed form for the single-server loss system. A key structural finding is a *decoupling property*: in steady state the charger occupancy and battery level are conditionally independent given the battery is the interior of the state space (partially charged), so that the stationary density factors as a product of an exponential in x and a mode-dependent weight. This yields explicit formulas for the blocking probability, mean charging time, and a *slowdown factor* quantifying the service degradation as a function of a car's energy demand. We then extend the analysis to a loss system with s parallel chargers sharing a common battery. The exponential form of the stationary density is preserved, with the mode weights now governed by a simple recurrence. Armed with these formulas, we discuss several performance issues and design objectives that provide guidelines on how to design such systems.

The paper is organized as follows. Section 2 introduces the single-server model and its PDMP formulation. Section 3 derives the stationary distribution and performance metrics. Section 4 treats the many-server case. Section 5 concludes.

2. SINGLE-SERVER MODEL

We consider a single EV charging station consisting of one charger connected to the electrical grid, equipped with a battery buffer of capacity $B > 0$. Cars arrive according to a Poisson process of rate $\lambda > 0$, each carrying an energy

*This work was partially supported by ANII Uruguay under grant CF_1_2024_1_182277.

IFIP Performance '26. 3-5 November 2026, Ghent, Belgium
Copyright is held by author/owner(s).

demand $Y \sim \mathrm{Exp}(\mu)$. The station operates as a *loss system*: a car that arrives when the charger is busy is turned away.

The system parameters are the following: the grid may supply a maximum power p_1, and this energy may be used to charge the battery or the car, if present. When the system is idle, the battery is recharged at rate $0 < p_0 \leqslant p_1$. Inequality reflects that we may want to recharge the battery at a slower rate to preserve battery life. The EV charging station itself may provide power $p_2 > p_1$, which amounts to fast charging. When a car is present, this power is provided by the grid at rate p_1 and the extra amount $c := p_2 - p_1 > 0$ is provided by the battery, whenever is not empty. If the battery empties, the system reverts to charging only from the grid at rate p_1, and the battery stays depleted until the current car finishes service. We denote by $x(t) \in [0, B]$ the current state of the battery at time t, and by $n(t) \in \{0, 1\}$ the presence of not of a charging vehicle.

Under the above assumptions, when a car is admitted, service proceeds in at most two phases. In *Phase 1* (fast charging), while the battery level $x > 0$, the car charges at rate p_2 and the battery discharges at rate c. In *Phase 2* (slow charging), once the battery is exhausted, $x = 0$ and the car charges at rate p_1, while x remains at zero. A car with small demand may complete service entirely in Phase 1 if its service requirement is low enough. Under the exponential energy demands assumed before, the instantaneous departure rate from the system is therefore $\mu p(x)$, where:

$$p(x) = p_2 \, \mathbf{1}_{x>0} + p_1 \, \mathbf{1}_{x=0}. \tag{1}$$

The system state at time t is thus the pair $Z(t) = (n(t), x(t))$. Between arrival and departure events, the battery evolves deterministically according to $\dot{x} = r(n, x)$, where

$$r(n,x) = \begin{cases} p_0 & n = 0,\ x < B, \\ 0 & n = 0,\ x = B, \\ -c & n = 1,\ x > 0, \\ 0 & n = 1,\ x = 0. \end{cases} \tag{2}$$

The jumps are spontaneous events: *arrivals* at $(0, x)$ occur at rate λ and the states transitions (deterministically) to $(1, x)$; *departures* at $(1, x)$ with $x > 0$ occur at rate μp_2 and transition to $(0, x)$; *departures* at $(1, 0)$ occur at rate μp_1 and transition to $(0, 0)$, or in short $(1, x) \mapsto (0, x)$ at rate $\mu p(x)$. In all cases the battery level is unchanged at the jump epoch.

The process $Z(t)$ with state space $\{0, 1\} \times [0, B]$ fits the PDMP framework of Davis [**?**, **?**], though the standard theory requires an open state space and forces the process to jump before reaching the boundary. Neither condition holds here: E is compact, and the flow reaches $x = 0$ and $x = B$ in finite time without a jump. Nevertheless, the vector field (2) is bounded and monotone on each mode, so the flow is globally well-defined. The strong Markov property follows from the martingale-problem approach, which extends to this setting since all jump rates are bounded and the jump kernel leaves x unchanged, i.e. jumps in the continuous variable are bounded.

The extended generator $\mathcal{A}$ of $Z(t)$ has domain $\mathcal{D}(\mathcal{A})$ consisting of functions $\psi : E \to \mathbb{R}$ such that $\psi(n, \cdot)$ is absolutely continuous on $[0, B]$ for each n. For $\psi \in \mathcal{D}(\mathcal{A})$,

$$\mathcal{A}\psi(0,x) = r(0,x)\,\psi_0'(x) + \lambda\,[\psi(1,x) - \psi(0,x)], \tag{3a}$$
$$\mathcal{A}\psi(1,x) = r(1,x)\,\psi_1'(x) + \mu p(x)\,[\psi(0,x) - \psi(1,x)], \tag{3b}$$

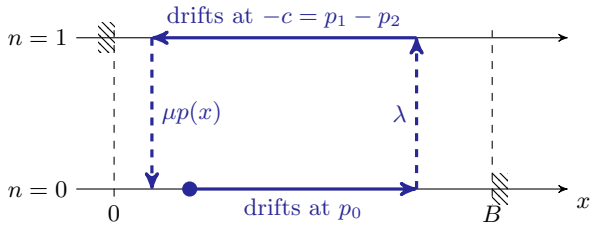


Figure 1: State space and system dynamics, showing a typical trajectory of $Z(t)$

where $\psi_n' = \partial_x \psi(n, \cdot)$ is defined Lebesgue-a.e. The first term in each line is the flow contribution; the second is the jump contribution, which in fact just switches mass from $n = 0$ to $n = 1$ and viceversa leaving x unchanged. For any $\psi \in \mathcal{D}(\mathcal{A})$, the process $M_t^\psi := \psi(Z(t)) - \psi(Z(0)) - \int_0^t \mathcal{A}\psi(Z(s))\,ds$ is a local martingale [**?**], and the process is right-continuous and a strong Markov process.

Note that an arriving car always finds $x > 0$ with probability one. During any idle period the battery charges at rate $p_0 > 0$, and since the idle time before the next arrival is $\mathrm{Exp}(\lambda)$ (positive a.s.), the battery is strictly positive at every arrival epoch. The state $(n = 0, x = 0)$ therefore should have zero probability under any stationary distribution.

The adjoint operator $\mathcal{A}^*$ operates on the probability distributions on E and provides the forward Kolmogorov equation of the system [**?**]. A stationary distribution π satisfies $\int \mathcal{A}\psi \, d\pi = 0$ for all $\psi \in \mathcal{D}(\mathcal{A})$, which is the weak form of the Kolmogorov forward equation $\mathcal{A}^*\pi = 0$. We now proceed to solve the steady state of this system by positing a particular form of π using the characteristics of the system.

3. SINGLE-SERVER IN STEADY-STATE

3.1 Stationary distribution

Since E is compact and $Z(t)$ is irreducible (every open rectangle $\{n\} \times (a, b)$ is reachable with positive probability from any starting point, by a combination of deterministic drift and Poisson events), the process is ergodic with a unique stationary distribution π [**?**].

We now seek π as a mixed measure with densities on $(0, B)$ and point masses at the boundary points where flow accumulates. Therefore, we propose the following solution structure:

$$\pi = f_0(x)\,dx + f_1(x)\,dx + \pi_{0,B}\,\delta_{(0,B)} + \pi_{1,0}\,\delta_{(1,0)}. \tag{4}$$

Here $f_n(x)$ $n = 0, 1$ are the interior densities and $\pi_{0,B}, \pi_{1,0} \geq 0$ are point masses at the corners where the flow accumulates: $x = B$ in mode 0 (since $r(0, \cdot) = p_0 > 0$) and $x = 0$ in mode 1 (since $r(1, \cdot) = -c < 0$). The other two corners should carry no atoms since flow arriving on them is immediately carried into the interior by the flow (cf. Figure 1)

Substituting this form into $\int \mathcal{A}\psi \, d\pi = 0$ and using eqs. (3), the stationarity condition $\int \mathcal{A}\psi \, d\pi = 0$ for all $\psi \in \mathcal{D}(\mathcal{A})$ yields the following balance equations for the interior densities:

$$p_0\,f_0'(x) = -\lambda\,f_0(x) + \mu p_2\,f_1(x), \tag{5a}$$
$$-c\,f_1'(x) = \quad \lambda\,f_0(x) - \mu p_2\,f_1(x). \tag{5b}$$

As for the atoms, we obtain the following *boundary flux equations*, obtained by flux conservation at each boundary point. At $x = 0$ in mode 1, the inward flow $c\, f_1(0^+)$ feeds the atom $\pi_{1,0}$, which drains via departures at rate μp_1:

$$c\, f_1(0^+) = \mu p_1\, \pi_{1,0}. \tag{5c}$$

Similarly, at $x = B$ in mode 0, the inward flow $p_0\, f_0(B^-)$ feeds the atom $\pi_{0,B}$, which drains via arrivals at rate λ:

$$p_0\, f_0(B^-) = \lambda\, \pi_{0,B}. \tag{5d}$$

Finally, at $(n, x) = (0, 0)$, mass arriving from departures at rate μp_1 must immediately be carried at rate p_0 into the interior (no atom), yielding:

$$p_0\, f_0(0^+) = \mu p_1\, \pi_{1,0}. \tag{5e}$$

And finally by a similar argument, at $(n, x) = (1, B)$

$$c\, f_1(B^-) = \lambda\, \pi_{0,B}. \tag{5f}$$

Finally we have the normalization condition $\int_0^B (f_0 + f_1)\, dx + \pi_{0,B} + \pi_{1,0} = 1$. We can now state the main result of this section.

THEOREM 3.1. *Let $\theta := \mu p_2/c - \lambda/p_0$. The unique stationary distribution of $Z(t)$ has the form (4) with*

$$f_0(x) = \frac{e^{\theta x}}{K}, \qquad f_1(x) = \frac{p_0}{c} \cdot \frac{e^{\theta x}}{K}, \qquad x \in (0, B), \tag{6a}$$

$$\pi_{1,0} = \frac{p_0}{\mu p_1\, K}, \qquad \pi_{0,B} = \frac{p_0\, e^{\theta B}}{\lambda\, K}, \tag{6b}$$

and the normalization constant is

$$K = \frac{p_0 + c}{c} \cdot \frac{e^{\theta B} - 1}{\theta} + \frac{p_0}{\mu p_1} + \frac{p_0\, e^{\theta B}}{\lambda}, \tag{7}$$

with the convention $(e^{\theta B} - 1)/\theta = B$ when $\theta = 0$.

PROOF SKETCH. Adding (5a), (5b) gives $\frac{d}{dx}[p_0 f_0 - c f_1] = 0$, so $p_0 f_0 - c f_1$ is constant on $(0, B)$. Equations (5c) and (5e) together give $p_0 f_0(0^+) = c f_1(0^+)$, so the constant is zero. Therefore the densities should be proportional to each other, i.e. $f_1(x) = (p_0/c)\, f_0(x)$ for all $x \in (0, B)$. Substituting this condition into (5a) yields a first order differential equation for f_0, which accounting for the definition of θ is simply $f_0'(x) = \theta\, f_0(x)$. We conclude that f_0 (and thus also f_1) should be exponential: $f_0(x) = f_0(0^+)\, e^{\theta x}$. With this expression, the atoms follow directly from (5d), (5e), and (5f) is automatically satisfied, confirming consistency. Setting $f_0(0^+) = 1/K$ and imposing normalization determines K as in (7). □

The parameter θ has a physical interpretation: define the offered load of the system $\rho := \lambda/\mu$, i.e. the average external power request. Consider now a single idle-busy cycle in the absence of battery boundaries: the battery charges at rate p_0 during the idle period (mean duration $1/\lambda$) and discharges at rate c during the busy period with mean duration $1/(\mu p_2)$. Then, the expected net battery change per cycle is therefore $\Delta := \frac{p_0}{\lambda} - \frac{c}{\mu p_2}$. It is easy to see that θ has the same sign as Δ, in particular:

$$\theta > 0 \Leftrightarrow \rho < \frac{p_0 p_2}{c} = \rho \frac{p_0 p_2}{p_2 - p_1}$$

This corresponds to a *lightly loaded* station, where the battery gains energy on average on each cycle and thus tends to fill, concentrating its mass towards $x = B$. When $\lambda/\mu > p_0 p_2/c$, we are in the *highly loaded* regime, $\theta < 0$, the battery tends to drain and mass concentrates near $x = 0$, where a significant fraction of service occurs at the slow rate p_1. When $\theta = 0$ the battery neither drains nor fills on average and stationary density is uniform on $(0, B)$.

3.2 Performance metrics

We now derive the key performance metrics directly from Theorem 3.1. We begin by computing the blocking probability, that due to the PASTA property, is just the stationary probability of being in state 1, i.e.

$$P_B = \int_0^B f_1(x)\, dx + \pi_{1,0} = \frac{p_0}{K} \left(\frac{e^{\theta B} - 1}{c\, \theta} + \frac{1}{\mu p_1} \right). \tag{8}$$

Note that this probability is also the probability that the charger is working. As $B \to 0$, $P_B \to \rho/(\rho + p_1)$, the blocking probability of an $M/M/1/1$ queue at rate p_1, since cars can only be served from the grid. Conversely, if the battery is large, as $B \to \infty$ we distinguish two cases: in the lightly loaded regime, $\theta > 0$ and $P_B \to \rho/(\rho + p_2)$, corresponding to service always at the fast rate p_2 because the battery can cope with the load and the system operates most of the time in fast charging. However, if the system is highly loaded ($\theta < 0$), P_B converges to a value strictly between these two limits even as $B \to \infty$, reflecting that the system operates *partly in both charging regimes* because the battery regularly depletes.

We now focus on the mean service time. By Little's law, since there is only one server working and arrivals onto a busy system are blocked, we have $E[N] = P_B = \lambda(1 - P_B)E[T]$ and therefore, the mean service time of an admitted car is:

$$\mathbb{E}[T] = \frac{P_B}{\lambda(1 - P_B)}. \tag{9}$$

A more meaningful quantity is the *average slowdown*, which we define as $E[T]$ normalized by the average service time in a system that operates at the fast rate p_2 permanently, which is given by:

$$\bar{S} := \frac{E[T]}{E[Y]} = \frac{\mu p_2 P_B}{\lambda(1 - P_B)} = \frac{p_2}{\rho} \frac{P_B}{1 - P_B} \tag{10}$$

A final quantity of interest is how different demands are affected in terms of charging time. One expects that larger demands are more affected since the battery may deplete during serive. To this end, define the *slowdown factor*:

$$S(y) := \frac{\mathbb{E}[T \mid Y = y]}{(y/p_2)}. \tag{11}$$

The following proposition is proved in the Appendix.

PROPOSITION 3.2. *Define the energy threshold $x^* = p_2 B/c$. If $Y = y < x^*$, the battery may be active during the whole charge and:*

$$S(y) = 1 + \frac{p_2 - p_1}{p_1\, y\, K(1 - P_B)\, \theta} \left[\frac{p_2}{c\, \theta} \left(e^{\theta c y / p_2} - 1 \right) - y \right]. \tag{12a}$$

For $y \geqslant x^*$, the battery always depletes during service and:

$$S(y) = 1 + \frac{p_2 - p_1}{p_1\, y\, K(1 - P_B)} \Big\{ \frac{1}{\theta} \left[(y - \tfrac{p_2 B}{c}) e^{\theta B} - y + \tfrac{p_2 (e^{\theta B} - 1)}{c\theta} \right] + \tfrac{p_0 e^{\theta B}}{\lambda} (y - \tfrac{p_2 B}{c}) \Big\}. \tag{12b}$$

3.3 Optimal battery regime

For practical battery health it is desirable to charge the battery as slowly as possible and to keep it cycling continuously rather than dwelling near the boundaries $x = 0$ or $x = B$. The stationary distribution of Theorem 3.1 reveals a natural design criterion that achieves both goals simultaneously.

Design parameters. We introduce two dimensionless parameters that will govern the analysis. The *speed-up ratio* $\alpha = p_2/p_1 > 1$ measures how much faster the charger operates with a full battery than without. The *normalised battery capacity* $\beta = \mu B p_2/c$ is the ratio of the battery drain time B/c to the mean fast-charge session $1/(\mu p_2)$: it counts how many full fast-charge sessions the battery can sustain before depleting. Finally, the *normalised load* $\tilde{\rho} = \rho/p_2 = \lambda/(\mu p_2)$ is the offered load measured in units of fast-charge capacity; it is the mean number of fast-charge sessions arriving per unit of service capacity at rate p_2.

Optimal recharge rate and feasibility. From the exponential form $f_0(x) \propto e^{\theta x}$, mass concentrates near $x = B$ when $\theta > 0$ and near $x = 0$ when $\theta < 0$; in either case the battery spends time pinned at a boundary. The uniform regime $\theta = 0$ eliminates this, giving a flat stationary density on $(0, B)$. Since $\theta = \mu p_2/c - \lambda/p_0$, setting $\theta = 0$ uniquely determines the idle recharge rate:

$$p_0^* = \tilde{\rho}\, c. \tag{13}$$

This is also the *slowest* recharge rate achieving $\theta = 0$, which minimises battery stress. The constraint $p_0^* \le p_1$ requires

$$\tilde{\rho} \le \frac{p_1}{c} = \frac{1}{\alpha - 1}, \qquad \text{equivalently} \qquad \rho \le \rho_{\max} = \frac{p_1 p_2}{c}. \tag{14}$$

Below this threshold the operator can always achieve the uniform regime by tuning p_0; above it, $\theta < 0$ regardless of p_0.

Average slowdown. Setting $\theta = 0$ and $p_0 = p_0^*$ in the expressions for K and P_B, one finds that K cancels in the ratio $P_B/(1 - P_B)$ and the load ρ drops out entirely, leaving:

$$\bar{S} = \frac{\beta + \alpha}{\beta + 1}. \tag{15}$$

This depends only on α and β, not on the load. It is a useful design property: the average slowdown is determined entirely by hardware parameters, and is the same for any load $\tilde{\rho} \le 1/\alpha$. As $\beta \to 0$, $\bar{S} \to \alpha = p_2/p_1$ (no battery, all service at the slow rate); as $\beta \to \infty$, $\bar{S} \to 1$ (infinite battery, always fast). The battery capacity achieving a target $\bar{S}_0 \in (1, \alpha)$ is:

$$\beta^* = \frac{\alpha - \bar{S}_0}{\bar{S}_0 - 1} \qquad \Longleftrightarrow \qquad B^* = \frac{c}{\mu p_2} \cdot \frac{\alpha - \bar{S}_0}{\bar{S}_0 - 1}. \tag{16}$$

Blocking probability. A direct computation gives $1 - P_B = 1/(1 + \tilde{\rho}\,\bar{S})$, and therefore:

$$P_B = \frac{\tilde{\rho}\,\bar{S}}{1 + \tilde{\rho}\,\bar{S}} = \frac{\tilde{\rho}(\beta + \alpha)}{\beta + 1 + \tilde{\rho}(\beta + \alpha)}. \tag{17}$$

This has the form of an M/M/1/1 blocking formula with effective load $\tilde{\rho}\,\bar{S}$: the slowdown inflates the apparent offered load seen by the server. Unlike $\bar{S}$, the blocking probability does depend on $\tilde{\rho}$, as expected.

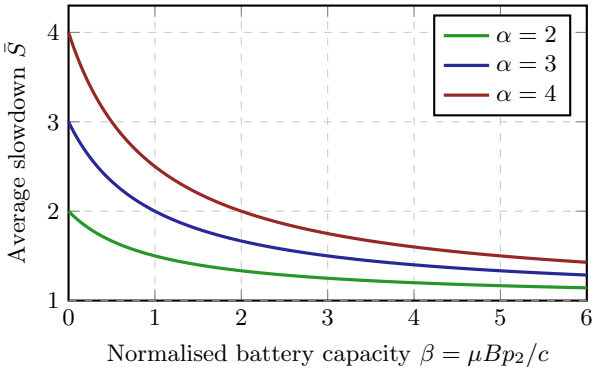


Figure 2: Average slowdown $\bar{S} = (\beta + \alpha)/(\beta + 1)$ in the optimal battery regime as a function of normalised capacity $\beta = \mu B p_2/c$, for three values of the speed-up ratio $\alpha = p_2/p_1$. Each curve starts at $\bar{S} = \alpha$ for $\beta = 0$ and decreases to 1 as $\beta \to \infty$.

4. THE MANY-SERVER CASE

We now extend the model to $s \ge 1$ parallel chargers sharing a single battery buffer of capacity B and a single grid connection of rate p_1. The station continues to operate as a loss system: a car that arrives when all s chargers are busy is turned away.

Assumptions. We impose $p_1 < s p_2$, so the grid alone cannot sustain all s chargers simultaneously at full rate; the battery is essential at full occupancy. We also set $p_0 = p_1$, so the idle recharge rate equals the grid supply rate; this simplifies the structure of the vector field.

State space and dynamics. The state is $Z(t) = (n(t), x(t))$ with $n(t) \in \{0, \dots, s\}$ busy chargers and $x(t) \in [0, B]$; $E = \{0, \dots, s\} \times [0, B]$ is compact. With n busy chargers each drawing p_2 and the grid supplying p_1, the net drift is $r_n = p_1 - n p_2$. Setting $p_0 = p_1$ makes this hold for all n: the battery charges at rate p_1 when idle and drains at rate $n p_2 - p_1$ when $n > p_1/p_2$. The vector field is

$$\dot{x} = \begin{cases} r_n & 0 < x < B,\ r_n \neq 0, \\ 0 & \text{otherwise (boundary reflection).} \end{cases} \tag{18}$$

Define the *critical occupancy* $n^* = \lfloor p_1/p_2 \rfloor \in \{0, \dots, s-1\}$; the battery charges when $n \le n^*$ and drains when $n > n^*$.

The jumps are: arrivals at rate λ when $n < s$, transitioning $n \to n + 1$ with x unchanged; departures at total rate $n\mu p_2$ when $x > 0$, and at rate μp_1 when $x = 0$ (the grid supplies p_1 shared equally, giving total throughput μp_1 regardless of occupancy), each transitioning $n \to n - 1$ with x unchanged.

The process $Z(t)$ is again a PDMP on a compact state space, and the same martingale-problem argument as in Section 2 establishes the strong Markov property. Irreducibility follows by the same reachability argument, so $Z(t)$ is ergodic with a unique stationary distribution.

Form of the stationary distribution. The flow direction at each boundary point now depends on the occupancy level n. Atoms accumulate at (n, B) for $n \le n^*$ (where the flow pushes toward $x = B$) and at $(n, 0)$ for $n > n^*$ (where the flow pushes toward $x = 0$). We therefore seek a stationary distribution of the form

$$\pi = \sum_{n=0}^{s} f_n(x)\, dx + \sum_{n=0}^{n^*} \pi_n^{(B)}\, \delta_{(n,B)} + \sum_{n=n^*+1}^{s} \pi_n^{(0)}\, \delta_{(n,0)}, \tag{19}$$

where $f_n \ge 0$ are densities on $(0, B)$ and $\pi_n^{(B)}, \pi_n^{(0)} \ge 0$ are

point masses.

Interior equations. Setting $\mathcal{A}^*\pi = 0$ on $(0, B)$ gives, for $0 \le n \le s$,

$$r_n f_n'(x) = \lambda f_{n-1}(x)\,\mathbf{1}_{n>0} + (n+1)\mu p_2\, f_{n+1}(x)\,\mathbf{1}_{n<s} - (\lambda\,\mathbf{1}_{n<s} + n\mu p_2)\, f_n(x). \quad (20)$$

THEOREM 4.1. *Let $\rho = \lambda/(\mu p_2)$. There exists a unique $\theta \in \mathbb{R}$, determined by the boundary flux equations together with normalization, such that the stationary densities take the form*

$$f_n(x) = C\, a_n(\theta)\, e^{\theta x}, \qquad x \in (0, B),\ n = 0, \dots, s, \quad (21)$$

where $C > 0$ is a normalization constant and the coefficients $a_n(\theta)$ satisfy the recurrence $a_0 = 1$ and

$$a_{n+1} = \frac{\theta\, S_n + \lambda\, a_n}{(n+1)\mu p_2}, \qquad S_n = \sum_{k=0}^{n} r_k\, a_k, \quad n = 0, \dots, s-1. \quad (22)$$

When $\theta = 0$, the recurrence yields $a_n = \rho^n/n!$ and the distribution reduces to the classical Erlang-B form with uniform density in x. For $\theta \neq 0$, the blocking probability

$$P_B = C\, a_s\, \frac{e^{\theta B} - 1}{\theta} + \pi_s^{(0)}\, \mathbf{1}_{n^*<s} \quad (23)$$

deviates from the Erlang-B value, with the battery shifting mass toward $x = B$ when $\theta > 0$ and toward $x = 0$ when $\theta < 0$.

PROOF SKETCH. Summing (20) from $k = 0$ to n telescopes the right side to $-\lambda f_n + (n+1)\mu p_2 f_{n+1}$. The exponential form $f_n = C a_n e^{\theta x}$ then yields (22). The value of θ is fixed by the boundary flux equations together with normalization. For $s = 1$ and $p_0 = p_1$, one recovers $\theta = \mu p_2/c - \lambda/p_1$ of Theorem 3.1. □

The parameter θ admits the same physical interpretation as in the single-server case. In the unconstrained system (infinite battery), the occupancy evolves as an $M/M/s/s$ queue with Erlang-B stationary weights $\pi_n \propto \rho^n/n!$, giving a mean battery drift $\bar{r} = p_1 - (\lambda/\mu)(1 - P_B^{\text{Erlang}})$. The sign of $\bar{r}$ determines the sign of θ: positive when the grid can sustain the average load (battery fills in the long run) and negative otherwise. The case $\theta = 0$ corresponds exactly to $\bar{r} = 0$, at which point the Erlang-B distribution is recovered.

Performance metrics. The blocking probability is given by (23). By PASTA and Little's law the mean charging time follows from P_B exactly as in Propositions **??** and **??**. The slowdown factor $S(y)$ generalizes directly: the admitted battery level has the same exponential density $f_0(x)/(1 - P_B)$ on $(0, B)$ (now with s-server normalization), and the conditional charging time $T(x, y)$ is unchanged, so the formulas of Proposition 3.2 apply with the updated P_B and $K = 1/C$.

5. CONCLUSIONS

We have studied a battery-buffered EV fast charging station using the framework of piecewise-deterministic Markov processes. For the single-server loss system we derived the stationary distribution in closed form, establishing a decoupling property that separates the battery level from the charger state in steady state, and obtained explicit expressions for the blocking probability, mean charging time, and slowdown factor. We extended the analysis to a loss system with s parallel chargers sharing a common battery, showing that the stationary densities retain an exponential form in the battery level with occupancy-dependent weights governed by a simple recurrence. In both cases the key parameter θ, the sign of the mean battery drift, determines whether the system operates in a battery-rich or battery-scarce regime and controls the deviation of the blocking probability from the classical Erlang-B value.

The analysis highlights a structural difference from standard fluid queues: the state-dependent service rate at $x = 0$ couples the discrete and continuous components in a way that prevents a product-form solution in the many-server case while still admitting an exponential form in x. Numerical illustrations of the performance metrics and a study of the optimal battery sizing problem are left for future work.

6. REFERENCES

[1] I. S. Bayram, G. Michailidis, M. Devetsikiotis, S. Bhattacharya, A. Chakrabortty, and F. Granelli. Local energy storage sizing in plug-in hybrid electric vehicle charging stations under blocking probability constraints. In *Proc. IEEE International Conference on Smart Grid Communications (SmartGridComm)*, pages 78–83, 2011.

[2] I. S. Bayram, G. Michailidis, M. Devetsikiotis, and F. Granelli. Electric power allocation in a network of fast charging stations. *IEEE Journal on Selected Areas in Communications*, 31(7):1235–1246, 2013.

[3] M. H. A. Davis. Piecewise-deterministic Markov processes: a general class of non-diffusion stochastic models. *Journal of the Royal Statistical Society: Series B*, 46(3):353–388, 1984.

[4] M. H. A. Davis. *Markov Models and Optimization*. Chapman & Hall, London, 1993.

[5] A. Dupont and Y. Hayel. A loss queueing game for electric vehicle charging performance evaluation. *Performance Evaluation*, 161:102365, 2023.

[6] M. E. Kabir, C. Assi, M. H. K. Tushar, and J. Yan. Optimal scheduling of EV charging at a solar power-based charging station. *IEEE Systems Journal*, 14(3):4221–4231, 2020.

[7] S. P. Meyn and R. L. Tweedie. *Markov Chains and Stochastic Stability*. Springer, London, 1993.

[8] National Renewable Energy Laboratory. Battery energy storage for electric vehicle charging stations. Technical report, U.S. Department of Energy, 2023. Available at driveelectric.gov.

[9] X. Tan, B. Sun, and D. H. K. Tsang. Queueing network models for electric vehicle charging station with battery swapping. In *Proc. IEEE International Conference on Smart Grid Communications (SmartGridComm)*, pages 1–6, 2014.

[10] V. T. Tran, M. R. Islam, K. M. Muttaqi, and D. Sutanto. An efficient energy management approach for a solar-powered EV battery charging facility to support distribution grids. *IEEE Transactions on Industry Applications*, 55(6):6517–6526, 2019.

APPENDIX

A. PROOF OF PROPOSITION ??

Charging time formula. Given admission when the battery is at level $x \in (0, B)$ and the car has demand $Y = y$, service proceeds in two phases. In Phase 1 (fast charging at rate p_2), the battery discharges at rate c, so it is exhausted after delivering energy $p_2 \cdot (x/c) = p_2 x/c$ to the car; this takes time x/c. If $y \le p_2 x/c$, the car completes in Phase 1 with charging time y/p_2. Otherwise, the remaining demand $y - p_2 x/c$ is served in Phase 2 at rate p_1, taking additional time $(y - p_2 x/c)/p_1$. Hence the total charging time is

$$T(x, y) = \frac{y}{p_2} + \left(\frac{1}{p_1} - \frac{1}{p_2}\right) \max\Big(y - \frac{p_2 x}{c},\, 0\Big). \tag{24}$$

The slowdown factor $S(y) = \mathbb{E}[T \mid Y = y] \,/\, (y/p_2)$ measures the ratio of actual to ideal (all-fast) charging time.

Averaging over the admitted battery distribution. By PASTA, an admitted car sees the stationary distribution conditioned on $n = 0$. The admitted battery level has density $g(x) = f_0(x)/(1 - P_B)$ on $(0, B)$, plus atom $\pi_{0,B}/(1 - P_B)$ at $x = B$. Substituting (24) and writing $x^* = cy/p_2$ for the critical level at which the battery would be exactly depleted:

$$\mathbb{E}[T \mid Y = y] = \frac{y}{p_2} + \frac{p_2 - p_1}{p_1 p_2} \cdot \frac{1}{1 - P_B} \int_0^{\min(x^*,\, B)} \Big(y - \frac{p_2 x}{c}\Big) f_0(x)\, dx + \mathbf{1}_{y \ge p_2 B/c}\, \frac{\pi_{0,B}}{1 - P_B} \left(y - \frac{p_2 B}{c}\right) \cdot \frac{p_2 - p_1}{p_1 p_2}. \tag{25}$$

The indicator term accounts for cars admitted from the atom at $x = B$ when their demand exceeds $p_2 B/c$, in which case the battery is always depleted during service.

Case 1: $y < x^* = p_2 B/c$. Here $\min(x^*, B) = x^*$ and no atom contribution arises. Using $f_0(x) = e^{\theta x}/K$:

$$\begin{aligned}\int_0^{x^*} \Big(y - \frac{p_2 x}{c}\Big) \frac{e^{\theta x}}{K}\, dx &= \frac{1}{K}\left[y\, \frac{e^{\theta x^*} - 1}{\theta} - \frac{p_2}{c} \int_0^{x^*} x\, e^{\theta x}\, dx\right] \\ &= \frac{1}{K}\left[y\, \frac{e^{\theta x^*} - 1}{\theta} - \frac{p_2}{c}\left(\frac{x^* e^{\theta x^*}}{\theta} - \frac{e^{\theta x^*} - 1}{\theta^2}\right)\right].\end{aligned}$$

Substituting $x^* = cy/p_2$ and simplifying yields (12a).

Case 2: $y \ge x^* = p_2 B/c$. Here the battery is always depleted during service regardless of the admission level. Setting $\min(x^*, B) = B$:

$$\int_0^{B} \Big(y - \frac{p_2 x}{c}\Big) \frac{e^{\theta x}}{K}\, dx = \frac{1}{K}\left[y\, \frac{e^{\theta B} - 1}{\theta} - \frac{p_2}{c}\left(\frac{B e^{\theta B}}{\theta} - \frac{e^{\theta B} - 1}{\theta^2}\right)\right].$$

Adding the atom contribution $(\pi_{0,B}/K(1 - P_B))(y - p_2 B/c)$ with $\pi_{0,B} = p_0 e^{\theta B}/(\lambda K)$ and collecting terms yields (12b).

Monotonicity and limiting behaviour. Since $(1/p_1 - 1/p_2) > 0$ and the Phase 2 component $\max(y - p_2 x/c, 0)$ is non-decreasing in y, we have $S(y) \ge 1$ for all y, with $S(y) \to 1$ as $y \to 0$ (all service in Phase 1). As $y \to \infty$ the Phase 2 component dominates and $S(y) \to p_2/p_1$. As $B \to \infty$ the battery is never depleted and $S(y) \to 1$; as $B \to 0$ all service is at rate p_1 and $S(y) = p_2/p_1$. $\square$