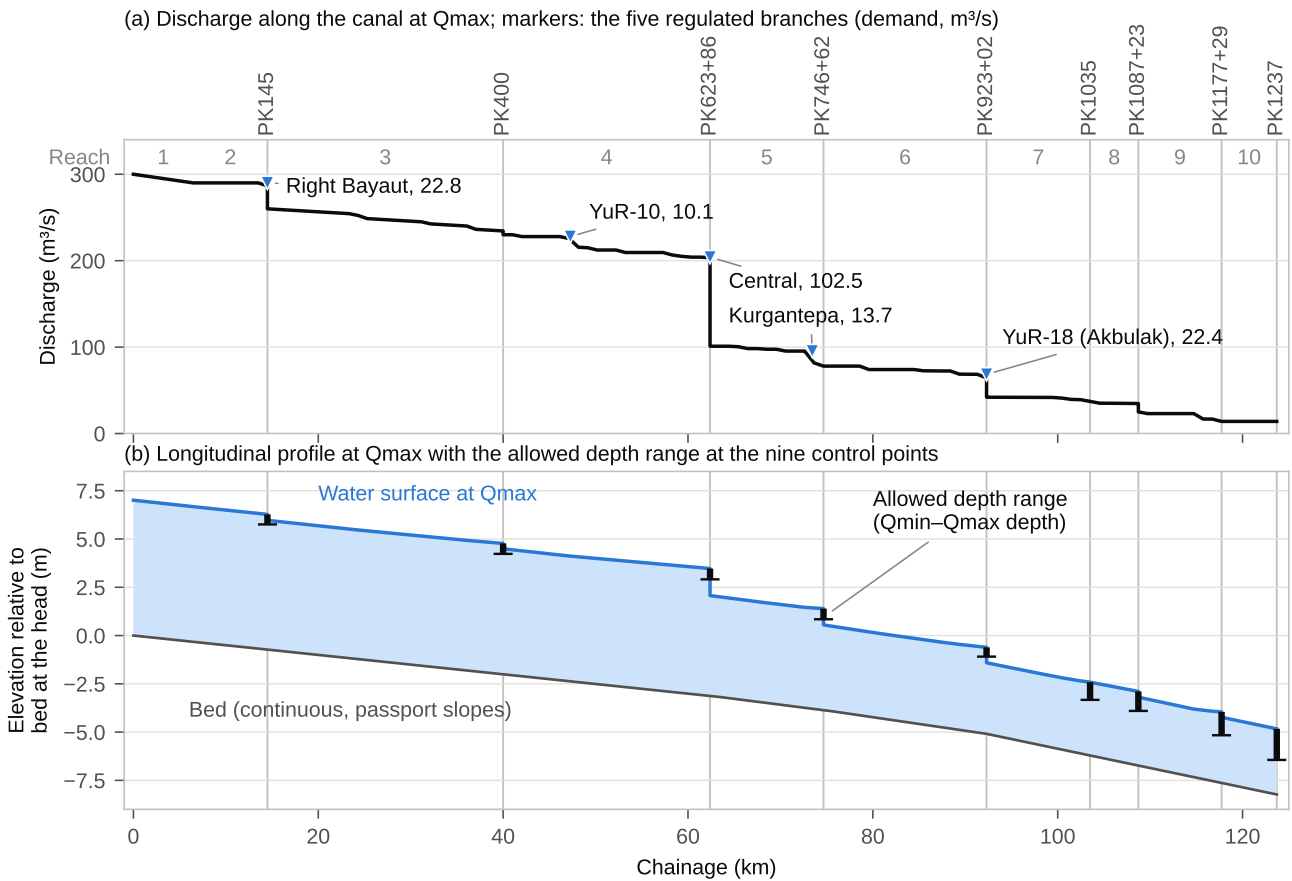
(a) Discharge along the canal at Qmax; markers: the five regulated branches (demand, m³/s)
PK145
PK400
PK623+86
PK746+62
PK923+02
PK1035
PK1087+23
PK1177+29
PK1237
Reach
1
2
3
4
5
6
7
8
9
10
300
200
100
0
Discharge (m³/s)
Right Bayaut, 22.8
YuR-10, 10.1
Central, 102.5
Kurgantepa, 13.7
YuR-18 (Akbulak), 22.4
(b) Longitudinal profile at Qmax with the allowed depth range at the nine control points
Water surface at Qmax
Allowed depth range
(Qmin–Qmax depth)
Bed (continuous, passport slopes)
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
Elevation relative to
bed at the head (m)
0
20
40
60
80
100
120
Chainage (km)