

User Manual



SP100

Thank you for purchasing our company's product! The SP100 is an amp designed mainly for electric guitars, offering users 9 switchable tones

The accompanying effects include chorus, phase, tremolo, and the ambient effects include reverb, delay, reverb delay, for a total of 6 types, making a guitar amp with excellent performance.

In addition, the SP100 has a wireless BT connection function, which makes it convenient for users to connect their mobile phones or computers play accompaniment.

This product is equipped with a built-in rechargeable battery, which allows users to use it outdoors.

II. Matters Need Attention

■ Power supply:

Please use the power adapter correctly, the adapter uses USB type-c 5V power, otherwise it may damage the device!

The charging time of the in-battery of this machine is about 3.5~4 hours with a charger with an output power of 5.0V 2.0A. The charging time starts from the state of discharge to full charge.

■ Connection:

USB type-c interface: can be connected to a computer or other multimedia devices.

Input guitar input interface: 6.5 mm two-core guitar universal interface.

Headphone Jack: 3.5mm stereo headphone jack. **Friendly reminder:** The external speaker will be muted when headphones are connected.

AUX Port: 3.5mm stereo audio interface.

■ Electrical interference:


Radio, television and other electromagnetic waves may cause interference to the use of equipment, so please try to stay away from radio, television and other equipment as much as possible.

■ Place of placement:

To prevent damage from deformation, discoloration and other aspects, avoid the following:

- A. Heat source B. Magnetic field C. Direct sunlight D. High temperature and damp
E. Dust or unclean places F. Strong strongly or shake

III. Panel Function

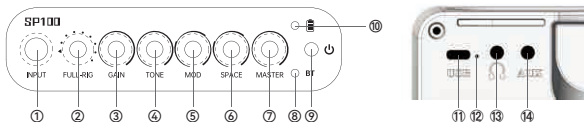

1.INPUT: 6.5 mm two-core guitar input interface.

2.FULL-RIG: Tone selection.

3.GAIN: Gain adjustment.

4.TONE: Brightness adjustment.

5.MOD Knob: Surrounding effect selection and adjustment knob.

6.SPACE Knob: Ambient effect selection and adjustment knob.

7.MASTER: Control the total output volume of the speaker.

8.BT Indicator Light: The indicator light flashes to indicate that BT is turned on and waiting for a connection, waiting time is 2 minutes, the indicator light is always on to indicate a successful connection, and the indicator light is off to indicate that BT is turned off. After the first successful connection with the device, it can be automatically connected during subsequent startup.

9.Power switch button.

- 10.Battery level indicator:** Solid on when powered on, blinking when power is low.
- 11.Charging or OTG recording and other external functions.**
- Note:** By using a USB Type-C cable with a separately purchased OTG adapter, you can connect to mobile devices for synchronized real-time audio and video internal recording.
- 12.Charging indicator light:** Red light when charging, off when fully charged.
- 13.3.5mm headphone output jack.**
- 14.3.5mm AUX input jack.**

IV. PEeffect Module
EN

1. FULL-RIG: The tone selection knob features 9 preset positions with the following default tone configurations. Users may also utilize the M-EFCS system to import third-party tones into any position for audition or storage.

Knob Position	AMP+CAB	Tone Type
	BYPASS	
1	Fender Twin Reverb '65 Reissue 2x12	Clean
2	Roland JC120 2x12	Clean
3	Fender Hot Rod Deville 2x12	Clean
4	TS808+JC900	Overdrive
5	Supro Delta King 1x12	Overdrive
6	Marshall JMP 1971 + Marshall 1960 4x12	Overdrive
7	Marshall JCM800 2203 + Marshall 1960 4x12	Distortion
8	EVH 5150 III - 6L6 + Mesa Boogie OS 4x12	Distortion



Note: The above mentioned manufacturers and product names are only used to describe the tonal characteristics of SP100, without any other intention. The trademark names belong to their respective companies. We will keep updating the tones, please refer to the actual product.

- 2. GAIN:** Adjust the gain of the AMP module.
- 3. TONE:** Adjust the brightness by high and low.
- 4. MOD:** The MOD is a knob for selecting and adjusting the parameters of the surrounding effects, including three processes, and three modes are available. The first process is to adjust the parameters of the CHORUS chorus effect, the second process is to adjust the parameters of the PHASER phase shift effect, and the third process is to adjust the parameters of the TREMOLO tremolo effect. Turn the knob to the leftmost end to turn off the effect.
- 5. SPACE:** The SPACE is a knob for adjusting the spatial atmosphere effect, including three processes, and three SPACeS are available. The first process is to adjust the parameters of the REVERB reverberation effect, the second process is to adjust the parameters of the DELAY delay effect, and the third process is to adjust the parameters of the REVERB DELAY effect. Turn the knob to the leftmost end to turn off the effect.
- 6. BT module:** After startup, the BT indicator light flashes, waiting for the device to connect. When an external device is connected, the BT indicator light is on steadily, indicating that the device is successfully matched and connected with the machine.
- Note:** If the BT is not successfully connected after 2 minutes of waiting, the BT mode will be automatically closed and the light will be extinguished (to avoid being connected incorrectly during use). Restarting the machine will turn on the BT mode again.

V. Technical Parameters		EN
Input	Standard 1/4" mono interface/(TS), 1/8" AUX stereo interface(TRS)	
Output	1/8" stereo output(TRS)	
Sampling rate	44.1K 24bit	
Dimensions	196.7(L)X 133(W)X 106(H)mm	
Weight	1128g	
Audio Specifications	Speaker System	Mono Full-Range Speaker Impedance: 4Ω Max Power: 10W
	Maximum Sound Pressure Level (SPL)	90±3 dB SPL@1m
	Frequency Range	110-20000HZ
	Enclosure Material	Bass Reflex Port Design (f0≈158HZ)
	Power Amplifier	Class D Amplifier 10W Output
	Headphone Output Impedance	16-32Ω
Power	5V, 2A	
Rated Power of Speaker	10W	
Maximum Loudness	90dB±3dB	
Battery Model Specification	18650-2S	
Battery Capacity	2600 mAh	
Battery Nominal Voltage	7.4V	
Battery Life	About 8 hours	
Operating Current	≥110mA	
Ambient temperature	-10°C to +40°C, normal temperature at +25°C	
Factory Accessories	USB-C, 3.5mm Audio Cable, Non-Slip Rubber Pads x4	


We will continually improve our products and reserve the right to modify certain features and specifications (including but not limited to appearance, packaging design, user manuals, accessories, dimensions, specifications, and displays) without prior notice.

Please confirm the product features and specifications with your local dealer before purchasing. Product images and colors may vary from the actual product due to lighting and screen settings. Please refer to the actual product.


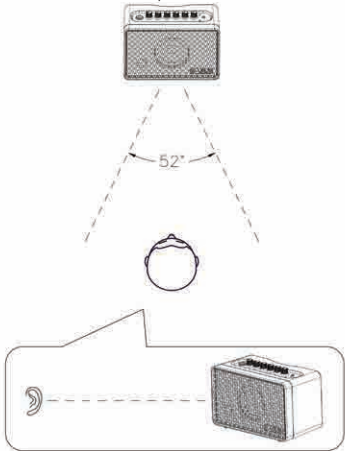


The upright placement delivers a broader soundstage.


Suggestion: Users are advised to select an optimal listening position to achieve a relatively complete soundstage and frequency response.

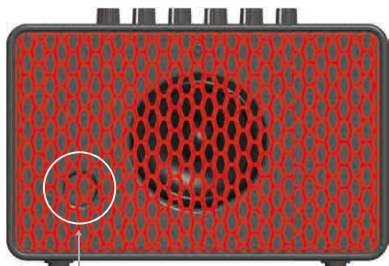

Bass Reflex
Port Design

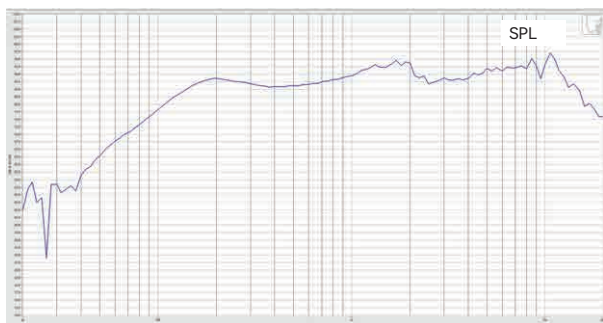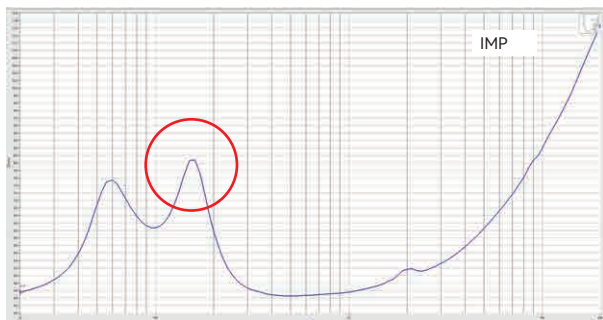

The SP100 speaker allows switching tones and turning onboard effects on/off via data cable or BT connection to the pedal



VI. Other EN

● Official APP download:



scan the QR code

● APP using tips:

Before operation, make sure that the BT of the cellphone and SP100 are both turned on, then run the APP and click the "≡" button,click the "Current Device" and select the "SP100", then scan nearby devices, you can connect to use.

●Tips: Loopback function, a common function on sound cards, can be enabled or disabled in software, it is set to the "on" position in factory condition.
When the function is turned on, the music in the computer/mobile phone will be recorded at the same time with the instrument sound, it's the same track mixed recording, including USB and BT music.
If the function is turned off, when using the SP100 as a sound card for recording, only the IN-interface instrument sounds can be recorded, which is more convenient for sub-track recording of instrument sounds during computer recording.

● We will continue to improve our products and reserve the right to modify certain functions and specifications (including but not limited to appearance, packaging design, operation manual, accessories,dimensions, specifications, displays, etc.) without prior notice.Please confirm the product functions and specifications with the local distributor before the purchase. Product pictures and color due to the light error and screen admiration setting.It may be different from the physical product effect. Please refer to the physical object accordingly.

★ Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

说明书



SP100音箱

感谢您购买本公司产品！SP100是一款主要为电吉他而设计的音箱，为用户提供了可切换的9种音色。

搭配的周边效果有合唱、相位、颤音，氛围效果有混响、延时、混响+延时共6种类型，是一款性能优秀的吉他音箱。

另外，SP100具有无线BT连接功能，便于用户连接手机或电脑播放伴奏演奏。本产品内置蓄电池，可供用户在户外使用。

二、注意事项

■ 电源供应：

请正确使用电源适配器，适配器使用USB type-c的5V电源，否则可能会损坏设备！

本机内置电池充电时长以输出功率为5.0V 2.0A的充电器为例，馈电状态开始充至满电，约3.5~4小时完成。

■ 连接：

USB type-c接口：可连接电脑或其他多媒体设备。

Input 吉他输入接口：6.5mm大二芯吉他通用音频接口。

耳机接口：3.5mm双声道耳机接口。**温馨提示：**接入耳机时，外扩喇叭静音。

AUX接口：3.5mm双声道音频接口。

■ 电器干扰：


收音机、电视机等电磁波可能会对设备使用造成干扰，因此请尽量远离收音机和电视机等设备。

■ 放置场所：

为防止变形、变色和其他方面等对产品造成损坏，请避免以下情况：

- A. 热源 B. 磁场 C. 阳光直射 D. 高温潮湿
E. 灰尘或不洁的地方 F. 强烈震动或摇晃

三、面板功能图解

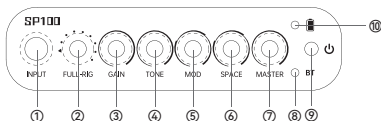

1.INPUT：6.5mm大二芯吉他输入接口。

2.FULL-RIG：音色选择。

3.GAIN：增益度调节。

4.TONE：明亮度调节。

5.MOD 旋钮：周边效果选择及调节旋钮。

- 6.SPACE 旋钮：**氛围效果选择及调节旋钮。
 - 7.MASTER：**控制音箱总输出音量。
 - 8.BT指示灯：**指示灯闪烁表示蓝牙开启并等待连接，等待时间为2分钟，指示灯常亮表示连接成功，指示灯熄灭表示蓝牙关闭。首次与设备连接成功后，后续开机可自动连接。
 - 9.电源开关按钮。**
 - 10. 电量指示灯：**开机长亮，馈电闪烁。
 - 11.充电或OTG内录等外接功能。**
- 温馨提示：**使用USB type-C线搭配另购的OTG转换器，可连接到手机等设备进行音画同步实时内录。
- 12.充电指示灯：**充电红灯亮起、满电熄灭。
 - 13.3.5mm 耳机输出接口。**
 - 14.3.5mm AUX 输入接口。**

四、效果模块功能介绍

CN

1.FULL-RIG：音色选择旋钮共有9个档位，音色预设如下，也可使用M-EFCS导入第三方音色到任意档位试听或保存。

旋钮档位	AMP+CAB	音色类型
	BYPASS	
1	Fender Twin Reverb '65 Reissue 2x12	清音
2	Roland JC120 2x12	清音
3	Fender Hot Rod Deville 2x12	清音
4	TS808+JC900	过载
5	Supro Delta King 1x12	过载
6	Marshall JMP 1971 + Marshall 1960 4x12	过载
7	Marshall JCM800 2203 + Marshall 1960 4x12	失真
8	EVB 5150 III - 6L6 + Mesa Boogie OS 4x12	失真



注：以上所提及的厂商及产品名称仅用于描述SP100的音色特点，无其他意图，商标名称归其公司所有，我们将不断更新音色，请以实物为准。

- 2.GAIN：**AMP模块增益度调节。
 - 3.TONE：**明亮度调节高低。
 - 4.MOD：**周边效果参数选择和调节旋钮，包含三段进程，三种模式可选。第一段进程为调节CHORUS合唱效果的参数，第二段进程为调节PHASER相移效果的参数，第三段进程为调节TREMOLO颤音效果的参数。将旋钮调至最左端，可关闭效果。
 - 5.SPACE：**空间氛围效果调节旋钮，包含三段进程，三种SPACE可选。第一段进程为调节REVERB混响效果的参数，第二段进程为调节DELAY延时效果的参数，第三段进程为调节REVERB+DELAY效果的参数。将旋钮调至最左端，可关闭效果。
 - 6.BT 模块：**开机后，BT指示灯闪烁，等待设备连接。当连接外部设备后，BT指示灯长亮，表示设备与机器匹配连接成功。
- 说明：**BT等待连接2分钟后仍没有成功连接，将自动关闭BT模式，灯熄灭(避免使用过程中被错误连接)，重启机器可再次打开BT模式。


五、技术参数		CN
输入		标准1/4" 单声道接口/(TS), 1/8" AUX立体声接口(TRS)
输出		1/8" 立体声输出(TRS)
采样率		44.1K 24bit
尺寸		196.7(L)X 133(W)X 106(H)mm
重量		1128g
音频规格	扬声器	单声道全频扬声器 阻抗4Ω 最大功率10W
	最大声压级	90±3 dB SPL@1m
	频率范围	110-20000HZ
	音箱壳体	倒相孔设计 (f0≈158HZ)
	功率放大器	D类10W
	耳机输出阻抗	16-32Ω
电源		5V, 2A
音箱额定功率		10W
最大响度		90dB±3dB
电池型号规格		18650-2S
电池容量		2600mAh
电池标称电压		7.4V
电池续航		约8 小时
工作电流		≥110mA
环境温度		-10℃~+40℃常温+25℃
出厂附带		USB-C数据线, 3.5mm音频线, 防滑胶垫x4
修订		2026年4月14日

我们将不断改进我们的产品并保留修改某些功能和规格(包括, 但不限于外观、包装设计、操作手册、配件、尺寸、规格参数、显示屏等)的权利, 恕不另行通知。


购买前请与当地经销商确认产品功能及规格。产品图片及颜色因拍照光线误差及屏幕设定可能与实物产品效果有所差异。请以实物为准。





竖立放置可得到更宽广的声场



建议：用户选择合适的听音位置，可得到相对完整的声场及频率响应。

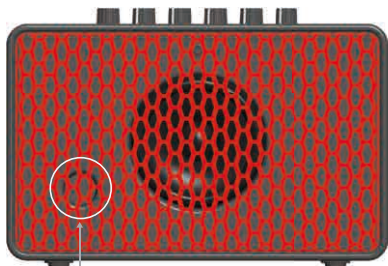

倒相管设计

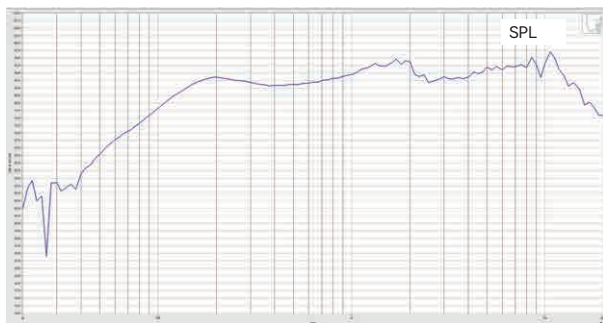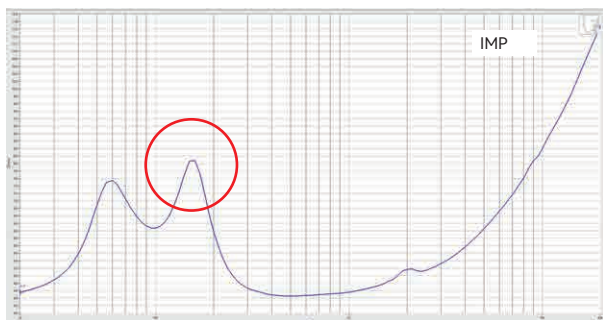

SP100音箱可用数据线或BT连接踏板进行切换音色及开关周边效果



六、其他 CN

● 扫码下载APP:



扫描二维码下载

● **手机 APP 连接步骤:** 在操作前需确认手机和SP100的BT功能都已经开启，然后打开 M-EFCS，点击左上角“≡”按键，点击“当前设备”选择 SP100，再扫描附近设备，即可连接使用。

● **温馨提示:** Loopback功能，是常见的声卡回环功能，可到软件上开启或者关闭，默认出厂为开启状态。功能开启时，电脑/手机内的音乐声会与乐器声同时录制，同一轨道混合录制，其中包括USB 和 BT的音乐声。如果功能关闭，使用 SP100 作为声卡进行录音时候，只能录制到IN 接口的乐器声，这样更便于电脑录音时候进行乐器声分轨录音。

● 我们将不断改进我们的产品并保留修改某些功能和规格(包括但不限于外观、包装设计、操作手册、配件、尺寸、规格参数、显示屏等)的权利，恕不另行通知。购买前请与当地经销商确认产品功能及规格。产品图片及颜色因拍照光线误差及屏幕设定可能与实物产品效果有所差异。请以实物为准。