


M-VAVE

User Manual

H8

Multi-Effects Headphone Guitar Amplifiers

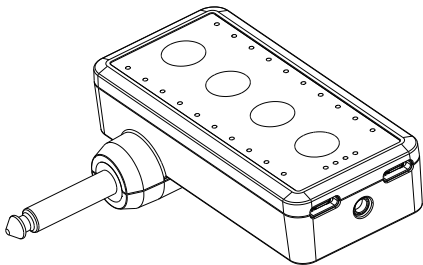

Product Information

- **Website:** www.m-vave.com
- **CubeSuite for Windows/Mac OS:** <http://www.m-vave.com/appdownload>
- **CubeSuite for Android/iOS:** scan the QR code



Thank you for purchasing the H8 headphone guitar amplifiers. H8 is a comprehensive guitar effects with multiple functions. H8 has 10 factory presets, users can edit the presets to overlay storage, and the **operation method is simple and intuitive. The extremely small body** contains a wealth of effect energy, and has a very good performance in timbre effects! H8 also has a built-in power supply battery, which **can be used continuously for 5 hours when fully charged.** The H8 is designed for 3.5 headphone output, which is not bothersome and very convenient to use.

H8 contains 10 classic PREAMP, two commonly used modulation effects CHORUS & PHASER, a TAPE ECHO effect, a HALL REVERB effect, 10 classic IR cabinet simulations, and a high precision TUNER. In addition, H8 also has high-quality mobile phone recording, **wireless music playback and other functions in one.** H8 is small in size, good in performance, easy to carry, and excellent in tone. It is your good guitar companion!

EN Attention

Power Supply:

■ This machine is equipped with a built-in battery for power supply, which can last for 5 hours when fully charged. After the battery is consumed due to use, please use the USB 2.0 cable that comes with the machine to connect the charging port of the machine (please refer to the third item title ①) to A charger below 6V (similar to a mobile phone charger) for charging, this device supports fast charging.

■ You can directly use the mobile phone power bank to directly supply power to the device, and the device supports charging/power synchronization.

■ The charging time of this device depends on the output power of the charging transformer. Taking a charging head with an output power of DC 5.0V/2.0A as an example, it can be charged when the built-in battery of this device is exhausted. Generally, it can be fully charged in 2 hours.

Precautions:

■ In the process of using this product, if the system freezes or indirectly fails, please keep pressing the On/Off ◀ button for 10 seconds and then release it. This operation is a forced restart of the device.

Connection reminder:

When the effector is connected to headphones, power amplifier equipment or disconnected, please be sure to turn off the power and other equipment, which will help prevent equipment failure and damage to other equipment.


Placement:

In order to prevent deformation, discoloration and other damage to the product, please avoid the following situations;


- Heat source
- Magnetic field
- Direct sunlight
- High temperature and humidity
- High humidity
- Dust or dirty place
- Strong vibration or shaking

EN H8's Effect Module Link

■ Guitar Input→Tuner→Amp Simulation→Chorus/Phase Shift Effect→Delay Effect→Reverb Effect→CAB Simulation→Output to the headphone.

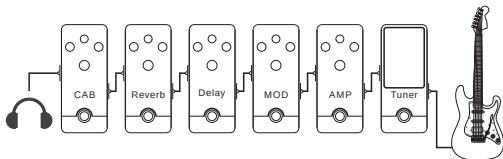


EN H8 Panel Function Diagram

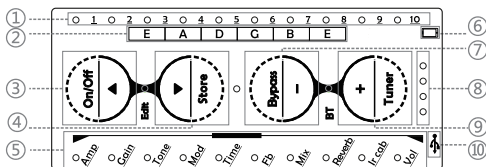

- ① **Effect parameter prompt light:** In the PRESET mode, it is the presets position display, if you change the master volume, it will display the volume a few seconds, in the EDIT mode it is the effect parameter display.
- ② **Guitar tuning note name table:** In order from right to left, the far right is the guitar 1 string note name, and the far left is the guitar 6 string note name.
- ③ **On/Off ◀ button:** (long press) On/Off ◀ button. In PRESET mode (short press) to switch the previous preset. In the EDIT mode (short press), select the effect module for scrolling up.
- ④ **Store ▶ button:** (long press) Preset Store ▶ button. In PRESET mode (short press) to switch to the next preset. In EDIT mode (short press), select the effect module for scrolling down.
- ⑤ **Effect module indicator:** In PRESET mode, it indicates the effect module link. In the EDIT mode, it prompts the currently selected effect module. In TUNER mode, it functions as a tuning table.
- ⑥ **Mobile phone internal recording interface icon:** It can be connected to a phone for "internal recording".
- ⑦ **Bypass- button:** (long press) Enter the bypass function. In PRESET mode (short press) to reduce the master volume. In EDIT mode (short press) to reduce the effect module parameters.
- ⑧ **Charging indicator light:** It lights up when charging, and automatically goes out to stop charging when fully charged.

⑨**Tuner+ button:** (long press) Enter the tuner mode,in PRESET mode (short press) to increase the master volume.In EDIT mode (short press) to increase the effect module parameters.

⑩**USB icon:** Can be used for charging,connecting to a computer as a sound card and loading third-party IR files.

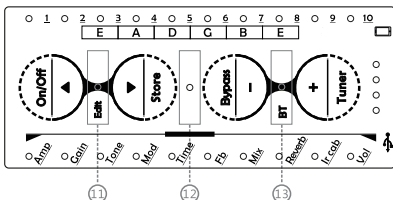


⑪**Edit indicator:** It is off in the PRESET mode,and it is light in the EDIT mode.

⑫**Bypass/Tuner indicator:** It lights up blue in Bypass mode,red in Tuner mode,and off in other modes.

⑬**BT indicator light:** Wireless music link indicator light.This indicator light flashes slowly when the wireless device is not connected.After the wireless device is connected,the light turns to a steady state.It is off when the wireless function is turned off.

▲**PIN: 0000**

EN Audio,Data Interface Function Illustrated



- ① USB 2.0 data line socket/charging socket.
- ② The recording data line socket in the mobile phone.
- ③ 1/8 headphone output jack.
- ④ 1/4 audio plug.

EN PRESET and EDIT Mode


H8 has two operating modes, EDIT is the real-time editing mode, and PRESET is the preset mode. Initially, it enters the PRESET preset mode by default. Press the On/Off ◀ and Store ▶ combination buttons at the same time to switch between EDIT and PRESET modes.

A. PRESET Mode

In the PRESET mode, the 10 presets display correspond to the 10 parameter indicators.

In the PRESET mode, the parameter indicator is also used to display the master volume.

In PRESET mode, the On/Off ◀ button is to switch the previous preset. The Store ▶ button is to switch the next preset.



In PRESET mode, the Bypass- button is to decrease the master volume, and the Tuner+ button is to increase the master volume.

In the PRESET mode, the lights of the activated modules that are on, and the lights of the inactivated modules are off.

■ H8 defaults to the PRESET mode when it is initially turned on. You can switch and browse presets by short pressing the On/Off ◀ (previous) and Store ▶ button (next).

■ In PRESET mode, short pressing the Bypass- button to decrease the master volume, short pressing the Tuner+ button to increase the master volume.

■ In the PRESET mode, the parameter indicator is used as a reminder to show the preset position and output volume.

■ In the effect module chain of the preset, the indicators of the modules that are not activated are off, and the indicators of the effect modules that have been activated are on.

■ H8 effector presets 10 commonly used factory presets for users, (The following is for reference only, we will modify the parameters whenever necessary, the specific value is subject to the actual product.)

Tone Number	Tone Name	AMP	GAIN	TONE	MOD	TIME	FB	MIX	REVERB	IR CAB	VOL
1	Clean	3	8	6	5	6	5	2	4	7	10
2	Clean	2	10	8	0	0	0	0	6	10	6
3	Clean	3	5	8	6	7	3	3	4	5	10
4	Overdrive	4	2	7	0	8	3	4	2	1	5
5	Overdrive	5	10	7	3	9	5	3	6	9	10
6	Overdrive	6	5	8	0	8	5	2	3	4	9
7	Distortion	7	9	8	0	0	0	0	3	3	6
8	Distortion	8	4	7	0	9	5	2	2	5	8
9	Distortion	9	10	7	0	9	3	3	3	2	8
10	Distortion	10	8	7	3	8	3	3	4	2	9

B. EDIT Mode (please short press the combination button On/Off ◀ and Store ▶ to switch from PRESET mode to EDIT mode after booting)

■ In EDIT mode, short pressing the On/Off ◀ button to scroll up for selecting the function module, short pressing the Store ▶ button to scroll down for selecting the function module, when the effect module is selected, the corresponding indicator lights up, and others light off.


■ When entering the EDIT mode initially, the system defaults to the AMP module, and you can browse the 10 amp in the AMP module up/down through the Bypass-/Tuner+ buttons.

■ Bypass- and Tuner+ buttons play different roles in different modules. For example, they play the role of up/down browsing in the Amp or IR CAB module, and increase/decrease the effect parameters in the REVERB or DELAY module. The user can edit the parameters in EDIT mode and save them to PRESET mode.

■ In the EDIT mode, the user can Store ► the edited preset to the corresponding position in the PRESET mode by long pressing the Store button. The storage location cannot be moved. For example, if you select the third preset in the PRESET mode and then press the On/Off ◀ and Store ► combination button to enter the EDIT mode, then the edited preset can only be stored in this case in the position of the third preset.

EN The Function Introduction Of The Effect Module

1. AMP Module

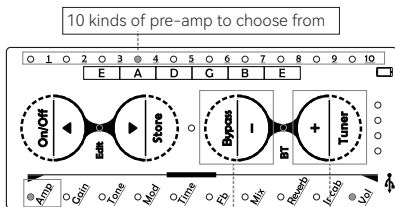

Select the AMP module, the indicator light is on.

Scroll down to browse AMP type

Scroll up to browse AMP type

■ H8 has a total of 10 classic pre-amp. In the EDIT mode, you can select the AMP module through the On/Off ◀ and Store ▶ buttons. When the AMP is selected, the indicator lights up, and you can use the Bypass- and Tuner+ buttons to access/browse.


The timbre sequence corresponds to the parameter indicator lights 1 to 10. When the timbre is selected, the corresponding serial number indicator lights up, and the unselected timbre indicator lights are off.

■ 10 kinds of AMP module, please refer to the list below for specific data;

(The following is for reference only; we will modify the parameters whenever necessary; the specific value is subject to the actual product.)


Tone Number	Name	Voice Name
1	Gas Station Clean	Clean
2	Power-Zone Clean	Clean
3	Two Stone Coral Clean	Clean
4	Day Tripper OD	Overdrive
5	Two Stone Coral OD	Overdrive
6	US Classic OD	Overdrive
7	Mr Smith Dist	Distortion
8	Two Stone Cardeff	Distortion
9	Randy Devil Dist	Distortion
10	Shittcow Dist	Distortion

2. GAIN;gain adjustment

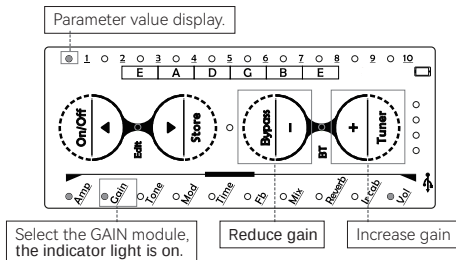


■ In the EDIT mode, you can select the GAIN module through the On/Off ◀ and Store ▶ buttons. When GAIN is selected, the indicator will light up. You can use the Bypass- and Tuner+ buttons to reduce or increase the gain of the module and adjust the range From parameter indicator 1 (minimum) to parameter indicator 10 (maximum).

3. TONE;tone brightness adjustment

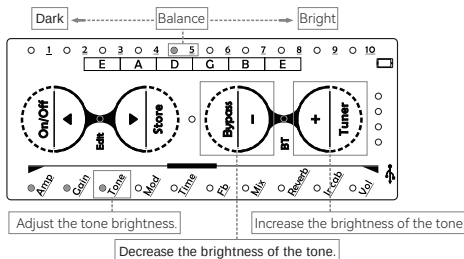

■ In EDIT mode, you can use the On/Off ◀ and Store ▶ buttons to select the TONE module. When TONE is selected, the indicator will light up. You can use the Bypass- and Tuner+ buttons to decrease or increase the brightness and adjustment range of the tone. From parameter indicator 1 (darkest) to parameter indicator 10 (brightest), the default parameter indicator 5 is "balance" brightness.

4. MOD Module; contains two modulation effects, CHORUS/ PHASER.

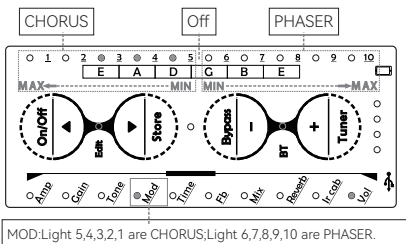


■ In the EDIT mode, you can select the MOD by pressing the On/Off ◀ and Store ▶ buttons. In the MOD mode, the position between the parameter indicator light 5 and light 6, is used to close the MOD module. When MOD is closed, all the parameter lights are off.

■ When the MOD module is selected, you can use the Bypass- button to turn on the CHORUS effect. When the MOD module is off, press the Bypass- button, and the light 5 will light up, indicating that the CHORUS effect is currently enabled. CHORUS effect gain adjustment corresponding to a range from small to large between the light of 5,4,3,2,1, light 5 is the MIN effect, and light 1 is the MAX effect.

■ After the MOD module is selected, you can enable the PHASER effect by pressing the Tuner+ button. When the MOD module is closed, press the Tuner+ button, and the light 6 will light up, indicating that the PHASER effect is currently enabled. PHASER effect gain adjustment corresponding to a range from small to large between the light of 6, 7, 8, 9, 10, light 6 is the MIN effect, and light 10 is the MAX effect.

5. DELAY Module: The DELAY module contains three parameter buttons of Time, Fb and Mix to adjust.

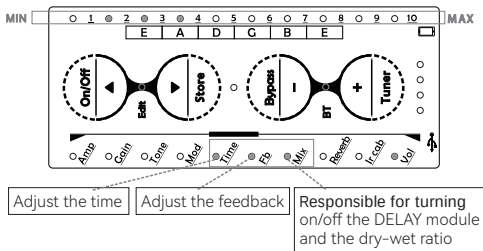


■ In EDIT mode, you can select MIX (DELAY module) by pressing the On/Off ◀ or Store ▶ buttons. MIX is responsible for turning On/Off ◀ the DELAY effect. When Mix is selected, press the Bypass- button continuously until all parameter indicators and Time are selected. Fb and Mix prompt lights are all off, this operation is to close the DELAY module. When the DELAY module is off, select Mix and press the Tuner+ button to turn on the DELAY module, and the Time, Fb and Mix indicator lights will light up. When the DELAY module is turned on, the first parameter of MIX (delayed dry-wet ratio) is also turned on. Then the parameter indicator 1 lights up. You can increase or decrease the DELAY dry-wet ratio by pressing the Bypass- and Tuner+ buttons. Adjustable range parameter indicator 1 (minimum) to the parameter indicator 10 (maximum).

■ Fb is to adjust the DELAY feedback. When the DELAY module is turned on, you can use the On/Off ◀ and Store ▶ buttons to select Fb. Then the Fb indicator lights up, and you can increase or decrease the DELAY by pressing the Bypass- and Tuner+ buttons. The adjustable range is from parameter indicator 1 (minimum) to parameter indicator 10 (maximum).

■ Time is to adjust the time of the DELAY. When the DELAY module is turned on, you can use the On/Off ◀ and Store ▶ buttons to select Time, and then the Time indicator will light up, and you can increase or decrease it through the Bypass- and Tuner+ buttons. DELAY small speed feedback time, adjustable range parameter indicator from 1 (minimum) to the parameter indicator 10 (maximum).

6. REVERB module

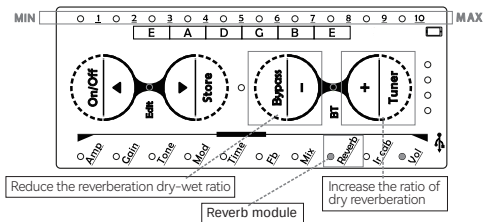


■ In the EDIT mode, you can select the Reverb module by pressing the On/Off ◀ and Store ▶ buttons. When the Reverb module is selected, the Reverb indicator will light up.

■ Continuously press the Bypass- button until the parameter indicators are all off. This operation is to turn off the Reverb module. When the REVERB module is off, press the Tuner+ button to turn on the Reverb module again, and the parameter indicator lights up.

■ You can reduce or increase the effect of Reverb by pressing the Bypass- and Tuner+ buttons.

7.IR CAB Module

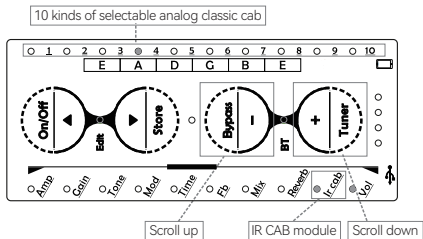

■ H8 is set with 10 classic cabinet simulations. In the EDIT mode, you can select the Ir cab module by pressing the On/Off ◀ and Store ▶ buttons. When the Ir cab module is selected, press the Bypass- button continuously until all the parameter indicators are all Off; this operation is to close the Ir cab module.

■ When the Ir cab module is closed, press the Tuner+ button to turn on the Ir cab module. At the same time, the parameter indicator 1 lights up, indicating that the first IR cabinet built into the H8 effector is currently enabled.

■ You can browse 10 different Ir cab through the Bypass- and Tuner+ buttons.


■ You can use the CubeSuite software provided by our company to load third-party IR files.

■ H8 factory IR settings list:

(The following is for reference only, we will modify the parameters whenever necessary; the specific value is subject to the actual product.)

Number	Name	CAB specifications
1	Line 6 Vetta	1X12
2	Marshall 1960AV V30	2X12
3	Marshall 1960A T75 LA610	4X10
4	VHT Deliverance	2X12
5	Soldano 2x12 V30	2X12
6	Peavey 5150 + Mesa	4X12
7	JSX KT77 + Mesa Stiletto	4X12
8	Diezel V30 SM57	2X12
9	GuitarHack Mesa Trad	2X12
10	Marshall SM81 9100A 1960B	4X12


8.VOL volume setting

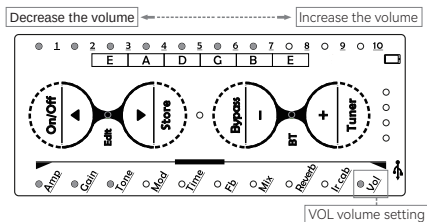

■ In EDIT mode, you can select the VOL module by pressing the On/Off ◀ and Store ▶ buttons.

■ Please use the Bypass- and Tuner+ buttons to decrease or increase the volume of the tone currently being edited. The adjustable range is from parameter indicator 1 to parameter indicator 10.

9. TUNER;tuning module

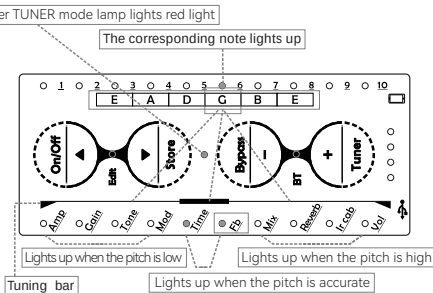

■ H8 contains a high-sensitivity tuner, the method of use is as follows; in the PRESET mode, long press the Tuner+ button to enter the Tuner tuning mode, at this time the indicator in the middle of the function button lights up in red. Indicates that the tuning function has been entered.


■ In the Tuner mode, in the top note name table, from left to right correspond to the 6/5/4/3/2/1 strings of the guitar. When the strings are played, the main unit automatically recognizes the pitch, and the indicator light above the corresponding note name will light up, indicating that the current pitch is close to the lighted note name.

■ We take the third string of the guitar as an example for tuning; when the third string is played, the indicator light above the note name of the corresponding note name table G lights up, and then adjusts against the tuning bar below; when the left light of the tuning bar lights up it means that the current pitch is low. When the right light is on, it means the current pitch is high. When the middle two lights are on, it means that the current pitch is close to the guitar 3 string G.

■ In order to avoid unnecessary noise during tuning, the H8 audio output is muted when entering the TUNER mode, and the normal output state will be restored after exiting the TUNER mode.

■ After the tuning is complete, press any button to exit the TUNER mode, and the TUNER indicator will be extinguished.

10. Wireless music playback function

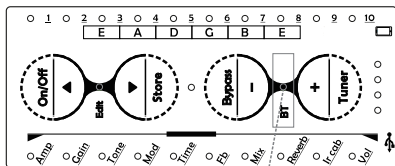

When this light keeps flashing, it means that the connection is not successful. After the connection is successful, the light will stay on.

■ H8 includes a wireless music playback function, which is convenient for users to play accompaniment in practice or performance. The connection method is as follows; after the H8 is turned on, the wireless pairing function is automatically turned on, and the BT indicator keeps flashing slowly, indicating that the device is not currently connected, and we need to pair to the mobile phone or tablet side. Please open the settings item on your mobile device to find the BT name list, find and select 'H8' from the list to connect. After the connection is successful, the BT indicator turns to a long light.

■ Short press the combination button Bypass- and Tuner+ to turn On/Off ◀ the wireless connection function. In the off state, the BT indicator is off.


11.Bypass function;direct dry signal

■ We set the Bypass function for the H8 effector. Long press the Bypass- button to enter the Bypass mode.

■ After entering the Bypass mode, the Bypass indicator lights up in blue, and the parameter and module indicators are all off. In Bypass mode, the output signal of the instrument is a dry signal (through).


■ Short press the On/Off ◀ or Store ▶ button to exit the Bypass mode.

12.Internal recording function:connect to a M/P or PC device with 3.5 interface to achieve record function



■ H8 includes a high-quality internal recording function, plug into the USB port of the device through a dedicated data cable for internal recording, and then connect to your mobile phone computer. Use your mobile phone/computer recording software to achieve H8 high-quality built-in audio recording function.

13.IR CAB loading function



■ H8 supports users to load third-party IR CAB simulations, and users can load them online through the CubeSuite software provided by the manufacturer for free. You only need to connect the H8's built-in USB 2.0 cable to your computer to operate it in the CubeSuite software. The CubeSuite software is easy to use and easy to operate.

■ Install CubeSuite on the computer, generate the following icon, double-click to open it.



EN The Software Interface

■ Software interface is divided into seven parts

①**IR file search:** through this search to find your preparation on your computer IR file.

②**IR file name display window:** this window displays the selected IR file, which is convenient for us to click and listen.


③**Pick-up microphone distance simulator:** through this knob you can adjust the distance of the microphone to the speaker, the closer the distance, the greater the sound, the further the distance, the smaller the sound.

④**Storage location:** this drop-down serial number is the H8 internal IR storage location, you can choose 1-10 locations to store third-party IR.

⑤**Save button:** When the third-party IR is selected, the microphone pickup distance is adjusted, and the storage number position is selected, we can click this button to save.


⑥ Click this button to restore the factory IR.

⑦ Click this button to restore the factory presets.

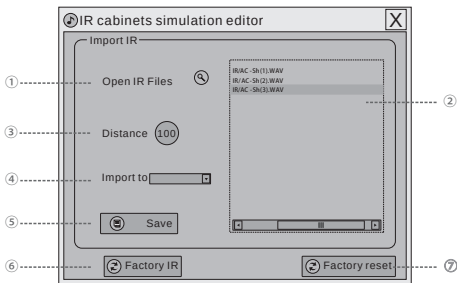

Preset

- ①Select the preset that needs to be adjusted (a total of 10 sets of presets are available for selection),if the software and equipment are in the same set of presets,you can hear the real-time adjustment effect.
- ②**Amp:** adjust the amp analog tone,there are 10 kinds of amp analog to choose from (see manual 5-1 for details).
- ③**Gain:** adjust the GAIN tone distortion (see manual 5-2 for details).
- ④**Tone:** adjust the brightness of TONE tone (see manual 5-3 for details).
- ⑤**Mod:** adjust the MOD module,0-4 is the CHORUS effect parameter,5 is the MOD effect off,and 6-10 is the PHASER effect parameter (see manual 5-4 for details).
- ⑥**Time:** adjust the feedback time of Delay effect (see manual 5-5 for details).
- ⑦**Fb:** adjust the feedback depth of Delay effect (see manual 5-5 for details).
- ⑧**Mix:** adjust the dry-to-wet ratio of the Delay effect (see manual 5-5 for details).
- ⑨**Reverb:** Adjust the dry-to-wet ratio of the REVERB effect (see manual 5-6 for details).
- ⑩**Ir cab:** adjust the sound of IR box simulation,there are 10 kinds of box simulation to choose from (see manual 5-7 for details).
- ⑪**Vol:** adjust the current preset output volume (see manual 5-8 for details).
- ⑫**Save:** tone save button.**Note:** If the adjusted preset is not saved, it will be restored to the parameters before the adjustment after the device is powered off.

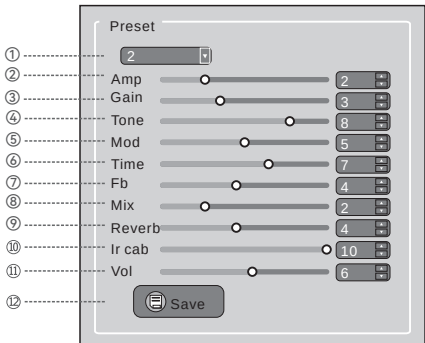

EN Technical Parameters


Input	Standard 1/4" interface mono/TS
Output	Standard 1/4" interface mono/TS
Sample rate	48K/24bit
Power supply	DC 5V 300mA power adapter
Size	85(D)X81(W)X29(H)mm
Weight	121g
Accessories	Packing box,charging cable,internal recording cable

M-VAVE

使用说明书

H8

耳放式便携电吉他效果器

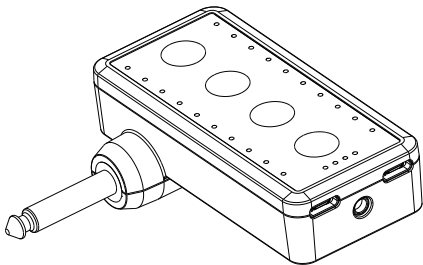

产品信息

- 官网: www.m-vave.com
- 电脑端Windows/Mac OS下载网址: <http://www.m-vave.com/appdownload>
- 手机端Android/iOS下载APP: 扫描二维码下载



感谢您购买H8耳放式便携电吉他效果器，H8是一款集多项功能为一体的综合电吉他效果器。H8设置了10组出厂预置音色，用户可自定义编辑音色进行覆盖储存，操作方法简便直观。极其小巧的机身却包含着丰富的效果能量，并且在音色效果上具备着非常出色的表现！本效果器还内置了供电电池，满电状态下可连续使用5小时，H8设计为3.5耳机输出，使用起来既不扰民又非常便捷。

H8包含了10种经典的AMP箱头数字模拟音色、两种常用的MOD效果CHORUS/PHASER、一个ECHO1/4的DELAY效果、一个HALL混响效果、10种经典的IR箱体模拟以及一个高精度的TUNER校音器。另外，H8还带有高品质的手机内录、无线音乐播放等多种功能集于一身。H8体积小性能好、便于携带且音色优秀，是您不错的吉他伴侣！

电源供应:

■本机设有内置电池供电，满电状态下可持续使用5小时，电池因使用消耗后，请使用本机附带的USB线连接本机充电口（请参考第三项标题①）至低于6V的充电器（类同于手机充电器）进行充电，本设备支持快充。

■可直接使用手机充电宝直接为本设备进行供电，本设备支持充电/用电同步进行。

■本设备充电时长取决于充电变压器的输出功率，以输出功率为DC 5.0V/2.0A的充电头为例，在本设备内置电池耗尽的状态下进行充电，一般情况下2小时可以充满。

注意事项:

■在使用本产品的过程中如果出现系统卡顿或间接性失灵的状态，请保持按住On/Off ◀ 按键10秒后再松开，此操作为强制重启设备。

连接提醒:

■当效果器连接耳机、音箱设备或断开前，请务必关闭电源及其他设备，这将有助于避免设备出现故障和损害其他设备。


放置场所:

为防止变形，变色和其他方面等对产品造成的损坏，请避免以下情况；


- 热源
- 磁场
- 阳光直射
- 高温潮湿
- 湿度较大
- 多尘或不洁地方
- 强烈震荡或摇晃

CN H8的效果模块链接

■ 吉他输入→调音器→箱头模拟→合唱/相移效果→延迟效果→混响效果→箱体模拟→输出至耳机。

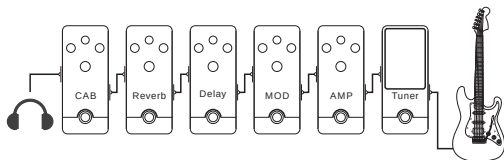

CN H8的面板功能图解

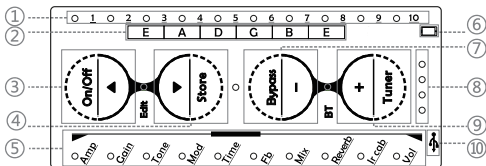

①**效果参数提示灯**：在PRESET模式下为音色位置显示，在调节总输出音量模式下为音量数值显示，EDIT模式下为效果参数增益度显示。

②**吉他校音音名对照表**：按顺序从右至左，靠最右边为吉他1弦音名对照，靠最左边为吉他6弦音名对照。

③**On/Off ◀ 按键**：（长按）开/关机按键。在PRESET模式下（短按）为切换上一个音色。在EDIT模式下（短按）为上翻选择效果模块。

④**Store ▶ 按键**：音色储存按键。在PRESET模式下（短按）为切换下一个音色。在EDIT模式下（短按）为下翻选择效果模块。在EDIT模式下（长按）为储存音色。

⑤**效果模块指示灯**：在PRESET模式下为效果模块链接指示。在EDIT模式下为提示当前音色被选用的效果模块。在Tuner模式下为校音表作用。


⑥**手机内录接口图标**：可连接手机进行“内录”。

⑦**Bypass-按键**：在PRESET模式下（长按）为进入旁路直通功能。在PRESET模式下（短按）为减小总输出音量。在EDIT模式下（短按）为减小效果模块参数。

⑧**充电提示灯**：充电时亮起，满电后自动熄灭停止充电，实时显示剩余电量。

⑨**Tuner+按键**：在PRESET模式下（长按）为进入校音器模式，在PRESET模式下（短按）为增大总输出音量。在EDIT模式下（短按）为增大效果模块参数。

⑩USB数据线插口图标：可用于充电、连接电脑当做声卡和加载第三方IR文件。

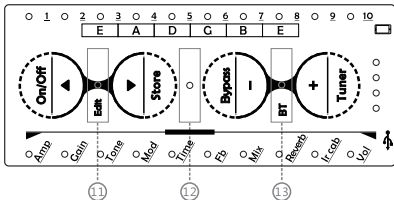


⑪Edit指示灯：在PRESET模式下为熄灭状态，在EDIT模式下为长亮蓝灯状态。

⑫Bypass/Tuner指示灯：在Bypass模式下亮蓝灯，在Tuner模式下亮红灯，在其他的模式下此灯不亮。

⑬Bt指示灯：无线音乐链接提示灯。在未连接无线设备时此提示灯慢闪，当成功接无线设备后此灯转为长亮状态。在关闭无线功能时为熄灭状态。

CN 音频、数据接口功能图解



①数据传输USB数据线插口/充电插口。

②手机内录数据线插口。

③1/8耳机输出插口。

④1/4吉他输入插头。

CN PRESET与EDIT模式


H8有两种操作模式；EDIT实时编辑模式以及PRESET预置模式。开机初始默认进入PRESET预置模式，同时按下On/Off ◀ 和Store ▶ 组合按键可以进行EDIT与PRESET模式之间的切换。

A、PRESET模式

在PRESET模式下10个预置音色显示对应10个参数指示灯。

在PRESET模式下参数指示灯也作为显示音量的大小数值。

在PRESET模式下On/Off ◀ 按键为切换上一个预置色，Store ▶ 按键为切换下一个预置音色。



在PRESET模式下Bypass-按键为减小总输出音量，Tuner+按键为增大总输出音量。

在PRESET模式下的预置音色里，被启用的模块灯亮起，未被启用模块灯熄灭。

■ H8默认初始开机为PRESET模式，您可通过短按On/Off ◀（前一音色）和Store ▶ 按键（后一音色）来进行切换浏览音色。

■ 在PRESET模式下短按Bypass-按键为减小总输出音量，短按Tuner+按键为增大总输出音量。

■ 在PRESET模式下参数指示灯作为显示音色位置与输出音量的数值。

■ 在预置音色的效果模块链接里未被启用的模块指示灯不亮，已被启用的效果模块指示灯则亮起。

■ H8效果器为用户预置了10个常用的出厂音色，下图为预置音色参数表；

（以下仅供参考，数据会不定期更新，请以实物为准）

音色序号	音色名称	AMP	GAIN	TONE	MOD	TIME	FB	MIX	REVERB	IR CAB	VOL
1	清音	3	8	6	CHORUS 5	6	5	2	4	7	10
2	清音	2	10	8	无	0	0	0	6	10	6
3	清音	3	5	8	PHASER 6	7	3	3	4	5	10
4	过载	4	2	7	无	8	3	4	2	1	5
5	过载	5	10	7	CHORUS 3	9	5	3	6	9	10
6	过载	6	5	8	无	8	5	2	3	4	9
7	失真	7	9	8	无	0	0	0	3	3	6
8	失真	8	4	7	无	9	5	2	2	5	8
9	失真	9	10	7	无	9	3	3	3	2	8
10	失真	10	8	7	CHORUS 3	8	3	3	4	2	9

B、EDIT模式

（开机完成后请短按组合按键On/Off ◀ 和Store ▶ 从PRESET模式切换至EDIT模式）

■ 在EDIT模式下，短按On/Off ◀ 按键可上翻选择功能模块，短按Store ▶ 按键可下翻选择功能模块，当效果模块被选中时对应的指示灯亮起，未被选中的其他效果模块指示灯熄灭。


■ 初始进入到EDIT模式时，系统默认选中AMP模块，可通过Bypass-和Tuner+按键来上下浏览AMP模块里的10种箱头音色。

■ Bypass-和Tuner+按键在不同模块里起到不同的作用，比如在AMP或IR CAB模块时起到上/下浏览的作用，在REVERB或DELAY模块里起到增加/减少效果参数的作用。用户可以在EDIT模式编辑好参数后将音色覆盖储存至PRESET模式。

■ 用户在EDIT模式下可通过长按Store ► 按键将编辑好的音色储存到PRESET模式对应的音色位置。储存位置不能移动，比如您在PRESET(预置)模式下选中了第3个音色，然后再按下On/Off ◀ 与Store ► 组合按键进入到EDIT模式，那么在这样的情况下编辑的音色就只能储存在第3个音色的位置。

CN 效果模块功能介绍

1. AMP模块

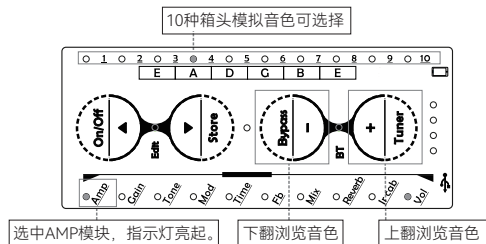


■ H8总共有10种经典的箱头模拟音色，在EDIT模式下您可以通过On/Off ◀ 和Store ► 按键来选中AMP模块，当AMP被选中后指示灯亮起，您可以使用Bypass-和Tuner+按键来上/下浏览音色，音色顺序对应参数指示灯1至10，被选中音色时对应序号指示灯亮起，未被选中的音色指示灯为关闭状态。

■ AMP模块10种音色，具体数据请参考下方列表；
(以下仅供参考，数据会不定期更新，请以实物为准)


音色序号	AMP名称	音色名称
1	Gas Station Clean	清音
2	Power-Zone Clean	清音
3	Two Stone Coral Clean	清音
4	Day Tripper OD	过载
5	Two Stone Coral OD	过载
6	US Classic OD	过载
7	Mr Smith Dist	失真
8	Two Stone Cardeff	失真
9	Randy Devil Dist	失真
10	Shittcow Dist	失真

2.GAIN; 音色失真度调节

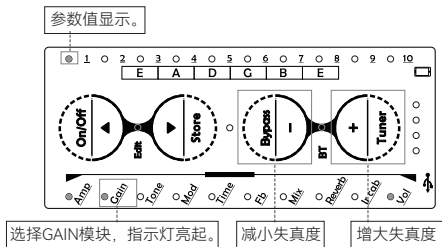


■在EDIT模式下您可以通过On/Off ◀和Store ▶ 按键来选中Gain模块，当Gain被选中后指示灯随即亮起，您可以使用Bypass-和Tuner+ 按键来减少或增大音色的失真度，调节范围从参数指示灯1（最小失真度）到参数指示灯10（最大失真度）之间。

3.TONE；音色明亮度调节

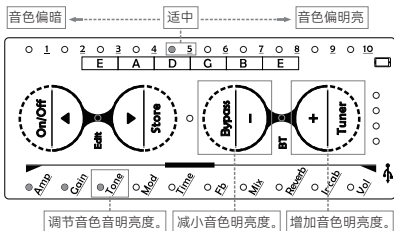

■在EDIT模式下您可以通过On/Off ◀和Store ▶ 按键来选中Tone模块，当Tone被选中后指示灯随即亮起，您可以通过Bypass-和Tuner+ 按键来减小或增加音色的明亮度，调节范围从参数指示灯1（最低沉音色）到参数指示灯10（最明亮音色）之间，默认参数指示灯5为“适中”明亮度。

4.MOD模块；包含了CHORUS和PHASER两种调制类效果。

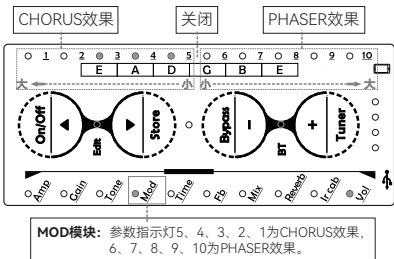


■在EDIT模式下您可以通过On/Off ◀ 和Store ▶ 按键来选中Mod模块，在Mod模式下我们以参数指示灯第5灯和第6灯之间的位置为关闭Mod模块，Mod模块在关闭的模式下所有参数指示灯均是熄灭状态。

■当选中Mod模块之后您可以通过Bypass-按键来开启CHORUS效果，在Mod模块关闭的状态下按下Bypass-按键，此时参数指示灯5亮起，表示当前已开启CHORUS效果。CHORUS效果增益调节从小至大的范围对应参数指示灯的5、4、3、2、1之间，5灯为最小效果参数，1灯为最大效果参数。

■当选中Mod模块之后您可以通过Tuner+按键来开启PHASER效果，在Mod模块关闭的状态下按下Tuner+按键，此时参数指示灯6亮起，表示当前已开启PHASER效果。PHASER效果增益调节从小至大范围在参数指示灯的6、7、8、9、10之间，6灯为最小效果参数，10灯为最大效果参数。

5.DELAY模块；DELAY模块包含了Time、Fb及Mix三个模式灯来调节。

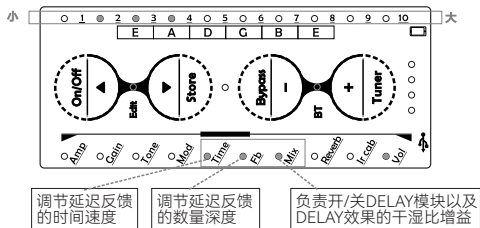


■在EDIT模式下您可以通过On/Off ◀ 或Store ▶ 按键来选中Mix (DELAY模块)，Mix为负责开启/关闭DELAY效果，在选中Mix的状态下连续按下Bypass-按键直到所有参数指示灯全部熄灭，此操作为关闭DELAY模块。在DELAY模块关闭的状态下选中Mix然后按一下Tuner+按键即可开启DELAY模块。DELAY模块被开启的同时也开启了Mix (延迟干湿比) 的第1档参数，随即参数指示灯1亮起，您可以通

过Bypass-和Tuner+按键来增大或减小DELAY的干湿比，可调范围在参数指示灯1（最小）至参数指示灯10（最大）之间。

■Fb为调节DELAY反馈的深度，在DELAY模块开启的模式下，您可以通过On/Off ◀ 和Store ▶ 按键来选中Fb，随即Fb指示灯亮起，您可以通过Bypass-和Tuner+按键来增大或减小DELAY的反馈深度，可调范围从参数指示灯1（最小）至参数指示灯10（最大）之间。

■Time为调节DELAY反馈的时间速度，在DELAY模块开启的模式下，您可以通过On/Off ◀ 和Store ▶ 按键来选中Time，随即Time指示灯亮起，您可以通过Bypass-和Tuner+按键来增大或减小DELAY的反馈时间速度，可调范围从参数指示灯1（最小）至参数指示灯10（最大）之间。

6.REVERB模块

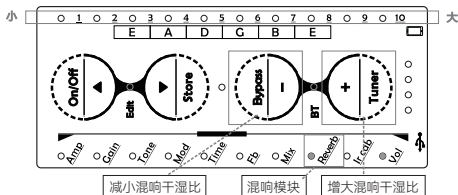


■在EDIT模式下您可以通过On/Off ◀ 和Store ▶ 按键来选中Reverb模块，当Reverb模块被选中后Reverb的指示灯亮起。

■连续按下Bypass-按键直到参数指示灯全部熄灭，此操作为关闭Reverb模块。在Reverb模块关闭的状态下按一下Tuner+按键即可再次开启Reverb模块，同时参数指示灯亮起。

■您可以通过Bypass-和Tuner+按键来减少或增大Reverb的效果量，可调范围从参数指示灯1（最小）至参数指示灯10（最大）之间。

7.IR CAB模块

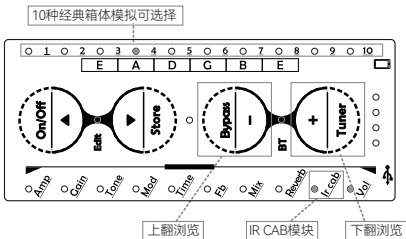

■ H8效果器设置了10种经典箱体模拟，在Edit模式下您可以通过On/Off ◀ 和Store ▶ 按键来选中Ir cab模块，当选中Ir cab模块后连续按下Bypass-按键直到所有参数指示灯全部熄灭，此操作为关闭Ir cab模块。

■ 在Ir cab模块关闭的状态下，按一下Tuner+按键即可打开Ir cab块，同时参数指示灯1亮起，表示当前启用的是H8效果器内置的第一个IR箱体。


■ 您可以通过Bypass-和Tuner+按键来浏览10种不同的Ir cab。

■ 您可以通过本公司提供的CubeSuite软件来配对H8效果器进行加载第三方IR文件。

■ 原厂IR列表：（以下仅供参考，数据会不定期更新，请以实物为准）

序号	名称	箱体
1	Line 6 Vetta	1X12
2	Marshall 1960AV V30	2X12
3	Marshall 1960A T75 LA610	4X10
4	VHT Deliverance	2X12
5	Soldano 2x12 V30	2X12
6	Peavey 5150 + Mesa	4X12
7	JSX KT77 + Mesa Stiletto	4X12
8	Diezel V30 SM57	2X12
9	GuitarHack Mesa Trad	2X12
10	Marshall SM81 9100A 1960B	4X12


8.VOL音量设置

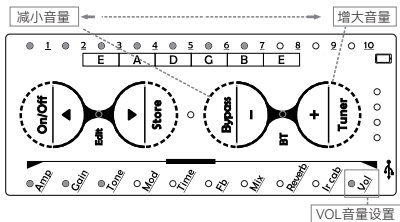

■在EDIT模式下您可以通过On/Off ◀ 和Store ▶ 按键来选中Vol模块。

■请使用Bypass-和Tuner+按键来减小或增大当前正在编辑音色的音量，可调范围从参数指示灯1至参数指示灯10之间。

9.TUNER; 校音模块

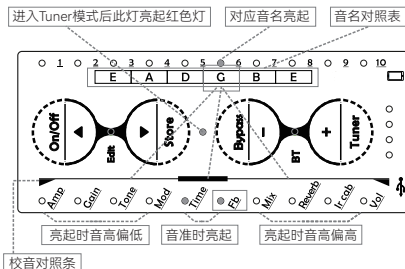

■ H8包含有一个高灵敏度的调音器，使用方法如下：在PRESET模式下长按Tuner+按键，直到Store ►与Bypass-两个按键中间的指示灯亮起红色灯。表示当前已进入校音功能。


■ 在Tuner+模式下在上方的音名对照表中，从左至右依次对应吉他的6/5/4/3/2/1弦。当弹响琴弦时主机自动识别音高，对应音名上方的指示灯会亮起，表示当前音高接近亮起的音名。

■ 我们以吉他第3弦为例来校音；当弹响3弦时对应音名表G音名上方的指示灯亮起，接着对照下方的校音条进行调校，当校音对照条左边灯亮起时表示当前音高偏低，当右边灯亮起时表示当前音高偏高，中间两个灯亮时则表示当前音高接近吉他3弦G音。

■ 为避免校音时产生不必要的杂音，在进入Tuner模式时的音频输出被静音，退出Tuner模式后即恢复正常输出状态。

■ 校音完成后请按下任意按键退出Tuner模式，Tuner指示灯熄灭。

10.无线音乐播放功能

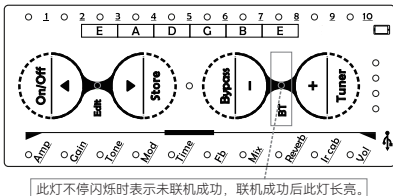

■H8包含有无线音乐播放功能，方便用户在练习或演奏中播放伴奏。连接方法如下；H8开机以后自动打开无线配对功能，BT指示灯一直慢闪，表示当前未连接无线设备，此时我们需要配对到手机或平板端。请打开您的移动设备上的设置项找到BT名称列表，从列表中的找到并选中‘H8’进行连接。连接成功后BT指示灯转为长亮。

■您可以通过短按组合按键Bypass-和Tuner+进行开启/关闭无线联机功能，在关闭状态下，BT指示灯熄灭。


11.Bypass功能；直通干信号

■我们为H8效果器设置了Bypass功能，在PRESET模式下长按Bypass-按键即可进入Bypass模式。

■在进入Bypass模式后，Bypass指示灯亮起蓝色灯(Store ► 与 Bypass-之间的灯)，参数以及模块指示灯全部熄灭。在Bypass模式里乐器输出信号为干信号（直通）。


■短按On/Off ◀ 或store ► 按键即可退出Bypass模式。

12.内录功能；连接带有3.5接口内录功能的手机或电脑设备



■ H8包含有高品质的内录功能，通过随机附带内录专用的数据线插入本设备的USB插口，然后连接到您的手机/PC电脑上，使用您手机/电脑的录音软件即可实现针对H8的高品质内置录音功能。

13.IR CAB加载功能



■ H8支持用户加载第三方IR箱体模拟，用户可以通过厂家免费提供的CubeSuite软件进行联机操作加载。您只需要把H8自带的USB数据线连接H8效果器到您的电脑就可以在CubeSuite软件里操作了，CubeSuite软件简单易用，很容易操作。

■ 在电脑上安装好CubeSuite，生成右图图标，双击打开即可。



■软件界面分为2个部分

1.自定义IR部分

①IR文件搜索框；通过此搜索框找到您预备在电脑上的IR文件。

②IR文件名称显示窗口；此窗口显示被选中的IR文件，方便我们点击试听。


③拾音话筒距离模拟器；通过此旋钮可以调节话筒对音箱拾音的距离，距离越近声音会越大距离越远声音越小。

④储存位置；此下拉序号为H8内部IR储存位置，您可以选择对应Ircab模块1-10的位置储存第三方IR。

⑤储存按键；当选中第三方IR、调好话筒拾音距离且选择储存序号位置后，我们可以通过点击此按键进行储存。

⑥点击此按键为恢复出厂IR。

⑦点击此按键为恢复出厂音色参数。

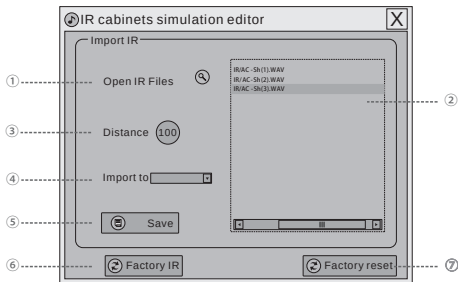

2.预设调整部分

①选择需要调节的预设（一共有10组预设可供选择），软件和设备如果处于同一组预设，则可以听到实时调节效果。

②调节AMP箱头模拟音色，一共有10种箱头模拟可供选择（详见说明书5-1）。

③调节GAIN音色失真度（详见说明书5-2）。

④调节TONE音色明亮度（详见说明书5-3）。

⑤调节MOD模块，0-4为CHORUS效果参数，5为关闭MOD效果，6-10为PHASER效果参数（详见说明书5-4）。

⑥调节Delay效果的反馈时间（详见说明书5-5）。

⑦调节Delay效果的反馈深度（详见说明书5-5）。

⑧调节Delay效果的干湿比（详见说明书5-5）。


⑨调节REVERB效果的干湿比（详见说明书5-6）。

⑩调节IR箱体模拟音色，一共有10种箱体模拟可供选择（详见说明书5-7）。

⑪调节当前预设输出音量大小（详见说明书5-8）。

⑫音色保存按键。

备注：如果调整了预设没有进行保存，则在设备断电之后会恢复为调整之前的参数。

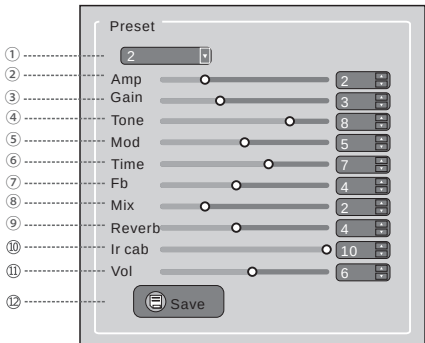

CN 技术参数

输入	标准 1/4" 单声道插头 /TS
输出	标准 1/8" 接口单声道 /TS
采样率	48K/24bit
电池供给	DC5V 300mA 电源适配器
尺寸	85(D)X81(W)X29(H)mm
重量	121g
附件	包装盒、充电数据线、内录连接线
修订	20230901