


User Manual

MINI-EFX

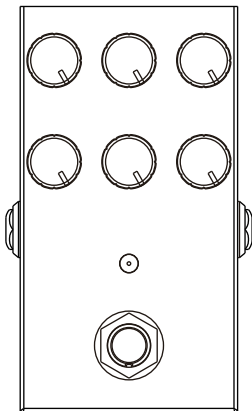

I. Preface

Thank you for purchasing our product. MINI-EFX is designed for electric guitar player. We do our best to present you with this high-quality Pedal, I hope you will like it.

II. Attentions

■ The power supply:

Please use 9V(+/-10%) adapter (negative inside and positive outside), otherwise it may cause equipment damage. Please unplug the power when not in use or during thunderstorm weather.

■ The connection:

Be sure to turn off the power of related equipment before connecting or disconnecting the device.

■ The electrical interference:

The electromagnetic wave of radio, television and other equipment may cause interference to the equipment, so please try to stay away from radio, television and other equipment.


■ The location:

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- a. Heat sources
- b. Magnetic fields
- c. Sunlight
- d. High temperature or moist district
- e. Excessively dusty or dirty locations
- f. Strong vibrations or shocks

III.Features

- This product is a compact metal appearance design.
- There are 9 Tones in total, it can be adapted to a variety of music. The first slot is BOOST, 2-5 slots are OVERDRIVE, 6-9 slots are DISTORTION.
- MINI-EFX will let you get warm,natural and bright timbres,also it has dynamic response.
- True bypass.
- 3-band EQ.



①Power jack:

Please use 9V DC adapter (negative inside and positive outside).

②USB jack:

Support power supply,suggest to use 5V 1A adapter.

③**GAIN knob:**Adjust the Gain.

④**TYPE knob:**Select different TONE by dialing this knob.

SLOT	NAME	TYPE
1	BOOST	Clean
2	ODRIVE-TS	Overdrive
3	ODRIVE-BLUES	Overdrive
4	ODRIVE-DB	Overdrive
5	ODRIVE-AMP	Overdrive
6	DIST-SCI	Distortion
7	DIST-BRITISH	Distortion
8	DIST-METAL1	Distortion
9	DIST-METAL2	Distortion

⑤LEVEL knob:

When the product is in working condition,adjust the output volume by turning the LEVEL knob.

⑥BASS knob:Adjust the bass.

⑦MID knob:Adjust the middle.

⑧TREBLE knob:Adjust the treble.

⑨Output jack:1/4" MONO audio output jack.

⑩LED:


The LED lights up when the effect pedal is enabled ,or goes out in bypass mode.

⑪Input jack:1/4" MONO audio input jack.

⑫Footswitch:Enable/bypass the MINI-EFX by tap the footswitch.


IV. Use cases and connections

1. When MINI-EFX connect to FX LOOP RETURN of guitar amplifier.




In this case, MINI-EFX replace the Pre-Amp, the product's sound-crafter ability is playing in maximum.

2. When MINI-EFX connect to INPUT of guitar amplifier.



In this case, the GAIN of guitar amplifier and MINI-EFX should be reduced, don't use high gain distortion timbre with both at the same time, to avoid excessive noise.

3. When MINI-EFX connect to Sound Card/Earphone/ Monitor/ Mixer.

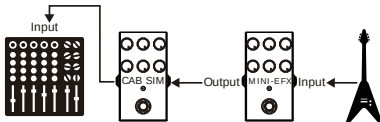

In this case, a "CAB SIM" EFFECTOR should be attached to the front of the Speaker/Earphone, in this way, you can get a plump and natural timbre.


V. Technical parameter

Input	Standard 1/4"jack-MONO/TS
Output	Standard 1/4"jack-MONO/TS
Power supply 1	DC9V $\geq$ 300mA 
Power supply 2	USB 5V $\geq$ 300mA
Size	112(L)X68(W)X40(H)mm
Weight	230g

Disclaimer: Specifications are subject to change without notice.

使用说明书

MINI-EFX

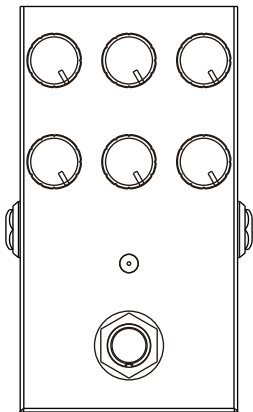

I.前言

感谢您购买我司产品，MINI-EFX是一款为电吉他玩家而设计的效果器，我们尽最大的努力为您提供这款高品质的效果器，希望您能喜欢它。

II.注意事项

■ 电源供应:

请使用正确的电源适配器，适配器使用内负外正的9V电源，否则可能会导致设备损坏。在不需要使用本设备或雷雨天气时请拔下电源。

■ 连接:

当连接或断开设备前，请先关闭其他相关设备。

■ 电器干扰:

收音机、电视机等电磁波可能会对设备使用造成干扰，因此请尽量远离收音机和电视机等设备。


■ 放置场所:

为防止变形、变色和其他方面等对产品造成损坏，请避免以下情况：

- a. 热源
- b. 磁场
- c. 阳光直射
- d. 高温潮湿
- e. 多尘或不洁地方
- f. 强烈震荡或摇晃

III.功能概述

- 简洁、高档的金属外观设计。
- 一共 9 档音色选择，代表 9 款单块效果器音色，适用于大部分音乐风格。分别是 1 档激励效果，4 档过载效果，4 档失真效果。
- MINI-EFX 会让你得到温暖、自然、明亮的音色，而且它有良好的动态响应。
- 具备硬件直通功能。
- 三段 EQ 调节器。



- ①**电源接口**：使用9V直流变压器（外正内负）。
- ②**USB接口**：支持5V供电。
- ③**GAIN 旋钮**：调整增益度。
- ④**TYPE 旋钮**：通过此旋钮可选择不同音色。

档位	效果名称	音色类型
1	BOOST	清音
2	ODRIVE-TS	过载
3	ODRIVE-BLUES	过载
4	ODRIVE-DB	过载
5	ODRIVE-AMP	过载
6	DIST-SCI	失真
7	DIST-BRITISH	失真
8	DIST-METAL1	失真
9	DIST-METAL2	失真

⑤LEVEL 旋钮:

当效果器处在工作状态时，可通过此旋钮调节相应的效果音量。

⑥BASS 旋钮: 调整低频。

⑦MID 旋钮: 调整中频。

⑧TREBLE 旋钮: 调整高频。

⑨输出接口: 1/4"单声道音频输出接口。

⑩LED 灯:


指示效果器状态。灯亮，表示效果开启；灯灭，表示直通状态。

⑪输入接口: 1/4"单声道音频输入接口。

⑫踩钉: 激活效果器或切换到直通状态（真直通）。


IV.应用场景及连接

1.连接吉他音箱FX LOOP的RETURN。

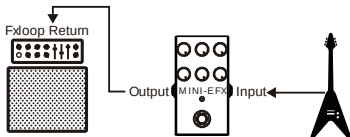


此场景下, MINI-EFX 代替音箱前级, 最大地发挥产品的音色塑造能力。

2.连接吉他音箱INPUT。

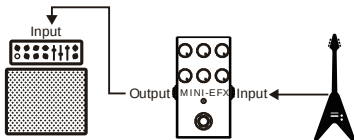

此场景下, 应把音箱和MINI-EFX的GAIN调小, 合理搭配音色, 请勿两者同时使用高增益失真, 避免产生过大噪音。

3.连接声卡/耳机/监听音箱/调音台/等等。



此场景下, 应在全频监听设备前连接一个“箱体模拟”效果器, 以获得真实饱满的箱体音色。

V.技术参数

输入	标准1/4"单声道接口/TS
输出	标准1/4"单声道接口/TS
电源供给1	DC9V $\geq$ 300mA 
电源供给2	USB 5V $\geq$ 300mA
尺寸	112(L)X68(W)X40(H)mm
重量	230g
修订	2024-08-23

免责声明：参数更新恕不另行通知。

VI. FCC Warning Statement

★ Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.