



用户说明书

AIR BRIDGE

麦克风无线传输系统



产品信息

CN Main Features / 主要特点

首先感谢您选购我们这款麦克风无线传输系统。此产品是一款专门为麦克风无线连接使用而开发的设备。我们尽了最大的努力为您呈现这款高信噪比、低延迟并拥有高音质采样率（48KHz）和长有效传输距离的无线设备。希望您会喜欢它。

CN Attentions / 注意事项

电源供应

无线设备内置锂电池,我们提供了专门的USB充电线,充电时请确保设备为关机状态以避免充电过程中电量流失,导致充电时间加长且电池使用寿命缩短。在不使用无线设备时请关机,否则电量会持续消耗。

连接

当该无线设备与调音台等设备连接或断开前,请务必关闭电源及其他相关设备这有助于避免设备故障和损害其他设备。

干扰

本设备在2.4GHz频段播出,成功避免了电视台,公共广播,手机信号塔和其他高功率信号源造成的干扰。但我们仍建议您使用时远离路由器或其他无线系统设备。

警告

为了减少触电或者火灾等风险发生请不要在下雨或者潮湿环境下暴露使用该设备。

产品参数

- 采样率: 24bit/48KHz无压缩数据传输
- 延迟: <12ms
- 有效范围: 30~50米室外传输距离或15米穿墙距离
- 失真度: -98dB
- 动态范围: >105dB
- 使用频段: 2.4GHz ISM频段
- 频率响应: 20~20KHz, +1dB/-3dB
- 电池型号规格TX/RX: 802050 / 802035
- 电池容量TX/RX: 800mAh / 500mAh
- 电池标称电压: 3.7V
- 可支持6组设备同时工作

■ Transmitter / 发射器

①信号输入，可接话筒。

②USB充电插座。

③连接指示灯，有3种状态：

慢闪：没有连接状态。

快闪：配对状态。

常亮：正常工作状态。


④电池指示灯，有2种状态：

常亮：(1)正在充电中，或者(2)电池电量低。

熄灭：(1)电池已经充满，或者(2)电池电量充足。

⑤配对按键：长按进入配对状态，连接指示灯快闪。

⑥电源：打开或关闭电源。

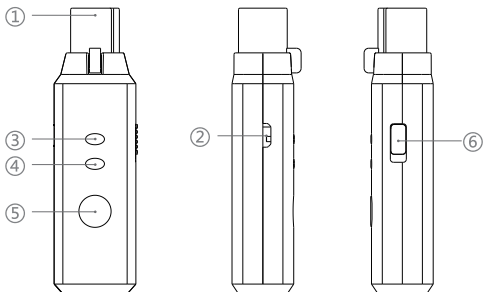

■ Receiver/ 接收器

①信号输出，可接调音台。

②USB充电插座。

③连接指示灯，有3种状态：

慢闪：没有连接状态。

快闪：配对状态。

常亮：正常工作状态。


④电池指示灯，有2种状态：

常亮：(1)正在充电中，或者(2)电池电量低。

熄灭：(1)电池已经充满，或者(2)电池电量充足。


⑤配对按键：长按进入配对状态，连接指示灯快闪。

6电源：打开或关闭电源。

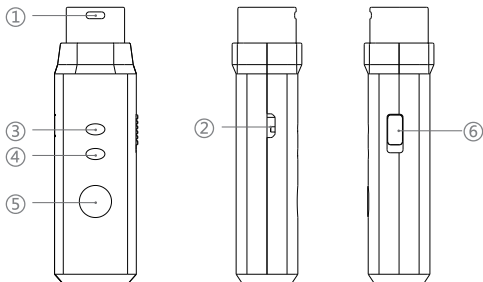

CN How To Use / 使用方法

1. 打开接收器和发射器的电源，两个连接指示灯都会慢闪，说明这两个设备未配对。
2. 按住接收器和发射器的配对键约3秒钟，两个连接指示灯快闪，说明两个设备都处于配对状态。一会儿，两个设备的指示灯都会亮起，说明两个设备已成功配对。
3. 发射器接话筒，接收器接调音台。
4. 配对成功后，以后开机默认自动配对。

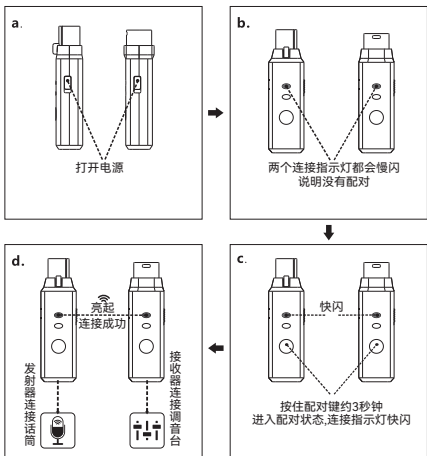

1.问:设备无法开机？

答:如果设备长时间未使用,或电池电量不足时断电却未及时充电。
电池电量不足导致电池进入保护模式, 需要给电池充电以激活电池。

2.问:设备可以开机,但不能使用,根本没有声音?

答:请检查绿色LED是否点亮, 如果LED闪烁, 则需要配对发射器和接收器。

3.问:使用时发出奇怪的噪音?

答:可能有很强的电磁干扰、传输距离太远、传输障碍物太多,因此大多数通信数据丢失。请尽量缩短传输距离。

4.问:设备无法正常充电?

答:锂电池长时间处于低电量状态时会进入保护状态,因此需要充电10分钟才能启动电池。



5.问:多个接收器可同时从一个发射器中接收信号吗?

答:可以,配对时先让所有接收器进入配对状态,再让发射器进入配对状态完成配对即可。

USER MANUAL

AIR BRIDGE

Microphone wireless
transmission system



EN Main Features

First of all, thank you for choosing our wireless transmission system. This product is a device specially developed for wireless connection of microphone. We try our best to present this wireless device with high snr, low latency, high quality sampling rate (48Khz) and long effective transmission distance. I hope you will like it.

EN Precautions

Power supply

The wireless device has a built-in lithium battery. We provide a special USB charging cable. Please ensure that the device is turned off when charging. To avoid power loss during charging, resulting in longer charging time and shorter battery life. Please turn off the wireless device when it is not in use, otherwise the power will continue to be consumed.

Connection

Before connecting or disconnecting the wireless device with the mixer and other devices, be sure to turn off the power supply and other related devices, which will help to avoid equipment failure and damage to other devices.

Interference

The equipment is broadcast in the 2.4GHz frequency band, successfully avoiding TV stations, public broadcasting, mobile phone signal tower and its other caused interference from high-power signal sources. However, we still recommend that you stay away from routers or other wireless system devices.

Warning

In order to reduce the risk of electric shock or fire, please do not use the equipment in rainy or humid environment.

EN Specification

- **Sampling rate:** 24bit / 48Khz uncompressed data transmission.
- **Delay:** < 12ms.
- **Effective range:** 30 ~ 50m outdoor transmission distance or 15m through wall distance.
- **Distortion:** - 98dB.
- **Dynamic range:** > 105dB.
- **Frequency band used:** 2.4GHz ISM frequency band.
- **Frequency response:** 20 ~ 20kHz, + 1dB / - 3dB.
- **Battery Model/Type TX/RX:** 802050 / 802035
- **Battery capacity TX/RX:** 800mAh / 500mAh
- **Battery Nominal Voltage:** 3.7V
- Support 6 groups of devices working at the same time.

EN FCC Warning Statement

★ Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement


The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.


■ Transmitter

- ①Signal in, connect to your device, such as microphone.
- ②USB socket for charging.
- ③Connection indicator, 3 status:
 - Flash slowly: no connection status
 - Flash fast: pairing status.
 - Light up: normal working status
- ④Battery indicator, 2 status:
 - Light up: (1)battery is charging or (2)battery level is low.
 - Off: (1)battery is fully charged or (2)battery level is high.
- ⑤Pair key: long press to turn to pairing status, the connection indicator flash fast.
- ⑥Turn the power on or off.

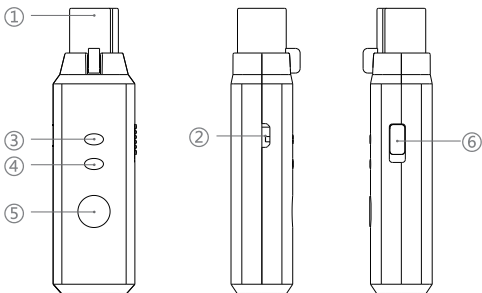


■ Receiver

- ①Signal out, connect to your device, such as mixer.
- ②USB socket for charging.
- ③Connection indicator, 3 status:
 - Flash slowly: no connection status
 - Flash fast: pairing status.
 - Light up: normal working status
- ④Battery indicator, 2 status:
 - Light up: (1) battery is charging or (2) battery level is low.
 - Off: (1) battery is fully charged or (2) battery level is high.
- ⑤Pair key: long press to turn to pairing status, the connection indicator flash fast.
- ⑥Turn the power on or off.

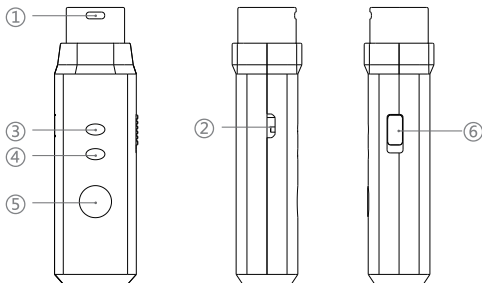

EN How To Use

1. Turn on the power of the receiver and transmitter, and then both connection indicators will flash slowly, this means that the two devices are not paired.
2. Press and hold the pairing key of the receiver and transmitter for about 3 seconds, and then the two connection indicators will flash fast, this means that both devices are in the pairing state. After a while, the indicators of both devices will light up, this means that the two devices have been successfully paired.
3. The transmitter is connected to microphone and the receiver is connected to mixer.
4. Once successfully paired, it will be automatically paired after power on.

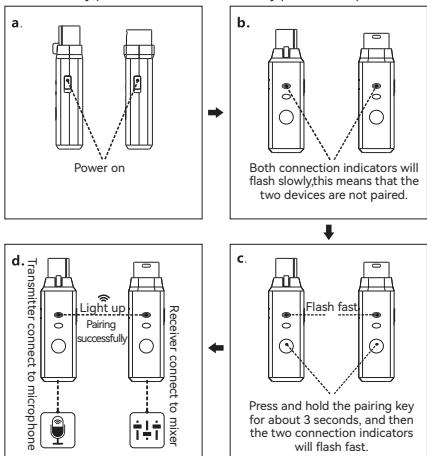

1. Q: the device cannot be turned on?

A: If the equipment is not used for a long time, or the battery is low, it is powered off but not charged in time. Insufficient battery power causes the battery to enter protection mode, and the battery needs to be charged to activate the battery.

2. Q: the device can be turned on, but it can not be used. There is no sound at all?

A: Please check whether the green LED is on. If the LED flashes, you need to pair the transmitter and receiver.

3. Q: make strange noise when using?

A: There may be strong electromagnetic interference, too long transmission distance and too many transmission obstacles, so most communication data is lost.

Please try to shorten the transmission distance.

4. Q: can the device be charged normally?

A: The lithium battery will enter the protection state when it is in the low power state for a long time, so it needs to be charged for 10 minutes to start the battery.

5. Q: can multiple receivers receive signals from one transmitter at the same time?

A: Yes, when pairing, first let all receivers enter the pairing state, and then let the transmitter enter the pairing state to complete the pairing.