


USER MANUAL

2.4GHz Wireless Audio Transceiver

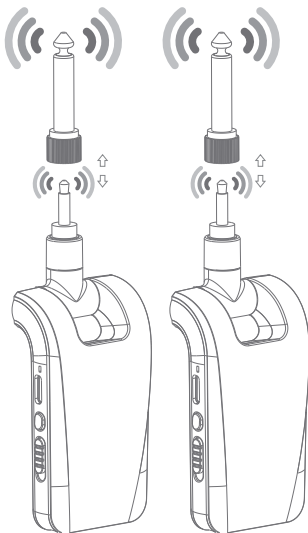

Thank you for choosing our Wireless System. The product is designed for musical instruments for wireless connection. We have tried our best to provide you a low noise and latency, high sound quality(48KHz) and long transmission distance wireless device. Enjoy yourself with the wireless system.

Power Supply

The USB cable is mainly for charging. Please use this to connect to USB interface of your devices and make sure you use a qualified adapter. While charging, please make sure that the device is shut down to avoid the loss of electricity during charging, which will lead to longer charging time and shorter battery life.

When the device is not in use, please shut down in time to avoid continuous battery consumption.

Connections

Please always turn off the power of the equipment when connecting or disconnecting with the guitar. It will help to prevent the damage cause to this product and other relevant equipment.

Interference


Operation is subject to the two following conditions:(1)this device may not cause harmful interference, and (2)this device must accept any interference received, including the interference that may cause undesired operation.

Warning

To reduce the risk of fire of electric shock, please do not expose appliance to rain or moisture.



EN Specification

- Sample range: 24bit/48KHz uncompressed transmission.
- Latency: <12ms.
- Range: 30 meters outdoor or 15 meters wall distance.
- THD+ Noise: -98dB.
- Dynamic Range: >105dB A weighted.
- Operating Band: 2.4GHz ISM Worldwide.
- Using time :about 6.5h.
- Frequency response: 20~20KHz, +1dB/-3dB.
- Battery Model/TypeTX/RX: 603040/602040
- Battery capacity TX/RX: 780MA/450MA
- Battery Nominal Voltage: 3.7V
- 280°rotating head, designed for electronic drums and keyboards,fit for most kind of instruments.
- Support for 6 devices to use simultaneously.
- USB fast charging interface.
- Support for 3.5mm plugs and 6.35 plugs to convert to each other.
- Stereo. Supports both mono and stereo musical instruments.

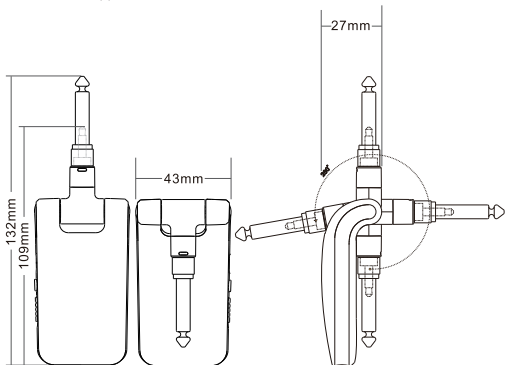

Transmitter

- ① Signal in, connect to your electronic instrument.
- ② 280°rotating head, it is available for most of the music instruments.
- ③ USB port for charging.
- ④ LED light.
- BLUE LED:
Light up: Indicates the battery is fully charged.
- RED LED:
Light up: Indicates the device is charging or the power of battery is low.
- GREEN LED:LED light are available in three states.
Flash fast: in pairing status.
Flash slowly: just turn on but not in pairing status.
Light up: pairing successfully and the power of the battery is in good status.
- ⑤ Pairing key, long press to turn to pairing status after power on.
- ⑥ Power,turn the power on or off.



Receiver

① Signal out, connect to amplifier or pedal etc.

② 280°rotating head.

③ USB port for charging.

④ LED light.

■ BLUE LED:

Light up: Indicates the battery is fully charged.

■ RED LED:

Light up: Indicates the device is charging or the power of battery is low.

■ GREEN LED:LED light are available in three states.


Flash fast: in pairing status.

Flash slowly: just turn on but not in pairing status.

Light up: pairing successfully and the power of the battery is in good status.

⑤ Pairing key, long press to turn to pairing status after power on.



⑥ Power,turn the power on or off.

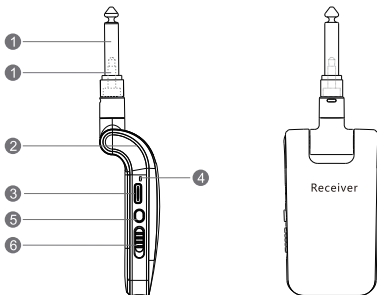

- Turn on the Receiver power, wait for the device to start normally, the device light turned green and slowly flashing state.
- Long press the pairing button of the receiver for about 3 seconds to make the green light flash quickly and enter the pairing state.
- Turn on the transmitter and the green light flashes quickly to enter the pairing state.
- After waiting for about one second, the automatic connection is successful and both devices are green.
- The transmitter connects to the instrument, and the receiver connects to the amplifier.
- After a successful pairing, the machine will be automatically matched when booted again.

Extended functions:

- (1) Our wireless system can support 6 pairs of devices work non-interference under the same circumstances.
- (2) One transmitter transmit signal to several receivers at the same time.



1. Q: Device cannot be powered on and doesn't work.

A: If the device unused for a long time, or powered off during low battery but then doesn't charge in time. The battery enters into protection mode due to low battery, and you need to charge it and activate the battery.

2. Q: Device can be powered on, but cannot operate and no sound at all.

A: Please check up whether the green LED is on, if the LED is flashing, then you need to pair the Transmitter and Receiver.

3. Q: Strange noise while in use.

A: There is quite strong electromagnetic interference, or the transmission distance is too far, and thus most communication data is lost. Please try to shorten the transmission distance.

4. Q: Device cannot be charged properly.

A: The lithium battery enters into protection if it's in low battery for a long time, therefore you need to charge it for over 10 minutes to activate the battery.

5. Q: This wireless Transceiver can multiple Receivers pick up from one Transmitter?

A: Yes, when pairing, let all receivers go into the pairing state, and then let the transmitter power on. The launch will automatically be paired and all the green lights will be ready to use.


EN FCC Warning Statement

Statement Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

使用说明书

2.4 GHZ 立体声无线传输系统

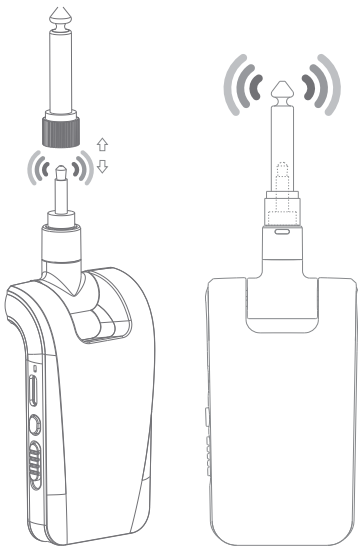

首先感谢您选购我们这款无线传输系统。此产品是一款专门为乐器无线连接使用而开发的设备。我们尽了最大的努力为您呈现这款低噪音，低延迟，并拥有高品质采样率（48KHz）和长有效传输距离的无线设备。希望您会喜欢它。

注意事项

电源供应

无线设备我们提供了专门的USB充电线，充电时请确保设备为关机状态，以避免充电过程中电量流失，导致充电时间加长且电池使用寿命缩短。在不使用无线设备时请关机，否则电量会持续消耗。

连接

当该无线设备与音箱等设备连接或断开前，请务必关闭电源及其他相关设备，这将有助于避免设备故障和损害其他设备。


干扰

本设备在2.4GHz频段播出，成功避免了电视，公共广播，手机信号塔和其他高功率信号源造成的干扰。但我们仍建议您使用时远离路由器或其他无线系统设备。

警告



为了减少触电或者火灾等风险发生，请不要在下雨或者潮湿环境下暴露使用该设备。

- 采样率: 24bit/48KHz无压缩数据传输
- 延迟: <12ms
- 有效范围: ≤30米室外传输距离或15米穿墙距离
- 失真度: -98dB
- 动态范围: >105dB
- 使用频段: 2.4GHz ISM频段
- 使用时间: 约6.5小时
- 频率响应: 20~20KHz, +1dB/-3dB
- 电池型号规格TX/RX: 603040/602040
- 电池容量TX/RX: 780MA/450MA
- 电池标称电压: 3.7V
- 280°可旋转接头(可适合绝大部分电声乐器使用)
- 可支持6组设备同时工作
- USB快速充电接口
- 支持3.5mm插头和6.35插头完美互转
- 立体声, 同时支持单双声道乐器使用

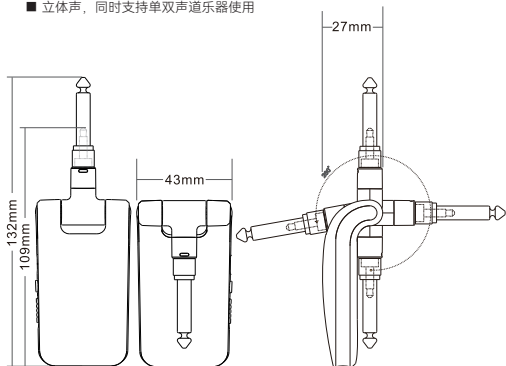



Transmitter / 发射器

- ① 输入信号，可插入乐器。
- ② 280°可旋转接头。
- ③ USB充电接口。
- ④ LED指示灯。
- 当显示为蓝灯时：
常亮：表示设备已充满电。
- 当显示为红灯时：
常亮：表示设备正在充电或者电池电量不足。
- 当显示为绿灯时：LED指示灯有3种状态。
慢速闪烁：当前设备处于空闲状态，还没配对。
快速闪烁：当前设备处于配对状态。
常亮：工作状态，已配对成功。
- ⑤ 配对按钮：长按按钮进入配对状态，绿灯快闪。
- ⑥ 电源：打开或关闭设备。



Receiver / 接收器


- ① 输出信号，连接到音箱或者效果器等。
- ② 280°可旋转接头。
- ③ USB充电接口。
- ④ LED指示灯。
- 当显示为蓝灯时：
常亮：表示设备已充满电。
- 当显示为红灯时：
常亮：表示设备正在充电或者电池电量不足。
- 当显示为绿灯时：LED指示灯有3种状态。
慢速闪烁：当前设备处于空闲状态，还没配对。
快速闪烁：当前设备处于配对状态。
常亮：工作状态，已配对成功。
- ⑤ 配对按钮：长按按钮进入配对状态，绿灯快闪。
- ⑥ 电源：打开或关闭设备。




1. 打开接收器Receiver电源，等待设备正常启动后，设备指示灯为绿灯慢闪状态。
2. 长按接收器的配对按钮约3秒，使绿灯快闪，进入配对状态。
3. 打开发射器Transmitter电源，绿灯快闪，进入配对状态
4. 等待1秒后，自动连接成功，两设备均为绿灯常亮。
5. 发射器连接乐器，接收器连接音箱。
6. 成功配对一次，以后开机都会自动配对。

扩展功能

1. 本产品的无线系统可支持6对独立发射器和接收器在相同的环境下同时工作。
2. 无线系统可支持一个发射器Transmitter发送信号到多个接收器Receiver上。



(1)

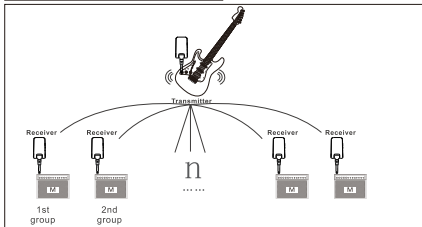

(2)

1.问:设备无法开机?

答:如果设备长时间未使用,或电池电量不足时断电却未及时充电。电池电量不足导致电池进入保护模式,需要给电池充电以激活电池。

2.问:设备可以开机,但不能使用,根本没有声音?

答:请检查绿色LED是否点亮,如果LED闪烁,则需要配对发射器和接收器。

3.问:使用时发出奇怪的噪音?

答:可能有很强的电磁干扰、传输距离太远、传输障碍物太多,因此大多数通信数据丢失。请尽量缩短传输距离。

4.问:设备无法正常充电?

答:锂电池长时间处于低电量状态时会进入保护状态,因此需要充电10分钟才能启动电池。

5.问:多个接收器可同时从一个发射器中接收信号吗?

答:可以,配对时先让所有接收器进入配对状态,再让打开发射器电源,发射会自动完成配对,等所有的绿灯常亮即可使用。