

# A Sub-Synchronous Oscillations Study for a Wind Farm

Ahmad Abdullah  
Electric Power Engineers, Inc  
& Department of Electrical Power and Machines  
Cairo University, Faculty of Engineering  
ahmad.abdullah@ieee.org

Billy Yancey  
Electric Power Engineers, Inc  
byancey@epeconsulting.com

**Abstract**—Due to the recent sub-synchronous oscillations (SSO) event in the Texas, most ISOs have instituted that any new wind project (WP) must perform an SSO study and that study must be approved before energization and commercial date. A wind project was constructed close to a series capacitor bank. Under certain N-1 conditions, the project becomes radially connected to those series capacitor banks. A frequency scan screening study was performed and indicated that there is no risk of SSO. A detailed electromagnetic transient (EMT) study was performed to confirm the findings of the frequency screening study. EMT simulations showed that the wind project will trip offline after clearing the fault on the line the outage of which causes the project to be radially connected to the series capacitor banks. Root cause analysis was performed to determine the reason of this trip. Investigations concluded that the project trips due to voltage and reactive power issues because of its existence close to the series capacitor banks but not due to SSO.

**Index Terms**—Subsynchronous oscillations, Electromagnetic transients, frequency response, wind farms, series capacitors

## I. INTRODUCTION

With the increased penetration of renewable energy into the grid, special system studies are called upon to assess their impact on various aspects of the power system. One of these studies is subsynchronous oscillations study.

SSO has become a concern to independent System Operators (ISOs) and Transmission System Operators (TSOs) since the two incidents of shaft damage experienced at the Mohave generating station in [1]. The subject has received renewed attention due to the incident that occurred in Texas on Oct. 22, 2009 which revealed that wind turbines can be also be affected by SSO [2].

Due to that, most ISOs today have grid codes that mandate performing an SSO study before the commercial date of wind projects. In this paper, we report on a study that has been done for one such projects.

The paper is organized as follows: the system model is described in section §II. The frequency scan study is provided in section §III. The detailed EMT study is presented in section §IV. The trip of the project after clearing the fault on the line connecting it to the series capacitor banks is investigated in section §V. Conclusions are summarized at the end of the paper.

## II. SYSTEM MODEL

The system model is shown in figure 1. The project is connected at bus A. The latest system model available from the ISO was employed for this analysis. The authors developed an equivalent model representation of the ISO system model to include the series compensation devices as well as surrounding buses such that the frequency scan performed at the POI has negligible changes when adding more of the ISO transmission network. This model was developed by converting the PSS®E load flow case into PSCAD™. The area of interest to be analyzed as part of the SSO study is shown in figure 1. It should be kept in mind that the buses in figure 1 are only a fraction of the buses that are included in the PSCAD™ model as will be explained below.

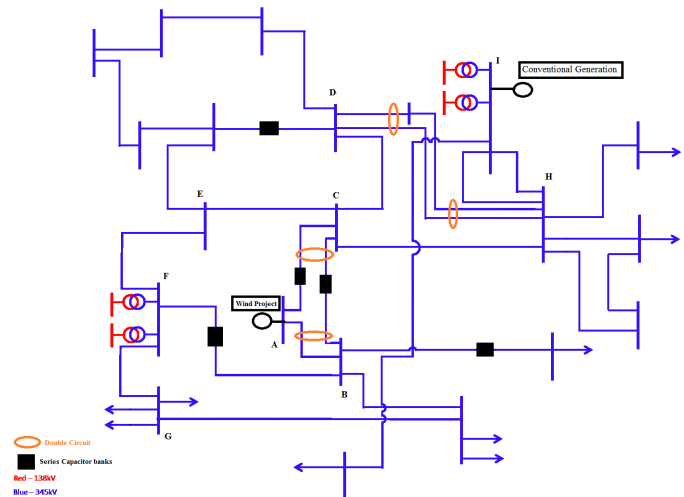


Fig. 1. Area under study

Prior to translating the ISO system model into PSCAD™, the WP was added to the PSS®E load flow case in order to complete the network model. The WP was added to the PSS®E case as an equivalent generator with an active and reactive power capability according to the project specifications. The PSS®E model was prepared for translation by running a load flow study including the WP to control the voltage at the POI. The authors then selected the buses shown in figure 1

within the PSS@E power flow case for direct inclusion in the PSCAD™ case. Afterwards, we performed a frequency scan in the PSCAD™ case at the POI of the project. The authors then added new buses from all directions around the WP until the frequency scan did not change in an appreciable manner from one scan to another as a result of the addition of the new buses. After selecting the buses that will be retained in the PSCAD™ case, the remainder of ISO system model was modeled as equivalent voltage sources behind impedances such that the power flow is preserved in the PSCAD™ case as in the PSS@E case. It should be noted that no generators other than WP were modeled in detail for this study; any generator translated into PSCAD™ was modeled as an ideal voltage source behind an impedance.

Additionally, we modeled all of the series capacitor banks in figure 1 with a proprietary protection model provided by the TSO. The model has been set up according with the settings provided by TSO. It should be noted that all the series capacitor banks shown in figure 1 are always 24  $\Omega$  per the information provided by the TSO. It should be noted that the series capacitors are compensation more than 100% of the line length in all cases.

A detailed model of WP was developed in PSCAD™. The detailed model contains all project equipment up to the high side of the project main power transformer. Additionally, this model includes the ability to activate and deactivate the feeder circuit breakers, shunt reactive devices, and the series compensation firmware. The transmission tie line was added to the output of the detailed model to complete the WP. The WP was assumed to operate under normal configuration with all feeder breakers, shunt reactive devices and the series compensation option all turned ON.

Surge arresters were added at the POI of the project at bus A. It should be noted that all series capacitors in the ISO case are installed at the midpoint of the respective transmission lines.

Lastly, the WP detailed model was inserted into the ISO PSCAD™ equivalent model, described above at the POI at Bus A as shown in figure 1, replacing the equivalent representation of the project created for the PSS@E load flow case. It should be noted that the wind turbines come with a proprietary software that can introduce synthetic inertia to the rotor in case SSO is detected. This has been modeled as well.

### III. FREQUENCY SCAN SCREENING STUDY

A frequency scan screening study has been performed according to [3]. The feedback effect of the grid on the turbine impedance as given in [4] has not been taken into consideration to produce conservative results. The grid frequency scan is described in section III-A while the project side frequency scan is provided in section III-B. The combined grid and project frequency scan is presented in section III-C.

#### A. Grid Side Frequency Scan

A grid side frequency scan was performed to determine the contingencies, if any, up to N-5 that result in the WP to become

near radial or radially connected to the series compensated transmission lines in figure 1. A frequency scan of the transmission system was performed for WP at the proposed POI at bus A. The frequency scan was used to calculate the equivalent resistance and reactance looking into the transmission network at the project's POI for different contingency conditions, up to N-5, that may show vulnerability to SSO due to becoming radially connected to series compensation capacitors.

Additionally, for each of these contingencies, we evaluated various combinations of sensitivities. These sensitivities pertain to whether the turbine series compensation option is turned ON or OFF, whether the switched shunts provided in table I are switched ON or OFF and whether the series capacitor banks in figure 1 are ON or OFF.

TABLE I  
SWITCHED SHUNTS SENSITIVITIES

Location	Type	# of steps and MVar size	Configuration
Bus D	Reactor	4-50	ON/OFF
Bus D	Capacitor	2-130.9	ON/OFF
Bus C	Reactor	4-50	ON/OFF
Bus C	Capacitor	2-130.9	ON/OFF
Bus B	Reactor	6-50	ON/OFF
Bus G	Capacitor	2-80	ON/OFF
Bus H	Reactor	3-50	ON/OFF
Bus E	Reactor	3-50	ON/OFF
Bus E	Capacitor	2-50	ON/OFF

The sensitivity analysis with regards to the switched shunts provided in table I has revealed that the status of those switched shunts has minimal effect on the grid side frequency scan. During the sensitivity analysis with regards to the switched shunts, we elected to switch all shunts ON or OFF at once to observe the effect on the grid side frequency scans in order to determine a worst case scenario. Switching all shunts ON or OFF at once does not cause appreciable difference in the grid frequency scan for all contingencies considered. Thus, for all subsequent analysis, the switched shunts given in table I has been either turned ON or OFF completely for the purpose of studying other sensitivities.

It is important to note that for each contingency case considered, the power flow case was convergent and solved for high and low wind conditions. The grid side frequency scan in the base case with no contingencies is given in figure 2. Note that the grid frequency scan is the same for both the cases when all switched shunts are OFF or ON. The grid side frequency scan for all contingency cases are shown in \$\$\$.

The results of the system side frequency scan indicate that the reactance of the system can become negative for all contingency conditions up to and including N-5 contingencies for all sensitivities considered. However, for all contingency conditions up to and including N-5 contingencies, the system resistance is positive, albeit small.

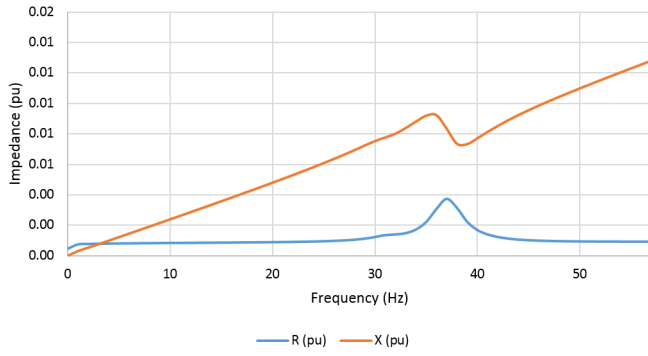


Fig. 2. Grid side frequency scan with no contingencies (Impedance is in per unit of system base)

### B. Project Side Frequency Scan

A project side frequency scan of the WP was performed with and without the series compensation firmware to determine the total net impedance of the WP given its specifications. This frequency scan looked into the wind project from the POI and included the wind turbines, the most recent collection system design and layout as well as the current main power transformer and pad mount transformer specifications.

The purpose of this study is to observe the impedance of the wind project over the range of frequencies under consideration to determine if the wind project provides a positive resistance at the POI to dampen out any resonance created from system disturbances.

The results from the project frequency scan shows that the reactance of the project is positive for all frequencies under study. The project frequency scans are shown in figure 3, figure 4, figure 5 and figure 6 for 10% and 100% output, respectively with and without the series compensation software.

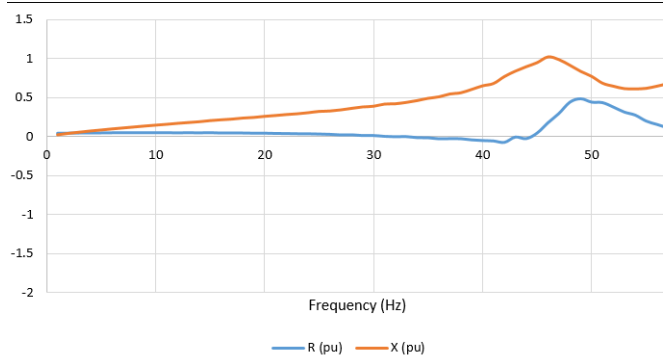


Fig. 3. Project side frequency scan for 10% turbine output without series compensation option

### C. Combined Frequency Scan

The system frequency scans given in §§ and the project frequency scans shown previously section III-B are combined in §§.

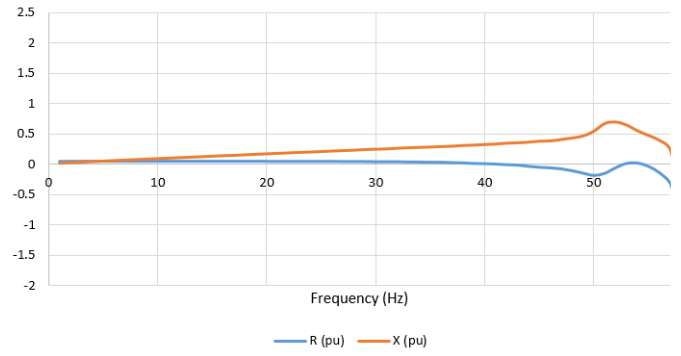


Fig. 4. Project side frequency scan for 100% turbine output without series compensation option

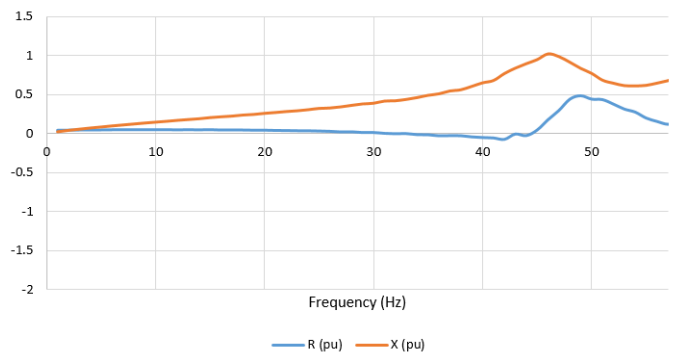


Fig. 5. Project side frequency scan for 10% turbine output with series compensation option

The combined grid and project scans show that the combined reactance can become below zero from 0 Hz to 12 Hz of the frequency range under consideration for both the 10% and 100% dispatch levels with and without the series compensation firmware engaged for all contingency conditions along with the sensitivities considered. For the 10% percent dispatch level, the combined resistance can become negative from 33 Hz to 44 Hz in case the series compensation option is engaged and 25 Hz to 34 Hz in case the compensation option is not engaged for the majority of the contingencies and sensitivities considered. Thus the combined resistance is never negative when the combined reactance crosses zero.

We concluded that the WP is unlikely to be susceptible to SSO for all cases considered even when the wind project is not equipped with the series compensation firmware. The series compensation firmware being engaged shows a benefit in shifting the low resistance point of the wind turbine to be further away from the typical SSO resonance point and therefore was recommended to be engaged for the lifetime of the project.

A detailed EMT study was then performed in section §IV to fully assess the susceptibility of WP for SSO for the N-1 contingency conditions and corresponding sensitivities. This is done to provide a firm answer on whether the negative resistance in case of the 10% dispatch level can cause SSO

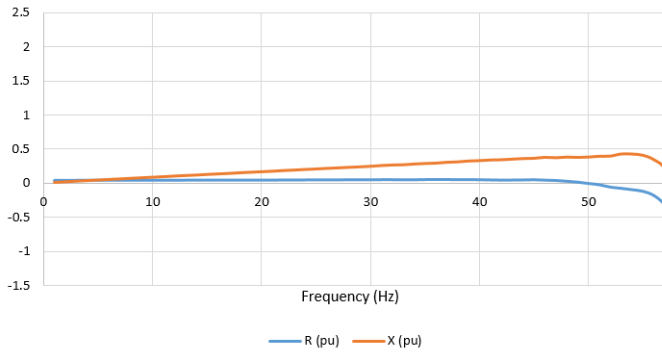


Fig. 6. Project side frequency scan for 100% turbine output with series compensation option

and to answer whether the resistance is high enough to damp any SSO in case the 100% dispatch level.

#### IV. DETAILED EMT STUDY

The system model was set up according to what has been mentioned in section §II. After that, we modified the PSCAD™ case manually by introducing a fault logic to the line A-B. The outage of this line causes the project to be radially connected to the series capacitor banks installed on the line A-C. The fault logic would create a bolted three phase to ground fault on the midpoint of the line A-B and clear the fault by opening the circuit breakers at both line ends after five (5) cycles.

After that, the fault logic would be activated after the PSCAD™ case reaches steady state. In all of the cases in this study, it was found that the PSCAD™ cases reach steady state at 1.3 seconds. The fault logic is then invoked at 1.3 seconds by creating the bolted three phase to ground fault on the midpoint of line A-B and then clearing the fault in five (5) cycles ( $t = 1.383$  seconds). The active power, reactive power, three phase voltage, RMS voltage, trip code of the turbines within the WP as well as three phase currents at the POI of the project were all monitored for 10 seconds.

Analysis revealed that the WP will trip offline following clearing of the fault on the line A-B for all of the scenarios considered. In some cases, the project would trip due to over-current while in other cases the trip was due to overvoltage. The current output of the project, MW and MVar as well as the POI voltage are shown in figure 7, figure 8 and figure 9, respectively.

#### V. INVESTIGATION OF THE TRIP AFTER CLEARING THE FAULT

As can be seen from figure 8, following the clearing of the fault the project absorbs high amount of reactive power. Additionally as evident from figure 9, the instantaneous voltage at the POI is beyond the high voltage ride through capability of any ISO. It is to be noted that the surge arrester at the POI is not able to clip the voltage to acceptable values due to the unusually high amount of reactive power that is absorbed by the project.

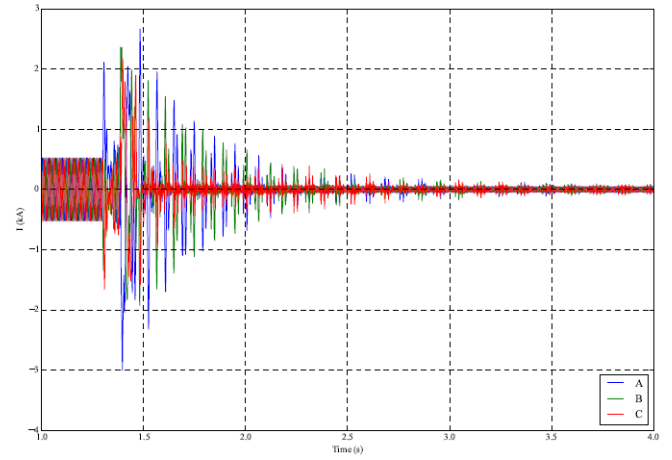


Fig. 7. Output current of the WP

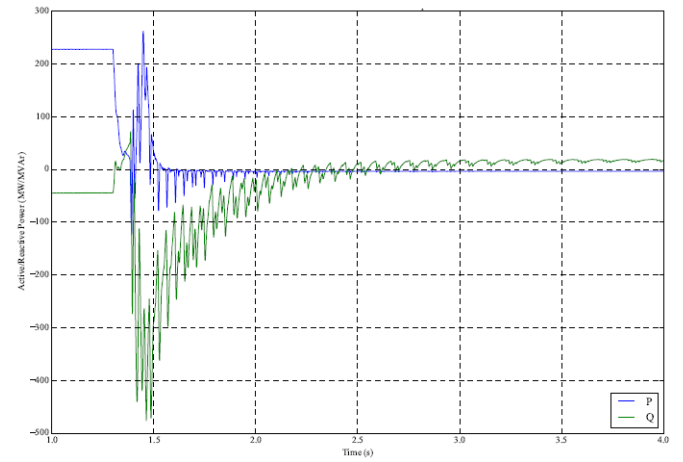


Fig. 8. Active and reactive power output of the WP

Root cause analysis has shown that the reactive power is being pushed from the series capacitor banks to the project after clearing the fault. The TSO has designed the protection of all of the series capacitor banks in the system such that they ride through the most severe fault. A fault in line A-B is not an exception to this. This is mainly done for stability enhancement and increasing the power transfer capability in the region under certain loading and generation scenarios.

The problem can be understood by referring to figure 10. In this figure, it can be seen that once the fault occurs on line A-B, the voltage across the capacitor banks become close to full line to line voltage of 345 kV and the capacitor bank store a massive amount of reactive power as a result. However, once the fault is cleared by opening the circuit breakers at both ends of the line A-B, the voltage across the capacitor bank returns to normal which is around 27 kV. Since the voltage across the capacitor cannot change instantaneously, the capacitor bank releases the previously stored energy back to the system in both directions and the voltage across the capacitor bank starts to overshoot. Since the WP is radially connected and very

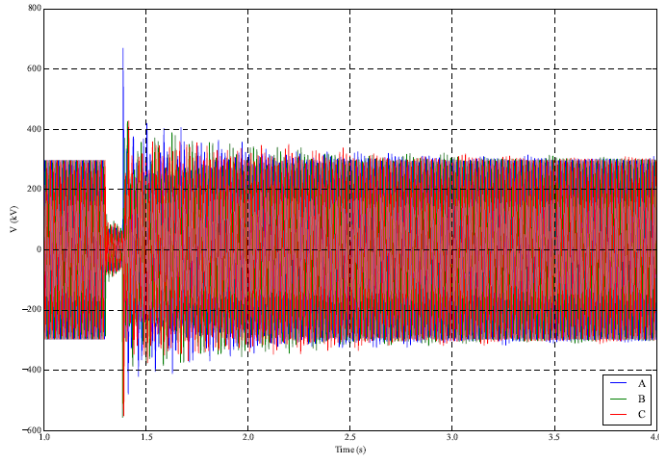


Fig. 9. Voltage at POI

close electrically to the series capacitor banks, it attracts most of the reactive power. The reactive power absorbed greatly exceeds capability of the the turbines and they trip offline as a result.

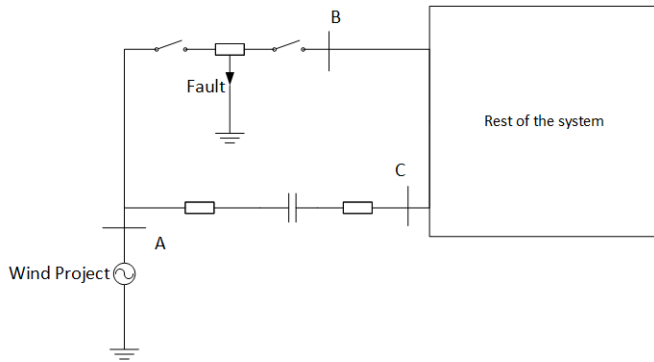


Fig. 10. Fault and clearing the fault on line A-B

## VI. CONCLUSIONS

An study has been performed to assess whether the WP under construction will be susceptible to SSO. A frequency scan screening study was performed and indicated that the WP is unlikely to suffer SSO even though is right next door to a large series compensation device. A detailed EMT study was performed to to confirm the findings of the frequency scan screening study. EMT simulations showed that the project will trip after clearing the fault on one line the outage of which will cause the project to be radially connected to the series compensation capacitor. Investigations were carried out to understand the nature of this trip. The authors concluded that the trip is due to the high voltage and reactive power surge coming back from the series capacitors after the fault is cleared. The project was thus not susceptible to SSO. The ISO was notified of the findings and approved the study.

## ACKNOWLEDGMENT

The authors would like to thank Dustin Howard and Nath Venkit of GE for their help and support throughout the study. The authors also would like to thank Mahdi Kefayati of EPE for producing some of the artwork in this paper.

## REFERENCES

- [1] M. Hall and D. Hodges, "Experience with 500 kv subsynchronous resonance and resulting turbine generator shaft damage at mohave generating station," *IEEE publication*, vol. 76, pp. 22–29, 1976.
- [2] P. Belkin, "Event of 10-22-09," in *CREZ Technical Conference, January*, vol. 26, 2010.
- [3] M. El-Marsafawy, "Use of frequency-scan techniques for subsynchronous-resonance analysis of a practical series-capacitor compensated ac network," in *IEE Proceedings C-Generation, Transmission and Distribution*, vol. 130, no. 1. IET, 1983, pp. 28–40.
- [4] W. Ren and E. Larsen, "A refined frequency scan approach to subsynchronous control interaction (ssci) study of wind farms," *IEEE Transactions on Power Systems*, vol. 31, no. 5, pp. 3904–3912, Sept 2016.