

#include <esp_now.h>
#include <WiFi.h>
#include <map>
#include <driver/ledc.h>

using namespace std;

const int myID = 99;

unsigned long lastTime = 0;
unsigned long timerDelay = 300;

unsigned long sendTime = 0;
unsigned long sendDelay = 9000;

bool noise = false;

uint8_t broadcastAddress[] = {0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF};

std::map<int, int> rcvBeeData;

```
typedef struct bee_struct {  
    int id;  
} bee_struct;
```

bee_struct beeData;
bee_struct myInfo;

esp_now_peer_info_t peerInfo;

void OnDataRecv(const esp_now_recv_info_t *recv_info, const uint8_t *incomingData, int len) {
 memcpy(&beeData, incomingData, sizeof(beeData));
 int8_t rssi = recv_info->rx_ctrl->rssi;
 rcvBeeData[beeData.id] = rssi;
}

void OnDataSent(uint8_t *mac_addr, uint8_t sendStatus) {
}

void setup() {

ledcAttach(5, 40000, 8);
 ledcAttach(6, 40000, 8);
 ledcAttach(7, 40000, 8);

WiFi.mode(WIFI_STA);

if (esp_now_init() != 0) {
 return;
 }

esp_now_register_recv_cb(OnDataRecv);
 esp_now_register_send_cb(esp_now_send_cb_t(OnDataSent));

peerInfo.channel = 0;
 peerInfo.encrypt = false;
 memcpy(peerInfo.peer_addr, broadcastAddress, 6);
 if (esp_now_add_peer(&peerInfo) != ESP_OK){
 return;
 }

delay(1000);
}

void loop() {
 if (((millis() - lastTime) > timerDelay) && noise == false) {
 lastTime = millis();
 }

if (noise == true && (rcvBeeData.size() != 0)) {

for (auto bee : rcvBeeData) {
 if (bee.first == 11) {

if (bee.second < -70) {
 ledcWrite(5, 127);
 }




if (bee.second >= -70 && bee.second <= -50) {
 ledcWrite(6, 127);
 }

if (bee.second > -50) {
 ledcWrite(7, 127);
 }

}
 }
 } else {

rcvBeeData.clear();
 ledcWrite(5, 0);
 ledcWrite(6, 0);
 ledcWrite(7, 0);
 }

if (((millis() - sendTime) > sendDelay) && myInfo.id == myID) {
 esp_now_send(broadcastAddress, (uint8_t *) &myInfo, sizeof(myInfo));
 sendTime = millis();
 }

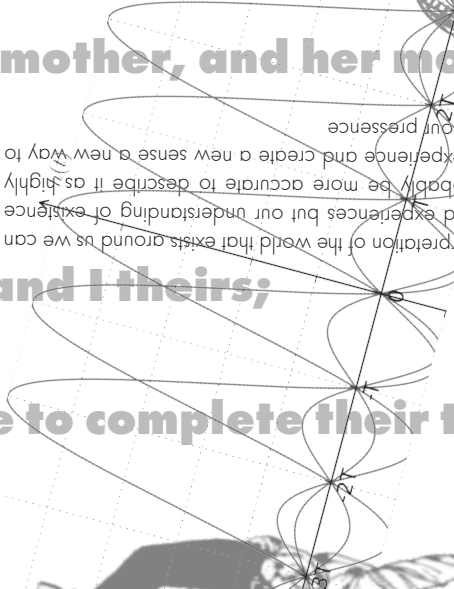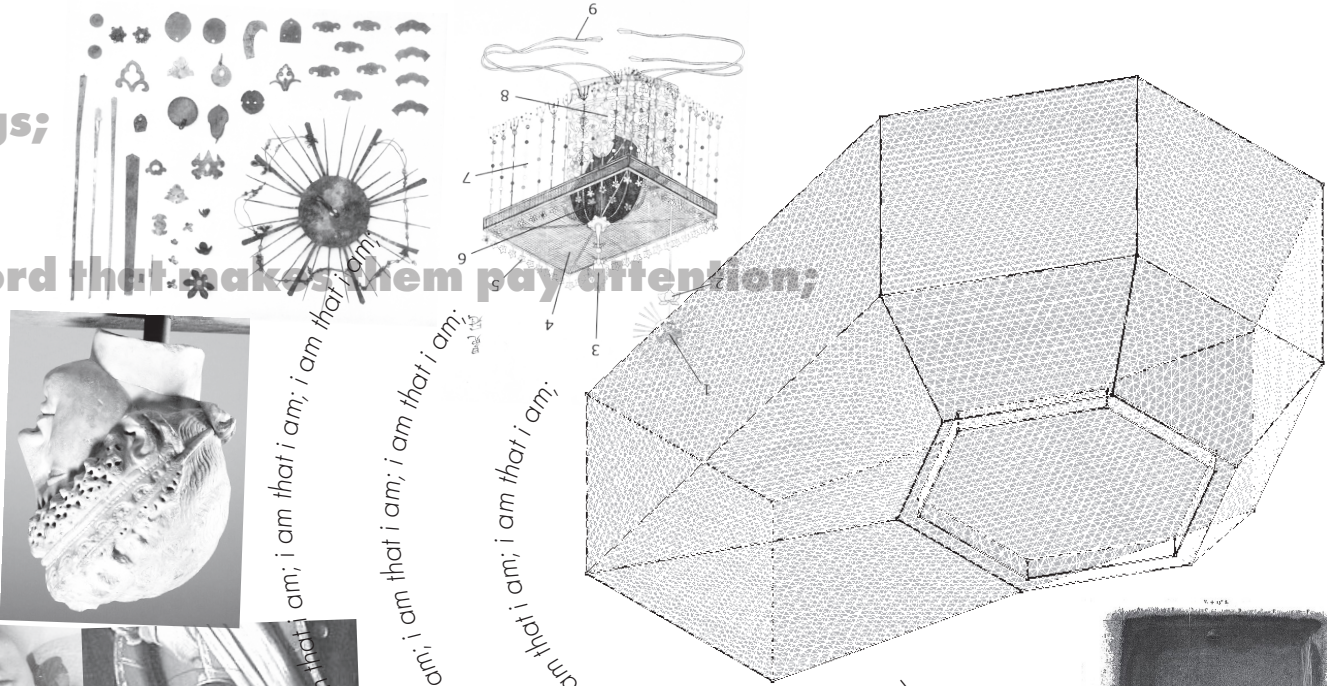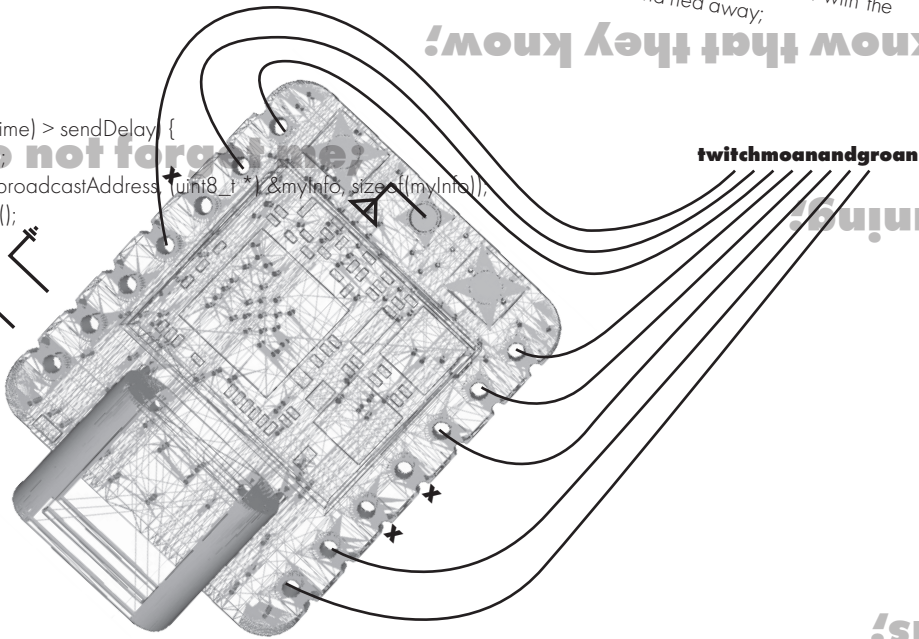

These are the words of my mother, and her mother before her;

My many fingers need time to complete their tasks;

All are equal;

This is the cause for concern;

My concern has its limits;

This I do not forget me;

#include <esp_now.h>
#include <WiFi.h>

const int myID = 11;

unsigned long lastTime = 0;
unsigned long timerDelay = 50;

bool noise = false;

uint8_t broadcastAddress[] = {0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF};

typedef struct bee_struct {
 int id;
} bee_struct;

bee_struct myInfo;
bee_struct rcvInfo;

void OnDataSent(uint8_t *mac_addr, uint8_t sendStatus) {
}

void OnDataRecv(const esp_now_recv_info_t *recv_info, const uint8_t *incomingData, int len) {
 memcpy(&rcvInfo, incomingData, sizeof(rcvInfo));
 int8_t rssi = recv_info->rx_ctrl->rssi;
 if (rcvInfo.id == 99 && rssi > -60) {
 rangerTimer = millis() + 640;
 }

void setup() {
 pinMode(4, INPUT);
 pinMode(5, OUTPUT);
 pinMode(6, OUTPUT);

WiFi.mode(WIFI_STA);
 if (esp_now_init() != 0) {
 return;
 }

esp_now_register_send_cb(OnDataSent);
 esp_now_register_recv_cb(OnDataRecv);
 peerInfo.channel = 0;
 peerInfo.encrypt = false;
 memcpy(peerInfo.peer_addr, broadcastAddress, 6);
 if (esp_now_add_peer(&peerInfo) != ESP_OK){
 return;
 }

delay(1000);
 }

there is no objective truth all that we know is an interpretation of the world that exists around us we can define the sensations and even agree upon shared experiences but our understanding of existence is subjective at an absolute minimum it would probably be more accurate to describe it as highly biased we seek to broaden the palette of human experience and create a new sense a new way to experience the familiar and a new way to interpret our presence
 in the world that surrounds us;

void loop() {
 if (((millis() - lastTime) > timerDelay) && noise == false) {
 lastTime = millis();
 }

unsigned long lastTime = 0;
 unsigned long timerDelay = 50;

bool noise = false;

uint8_t broadcastAddress[] = {0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF};

typedef struct bee_struct {
 int id;
 } bee_struct;

bee_struct myInfo;
 bee_struct rcvInfo;

void OnDataSent(uint8_t *mac_addr, uint8_t sendStatus) {
 }

void OnDataRecv(const esp_now_recv_info_t *recv_info, const uint8_t *incomingData, int len) {
 memcpy(&rcvInfo, incomingData, sizeof(rcvInfo));
 int8_t rssi = recv_info->rx_ctrl->rssi;
 rcvBeeData[beeData.id] = rssi;
 }

unsigned long lastTime = 0;
 unsigned long timerDelay = 300;

unsigned long sendTime = 0;
 unsigned long sendDelay = 9000;

bool noise = false;

uint8_t broadcastAddress[] = {0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF};

std::map<int, int> rcvBeeData;

typedef struct bee_struct {
 int id;
 } bee_struct;

using namespace std;

#include <driver/ledc.h>
 #include <map>
 #include <WiFi.h>
 #include <esp_now.h>