Good Display Specifications

Prepared: AiMing Wei
Checked: YongCheng Jian
Approved: Boris Ren
Issue Date: 2016.4.7

Dalian Good Display Co., Ltd.

Table of Content

INTRODUCTION

This driver is an all-in-one driver with timing controller for ESL. Its output is of 2-bit white/black and 1-bit red resolution per pixel. The timing controller provides control signals for the source driver and gate drivers.

The DC-DC controller allows it to generate the source output voltage VDPS/VDNS (+/-2.4V~+/-8V, +/-15V). The chip also includes an output buffer for the supply of the COM electrode (VCOMAC or VCOMDC). The system is configurable through a 3-wire/4-wire (SPI) serial interface.

MAIN APPLICATIONS

- E-tag application

FEATURE HIGHLIGHTS

- System-on-chip (SOC) for ESL
- Timing controller supports several all-resolutions
- Preselectable resolution (SourcexGate):
    - 94x230
    - 94x252
    - 128x296
    - 200x300
- Built-in Frame memory (Max.): 300x200x3bit
- Support LUT1 (VCOM1, White, Black, Gray1, Gray2)

- Support LUT2 (VCOM2, Red0, Red1)
- Source Driver with 2-bit white/black resolution and 1-bit red resolution
    - 200 channels
    - Output dynamic range: VDNS, 0, VDPS
    - Output deviation: 0.2 V
    - Left and Right shift capability
- Gate Driver:
    - 300 channel outputs
    - Output voltage VDNG+40
    - Up and Down scan capability
- 3-wire/4-wire (SPI) serial interface
- DC-DC controller for generating the analog power supply
- COM electrode (VCOM AC) level
- Built-in temperature sensor
- Digital supply voltage: 2.3~ 3.6V
- Operating frequency: 20MHz (max)
- COG Package
- COM/SEG bump information
  Bump pitch: 42 μM
  Bump gap: 24 μM $\pm$ 3μM
  Bump surface: 1350 μM^2

BLOCK DIAGRAM
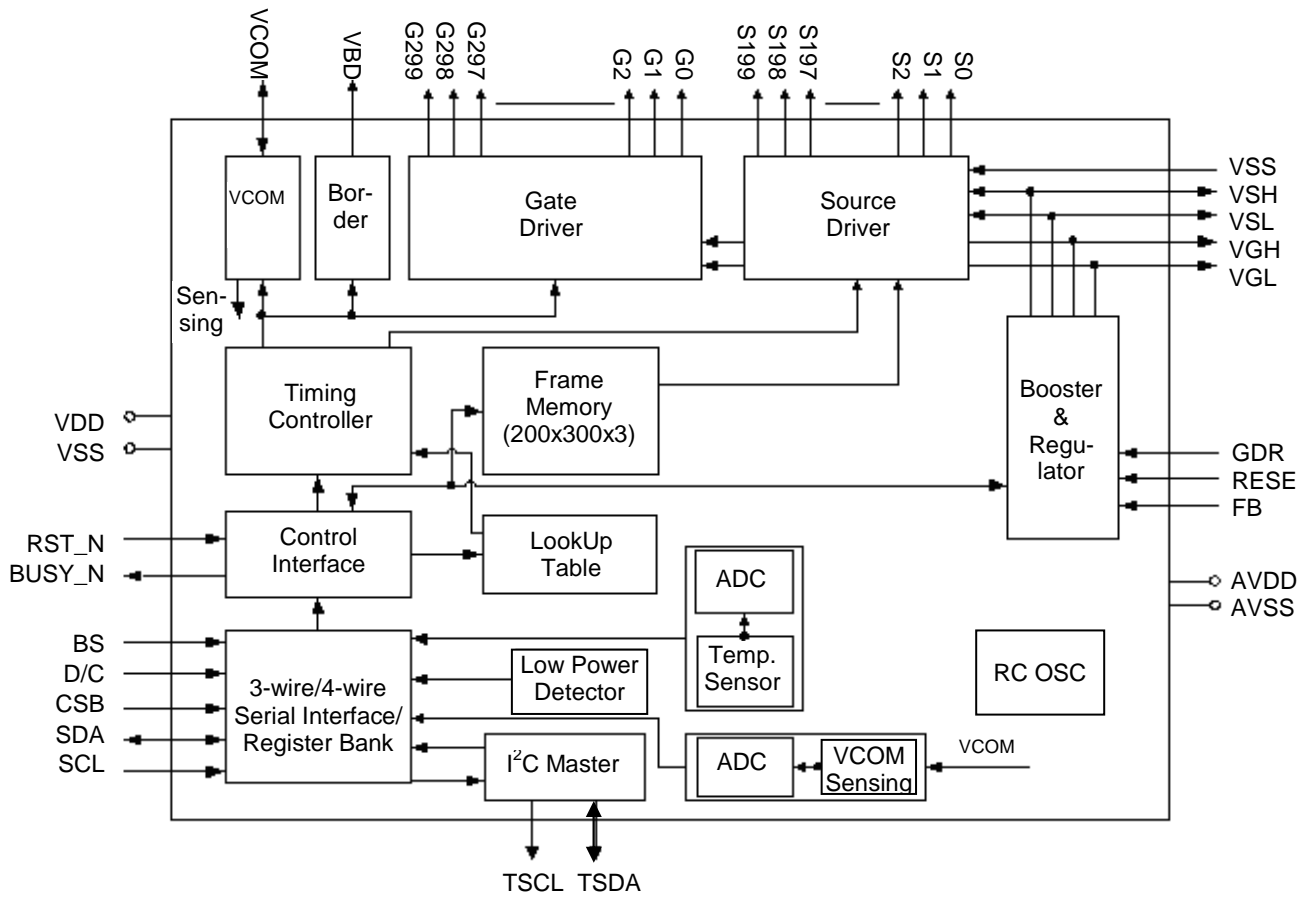
PIN DESCRIPTION

Type: I: Input,   O: Output,   I/O: Input/Output,   P: Power,   C: Capacitor pin

Pin (Pad) Name	Pin Count	Type	Description
POWER SUPPLY			
VDD	7	P	Digital power
VDDA	10	P	Analog power
VDDIO	10	P	IO power
GND	18	P	Digital Ground.
GNDA	17	P	Analog Ground
VDM	4	P	Driver Ground
SERIAL COMMUNICATION INTERFACE			
CSB	1	I (Pull-up)	Serial communication chip select.
SDA	1	I/O	Serial communication data input.
SCL	1	I	Serial communication clock input.
DC	1	I	Serial communication Command/Data input. L: command H: data
CONTROL INTERFACE			
BS	1	I (Pull-up)	Input interface setting. Select 3 wire/ 4 wire SPI interface L: 4-wire IF. **H: 3-wire IF. (Default)**
RST_N	1	I (Pull-up)	Global reset pin. Low: reset. When RST_N become low, driver will reset. All register will be reset to default value, and all driver functions will be disabled. SD output and VCOM will base on previous condition; and they may have two conditions: 0v or floating.
BUSY_N	1	O	This pin indicates the driver status. L: Driver is busy, data/VCOM is transforming. H: non-busy. Host side can send command/data to driver.
TEST1~7	7	--	Test pins. Reserved for testing. Leave them open.
TSCL	2	O	I^2C clock for external temperature sensor.
TSDA	2	I/O	I^2C data for external temperature sensor.

Pin (Pad) Name	Pin Count	Type	Description
OUTPUT DRIVER			
S[0..199] (S<0>~S<199>)	200	O	Source driver output signals.
G[0..299] (G<0>~G<299>)	300	O	Gate driver output signals.
VBD (VBD<1>~VBD<2>)	2	O	Border output pins. It outputs black WF.
CL	1	I/O	Clock pin for cascade mode. In single-chip mode, keep CL open. In cascade mode, the CL pin of the slave chip should be connected to the CL pin of the master chip.
MS	1	I	Master/Slave selection for cascade mode. Low: Slave, High: Master In single-chip mode, MS should be connect to VDD.
VSYNC	1	I/O	Vsync pin for cascade mode. In single-chip mode, VSYNC should be connected to GND or VDD. In cascade mode, VSYNC pin of slave chip shoulde be connected to VSYNC pin of master chip.
VCOM GENERATOR			

VCOM	16	O	VCOM output. It has the following voltage states:
			   (VDPS+VCM_DC) V,
			   (VCM_DC) V,
			   (VDNS+VCM_DC) V,
			   Floating

POWER CIRCUIT			
GDR	8	O	N-MOS gate control
RESE	2	P	Current sense input for control loop.
FB	2	P	(Keep Open.)
VGH	20	C	Positive Gate voltage.
VGL	24	C	Negative Gate voltage.
VSH	10	C	Positive Source voltage.
VSL	10	C	Negative Source voltage.
MISC. PINS			
NC	40		Not Connected.
Dummy	26		Dummy pins.

COMMAND TABLE

W/R: 0: Write Cycle 1: Read Cycle   C/D: 0: Command / 1: Data   D7~D0: –: Don't Care #: Valid Data

#	Command	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0	Registers	Default
1	Panel Setting (PSR)	0	0	0	0	0	0	0	0	0	0		00h
		0	1	#	#	--	#	#	#	#	#	RES, KW/R, UD, SHL, SHD_N, RST_N	0Fh
2	Power Setting (PWR)	0	0	0	0	0	0	0	0	0	1		01h
		0	1	--	--	--	--	#	#	#	#	RVSHLS, VDS_EN, VDG_EN	03h
		0	1	--	--	--	--	--	--	#	#	VGHL_LV	00h
		0	1	--	--	--	#	#	#	#	#	VDPS_LV	08h
		0	1	--	--	--	#	#	#	#	#	VDNS_LV	08h
3	Power OFF (POF)	0	0	0	0	0	0	0	0	1	0		02h
4	Power OFF Sequence Setting (PFS)	0	0	0	0	0	0	0	0	1	1		03h
		0	1	--	--	#	#	--	--	--	--	T_VDS_OFF	00h
5	Power ON (PON)	0	0	0	0	0	0	0	1	0	0		04h
6	Power ON Measure (PMES)	0	0	0	0	0	0	0	1	0	1		05h
7	Booster Soft Start (BTST)	0	0	0	0	0	0	0	1	1	0		06h
		0	1	--	#	#	#	#	#	#	#	BT_PHA[6:0]	0Fh
		0	1	--	#	#	#	#	#	#	#	BT_PHB[6:0]	0Eh
		0	1	--	--	--	#	#	#	#	#	BT_PHC[4:0]	0Dh
8	Display Start Transmission 1 (DTM1) (x-byte command)	0	0	0	0	0	1	0	0	0	0		10h
		0	1	#	#	#	#	#	#	#	#	KPixel1, KPixel2, KPixel3, KPixel4	00h
		0	1	..	..	..	..	..	..	..	..	..	:
		0	1	#	#	#	#	--	--	--	--	KPixel(n-1), KPixel(n)	00h
9	Data Stop (DSP)	0	0	0	0	0	1	0	0	0	1		11h
		1	1	#	--	--	--	--	--	--	--	data_flag	--
10	Display Refresh (DRF)	0	0	0	0	0	1	0	0	1	0		12h
11	Display Start transmission 2 (DTM2) (y-byte command)	0	0	0	0	0	1	0	0	1	1		13h
		0	1	#	#	#	#	#	#	#	#	RPixel1, RPixel2, RPixel3, RPixel4	00h
		0	1	..	..	..	..	..	..	..	..	..	:
		0	1	#	#	--	--	--	--	--	--	RPixel(n-1), RPixel(n)	00h
12	Vcom1 LUT (LUTC1) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	0	0	0		20h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
13	White LUT (LUTW) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	0	0	1		21h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
14	Black LUT (LUTB) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	0	1	0		22h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
15	Gray1 LUT (LUTG1) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	0	1	1		23h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
16	Gray2 LUT (LUTG2) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	1	0	0		24h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
17	Vcom2 LUT (LUTC2) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	1	0	1		25h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
18	Red0 LUT (LUTR0) (16-byte command, bytes 2~4 repeated 5 times)	0	0	0	0	1	0	0	1	1	0		26h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h

#	Command	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0	Registers	Default
19	Red1 LUT (LUTR1) (16-byte command, bytes 2~4 repeated 5 times)	0	0	**0**	**0**	**1**	**0**	**0**	**1**	**1**	**1**		**27h**
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
		0	1	#	#	#	#	#	#	#	#		00h
20	PLL control (PLL)	0	0	**0**	**0**	**1**	**1**	**0**	**0**	**0**	**0**		**30h**
		0	1	--	--	#	#	#	#	#	#	M, N	2Ah
21	Temperature Sensor Calibration (TSC)	0	0	**0**	**1**	**0**	**0**	**0**	**0**	**0**	**0**		**40h**
		1	1	#	#	#	#	#	#	#	#	TSE[D10:D0] / TS[3:0]	
		1	1	#	#	#	--	--	--	--	--		00h
22	Temperature Sensor Selection (TSE)	0	0	**0**	**1**	**0**	**0**	**0**	**0**	**0**	**1**		**41h**
		0	1	#	--	--	--	--	--	--	--	TSE	00h
23	Temperature Sensor Write (TSW)	0	0	**0**	**1**	**0**	**0**	**0**	**0**	**1**	**0**		**42h**
		0	1	#	#	#	#	#	#	#	#	WATTR[7:0]	00h
		0	1	#	#	#	#	#	#	#	#	WMSB[7:0]	00h
		0	1	#	#	#	#	#	#	#	#	WLSB[7:0]	00h
24	Temperature Sensor Read (TSR)	0	0	**0**	**1**	**0**	**0**	**0**	**0**	**1**	**1**		**43h**
		1	1	#	#	#	#	#	#	#	#	RMSB[7:0]	00h
		1	1	#	#	#	#	#	#	#	#	RLSB[7:0]	00h
25	Vcom and data interval setting (CDI)	0	0	**0**	**1**	**0**	**1**	**0**	**0**	**0**	**0**		**50h**
		0	1	--	--	#	#	#	#	#	#	SD_BDHZ, DDX, CDI	17h
26	Lower Power Detection (LPD)	0	0	**0**	**1**	**0**	**1**	**0**	**0**	**0**	**1**		**51h**
		1	1	--	--	--	--	--	--	--	#	LPD	--
27	TCON setting (TCON)	0	0	**0**	**1**	**1**	**0**	**0**	**0**	**0**	**0**		**60h**
		0	1	#	#	#	#	#	#	#	#	S2G, G2S	22h
28	Resolution setting (TRES)	0	0	**0**	**1**	**1**	**0**	**0**	**0**	**0**	**1**		**61h**
		0	1	#	#	#	#	#	#	#	**0**	HRES	00h
		0	1	--	--	--	--	--	--	--	#		00h
		0	1	#	#	#	#	#	#	#	#	VRES[8:0]	00h
29	Revision (REV)	0	0	**0**	**1**	**1**	**1**	**0**	**0**	**0**	**0**		**70h**
		1	1	0	0	0	0	0	0	0	0		00h
30	Get Status (FLG)	0	0	**0**	**1**	**1**	**1**	**0**	**0**	**0**	**1**		**71h**
		1	1	--	--	--	--	--	--	#	#	I2C_ERR, I2C_BUSYN, data_flag, PON, POF, BUSY_N	02h
31	Auto Measurement Vcom	0	0	**1**	**0**	**0**	**0**	**0**	**0**	**0**	**0**		**80h**
		0	1	--	--	#	#	--	--	#	#	AMVT, AMV, AMVE	10h
32	Read Vcom Value(VV)	0	0	**1**	**0**	**0**	**0**	**0**	**0**	**0**	**1**		**81h**
		1	1	--	--	#	#	#	#	#	#	VV	00h
33	VCM_DC Setting (VDCS)	0	0	**1**	**0**	**0**	**0**	**0**	**0**	**1**	**0**		**82h**
		0	1	--	--	#	#	#	#	#	#	VDCS	00h

Note: (1) All other register addresses are invalid or reserved by UltraChip, and should NOT be used.

(2) Any bits shown here as 0 must be written with a 0. All unused bits should also be set to zero. Device malfunction may occur if this is not done.

(3) Commands are processed on the 'stop' condition of the interface.

(4) Registers marked 'W/R' can be read, but the contents are written when the SPI command completes – so the contents can be read and altered. The user can subsequently write the register to restore the contents following an SPI read.

(5) All registers are accessible, (i.e., Host can send command/data to driver), only when BUSY_N =1; except R01h (PWR), R03h (PFS), R04h (PON), R05h (PMES), R06h(BTST), R51h (LPD), and R71h(FLG), which are accessible either when BUSY_N=0 or 1.

COMMAND DESCRIPTION

W/R : 0: Write Cycle / 1: Read Cycle   C/D : 0: Command / 1: Data   D7-D0 : –: Don't Care

(1) PANEL SETTING (PSR)   (REGISTER: R00H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Setting the panel	0	0	**0**	**0**	**0**	**0**	**0**	**0**	**0**	**0**
	0	1	RES1	RES0	--	KWR	UD	SHL	SHD_N	RST_N

RES[1:0]:   Display Resolution setting (source x gate)

00b: 94x230 (Default)   Active source channels: S0 ~ S93. Active gate channels: G0 ~ G229.
01b: 94x252   Active source channels: S0 ~ S93. Active gate channels: G0 ~ G251.
10b: 128x296   Active source channels: S0 ~ S127. Active gate channels: G0 ~ G295.
11b: 200x300   Active source channels: S0 ~ S199. Active gate channels: G0 ~ G299.

KWR: KW/R function

0: Pixel with K/W/Red. Will run both LU1 and LU2. (Default)
1: Pixel with K/W. Will run LU1 only.

UD: 0: Scan down.   First line to Last line: Gn-1 → Gn-2 → Gn-3 → … → G0
1: Scan up. (Default)   First line to Last line: G0 → G1 → G2 → … … . → Gn-1

SHL: 0: Shift left.   First data to Last data: Sn-1 → Sn-2 → Sn-3 → … → S0
1: Shift right. (Default)   First data to Last data: S0 → S1 → S2 → … … . → Sn-1

SHD_N: 0: DC-DC converter will be turned OFF
1: DC-DC converter will be turned ON (Default)

When SHD_N become LOW, charge pump will be turned OFF, register and SRAM data will keep until VDD OFF, and SD output and VCOM will remain previous condition. SHD_N may have two conditions: 0v or floating.

RST_N: 0: The controller is reset. Reset all registers to default value.
1: No effect (Default)

When RST_N become LOW, the driver will be reset, all registers will be reset to their default value. All driver functions will be disabled. SD output and VCOM will base on previous condition. It may have two conditions: 0v or floating.

This command can be active only when BUSY_N = "1".

(2) POWER SETTING (PWR) (R01H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Selecting Internal/External Power	0	0	**0**	**0**	**0**	**0**	**0**	**0**	**0**	**1**
	0	1	-	-	-	-	RVSHLS	RVSHLS	VDS_EN	VDG_EN
	0	1	-	-	-	-	-	-	VGHL_LV[1:0]	
	0	1	-	-	-	VDPS_LV[4:0]				
	0	1	-	-	-	VDNS_LV[4:0]				

RVSHLS[1:0]: Source power selection

RVSHLS[1:0]	VSH	VSL
00	+2.4 ~ +8.0V	-2.4 ~ -8.0V
01	+2.4 ~ +8.0V	-15V
10	+15V	-2.4 ~ -8.0V
11	+15V	-15V

VDS_EN: Source power selection
0 : External source power from VDH/VDL pins
1 : Inetrnal DC/DC function for generating VDH/VDL

VDG_EN: Gate power selection
0 : External gate power from VGH/VGL pins
1 : Internal DC/DC function for generating VGH/VGL

VGHL_LV[1:0]: VGHL_LVL / VDNG_LVL power selection.

VGHL_LV	VGHL_LVL power
00 (DEFAULT)	VGH=20V, VGL= -19.3V
01	VGH=19V, VGL= -18.3V
10	VGH=18V, VGL= -17.3V
11	VGH=17V, VGL= -16.3V

VDPS_LV[4:0]: Internal VDPS power selection for Red LUT.(**Default value: 01000b**)

VDPS_LV	VDPS	VDPS_LV	VDPS	VDPS_LV	VDPS	VDPS_LV	VDPS
00000	2.4 V	**01000**	**4.0 V**	10000	5.6 V	11000	7.2 V
00001	2.6 V	01001	4.2 V	10001	5.8 V	11001	7.4 V
00010	2.8 V	01010	4.4 V	10010	6.0 V	11010	7.6 V
00011	3.0 V	01011	4.6 V	10011	6.2 V	11011	7.8 V
00100	3.2 V	01100	4.8 V	10100	6.4 V	11100	8.0 V
00101	3.4 V	01101	5.0 V	10101	6.6 V	(others)	4.0 V
00110	3.6 V	01110	5.2 V	10110	6.8 V		
00111	3.8 V	01111	5.4 V	10111	7.0 V		

VDNS_LV[4:0]: Internal VDNS power selection for Red LUT. (**Default value: 01000b**)

VDNS_LV	VDNS	VDNS_LV	VDNS	VDNS_LV	VDNS	VDNS_LV	VDNS
00000	-2.4 V	01000	-4.0 V	10000	-5.6 V	11000	-7.2 V
00001	-2.6 V	01001	-4.2 V	10001	-5.8 V	11001	-7.4 V
00010	-2.6 V	01010	-4.4 V	10010	-6.0 V	11010	-7.6 V
00011	-3.0 V	01011	-4.6 V	10011	-6.2 V	11011	-7.8 V
00100	-3.2 V	01100	-4.8 V	10100	-6.4 V	11100	-8.0 V
00101	-3.4 V	01101	-5.0 V	10101	-6.6 V	(others)	-4.0 V
00110	-3.6 V	01110	-5.2 V	10110	-6.8 V		
00111	-3.8 V	01111	-5.4 V	10111	-7.0 V		

This command can be active only when BUSY_N = "1".

(3) POWER OFF (POF) (R02H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Turning OFF the power	0	0	**0**	**0**	**0**	**0**	**0**	**0**	**1**	**0**

After the Power Off command, driver will power off based on the Power Off Sequence, BUSY_N will become "0". This command will turn off charge pump, T-con, source driver, gate driver, VCOM, and temperature sensor, but register data will be kept until VDD becomes OFF.

SD output and Vcom will base on previous condition. It may have 2 conditions: 0V or floating.

This command can be active only when BUSY_N = "1".

(4) POWER OFF SEQUENCE SETTING (PFS) (R03H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Setting Power OFF sequence	0	0	**0**	**0**	**0**	**0**	**0**	**0**	**1**	**0**
	0	1	-	-	T_VDS_OFF[1:0]		-		-	

T_VDS_OFF[1:0]:   Power OFF Sequence of VDPS and VDNS.

00b: 1 frame (Default)   01b: 2 frames   10b: 3 frames   11b: 4 frame

This command can be active only when BUSY_N = "1".

(5) POWER ON (PON) (REGISTER: R04H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Turning ON the power	0	0	**0**	**0**	**0**	**0**	**0**	**1**	**0**	**0**

After the Power ON command, the driver will be powered ON following the Power ON Sequence. After the Power ON command and all power sequence are ready, the BUSY_N signal will become "1". Refer to the Power ON Sequence section.

(6) POWER ON MEASURE (PMES) (R05H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Turning ON the power	0	0	**0**	**0**	**0**	**0**	**0**	**1**	**0**	**1**

This command releases BUSY_N restriction for command TSC and command LPD until next Power Off.

(7) BOOSTER SOFT START (BTST) (R06H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Starting data transmission	0	0	**0**	**0**	**0**	**0**	**0**	**1**	**1**	**0**
	0	1	-	BTPHA6	BTPHA5	BTPHA4	BTPHA3	BTPHA2	BTPHA1	BTPHA0
	0	1	**-**	BTPHB6	BTPHB5	BTPHB4	BTPHB3	BTPHB2	BTPHB1	BTPHB0
	0	1	-	-	-	BTPHC4	BTPHC3	BTPHC2	BTPHC1	BTPHC0

BTPHA[6:5]: Soft start period of phase A. **00b: 10mS**   01b: 20mS   10b: 30mS   11b: 40mS

BTPHA[4:3] : Driving strength of phase A

    00b: strength 1   **01b: strength 2**   10b: strength 3   11b: strength 4 (strongest)

BTPHA[2:0] : Minimum OFF time setting of GDR in phase B

    000b: 0.27uS   001b: 0.34uS   010b: 0.40uS   011b: 0.54uS
    100b: 0.80uS   101b: 1.54uS   110b: 3.34uS   **111b: 6.58uS**

BTPHB[6:5] : Soft start period of phase B. **00b: 10mS**   01b: 20mS   10b: 30mS   11b: 40mS

BTPHB[4:3] : Driving strength of phase B

    00b: strength 1   **01b: strength 2**   10b: strength 3   11b: strength 4 (strongest)

BTPHB[2:0] : Minimum OFF time setting of GDR in phase B

    000b: 0.27uS   001b: 0.34uS   010b: 0.40uS   011b: 0.54uS
    100b: 0.80uS   101b: 1.54uS   **110b: 3.34uS**   111b: 6.58uS

BTPHC[4:3] : Driving strength of phase C

    00b: strength 1   **01b: strength 2**   10b: strength 3   11b: strength 4 (strongest)

BTPHC[2:0] : Minimum OFF time setting of GDR in phase C

    000b: 0.27uS   001b: 0.34uS   **010b: 0.40uS**   011b: 0.54uS
    100b: 0.80uS   101b: 1.54uS   110b: 3.34uS   111b: 6.58uS

(8) DATA START TRANSMISSION 1 (DTM1) (R10H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Starting data transmission	0	0	**0**	**0**	**0**	**1**	**0**	**0**	**0**	**0**
	0	1	kpixel1[1:0]		kpixel2[1:0]		kpixel3[1:0]		kpixel4[1:0]	
	0	1	…		…		…		…	
	0	1	kpixel(n-1)[1:0]		kpixel(n)[1:0]		-	-	-	-

This command starts transmitting data and write them into SRAM. To complete data transmission, command DSP (Data transmission Stop) must be issued. Then the chip will start to send data/VCOM for panel.

This command can be active only when BUSY_N = "1".

KPixel(x)[1:0]:

DDX	KPixel (x) [1:0]	LUT
0	00	White
	01	Gray2
	10	Gray1
	11	Black
1	00	Black
	01	Gray1
	10	Gray2
	11	White

(9) DATA STOP (DSP) (R11H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Stopping data transmission	0	0	**0**	**0**	**0**	**1**	**0**	**0**	**0**	**1**
	1	1	data_flag	-	-	-	-	-	-	-

To stop data transmission, this command must be issued to check the data_flag.

Data_flag: Data flag of receiving user data.
  0: Driver didn't receive all the data.
  1: Driver has already received all the one-frame data.

This command can be active only when BUSY_N = "1". After data start (10h) and data stop (11h) command, BUSY_N signal will become "0".

(10) DISPLAY REFRESH (DRF) (R12H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Refreshing the display	0	0	**0**	**0**	**0**	**1**	**0**	**0**	**1**	**0**

While user sent this command, driver will refresh display (data/VCOM) according to SRAM data and LUT.

This command can be active only when BUSY_N = "1". After display refresh command, BUSY_N signal will become "0".

(11) DATA START TRANSMISSION 2 (DTM2) (R13H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Starting data transmission	0	0	**0**	**0**	**0**	**1**	**0**	**0**	**1**	**1**
	0	1	RPixel1	RPixel2	RPixel3	RPixel4	RPixel5	RPixel6	RPixel7	RPixel8
	0	1	:	:	:	:	:	:	:	:
	0	1	RPixel(n-1)	RPixel(n)	-	-	-	-	-	-

This command starts transmitting data and write them into SRAM. To complete data transmission, command DSP (Data transmission Stop) must be issued. Then the chip will start to send data/VCOM for panel.

This command can be active only when BUSY_N = "1".

RPixel(x):

DDX	RPixel (x)	LUT
0	0	Red1
	1	Red0
1	0	Red0
	1	Red1

(12) VCOM1 LUT (LUTC1) (R20H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Build Look-up Table for Vcom 1 (16-byte command, Bytes 2~4 repeated 5 times)	0	0	**0**	**0**	**1**	**0**	**0**	**0**	**0**	**0**
	0	1	LEVEL SELECT.		NUMBER OF FRAMES					
	0	1	LEVEL SELECT.		NUMBER OF FRAMES.					
	0	1	TIMES TO REPEAT							
	0	1	:		:					
	0	1	:		:					
	0	1	:							
	0	1	:		:					
	0	1	:		:					
	0	1	:							

This command stores VCOM Look-Up Table with 5 groups of data. Each group contains information for one phase and is stored with 3 bytes, while the third byte indicates how many times that phase will repeat.

Bytes 2, 3, 5, 6, 8, 9, 11, 12, 14, 15:

{D7:D6}: Level selection.   00b: VCM_DC   01b: 15V+VCM_DC (VCOMH)   10b: -15V+VCM_DC (VCOML)   11b: Floating

{D5:D0}: Number of Frames.   00 0000b~11 1111b: 0 ~ 63 frames, respectively.

Bytes 4, 7, 10, 13, 16:

{D7:D0}: Times to repeat

(13) WHITE LUT (LUTW) (R21H)

This command builds Look-up Table for White. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

(14) BLACK LUT (LUTB) (R22H)

This command builds Look-up Table for Black. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

(15) GRAY1 LUT (LUTG1) (R23H)

This command builds Look-up Table for Gray 1. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

(16) GRAY2 LUT (LUTG2) (R24H)

This command builds Look-up Table for Gray 2. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

For commands (13)~(16), Level selection: 00b: 0V   01b: 15V (VSH)   10b: -15V (VSL)   11b: floating

(17) VCOM2 LUT (LUTC2) (R25H)

This command builds Look-up Table for Vcom 2. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

Level selection: 00b: VCM_DC   01b: VSH (red)+VCM_DC(VCOMH)   10b: VSL (red)+VCM_DC(VCOML)   11b: floating

(18) RED0 LUT (LUTR0) (R26H)

This command builds Look-up Table for Red 0. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

(19) RED1 LUT (LUTR1) (R27H)

This command builds Look-up Table for Red 1. Please refer to command (12) Vcom1 LUT (LUTC1) for similar definition details.

For commands (18)~(19), Level selection: 00b: 0V   01b: VSH (red)   10b: VSL (red)   11b: floating
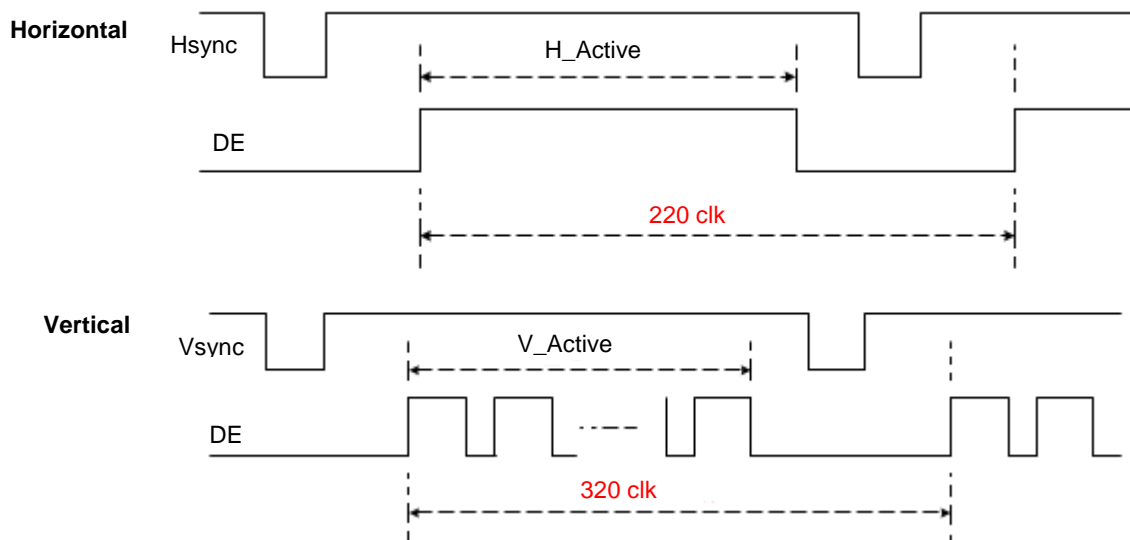
(20) PLL CONTROL (PLL) (R30H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Controlling PLL	0	0	**0**	**0**	**1**	**1**	**0**	**0**	**0**	**0**
	0	1	-	-	M[2:0]			N[2:0]		

The command controls the PLL clock frequency. The PLL structure must support the following frame rates:

M	N	Frame rate
1	1	20 Hz
	2	10 Hz
	3	7 Hz
	4	5 Hz
	5	4 Hz
	6	3 Hz
	7	3 Hz
2	1	39 Hz
	2	20 Hz
	3	13 Hz
	4	10 Hz
	5	8 Hz
	6	7 Hz
	7	6 Hz

M	N	Frame rate
3	1	59 Hz
	2	29 Hz
	3	20 Hz
	4	15 Hz
	5	12 Hz
	6	10 Hz
	7	8 Hz
4	1	78 Hz
	2	39 Hz
	3	26 Hz
	4	20 Hz
	5	16 Hz
	6	13 Hz
	7	11 Hz

M	N	Frame rate
5	1	98 Hz
	2	**50 Hz (default)**
	3	33Hz
	4	24 Hz
	5	20 Hz
	6	16 Hz
	7	14 Hz
6	1	117 Hz
	2	59 Hz
	3	39 Hz
	4	29 Hz
	5	23 Hz
	6	20 Hz
	7	17 Hz

M	N	Frame rate
7	1	137 Hz
	2	68 Hz
	3	46 Hz
	4	34 Hz
	5	27 Hz
	6	23 Hz
	7	20 Hz

This command can be active only when BUSY_N = "1".

(21) TEMPERATURE SENSOR CALIBRATION (TSC) (R40H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Sensing Temperature	0	0	**0**	**1**	**0**	**0**	**0**	**0**	**0**	**0**
	1	1	D10	D9	D8	D7	D6 / TS3	D5 / TS2	D4 / TS1	D3 / TS0
	1	1	D2	D1	D0	-	-	-	-	-

This command reads the temperature sensed by the temperature sensor.

TS[3:0]: When TSE (R41h) is set to 0, this command reads internal temperature sensor value.

D[10:0]: When TSE (R41h) is set to 1, this command reads external LM75 temperature sensor value.

(22) TEMPERATURE SENSOR ENABLE (TSE) (R41H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Calibrate Temperature Sensor	0	0	0	1	0	0	0	0	0	1
	0	1	TSE	-	-	-	-	-	-	-

This command selects Internal or External temperature sensor.

TSE: Internal temperature sensor switch

    0: Enable (default)   1: Disable; using external sensor.

(23) TEMPERATURE SENSOR WRITE (TSW) (R42H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
	0	0	0	1	0	0	0	0	1	0
Calibrate Temperature Sensor	0	1	WATTR[7:0]							
	0	1	WMSB[7:0]							
	0	1	WLSB[7:0]							

This command reads the temperature sensed by the temperature sensor.

WATTR: **D[7:6]:** I^2C Write Byte Number
                      00 : 1 byte (head byte only)
                      01 : 2 bytes (head byte + pointer)
                      10 : 3 bytes (head byte + pointer + 1st parameter)
                      11 : 4 bytes (head byte + pointer + 1st parameter + 2nd parameter)

              D[5:3]: User-defined address bits (A2, A1, A0)

              D[2:0]: Pointer setting

WMSB[7:0]:   MSByte of write-data to external temperature sensor

WLSB[7:0]:   LSByte of write-data to external temperature sensor

(24) TEMPERATURE SENSOR READ (TSR) (R43H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
	0	0	0	1	0	0	0	0	1	1
Calibrate Temperature Sensor	1	1	RMSB[7:0]							
	1	1	RLSB[7:0]							

This command reads the temperature sensed by the temperature sensor.

RMSB[7:0]:   MSByte read data from external temperature sensor

RLSB[7:0]:   LSByte read data from external temperature sensor

(25) VCOM AND DATA INTERVAL SETTING (CDI) (R50H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Set Interval between	0	0	**0**	**1**	**0**	**1**	**0**	**0**	**0**	**0**
Vcom and Data	0	1	-	-	SD_BDHZ	DDX	CDI[3:0]			

This command indicates the interval of Vcom and data output. When setting the vertical back porch, the total blanking will be kept (20 Hsync). This command can be active only when BUSY_N = "1".

SD_BDHZ: Border output selection
- 0 : Border output normal voltage
- 1 : Border floating

DDX: Internal temperature sensor switch

0: 0 – white / 1 – black   **1: 0 – black / 1 – white (default)**

CDI[3:0]: Vcom and data interval

CDI[3:0]	Vcom and Data Interval
0000 b	17 hsync
0001	16
0010	15
0011	14
0100	13
0101	12
0110	11
0111	10 (Default)

CDI[3:0]	Vcom and Data Interval
1000	9
1001	8
1010	7
1011	6
1100	5
1101	4
1110	3
1111	2
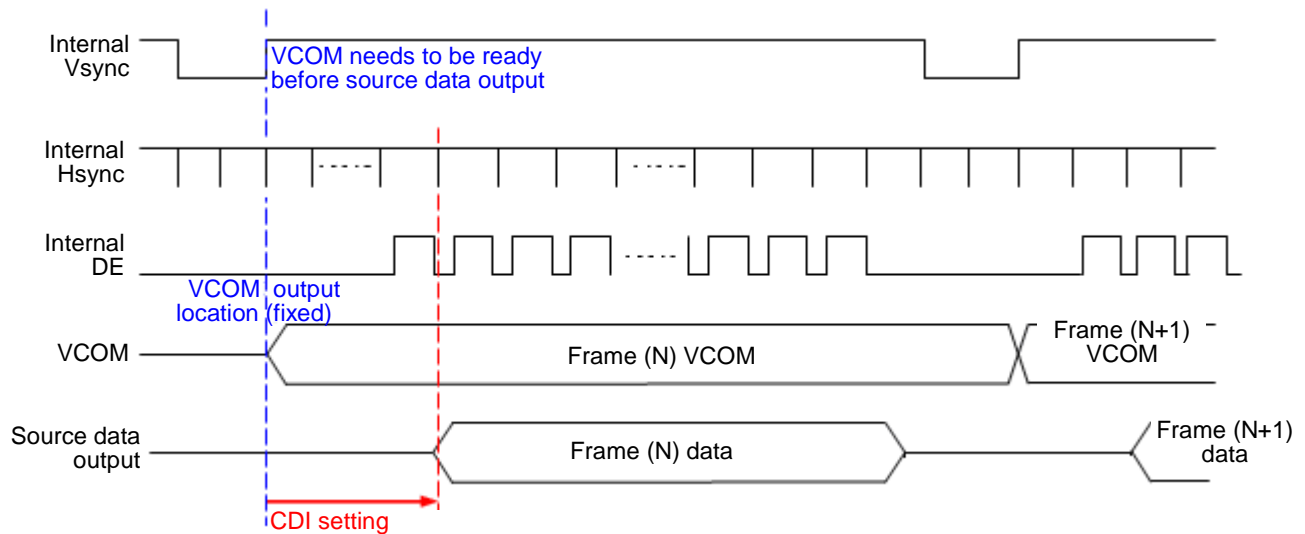
(26) LOW POWER DETECTION (LPD) (R51H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Detect Low Power	0	0	**0**	**1**	**0**	**1**	**0**	**0**	**0**	**1**
	1	1	-	-	-	-	-	-	-	LPD

This command indicates the input power condition. Host can read this flag to learn the battery condition.

LPD: Internal temperature sensor switch

0: Low power input (VDD<2.5V)   **1: Normal status (default)**
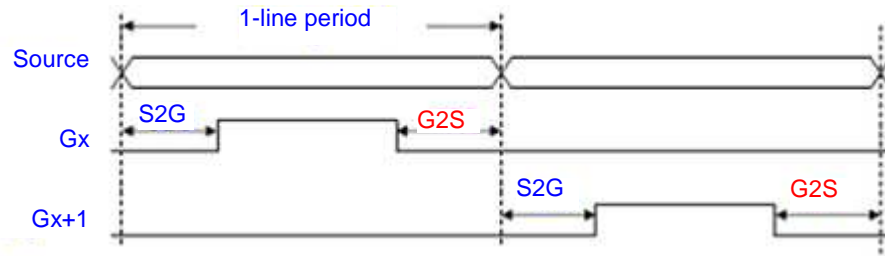
(27) TCON Setting (TCON) (R60H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Sensing Temperature	0	0	**0**	**1**	**1**	**0**	**0**	**0**	**0**	**0**
	0	1		S2G[3:0]				G2S[3:0]		

This command defines non-overlap period of Gate and Source. This command can be active only when BUSY_N = "1".

S2G[3:0] or G2S[3:0]: Source to Gate / Gate to Source Non-overlap period

S2G[3:0] or G2S[3:0]	Period
0000 b	4 clock
0001	8
0010	12 (Default)
0011	16
0100	20
0101	24
0110	28
0111	32

S2G[3:0] or G2S[3:0]	Period
1000 b	36
1001	40
1010	44
1011	48
1100	52
1101	56
1110	(reserved)
1111	(reserved)

Clock frequency is 2MHz.

(28) Resolution Setting (TRES) (R61H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Set Display Resolution	0	0	**0**	**1**	**1**	**0**	**0**	**0**	**0**	**1**
	0	1				HRES[7:1]				**0**
	0	1	-	-	-	-	-	-	-	VRES[8]
	0	1				VRES[7:0]				

This command defines alternative resolution and this setting is of higher priority than the RES[1:0] in R00H (PSR).

HRES[7:1]: Horizontal Display Resolution

VRES[8:0]: Vertical Display Resolution

Active channel calculation:

GD : First G active = G0; LAST active GD= first active +VRES -1

SD : First active channel: =S0 ; LAST active SD= first active +HRES-1

EX :128x296

GD: First G active = G0,   LAST active GD= 0+296-1= 295; (G295)

SD: First active channel = S0,   LAST active SD= 0+128-1=93; (S127)

This command can be active only when BUSY_N = "1".

(29) REVISION (REV)   (R70H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Chip Revision	0	0	**0**	**1**	**1**	**1**	**0**	**0**	**0**	**0**
	1	1	**0**	**0**	**0**	**0**			0	

This command can be active only when BUSY_N = "1".

(30) GET STATUS (FLG)   (R71H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Read Flags	0	0	**0**	**1**	**1**	**1**	**0**	**0**	**0**	**1**
	1	1	-	-	I^{2}C_ERR	I^{2}C_BUSYN	data_flag	PON	POF	BUSY_N

This command reads the IC status.

I^{2}C_ERR: I^{2}C master error status

I^{2}C_BUSYN: I^{2}C master busy status (low active)

data_flag: Driver has already received all the one frame data

PON: Power ON status

POF: Power OFF status

BUSY_N: Driver busy status (low active)

(31) AUTO MEASURE VCOM (AMV)   (R80H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Automatically measure Vcom	0	0	**1**	**0**	**0**	**0**	**0**	**0**	**0**	**0**
	0	1	-	-	AMVT[1:0]		-	-	AMV	AMVE

This command reads the IC status.

AMVT[1:0]: Auto Measure Vcom Time

      00b: 3s
      01b: 5s (default)
      10b: 8s
      11b: 10s

AMV: 0 – Get Vcom value with the VV command (R81h)
         1 – Get Vcom value in analog signal.

AMVE: Auto Measure Vcom Enable (/Disable)

      0 – No effect
      1 – Trigger auto Vcom sensing.

This command can be active only when BUSY_N = "1".

(32) VCOM VALUE (VV)   (R81H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Automatically measure Vcom	0	0	**1**	**0**	**0**	**0**	**0**	**0**	**0**	**1**
	1	1	-	-	VV[5:0]					

This command gets the Vcom value.

VV[5:0]: Vcom Value

VV[5:0]	Vcom value
00 0000b	0 V
00 0001b	-0.1 V
00 0010b	-0.2 V
:	:
01 0100b	-2.0 V (Default)
:	:
10 1000b	-4.0 V
10 1001b	-4.1 V
:	:
11 1111b	-6.3 V

This command can be active only when BUSY_N = "1".

(33) VCM_DC SETTING (VDCS)   (R82H)

Action	W/R	C/D	D7	D6	D5	D4	D3	D2	D1	D0
Set VCM_DC	0	0	**1**	**0**	**0**	**0**	**0**	**0**	**1**	**0**
	0	1	-	-	VDCS[5:0]					

This command sets VCOM_DC value

VDCS[5:0]: Vcom Value

VDCS[5:0]	Vcom value
00 0000b	**0 V** (Default)
00 0001b	-0.1 V
00 0010b	-0.2 V
00 0011b	-0.3 V
:	:
01 1110b	
:	-3.0 V
11 1111b	

This command can be active only when BUSY_N = "1".

HOST INTERFACES

3-WIRE SPI

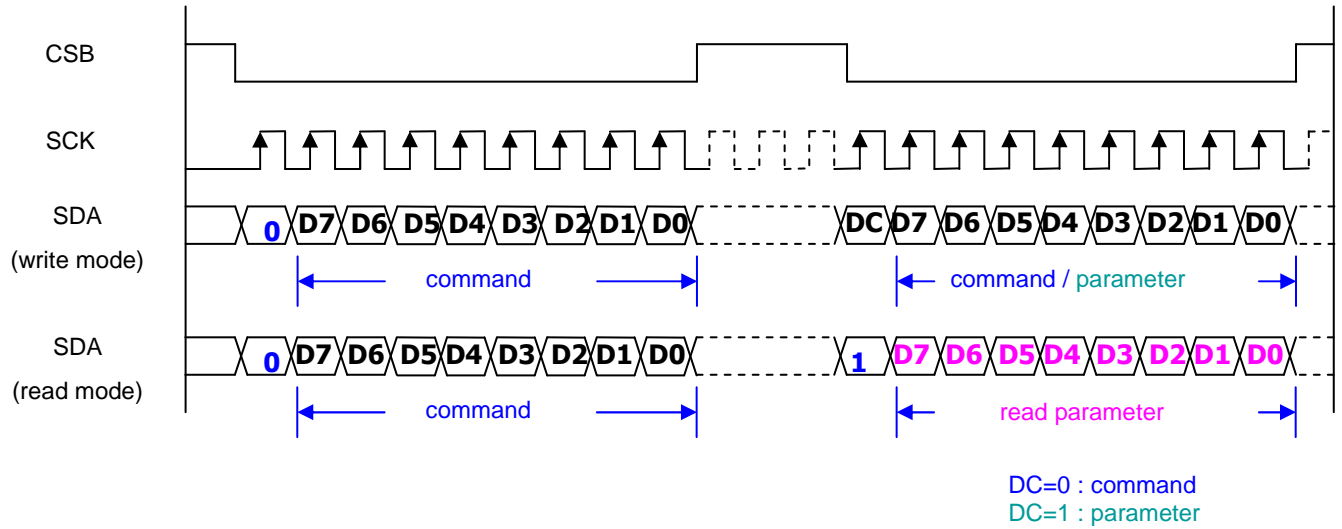DC=0 : command
DC=1 : parameter
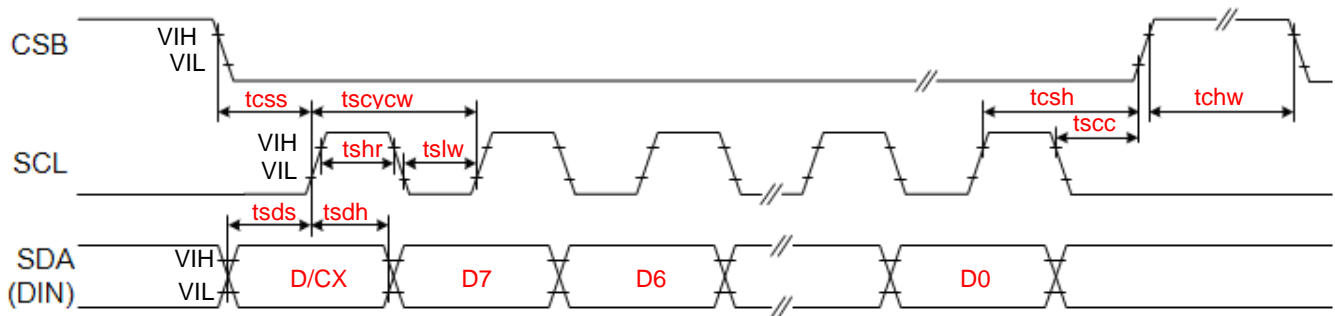
Figure : 3-wire SPI Typical Waveform – BS=1

Figure : 3-wire Serial Interface – Write

Figure : 3-wire Serial Interface – Read
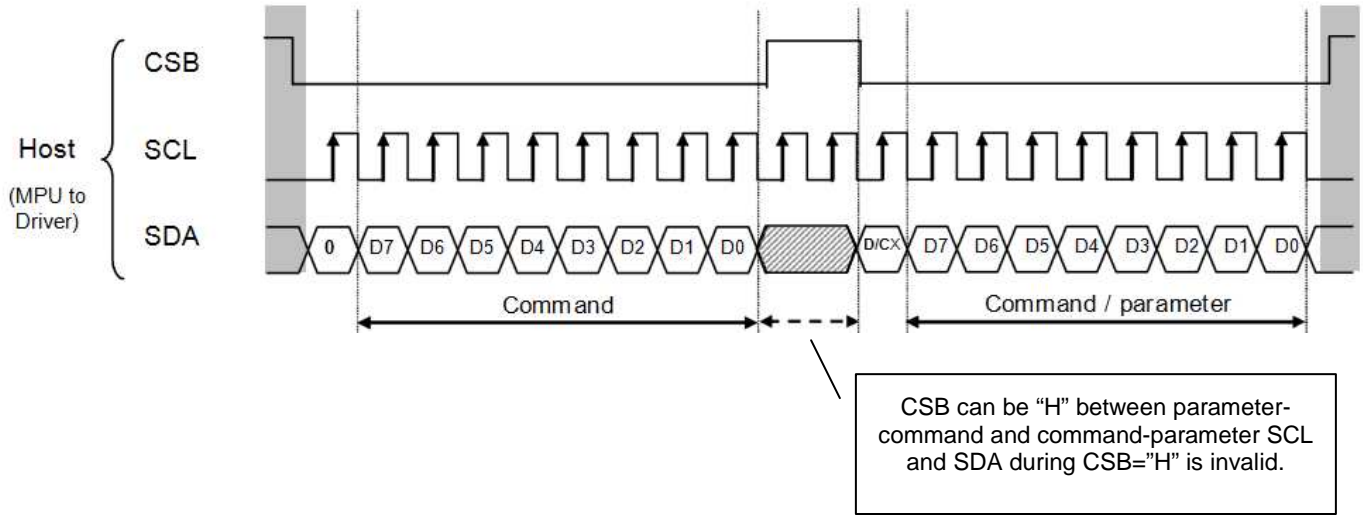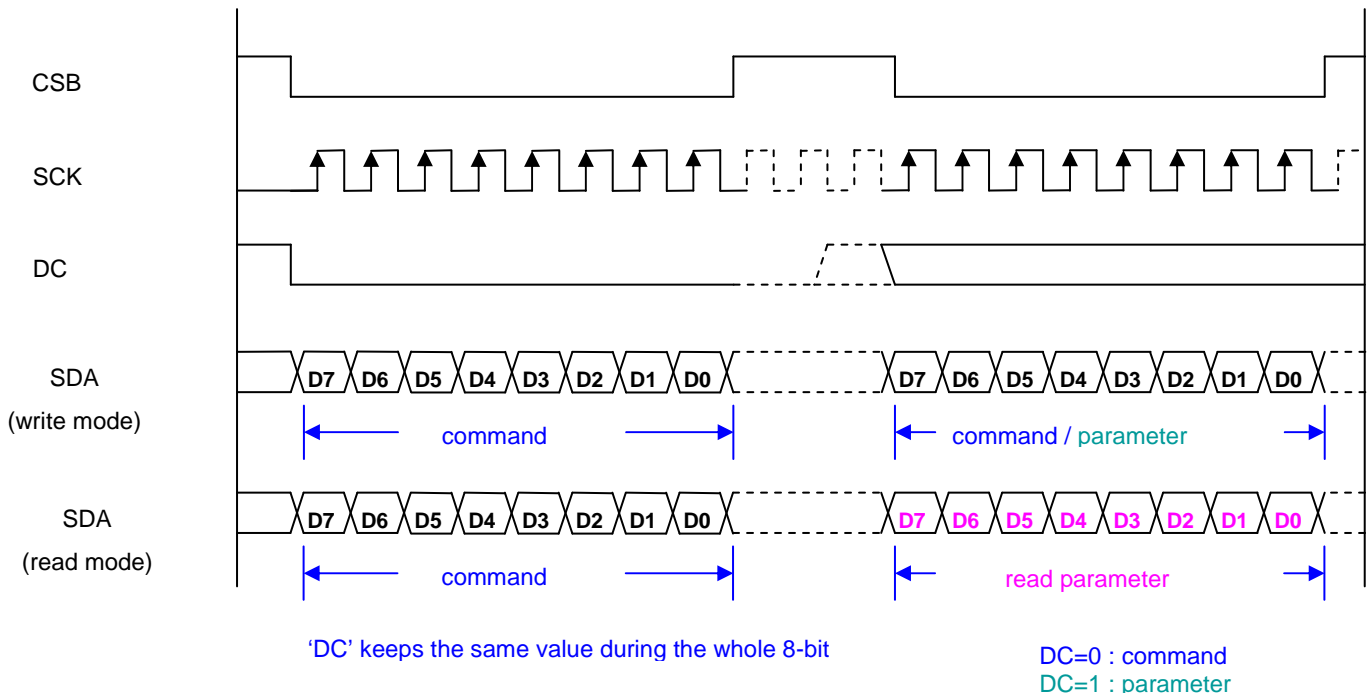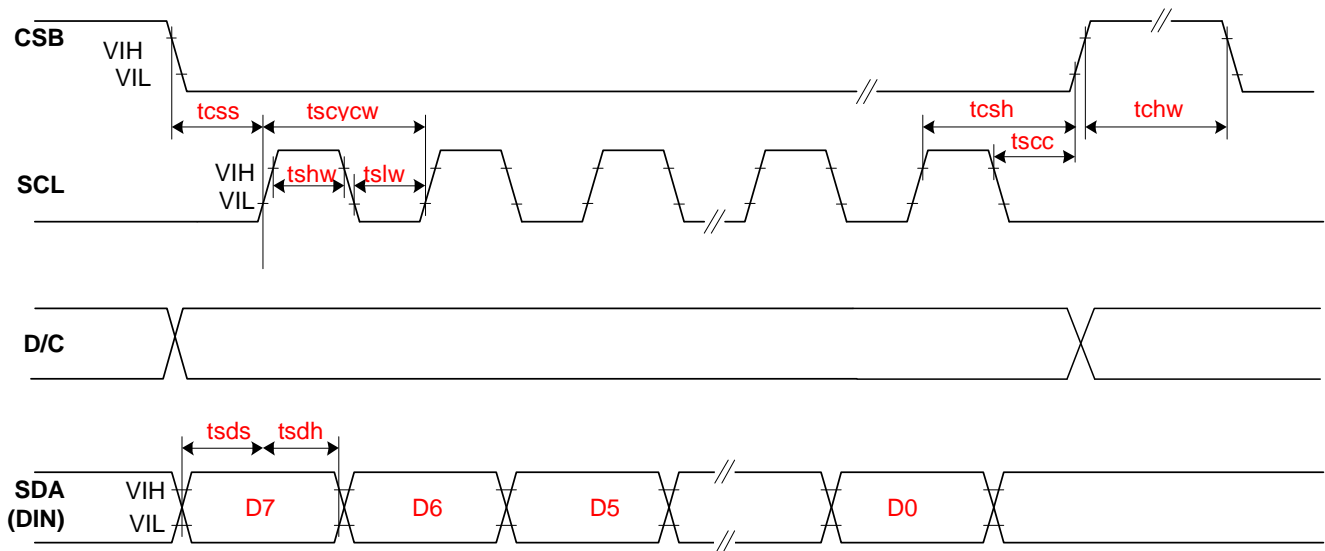
Dalian Good Display Co., Ltd.
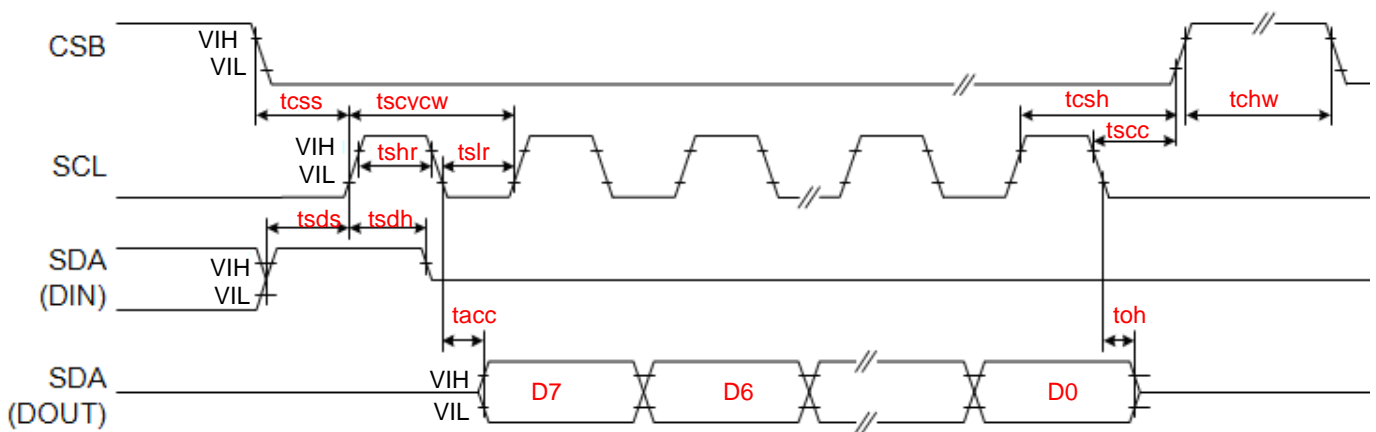
CSB can be "H" between parameter-command and command-parameter SCL and SDA during CSB="H" is invalid.

4-WIRE SPI

Figure : 4-wire SPI Typical Waveform – BS=0

Figure : 4-wire Serial Interface – Read

CSB can be "H" between parameter-command and command-parameter SCL and SDA during CSB="H" is invalid.
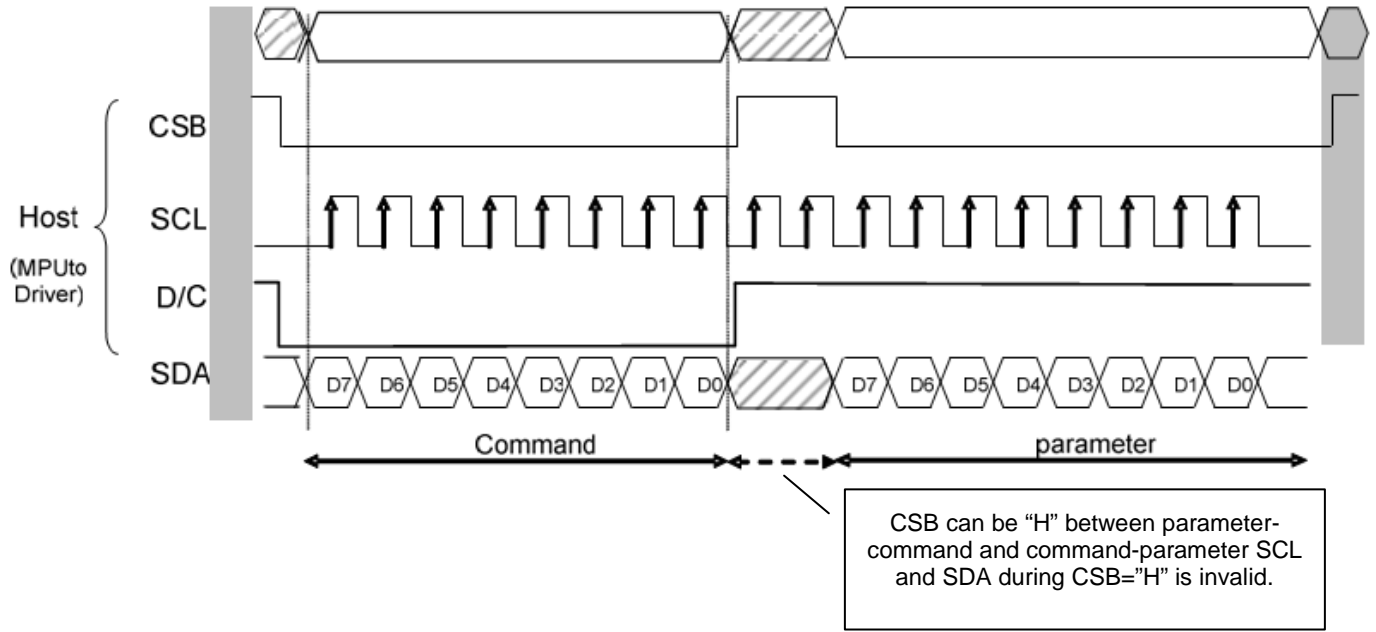
POWER MANAGEMENT

Power ON Sequence
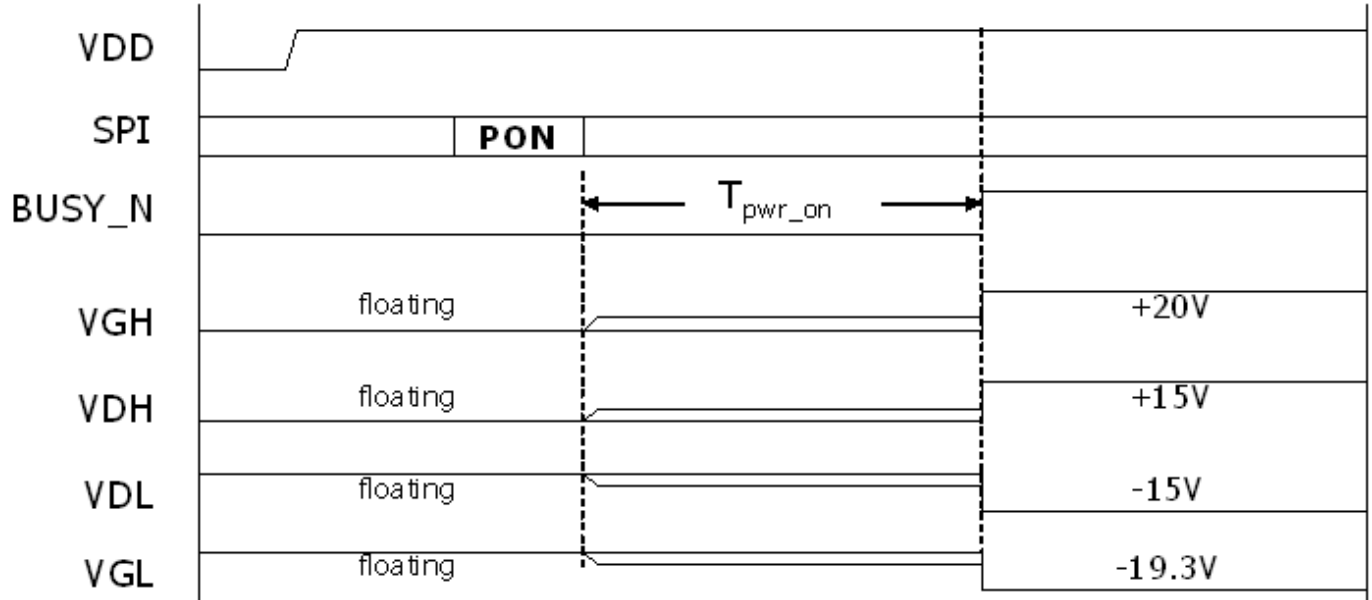
$$T_{pwr\_on} = \sim 80ms \ (default)$$

Power OFF Sequence

VDD
>10uS

Serial
Interface — Active

Internal
Vsync

POWER
OFF
(SPI)

1 frame T_VDS_OFF

VDPS
(+15V) Floating Floating

VDNS
(-15V) Floating

VDPG
(+20V) Floating

VDNG
(-20V) Floating

Source
output — Based on previous condition: 0V or floating.

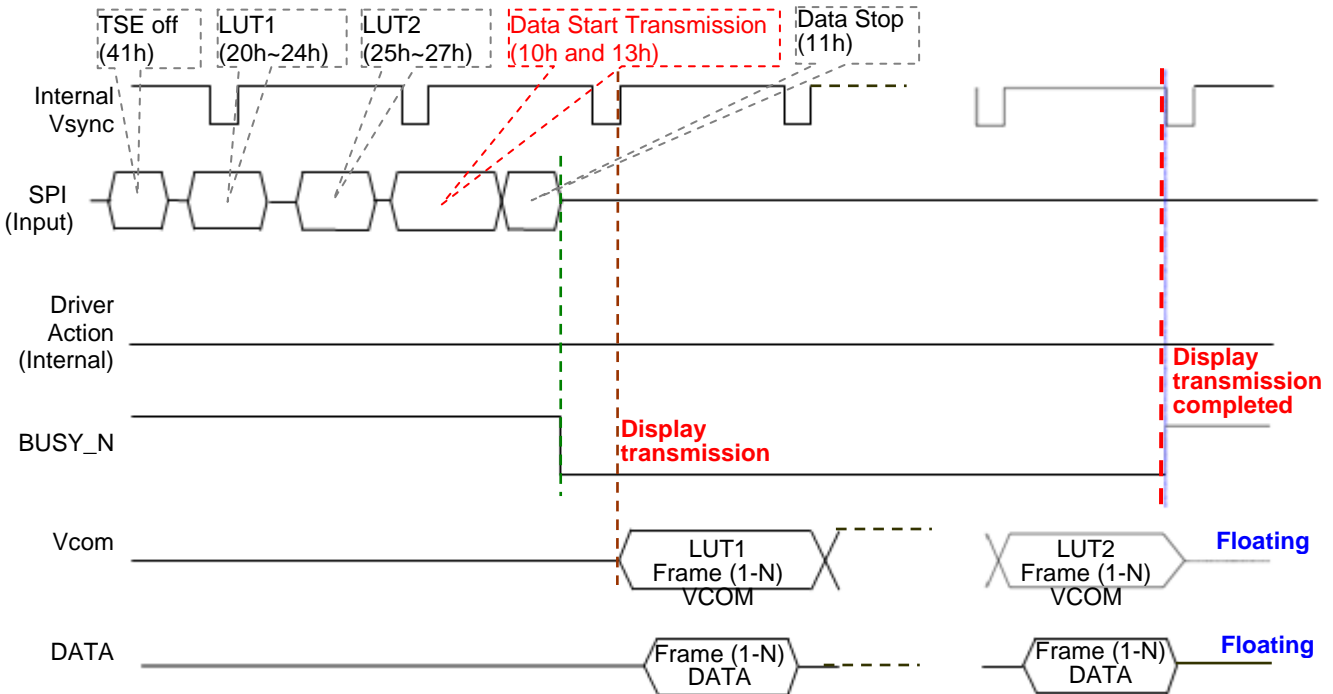VCOM — Based on previous condition: 0V or floating.

BUSY_N
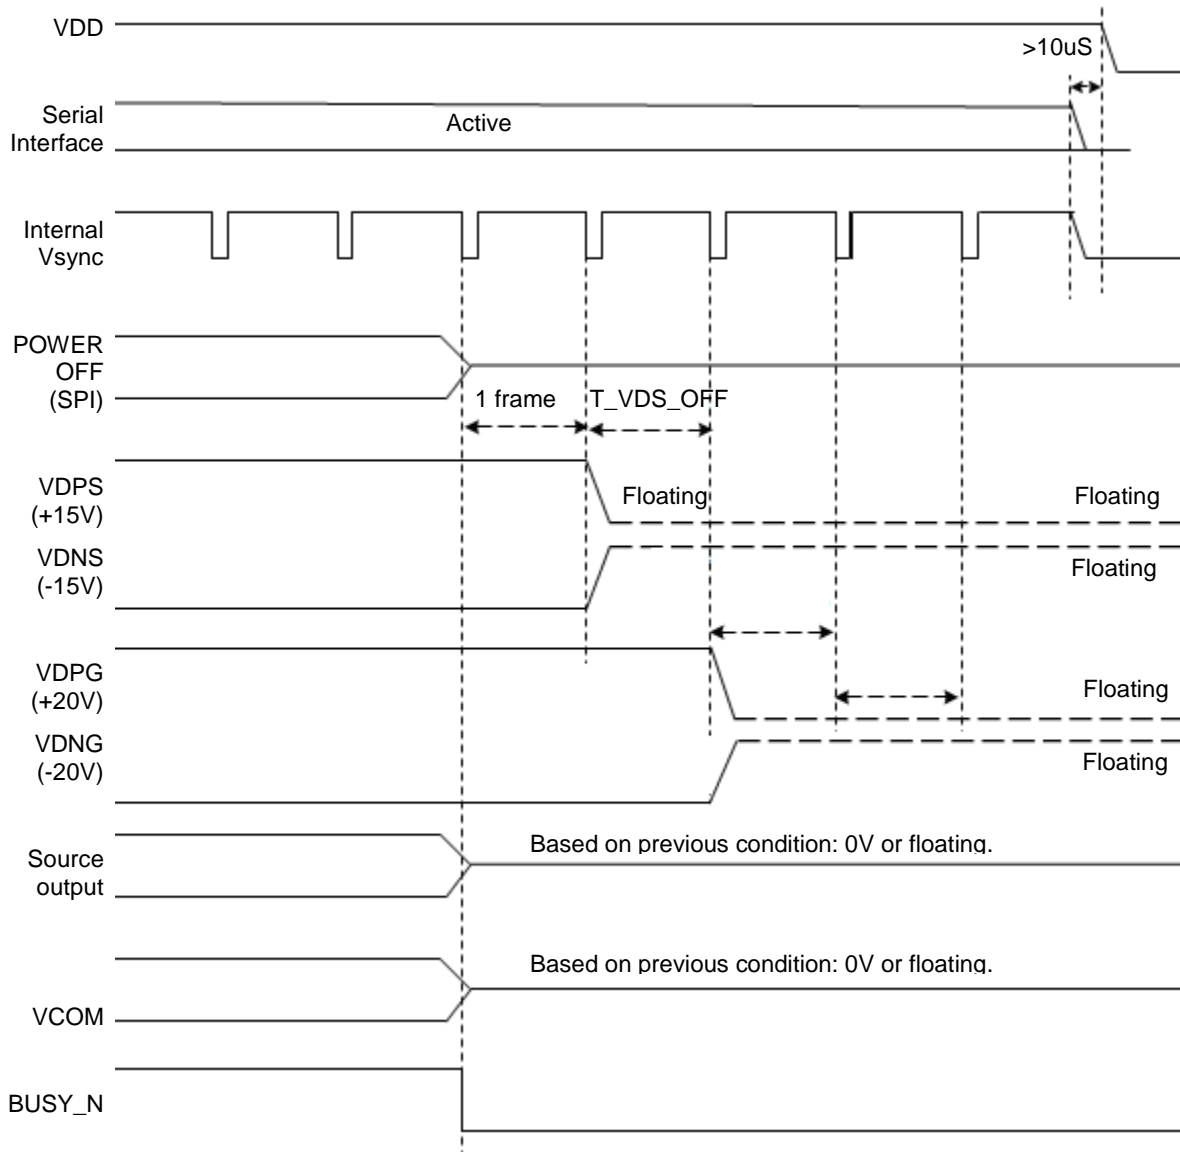
Data Transmission Waveform

Example 1: LUT all states (5 states) complete or phase number=0, the driver will send 2 frame VCOM and data to 0 V.
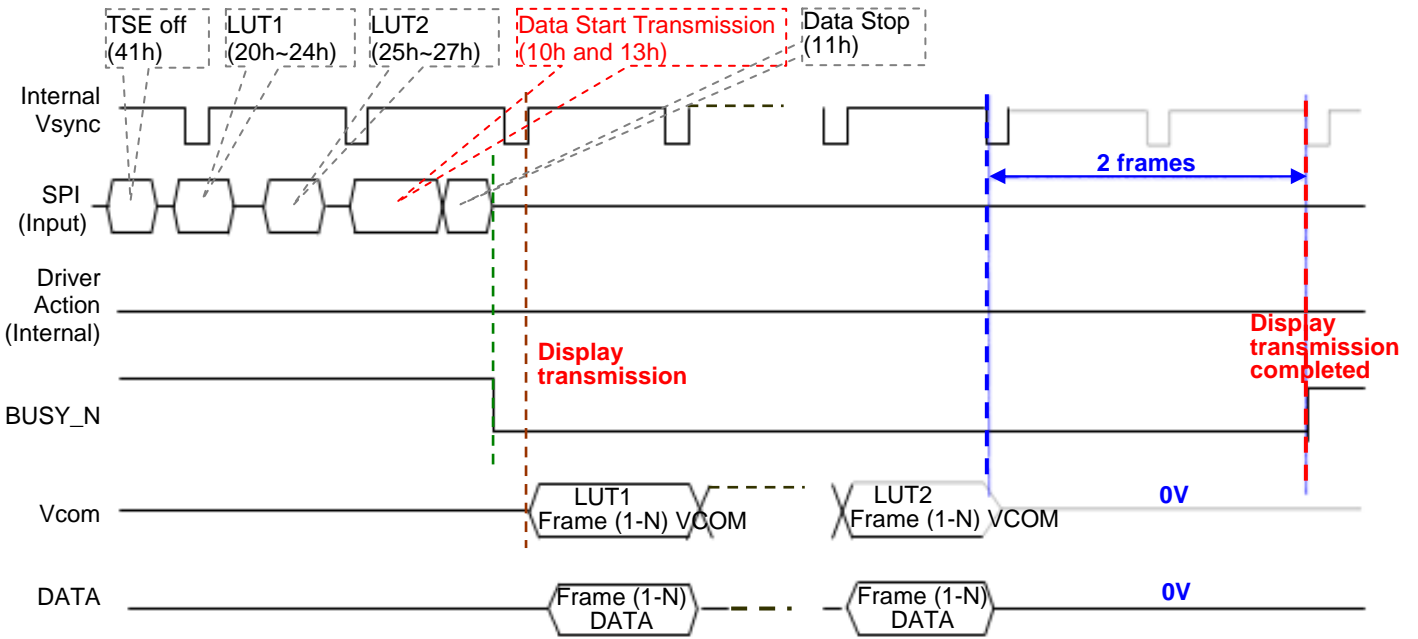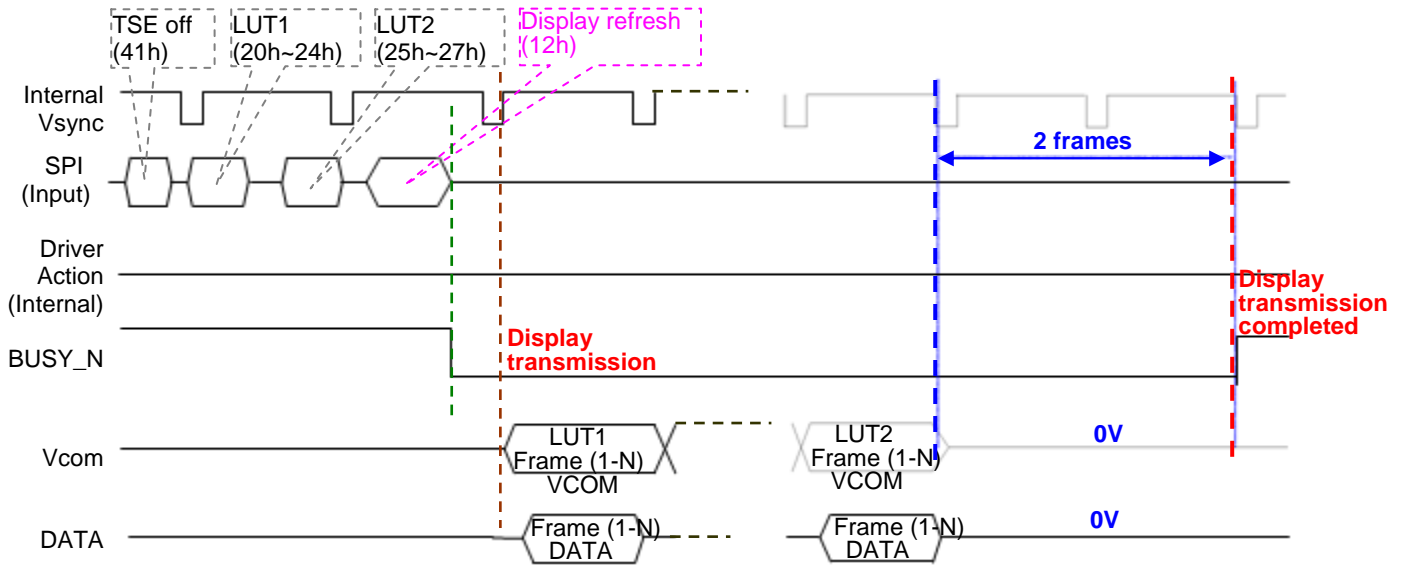
Example 2: While level selection in LUT is "11", the driver will float VCOM and data.

Display Refresh Waveform

Example 1: LUT all states (5 states) complete or phase number=0, the driver will send 2 frame VCOM and data to 0 V.

Example2: While level selection in LUT is "11", the driver will float VCOM and data.
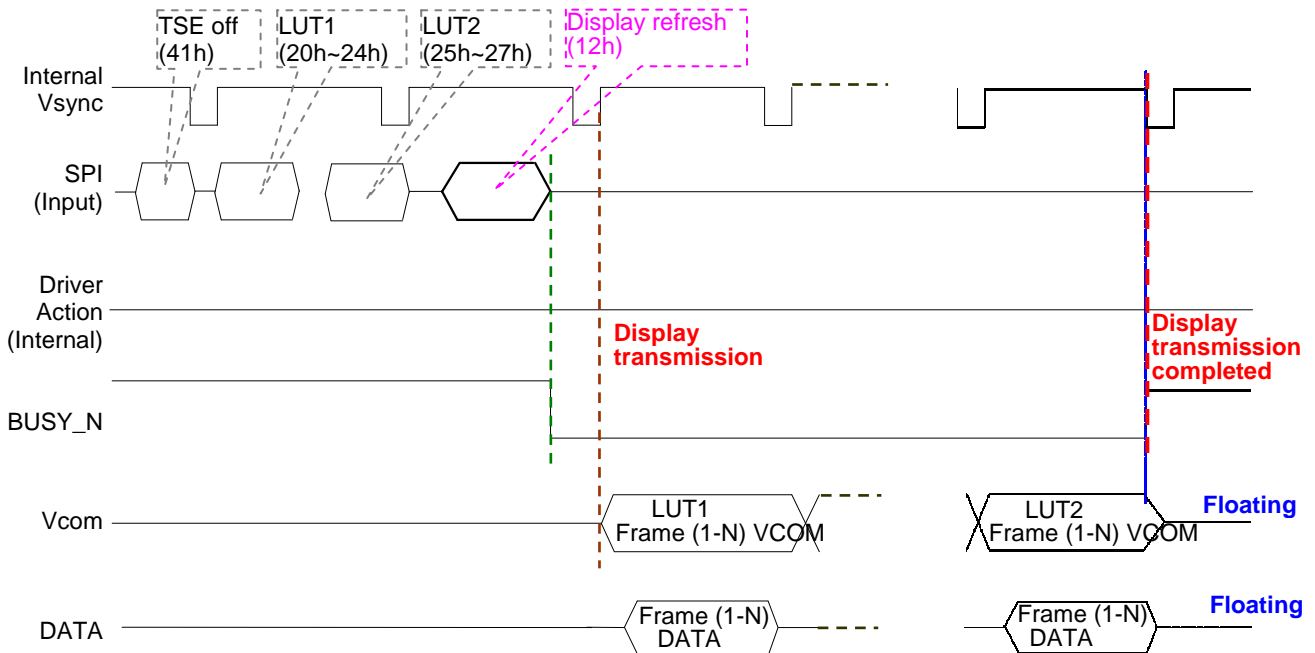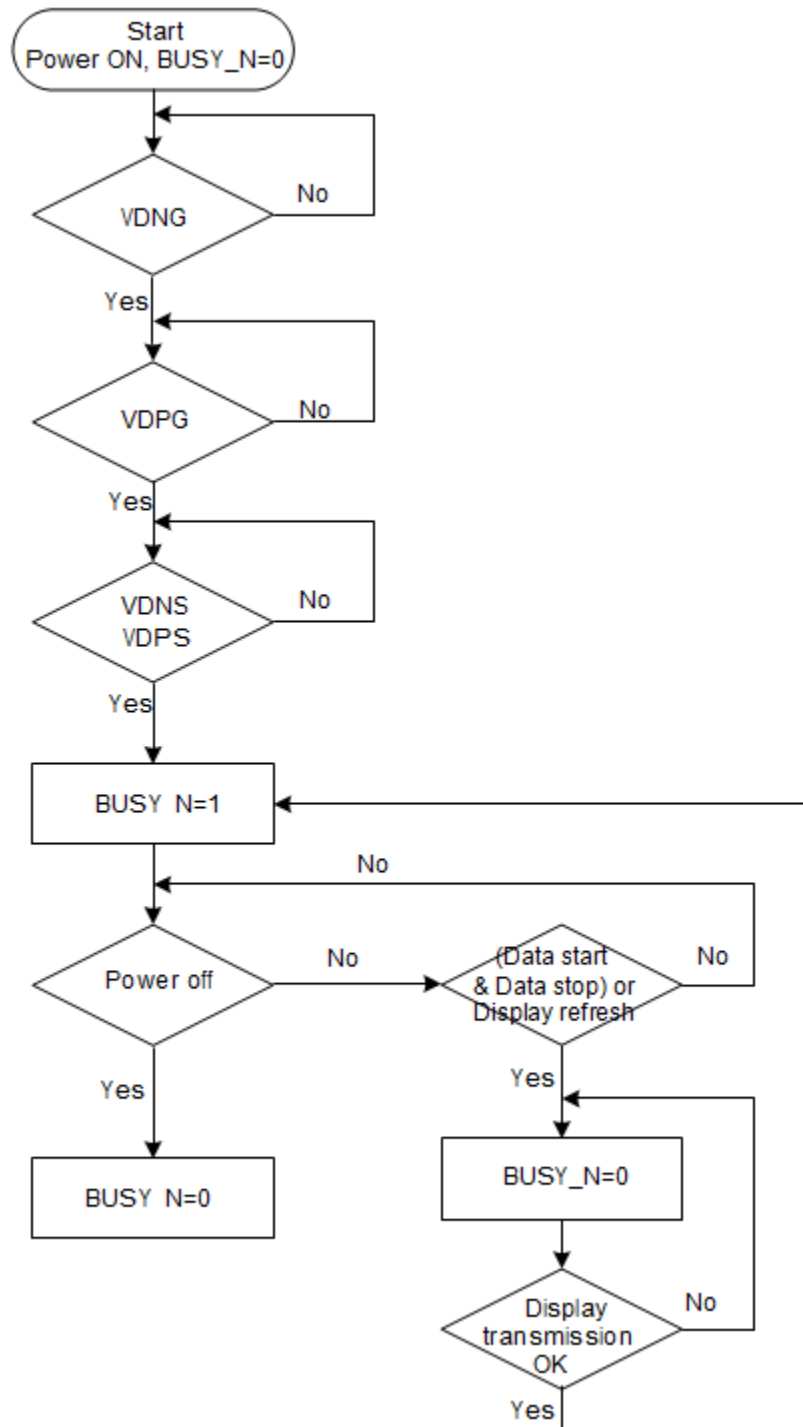
BUSY_N Signal Flow Chart

BUSY_N Signal Flow Chart

ABSOLUTE MAXIMUM RATINGS

V_{DD}= 2~3.6V (Typ. 3.3V),   GND=0V,   VDH=3~9V (Typ. 6V),   VDL=0~6V (Typ. 3V), T_A=0~70^{o}C (Typ. 25^{o}C)

| Signal	Item	Min	Max.	Unit
V_{DD}, V_{IO}, $V_{DD}1$, V_{PP}	Logic Supply voltage	- 0.3	+6.0	V
V_I	Digital input range	-0.3	V_{DDIO}+40	V
V_{DPS}-V_{DNS}	Supply range	V_{DNG}-0.3	V_{DPG}+0.3	V
Source				
V_{DPS}	Analog supply voltage – positive	+20		V
V_{DNS}	Analog supply voltage -- nagetive	-20		V
Gate				
V_{DPS}	Analog supply voltage – positive	-0.3	V_{DNG}+40	V
V_{DNS}	Analog supply voltage -- nagetive	V_{DPG}-40	0.3	V
I_{VDPS}	Input rush current for V_{DPS}	(TBD)	(TBD)	mA
I_{VDNS}	Input rush current for V_{DNS}	(TBD)	(TBD)	mA
T_{STG}	Storage temperature range	-55	+125	^{o}C

Warning:

If ICs are stressed beyond those listed above "absolute maximum ratings", they may be permanently destroyed. These are stress ratings only, and functional operation of the device at these or any other condition beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute maximum rated conditions for extended periods may affect device reliability.

DC CHARACTERISTICS

Symbol	Parameter	Conditions	MIN.	TYP.	MAX.	Unit
V$_{IO}$	IO supply voltage		2.3	3.3	3.6	V
V$_{DD}$	Supply voltage		2.3	3.3	3.6	V
V$_{DD}$1	DCDC driver supply voltage	DRVU, DRVD	2.3	3.3	3.6	V
V$_{IL}$	LOW Level input voltage	Digital input pins	0	--	0.3xV$_{DD}$	V
V$_{IH}$	HIGH Level input voltage	Digital input pins	0.7xV$_{IO}$	--	V$_{IO}$	V
V$_{OH}$	HIGH Level output voltage	Digital input pins, I$_{OH}$=400$_U$A	V$_{IO}$-0.4	--	--	V
V$_{OHD}$	HIGH Level output voltage	Digital input pins, I$_{OH}$=400$_U$A, DRVD, DRVU	V$_{DD}$1-0.4	--	--	V
V$_{OL}$	LOW Level Output voltage	Digital input pins, I$_{OL}$=-400$_U$A	0	--	0.4	V
I$_{IN}$	Input leakage current	Digital input pins except pull-up, pull-down pin	-1	--	1	uA
I$_{SLP}$	Sleep Current	V$_{DD}$=3.3 All stopped (Power OFF mode)			1	mA
R$_{IN}$	Pull-up/down impedance			200		KΩ
T$_{OP}$	Operating temperature		-30		85	^{o}C
VDPS	Supply Voltage	For source driver/VCOM		15		V
dVDPS	Supply voltage dev		-300	0	+300	mV
VDNS	Supply Voltage	For source driver/VCOM		-15		V
dVDNS	Supply voltage dev		-300	0	+300	mV
Idd	Analog Operating Current	No load,		TBD		mA
V$_{VD}$	Voltage Deviation of Outputs		--	±20	±35	mV
V$_{DR}$	Dynamic Range of Output		0.1	--	VDPS-0.1	V
VDPG-VDNG	Voltage Range of VDPG - VDNG		12		40	V
VDNG	VDNG voltage Range	For gate driver	-20		-17	V
dVDNG	VDNG Supply voltage dev		-400	0	+400	mV
VDPG	VDPG voltage Range	For gate driver	17		VDNG+40	V
dVDPG	VDPG Supply voltage dev		-400	0	+400	mV
Iopr	Operating Current	V$_{DD}$=3.3 DC/DC ON No waveform transitions No loading No RAM Read/Write		2		mA

AC CHARACTERISTICS
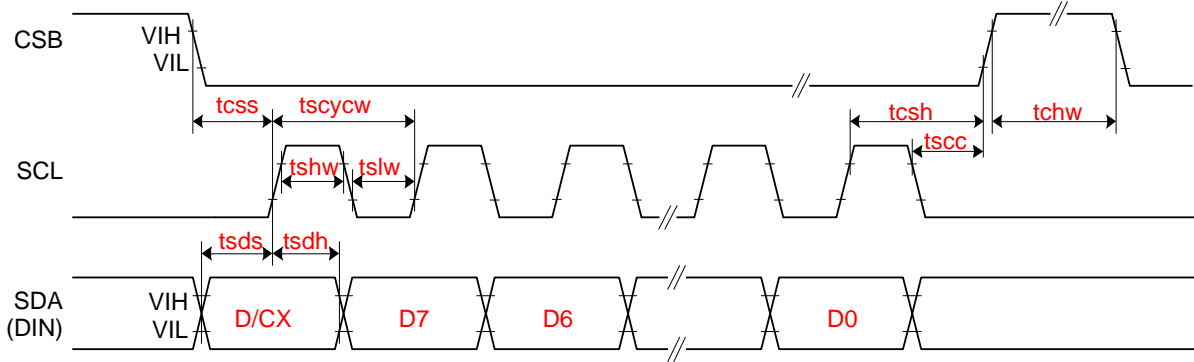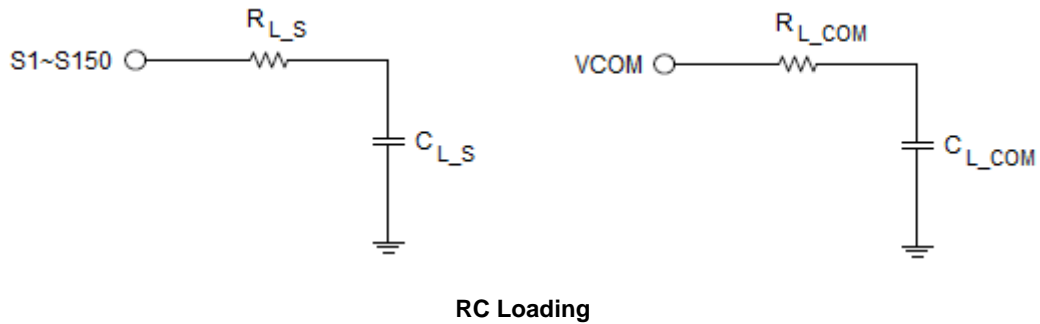

3-wire Serial Interface – Write
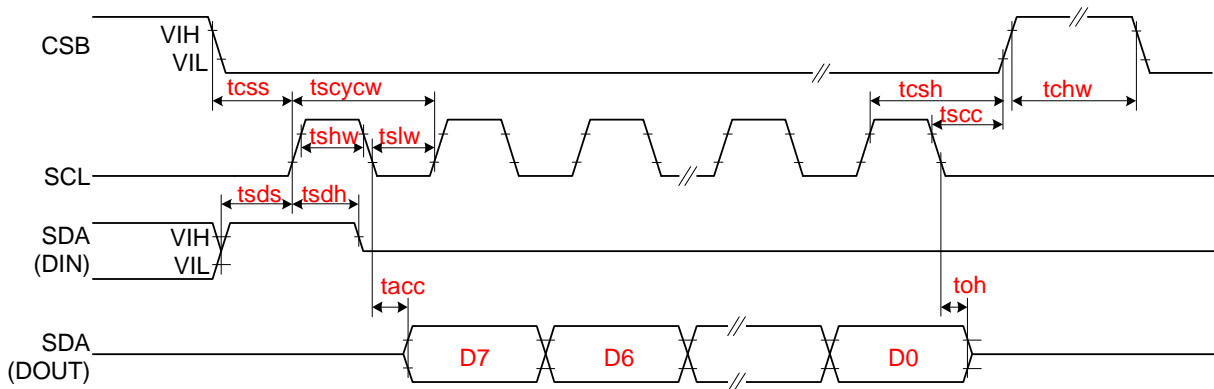
3-wire Serial Interface – Read

| SYMBOL	SIGNAL			MIN.	TYP.	MAX.	UNIT
		SERIAL COMMUNICATION					
tCSS	CSB	Chip select setup time		60			ns
tCSH		Chip select hold time		65			ns
tSCC		Chip select setup time		20			ns
tCHW		Chip select setup time		40			ns
tSCYCW	SCL	Serial clock cycle (Write)		100			ns
tSHW		SCL "H" pulse width (Write)		35			ns
tSLW		SCL "L" pulse width (Write)		35			ns
tSCYCR		Serial clock cycle (Read)		150			ns
tSHR		SCL "H" pulse width (Read)		60			ns
tSLR		SCL "L" pulse width (Read)		60			ns
tSDS	SDA (DIN) (DOUT)	Data setup time		30			ns
tSDH		Data hold time		30			ns
tACC		Access time		10			ns
tOH		Output disable time		15			ns

SYMBOL	SIGNAL			MIN.	TYP.	MAX.	UNIT
		DRIVER					
trS		Source driver rise time	99% final value		5		us
tFS		Source driver fall time			5		us
trG		Gate driver rise time	99% final value		5		us
tFG		Gate driver fall time			5		us
trCOM		VCOM rise time	99% final value		1		ms
tFCOM		VCOM fall time			1		ms
		RC LOADING					
RL_S		Source driver output loading			13.362		K Ω
CL_S					39.194		pf
RL_G		Gate driver output loading			12.329		KΩ
CL_G					32.095		pf
RL_com		VCOM output loading			61.26		Ω
CL_com					3365.7		pf

RC Loading

All-in-one driver IC with TCON for Color application

PHYSICAL DIMENSIONS

Die Size:	(13090µM ± 40µM) x (1530µM ± 40µM)
Die Thickness:	300µM ± 20µM
Die TTV:	(D_{MAX} – D_{MIN}) within die ⩽ 2µM
Bump Height:	12 µM ± 3µM
	(H_{MAX} – H_{MIN}) within die ⩽ 2µM
Hardness:	65Hv ± 15Hv
Bump Size:	18µM x 75µM ± 2µM
Bump Pitch:	42µM
Bump Gap:	24µM ± 3µM
Bump Area:	1350µM^2
Total Bump Area:	114300µM^2
Area Ratio:	1.761 : 1 (Output pad : Input pad)
	1 : 1 (Side power pad)
Coordinate origin:	Chip center
Pad reference:	Pad center
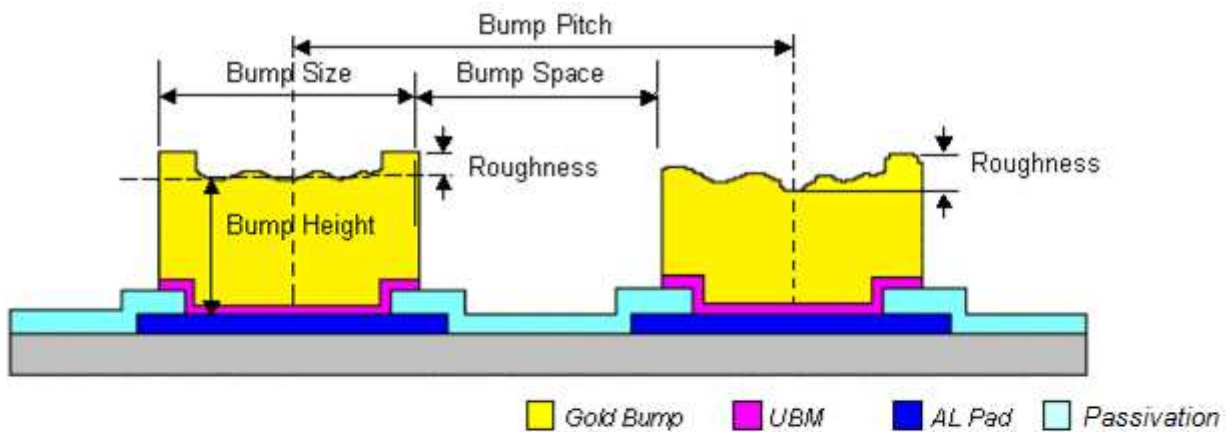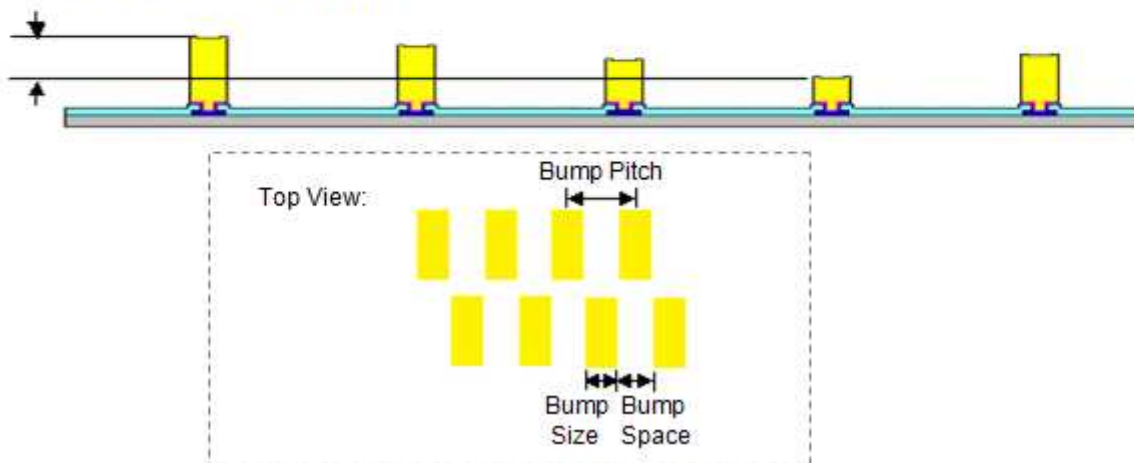
ALIGNMENT MARK INFORMATION

Location:

Upper-Left Mark   Upper-Right Mark

Y

(0, 0)   X
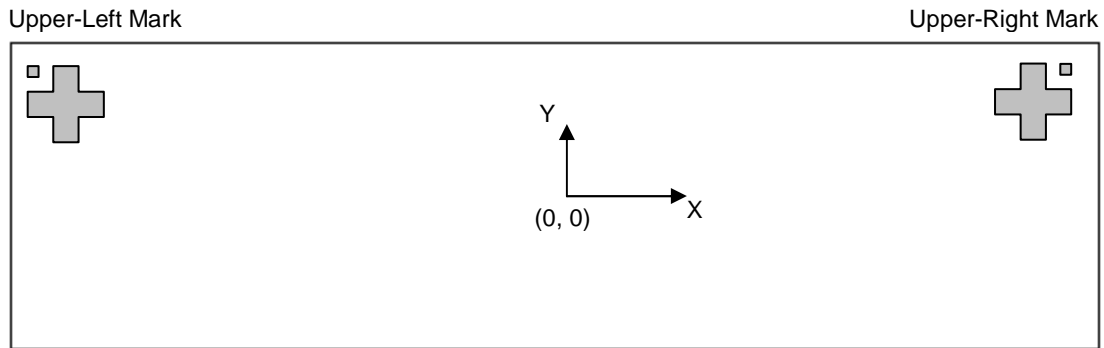
Shapes and Points:
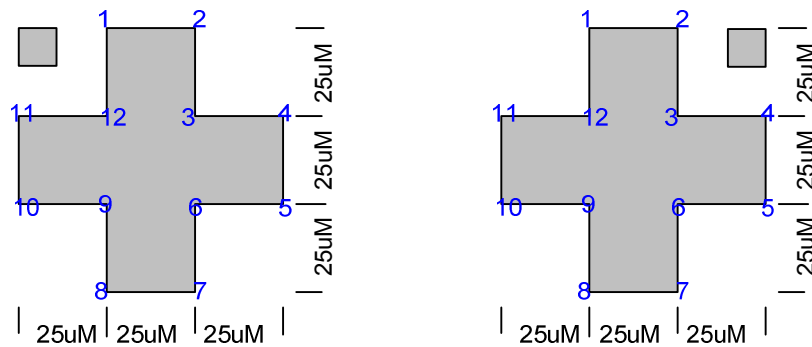
Point Coordinates:

Point	Upper-Left Mark		Upper-Right Mark	
	X	Y	X	Y
Center	-6382	642	6382	642
1	-6394.5	679.5	6369.5	679.5
2	-6369.5	679.5	6394.5	679.5
3	-6369.5	654.5	6394.5	654.5
4	-6344.5	654.5	6419.5	654.5
5	-6344.5	629.5	6419.5	629.5
6	-6369.5	629.5	6394.5	629.5
7	-6369.5	604.5	6394.5	604.5
8	-6394.5	604.5	6369.5	604.5
9	-6394.5	629.5	6369.5	629.5
10	-6419.5	629.5	6344.5	629.5
11	-6419.5	654.5	6344.5	654.5
12	-6394.5	654.5	6369.5	654.5

PAD COORDINATES

No.	Name	X	Y	W	H		No.	Name	X	Y	W	H
1	NC	-6180	-680	40	50		59	VSH	-2700	-680	40	50
2	VCOM	-6120	-680	40	50		60	VSH	-2640	-680	40	50
3	VCOM	-6060	-680	40	50		61	VSH	-2580	-680	40	50
4	VCOM	-6000	-680	40	50		62	GNDA	-2520	-680	40	50
5	VCOM	-5940	-680	40	50		63	DUMMY	-2460	-680	40	50
6	VCOM	-5880	-680	40	50		64	DUMMY	-2400	-680	40	50
7	VCOM	-5820	-680	40	50		65	DUMMY	-2340	-680	40	50
8	VCOM	-5760	-680	40	50		66	DUMMY	-2280	-680	40	50
9	VCOM	-5700	-680	40	50		67	DUMMY	-2220	-680	40	50
10	VDM	-5640	-680	40	50		68	DUMMY	-2160	-680	40	50
11	VGL	-5580	-680	40	50		69	DUMMY	-2100	-680	40	50
12	VGL	-5520	-680	40	50		70	DUMMY	-2040	-680	40	50
13	VGL	-5460	-680	40	50		71	DUMMY	-1980	-680	40	50
14	VGL	-5400	-680	40	50		72	DUMMY	-1920	-680	40	50
15	VGL	-5340	-680	40	50		73	DUMMY	-1860	-680	40	50
16	VGL	-5280	-680	40	50		74	DUMMY	-1800	-680	40	50
17	VGL	-5220	-680	40	50		75	DUMMY	-1740	-680	40	50
18	VGL	-5160	-680	40	50		76	DUMMY	-1680	-680	40	50
19	VGL	-5100	-680	40	50		77	DUMMY	-1620	-680	40	50
20	VGL	-5040	-680	40	50		78	DUMMY	-1560	-680	40	50
21	VGL	-4980	-680	40	50		79	GND	-1500	-680	40	50
22	VGL	-4920	-680	40	50		80	VDM	-1440	-680	40	50
23	VGL	-4860	-680	40	50		81	VDM	-1380	-680	40	50
24	VGL	-4800	-680	40	50		82	GND	-1320	-680	40	50
25	VGL	-4740	-680	40	50		83	GND	-1260	-680	40	50
26	VGL	-4680	-680	40	50		84	GND	-1200	-680	40	50
27	GNDA	-4620	-680	40	50		85	GND	-1140	-680	40	50
28	VSL	-4560	-680	40	50		86	GND	-1080	-680	40	50
29	VSL	-4500	-680	40	50		87	GND	-1020	-680	40	50
30	VSL	-4440	-680	40	50		88	GND	-960	-680	40	50
31	VSL	-4380	-680	40	50		89	GND	-900	-680	40	50
32	VSL	-4320	-680	40	50		90	GND	-840	-680	40	50
33	VSL	-4260	-680	40	50		91	GND	-780	-680	40	50
34	VSL	-4200	-680	40	50		92	GND	-720	-680	40	50
35	VSL	-4140	-680	40	50		93	GNDA	-660	-680	40	50
36	VSL	-4080	-680	40	50		94	GNDA	-600	-680	40	50
37	VSL	-4020	-680	40	50		95	GNDA	-540	-680	40	50
38	GNDA	-3960	-680	40	50		96	GNDA	-480	-680	40	50
39	VGH	-3900	-680	40	50		97	GNDA	-420	-680	40	50
40	VGH	-3840	-680	40	50		98	GNDA	-360	-680	40	50
42	VGH	-3780	-680	40	50		99	GNDA	-300	-680	40	50
41	VGH	-3720	-680	40	50		100	GNDA	-240	-680	40	50
43	VGH	-3660	-680	40	50		101	GNDA	-180	-680	40	50
44	VGH	-3600	-680	40	50		102	GNDA	-120	-680	40	50
45	VGH	-3540	-680	40	50		103	VDDA	-60	-680	40	50
46	VGH	-3480	-680	40	50		104	VDDA	0	-680	40	50
47	VGH	-3420	-680	40	50		105	VDDA	60	-680	40	50
48	VGH	-3360	-680	40	50		106	VDDA	120	-680	40	50
49	VGH	-3300	-680	40	50		107	VDDA	180	-680	40	50
50	VGH	-3240	-680	40	50		108	VDDA	240	-680	40	50
51	GNDA	-3180	-680	40	50		109	VDDA	300	-680	40	50
52	VSH	-3120	-680	40	50		110	VDDA	360	-680	40	50
53	VSH	-3060	-680	40	50		111	VDDA	420	-680	40	50
54	VSH	-3000	-680	40	50		112	VDDA	480	-680	40	50
55	VSH	-2940	-680	40	50		113	VDD	540	-680	40	50
56	VSH	-2880	-680	40	50		114	VDD	600	-680	40	50
57	VSH	-2820	-680	40	50		115	VDD	660	-680	40	50
58	VSH	-2760	-680	40	50		116	VDD	720	-680	40	50

No.	Name	X	Y	W	H	No.	Name	X	Y	W	H
117	VDD	780	-680	40	50	177	VGL	4380	-680	40	50
118	VDD	840	-680	40	50	178	VGL	4440	-680	40	50
119	VDD	900	-680	40	50	179	VGL	4500	-680	40	50
120	TEST1	960	-680	40	50	180	VGL	4560	-680	40	50
121	TEST2	1020	-680	40	50	181	VGL	4620	-680	40	50
122	VDDIO	1080	-680	40	50	182	VGL	4680	-680	40	50
123	VDDIO	1140	-680	40	50	183	GNDA	4740	-680	40	50
124	VDDIO	1200	-680	40	50	184	FB	4800	-680	40	50
125	VDDIO	1260	-680	40	50	185	FB	4860	-680	40	50
126	TEST3	1320	-680	40	50	186	GNDA	4920	-680	40	50
127	DUMMY	1380	-680	40	50	187	RESE	4980	-680	40	50
128	DUMMY	1440	-680	40	50	188	RESE	5040	-680	40	50
129	DUMMY	1500	-680	40	50	189	GNDA	5100	-680	40	50
130	DUMMY	1560	-680	40	50	190	GDR	5160	-680	40	50
131	DUMMY	1620	-680	40	50	191	GDR	5220	-680	40	50
132	SDA	1680	-680	40	50	192	GDR	5280	-680	40	50
133	SCL	1740	-680	40	50	193	GDR	5340	-680	40	50
134	GND	1800	-680	40	50	194	GDR	5400	-680	40	50
135	CSB	1860	-680	40	50	195	GDR	5460	-680	40	50
136	VDDIO	1920	-680	40	50	196	GDR	5520	-680	40	50
137	DUMMY	1980	-680	40	50	197	GDR	5580	-680	40	50
138	GND	2040	-680	40	50	198	VDM	5640	-680	40	50
139	DC	2100	-680	40	50	199	VCOM	5700	-680	40	50
140	VDDIO	2160	-680	40	50	200	VCOM	5760	-680	40	50
141	DUMMY	2220	-680	40	50	201	VCOM	5820	-680	40	50
142	GND	2280	-680	40	50	202	VCOM	5880	-680	40	50
143	RST_N	2340	-680	40	50	203	VCOM	5940	-680	40	50
144	BUSY_N	2400	-680	40	50	204	VCOM	6000	-680	40	50
145	CL	2460	-680	40	50	205	VCOM	6060	-680	40	50
146	VDDIO	2520	-680	40	50	206	VCOM	6120	-680	40	50
147	VSYNC	2580	-680	40	50	207	NC	6180	-680	40	50
148	GND	2640	-680	40	50	208	NC	6170	561.5	18	75
149	DUMMY	2700	-680	40	50	209	NC	6149	681.5	18	75
150	VDDIO	2760	-680	40	50	210	NC	6128	561.5	18	75
151	BS	2820	-680	40	50	211	NC	6107	681.5	18	75
152	GND	2880	-680	40	50	212	NC	6086	561.5	18	75
153	DUMMY	2940	-680	40	50	213	NC	6065	681.5	18	75
154	VDDIO	3000	-680	40	50	214	G<0>	6044	561.5	18	75
155	DUMMY	3060	-680	40	50	215	G<2>	6023	681.5	18	75
156	GND	3120	-680	40	50	216	G<4>	6002	561.5	18	75
157	MS	3180	-680	40	50	217	G<6>	5981	681.5	18	75
158	VDDIO	3240	-680	40	50	218	G<8>	5960	561.5	18	75
159	TSDA	3300	-680	40	50	219	G<10>	5939	681.5	18	75
160	TSDA	3360	-680	40	50	220	G<12>	5918	561.5	18	75
161	TSCL	3420	-680	40	50	221	G<14>	5897	681.5	18	75
162	TSCL	3480	-680	40	50	222	G<16>	5876	561.5	18	75
163	TEST4	3540	-680	40	50	223	G<18>	5855	681.5	18	75
164	TEST5	3600	-680	40	50	224	G<20>	5834	561.5	18	75
165	TEST6	3660	-680	40	50	225	G<22>	5813	681.5	18	75
166	TEST7	3720	-680	40	50	226	G<24>	5792	561.5	18	75
167	VGH	3780	-680	40	50	227	G<26>	5771	681.5	18	75
168	VGH	3840	-680	40	50	228	G<28>	5750	561.5	18	75
169	VGH	3900	-680	40	50	229	G<30>	5729	681.5	18	75
170	VGH	3960	-680	40	50	230	G<32>	5708	561.5	18	75
171	VGH	4020	-680	40	50	231	G<34>	5687	681.5	18	75
172	VGH	4080	-680	40	50	232	G<36>	5666	561.5	18	75
173	VGH	4140	-680	40	50	233	G<38>	5645	681.5	18	75
174	VGH	4200	-680	40	50	234	G<40>	5624	561.5	18	75
175	VGL	4260	-680	40	50	235	G<42>	5603	681.5	18	75
176	VGL	4320	-680	40	50	236	G<44>	5582	561.5	18	75

No.	Name	X	Y	W	H	No.	Name	X	Y	W	H
237	G<46>	5561	681.5	18	75	297	G<166>	4301	681.5	18	75
238	G<48>	5540	561.5	18	75	298	G<168>	4280	561.5	18	75
239	G<50>	5519	681.5	18	75	299	G<170>	4259	681.5	18	75
240	G<52>	5498	561.5	18	75	300	G<172>	4238	561.5	18	75
241	G<54>	5477	681.5	18	75	301	G<174>	4217	681.5	18	75
242	G<56>	5456	561.5	18	75	302	G<176>	4196	561.5	18	75
243	G<58>	5435	681.5	18	75	303	G<178>	4175	681.5	18	75
244	G<60>	5414	561.5	18	75	304	G<180>	4154	561.5	18	75
245	G<62>	5393	681.5	18	75	305	G<182>	4133	681.5	18	75
246	G<64>	5372	561.5	18	75	306	G<184>	4112	561.5	18	75
247	G<66>	5351	681.5	18	75	307	G<186>	4091	681.5	18	75
248	G<68>	5330	561.5	18	75	308	G<188>	4070	561.5	18	75
249	G<70>	5309	681.5	18	75	309	G<190>	4049	681.5	18	75
250	G<72>	5288	561.5	18	75	310	G<192>	4028	561.5	18	75
251	G<74>	5267	681.5	18	75	311	G<194>	4007	681.5	18	75
252	G<76>	5246	561.5	18	75	312	G<196>	3986	561.5	18	75
253	G<78>	5225	681.5	18	75	313	G<198>	3965	681.5	18	75
254	G<80>	5204	561.5	18	75	314	G<200>	3944	561.5	18	75
255	G<82>	5183	681.5	18	75	315	G<202>	3923	681.5	18	75
256	G<84>	5162	561.5	18	75	316	G<204>	3902	561.5	18	75
257	G<86>	5141	681.5	18	75	317	G<206>	3881	681.5	18	75
258	G<88>	5120	561.5	18	75	318	G<208>	3860	561.5	18	75
259	G<90>	5099	681.5	18	75	319	G<210>	3839	681.5	18	75
260	G<92>	5078	561.5	18	75	320	G<212>	3818	561.5	18	75
261	G<94>	5057	681.5	18	75	321	G<214>	3797	681.5	18	75
262	G<96>	5036	561.5	18	75	322	G<216>	3776	561.5	18	75
263	G<98>	5015	681.5	18	75	323	G<218>	3755	681.5	18	75
264	G<100>	4994	561.5	18	75	324	G<220>	3734	561.5	18	75
265	G<102>	4973	681.5	18	75	325	G<222>	3713	681.5	18	75
266	G<104>	4952	561.5	18	75	326	G<224>	3692	561.5	18	75
267	G<106>	4931	681.5	18	75	327	G<226>	3671	681.5	18	75
268	G<108>	4910	561.5	18	75	328	G<228>	3650	561.5	18	75
269	G<110>	4889	681.5	18	75	329	G<230>	3629	681.5	18	75
270	G<112>	4868	561.5	18	75	330	G<232>	3608	561.5	18	75
271	G<114>	4847	681.5	18	75	331	G<234>	3587	681.5	18	75
272	G<116>	4826	561.5	18	75	332	G<236>	3566	561.5	18	75
273	G<118>	4805	681.5	18	75	333	G<238>	3545	681.5	18	75
274	G<120>	4784	561.5	18	75	334	G<240>	3524	561.5	18	75
275	G<122>	4763	681.5	18	75	335	G<242>	3503	681.5	18	75
276	G<124>	4742	561.5	18	75	336	G<244>	3482	561.5	18	75
277	G<126>	4721	681.5	18	75	337	G<246>	3461	681.5	18	75
278	G<128>	4700	561.5	18	75	338	G<248>	3440	561.5	18	75
279	G<130>	4679	681.5	18	75	339	G<250>	3419	681.5	18	75
280	G<132>	4658	561.5	18	75	340	G<252>	3398	561.5	18	75
281	G<134>	4637	681.5	18	75	341	G<254>	3377	681.5	18	75
282	G<136>	4616	561.5	18	75	342	G<256>	3356	561.5	18	75
283	G<138>	4595	681.5	18	75	343	G<258>	3335	681.5	18	75
284	G<140>	4574	561.5	18	75	344	G<260>	3314	561.5	18	75
285	G<142>	4553	681.5	18	75	345	G<262>	3293	681.5	18	75
286	G<144>	4532	561.5	18	75	346	G<264>	3272	561.5	18	75
287	G<146>	4511	681.5	18	75	347	G<266>	3251	681.5	18	75
288	G<148>	4490	561.5	18	75	348	G<268>	3230	561.5	18	75
289	G<150>	4469	681.5	18	75	349	G<270>	3209	681.5	18	75
290	G<152>	4448	561.5	18	75	350	G<272>	3188	561.5	18	75
291	G<154>	4427	681.5	18	75	351	G<274>	3167	681.5	18	75
292	G<156>	4406	561.5	18	75	352	G<276>	3146	561.5	18	75
293	G<158>	4385	681.5	18	75	353	G<278>	3125	681.5	18	75
294	G<160>	4364	561.5	18	75	354	G<280>	3104	561.5	18	75
295	G<162>	4343	681.5	18	75	355	G<282>	3083	681.5	18	75
296	G<164>	4322	561.5	18	75	356	G<284>	3062	561.5	18	75

No.	Name	X	Y	W	H
357	G<286>	3041	681.5	18	75
358	G<288>	3020	561.5	18	75
359	G<290>	2999	681.5	18	75
360	G<292>	2978	561.5	18	75
361	G<294>	2957	681.5	18	75
362	G<296>	2936	561.5	18	75
363	G<298>	2915	681.5	18	75
364	NC	2893	561.5	18	75
365	NC	2871	681.5	18	75
366	NC	2849	561.5	18	75
367	NC	2827	681.5	18	75
368	NC	2805	561.5	18	75
369	NC	2783	681.5	18	75
370	NC	2761	561.5	18	75
371	NC	2739	681.5	18	75
372	NC	2717	561.5	18	75
373	NC	2695	681.5	18	75
374	NC	2673	561.5	18	75
375	NC	2343	681.5	18	75
376	NC	2321	561.5	18	75
377	VBD<1>	2299	681.5	18	75
378	S<0>	2277	561.5	18	75
379	S<1>	2255	681.5	18	75
380	S<2>	2233	561.5	18	75
381	S<3>	2211	681.5	18	75
382	S<4>	2189	561.5	18	75
383	S<5>	2167	681.5	18	75
384	S<6>	2145	561.5	18	75
385	S<7>	2123	681.5	18	75
386	S<8>	2101	561.5	18	75
387	S<9>	2079	681.5	18	75
388	S<10>	2057	561.5	18	75
389	S<11>	2035	681.5	18	75
390	S<12>	2013	561.5	18	75
391	S<13>	1991	681.5	18	75
392	S<14>	1969	561.5	18	75
393	S<15>	1947	681.5	18	75
394	S<16>	1925	561.5	18	75
395	S<17>	1903	681.5	18	75
396	S<18>	1881	561.5	18	75
397	S<19>	1859	681.5	18	75
398	S<20>	1837	561.5	18	75
399	S<21>	1815	681.5	18	75
400	S<22>	1793	561.5	18	75
401	S<23>	1771	681.5	18	75
402	S<24>	1749	561.5	18	75
403	S<25>	1727	681.5	18	75
404	S<26>	1705	561.5	18	75
405	S<27>	1683	681.5	18	75
406	S<28>	1661	561.5	18	75
407	S<29>	1639	681.5	18	75
408	S<30>	1617	561.5	18	75
409	S<31>	1595	681.5	18	75
410	S<32>	1573	561.5	18	75
411	S<33>	1551	681.5	18	75
412	S<34>	1529	561.5	18	75
413	S<35>	1507	681.5	18	75
414	S<36>	1485	561.5	18	75
415	S<37>	1463	681.5	18	75
416	S<38>	1441	561.5	18	75

No.	Name	X	Y	W	H
417	S<39>	1419	681.5	18	75
418	S<40>	1397	561.5	18	75
419	S<41>	1375	681.5	18	75
420	S<42>	1353	561.5	18	75
421	S<43>	1331	681.5	18	75
422	S<44>	1309	561.5	18	75
423	S<45>	1287	681.5	18	75
424	S<46>	1265	561.5	18	75
425	S<47>	1243	681.5	18	75
426	S<48>	1221	561.5	18	75
427	S<49>	1199	681.5	18	75
428	S<50>	1177	561.5	18	75
429	S<51>	1155	681.5	18	75
430	S<52>	1133	561.5	18	75
431	S<53>	1111	681.5	18	75
432	S<54>	1089	561.5	18	75
433	S<55>	1067	681.5	18	75
434	S<56>	1045	561.5	18	75
435	S<57>	1023	681.5	18	75
436	S<58>	1001	561.5	18	75
437	S<59>	979	681.5	18	75
438	S<60>	957	561.5	18	75
439	S<61>	935	681.5	18	75
440	S<62>	913	561.5	18	75
441	S<63>	891	681.5	18	75
442	S<64>	869	561.5	18	75
443	S<65>	847	681.5	18	75
444	S<66>	825	561.5	18	75
445	S<67>	803	681.5	18	75
446	S<68>	781	561.5	18	75
447	S<69>	759	681.5	18	75
448	S<70>	737	561.5	18	75
449	S<71>	715	681.5	18	75
450	S<72>	693	561.5	18	75
451	S<73>	671	681.5	18	75
452	S<74>	649	561.5	18	75
453	S<75>	627	681.5	18	75
454	S<76>	605	561.5	18	75
455	S<77>	583	681.5	18	75
456	S<78>	561	561.5	18	75
457	S<79>	539	681.5	18	75
458	S<80>	517	561.5	18	75
459	S<81>	495	681.5	18	75
460	S<82>	473	561.5	18	75
461	S<83>	451	681.5	18	75
462	S<84>	429	561.5	18	75
463	S<85>	407	681.5	18	75
464	S<86>	385	561.5	18	75
465	S<87>	363	681.5	18	75
466	S<88>	341	561.5	18	75
467	S<89>	319	681.5	18	75
468	S<90>	297	561.5	18	75
469	S<91>	275	681.5	18	75
470	S<92>	253	561.5	18	75
471	S<93>	231	681.5	18	75
472	S<94>	209	561.5	18	75
473	S<95>	187	681.5	18	75
474	S<96>	165	561.5	18	75
475	S<97>	143	681.5	18	75
476	S<98>	121	561.5	18	75

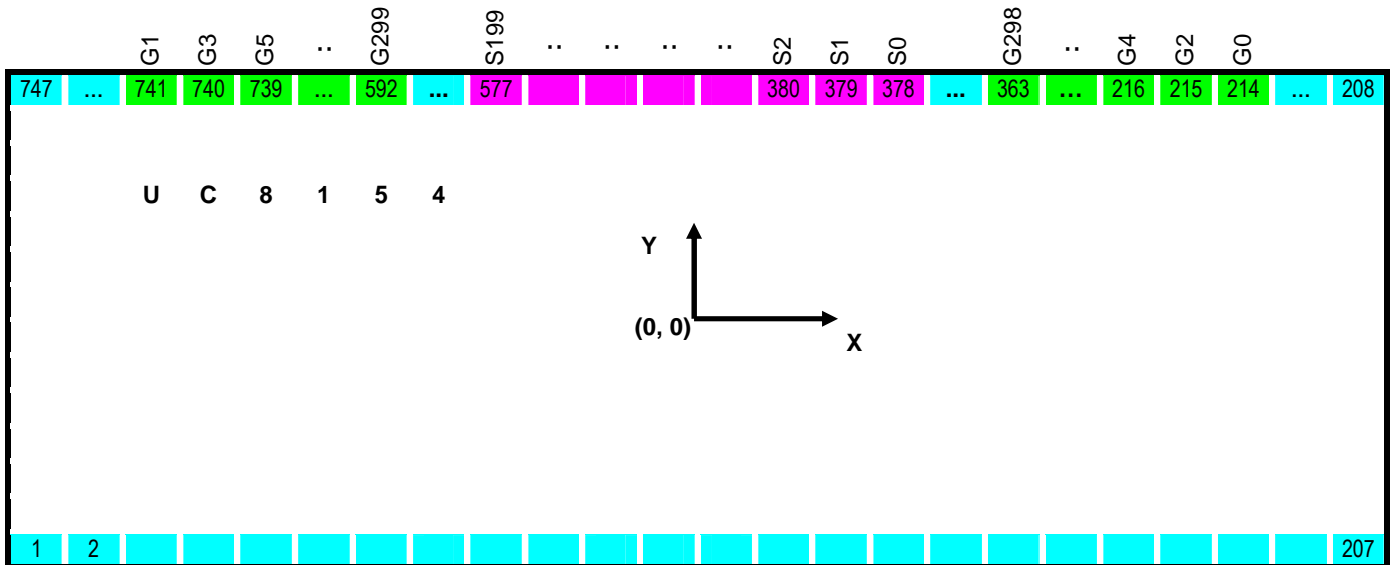| No.	Name	X	Y	W	H	No.	Name	X	Y	W	H
477	S<99>	99	681.5	18	75	537	S<159>	-1221	681.5	18	75
478	S<100>	77	561.5	18	75	538	S<160>	-1243	561.5	18	75
479	S<101>	55	681.5	18	75	539	S<161>	-1265	681.5	18	75
480	S<102>	33	561.5	18	75	540	S<162>	-1287	561.5	18	75
481	S<103>	11	681.5	18	75	541	S<163>	-1309	681.5	18	75
482	S<104>	-11	561.5	18	75	542	S<164>	-1331	561.5	18	75
483	S<105>	-33	681.5	18	75	543	S<165>	-1353	681.5	18	75
484	S<106>	-55	561.5	18	75	544	S<166>	-1375	561.5	18	75
485	S<107>	-77	681.5	18	75	545	S<167>	-1397	681.5	18	75
486	S<108>	-99	561.5	18	75	546	S<168>	-1419	561.5	18	75
487	S<109>	-121	681.5	18	75	547	S<169>	-1441	681.5	18	75
488	S<110>	-143	561.5	18	75	548	S<170>	-1463	561.5	18	75
489	S<111>	-165	681.5	18	75	549	S<171>	-1485	681.5	18	75
490	S<112>	-187	561.5	18	75	550	S<172>	-1507	561.5	18	75
491	S<113>	-209	681.5	18	75	551	S<173>	-1529	681.5	18	75
492	S<114>	-231	561.5	18	75	552	S<174>	-1551	561.5	18	75
493	S<115>	-253	681.5	18	75	553	S<175>	-1573	681.5	18	75
494	S<116>	-275	561.5	18	75	554	S<176>	-1595	561.5	18	75
495	S<117>	-297	681.5	18	75	555	S<177>	-1617	681.5	18	75
496	S<118>	-319	561.5	18	75	556	S<178>	-1639	561.5	18	75
497	S<119>	-341	681.5	18	75	557	S<179>	-1661	681.5	18	75
498	S<120>	-363	561.5	18	75	558	S<180>	-1683	561.5	18	75
499	S<121>	-385	681.5	18	75	559	S<181>	-1705	681.5	18	75
500	S<122>	-407	561.5	18	75	560	S<182>	-1727	561.5	18	75
501	S<123>	-429	681.5	18	75	561	S<183>	-1749	681.5	18	75
502	S<124>	-451	561.5	18	75	562	S<184>	-1771	561.5	18	75
503	S<125>	-473	681.5	18	75	563	S<185>	-1793	681.5	18	75
504	S<126>	-495	561.5	18	75	564	S<186>	-1815	561.5	18	75
505	S<127>	-517	681.5	18	75	565	S<187>	-1837	681.5	18	75
506	S<128>	-539	561.5	18	75	566	S<188>	-1859	561.5	18	75
507	S<129>	-561	681.5	18	75	567	S<189>	-1881	681.5	18	75
508	S<130>	-583	561.5	18	75	568	S<190>	-1903	561.5	18	75
509	S<131>	-605	681.5	18	75	569	S<191>	-1925	681.5	18	75
510	S<132>	-627	561.5	18	75	570	S<192>	-1947	561.5	18	75
511	S<133>	-649	681.5	18	75	571	S<193>	-1969	681.5	18	75
512	S<134>	-671	561.5	18	75	572	S<194>	-1991	561.5	18	75
513	S<135>	-693	681.5	18	75	573	S<195>	-2013	681.5	18	75
514	S<136>	-715	561.5	18	75	574	S<196>	-2035	561.5	18	75
515	S<137>	-737	681.5	18	75	575	S<197>	-2057	681.5	18	75
516	S<138>	-759	561.5	18	75	576	S<198>	-2079	561.5	18	75
517	S<139>	-781	681.5	18	75	577	S<199>	-2101	681.5	18	75
518	S<140>	-803	561.5	18	75	578	VBD<2>	-2123	561.5	18	75
519	S<141>	-825	681.5	18	75	579	NC	-2145	681.5	18	75
520	S<142>	-847	561.5	18	75	580	NC	-2167	561.5	18	75
521	S<143>	-869	681.5	18	75	581	NC	-2673	681.5	18	75
522	S<144>	-891	561.5	18	75	582	NC	-2695	561.5	18	75
523	S<145>	-913	681.5	18	75	583	NC	-2717	681.5	18	75
524	S<146>	-935	561.5	18	75	584	NC	-2739	561.5	18	75
525	S<147>	-957	681.5	18	75	585	NC	-2761	681.5	18	75
526	S<148>	-979	561.5	18	75	586	NC	-2783	561.5	18	75
527	S<149>	-1001	681.5	18	75	587	NC	-2805	681.5	18	75
528	S<150>	-1023	561.5	18	75	588	NC	-2827	561.5	18	75
529	S<151>	-1045	681.5	18	75	589	NC	-2849	681.5	18	75
530	S<152>	-1067	561.5	18	75	590	NC	-2871	561.5	18	75
531	S<153>	-1089	681.5	18	75	591	NC	-2893	681.5	18	75
532	S<154>	-1111	561.5	18	75	592	G<299>	-2915	561.5	18	75
533	S<155>	-1133	681.5	18	75	593	G<297>	-2936	681.5	18	75
534	S<156>	-1155	561.5	18	75	594	G<295>	-2957	561.5	18	75
535	S<157>	-1177	681.5	18	75	595	G<293>	-2978	681.5	18	75
536	S<158>	-1199	561.5	18	75	596	G<291>	-2999	561.5	18	75

No.	Name	X	Y	W	H	No.	Name	X	Y	W	H
597	G<289>	-3020	681.5	18	75	657	G<169>	-4280	681.5	18	75
598	G<287>	-3041	561.5	18	75	658	G<167>	-4301	561.5	18	75
599	G<285>	-3062	681.5	18	75	659	G<165>	-4322	681.5	18	75
600	G<283>	-3083	561.5	18	75	660	G<163>	-4343	561.5	18	75
601	G<281>	-3104	681.5	18	75	661	G<161>	-4364	681.5	18	75
602	G<279>	-3125	561.5	18	75	662	G<159>	-4385	561.5	18	75
603	G<277>	-3146	681.5	18	75	663	G<157>	-4406	681.5	18	75
604	G<275>	-3167	561.5	18	75	664	G<155>	-4427	561.5	18	75
605	G<273>	-3188	681.5	18	75	665	G<153>	-4448	681.5	18	75
606	G<271>	-3209	561.5	18	75	666	G<151>	-4469	561.5	18	75
607	G<269>	-3230	681.5	18	75	667	G<149>	-4490	681.5	18	75
608	G<267>	-3251	561.5	18	75	668	G<147>	-4511	561.5	18	75
609	G<265>	-3272	681.5	18	75	669	G<145>	-4532	681.5	18	75
610	G<263>	-3293	561.5	18	75	670	G<143>	-4553	561.5	18	75
611	G<261>	-3314	681.5	18	75	671	G<141>	-4574	681.5	18	75
612	G<259>	-3335	561.5	18	75	672	G<139>	-4595	561.5	18	75
613	G<257>	-3356	681.5	18	75	673	G<137>	-4616	681.5	18	75
614	G<255>	-3377	561.5	18	75	674	G<135>	-4637	561.5	18	75
615	G<253>	-3398	681.5	18	75	675	G<133>	-4658	681.5	18	75
616	G<251>	-3419	561.5	18	75	676	G<131>	-4679	561.5	18	75
617	G<249>	-3440	681.5	18	75	677	G<129>	-4700	681.5	18	75
618	G<247>	-3461	561.5	18	75	678	G<127>	-4721	561.5	18	75
619	G<245>	-3482	681.5	18	75	679	G<125>	-4742	681.5	18	75
620	G<243>	-3503	561.5	18	75	680	G<123>	-4763	561.5	18	75
621	G<241>	-3524	681.5	18	75	681	G<121>	-4784	681.5	18	75
622	G<239>	-3545	561.5	18	75	682	G<119>	-4805	561.5	18	75
623	G<237>	-3566	681.5	18	75	683	G<117>	-4826	681.5	18	75
624	G<235>	-3587	561.5	18	75	684	G<115>	-4847	561.5	18	75
625	G<233>	-3608	681.5	18	75	685	G<113>	-4868	681.5	18	75
626	G<231>	-3629	561.5	18	75	686	G<111>	-4889	561.5	18	75
627	G<229>	-3650	681.5	18	75	687	G<109>	-4910	681.5	18	75
628	G<227>	-3671	561.5	18	75	688	G<107>	-4931	561.5	18	75
629	G<225>	-3692	681.5	18	75	689	G<105>	-4952	681.5	18	75
630	G<223>	-3713	561.5	18	75	690	G<103>	-4973	561.5	18	75
631	G<221>	-3734	681.5	18	75	691	G<101>	-4994	681.5	18	75
632	G<219>	-3755	561.5	18	75	692	G<99>	-5015	561.5	18	75
633	G<217>	-3776	681.5	18	75	693	G<97>	-5036	681.5	18	75
634	G<215>	-3797	561.5	18	75	694	G<95>	-5057	561.5	18	75
635	G<213>	-3818	681.5	18	75	695	G<93>	-5078	681.5	18	75
636	G<211>	-3839	561.5	18	75	696	G<91>	-5099	561.5	18	75
637	G<209>	-3860	681.5	18	75	697	G<89>	-5120	681.5	18	75
638	G<207>	-3881	561.5	18	75	698	G<87>	-5141	561.5	18	75
639	G<205>	-3902	681.5	18	75	699	G<85>	-5162	681.5	18	75
640	G<203>	-3923	561.5	18	75	700	G<83>	-5183	561.5	18	75
641	G<201>	-3944	681.5	18	75	701	G<81>	-5204	681.5	18	75
642	G<199>	-3965	561.5	18	75	702	G<79>	-5225	561.5	18	75
643	G<197>	-3986	681.5	18	75	703	G<77>	-5246	681.5	18	75
644	G<195>	-4007	561.5	18	75	704	G<75>	-5267	561.5	18	75
645	G<193>	-4028	681.5	18	75	705	G<73>	-5288	681.5	18	75
646	G<191>	-4049	561.5	18	75	706	G<71>	-5309	561.5	18	75
647	G<189>	-4070	681.5	18	75	707	G<69>	-5330	681.5	18	75
648	G<187>	-4091	561.5	18	75	708	G<67>	-5351	561.5	18	75
649	G<185>	-4112	681.5	18	75	709	G<65>	-5372	681.5	18	75
650	G<183>	-4133	561.5	18	75	710	G<63>	-5393	561.5	18	75
651	G<181>	-4154	681.5	18	75	711	G<61>	-5414	681.5	18	75
652	G<179>	-4175	561.5	18	75	712	G<59>	-5435	561.5	18	75
653	G<177>	-4196	681.5	18	75	713	G<57>	-5456	681.5	18	75
654	G<175>	-4217	561.5	18	75	714	G<55>	-5477	561.5	18	75
655	G<173>	-4238	681.5	18	75	715	G<53>	-5498	681.5	18	75
656	G<171>	-4259	561.5	18	75	716	G<51>	-5519	561.5	18	75

No.	Name	X	Y	W	H
717	G<49>	-5540	681.5	18	75
718	G<47>	-5561	561.5	18	75
719	G<45>	-5582	681.5	18	75
720	G<43>	-5603	561.5	18	75
721	G<41>	-5624	681.5	18	75
722	G<39>	-5645	561.5	18	75
723	G<37>	-5666	681.5	18	75
724	G<35>	-5687	561.5	18	75
725	G<33>	-5708	681.5	18	75
726	G<31>	-5729	561.5	18	75
727	G<29>	-5750	681.5	18	75
728	G<27>	-5771	561.5	18	75
729	G<25>	-5792	681.5	18	75
730	G<23>	-5813	561.5	18	75
731	G<21>	-5834	681.5	18	75
732	G<19>	-5855	561.5	18	75

No.	Name	X	Y	W	H
733	G<17>	-5876	681.5	18	75
734	G<15>	-5897	561.5	18	75
735	G<13>	-5918	681.5	18	75
736	G<11>	-5939	561.5	18	75
737	G<9>	-5960	681.5	18	75
738	G<7>	-5981	561.5	18	75
739	G<5>	-6002	681.5	18	75
740	G<3>	-6023	561.5	18	75
741	G<1>	-6044	681.5	18	75
742	NC	-6065	561.5	18	75
743	NC	-6086	681.5	18	75
744	NC	-6107	561.5	18	75
745	NC	-6128	681.5	18	75
746	NC	-6149	561.5	18	75
747	NC	-6170	681.5	18	75

TRAY INFORMATION

Symbol	Spec (mm)	(mil)
W1	101.60±0.15	(4000)
W2	91.55±0.10	(3604)
W3	91.85±0.10	(3616)
H	7.26±0.10	(286)
Px	14.90±0.05	(587)
Py	3.30±0.05	(130)
Dx	21.00±0.05	(827)
TPx	59.60±0.10	(2346)
Dy	7.90±0.05	(311)
TPy	85.80±0.10	(3378)
X	13.24±0.05	(521)
Y	1.68±0.05	(66)
Z	0.45±0.05	(18)
N	135(pocket number)	

Remark:
1.Depth of text : Max. 0.1mm
2.Tray material : ABS
3.Tray color code: Blue   "   "
4.Surface resistance: 10~10⁹Ω/SQ
5.Tray warpage: Max. ± 0.1mm
6.Pocket Size: 13.24x1.68x0.45mm
7.Bottom of pocket: Rough surface