


0.2.084

1.总览等图标建议放大，现在的图标太小了



2.建议侧拉框不在左侧栏中，而是在界面上，让应用的图标在这列图标的最上方

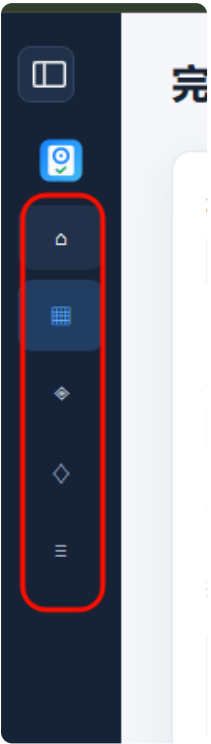

3.隐私与数据管理 (zh-CN / en-US) 的 技术基础即图中所圈内容应该在全文最后，放在箭头所指向的地方

The Web/API service uses a non-root account, TOS administrator session verification and CSRF checks. Separate diagnostic and mail helpers still run as root and require platform review. Feedback uses HTTPS, per-device credentials, HMAC-SHA256, time/replay checks and private file permissions. TOS passwords and cookies are not uploaded or included in reports. These safeguards reduce risk; they do not guarantee absolute security.

Email Configuration and Credentials


You select email recipients, defaulting to the administrator, with optional additional addresses. Custom SMTP passwords are submitted only when saved, encrypted locally using AES-GCM, and protected by 0600 permissions. The separate key is in the same private application data directory; this does not protect against an attacker with local administrator access. Passwords are not returned by the API or included in audit logs or automatic feedback packages. TLS/STARTTLS with certificate verification is required. Clear the password in email settings; normal upgrades preserve configuration. Selected recipients and mail providers process health notifications separately from feedback-upload consent.

Technical basis: [Go SMTP](#) · [Go TLS](#).


HTTP limitations

LAN HTTP works without certificate setup or a secure popup. SMTP passwords use one-use RSA-OAEP/AES-GCM envelopes against passive capture. This does not prevent active modification of HTTP pages or public keys and is not equivalent to HTTPS. Other HTTP fields, session cookies, attachments and reports are not automatically encrypted. Use certificate-valid HTTPS for full transport protection. Subsequent NAS-to-feedback-server uploads still use HTTPS.

4. 智能守护的收件人于邮箱服务器中，没有对输入的邮箱的格式进行校验，邮箱中含有中文也可保存成功

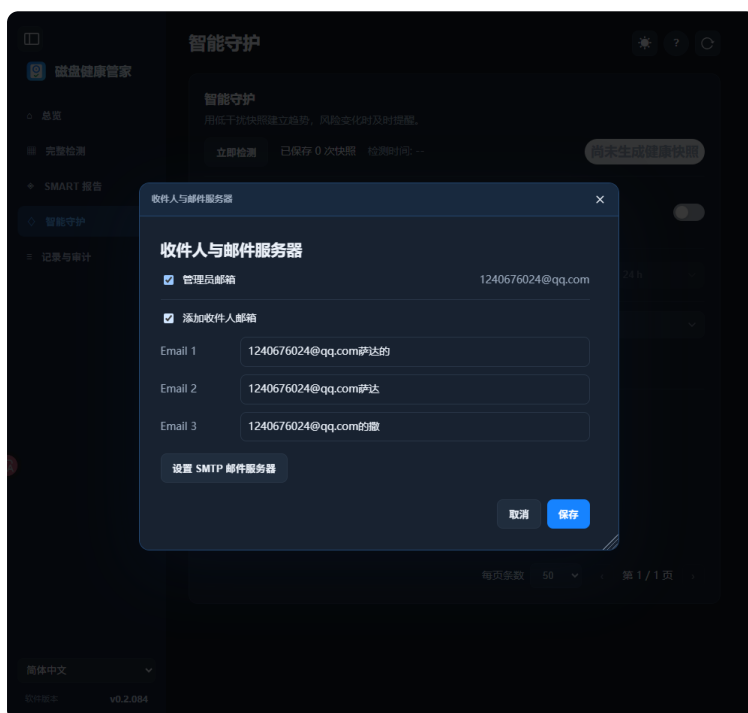

5. 完整检测部分的批量顺序检测，当所有磁盘都在等待中时，点击这个“全选可用磁盘”无响应，只有点击的抖动反馈，建议此时将按钮置灰不可点击

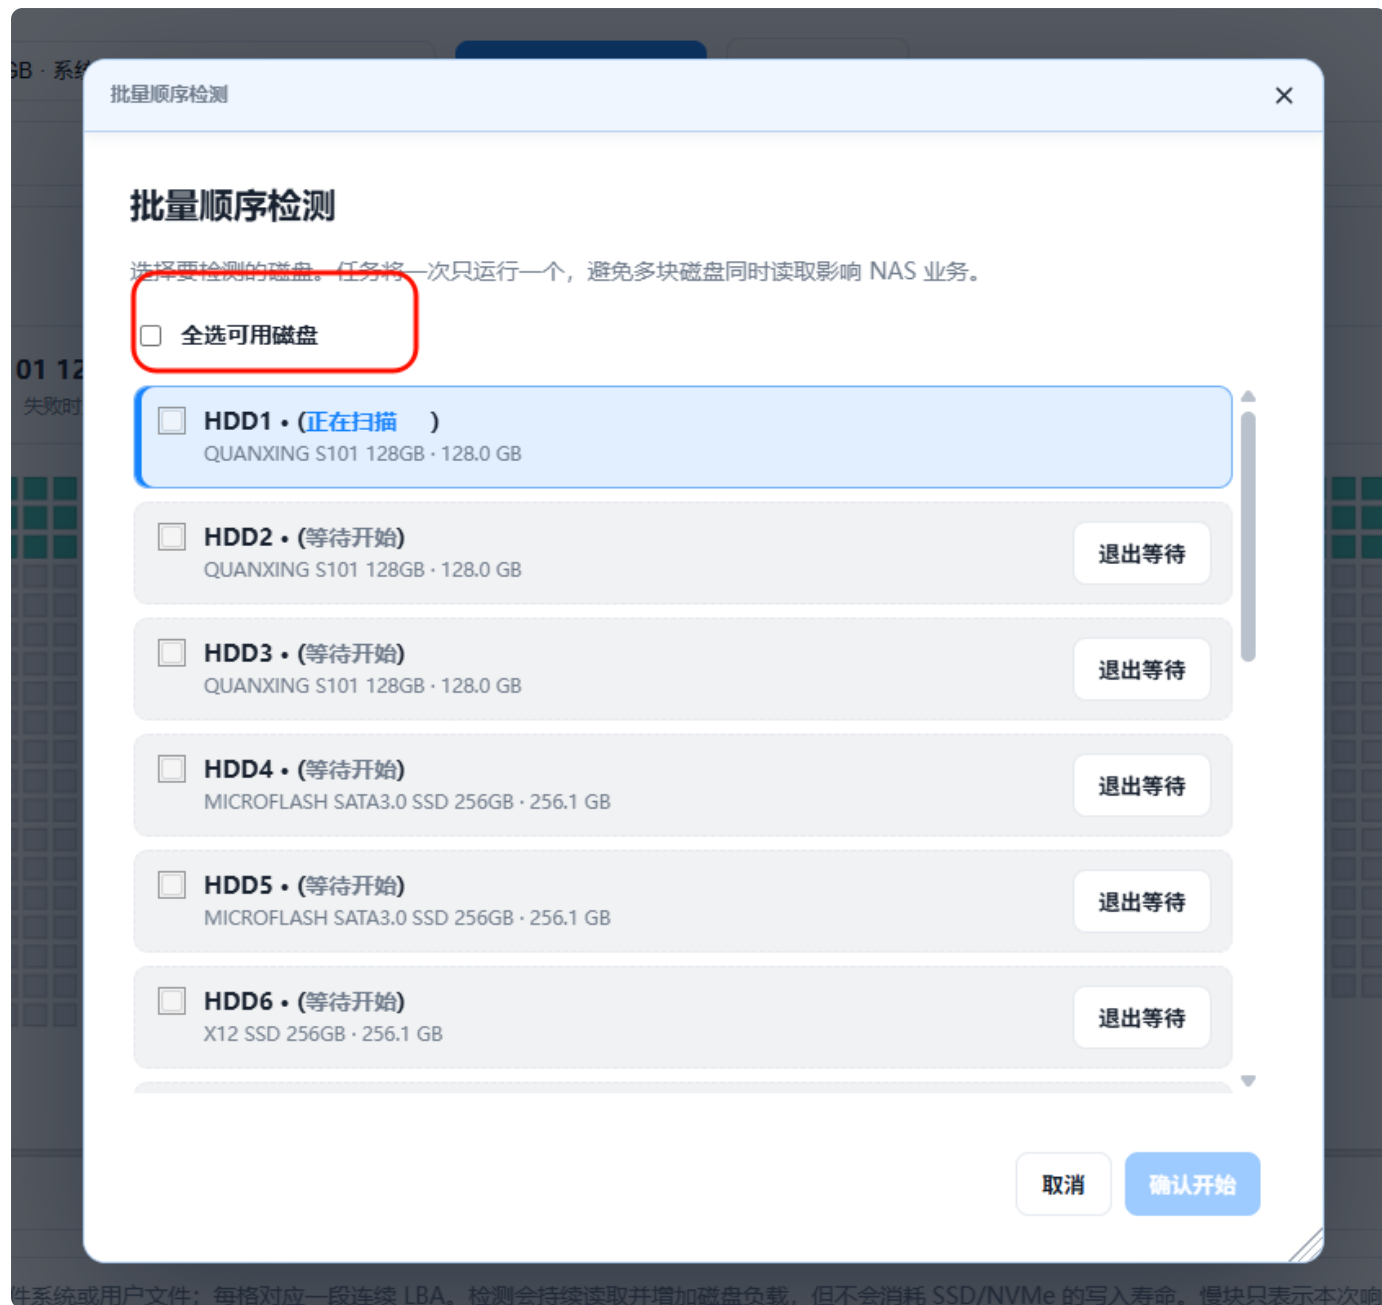


6. 建议批量顺序检测中，等待开始的磁盘也可以有一个拖拽排序的功能，而不是现在必须退出等待重新排序




7.建议这种悬浮显示的弹窗不用默认黑色框,可以参考图2 中圈中的边框时有圆角的,这样更好看一些




8.建议在磁盘选择的下拉框分为10个或15个展示,多的用下拉框拖动,避免用户连接大量USB导致选择磁盘的界面过长甚至直接达到页面底部

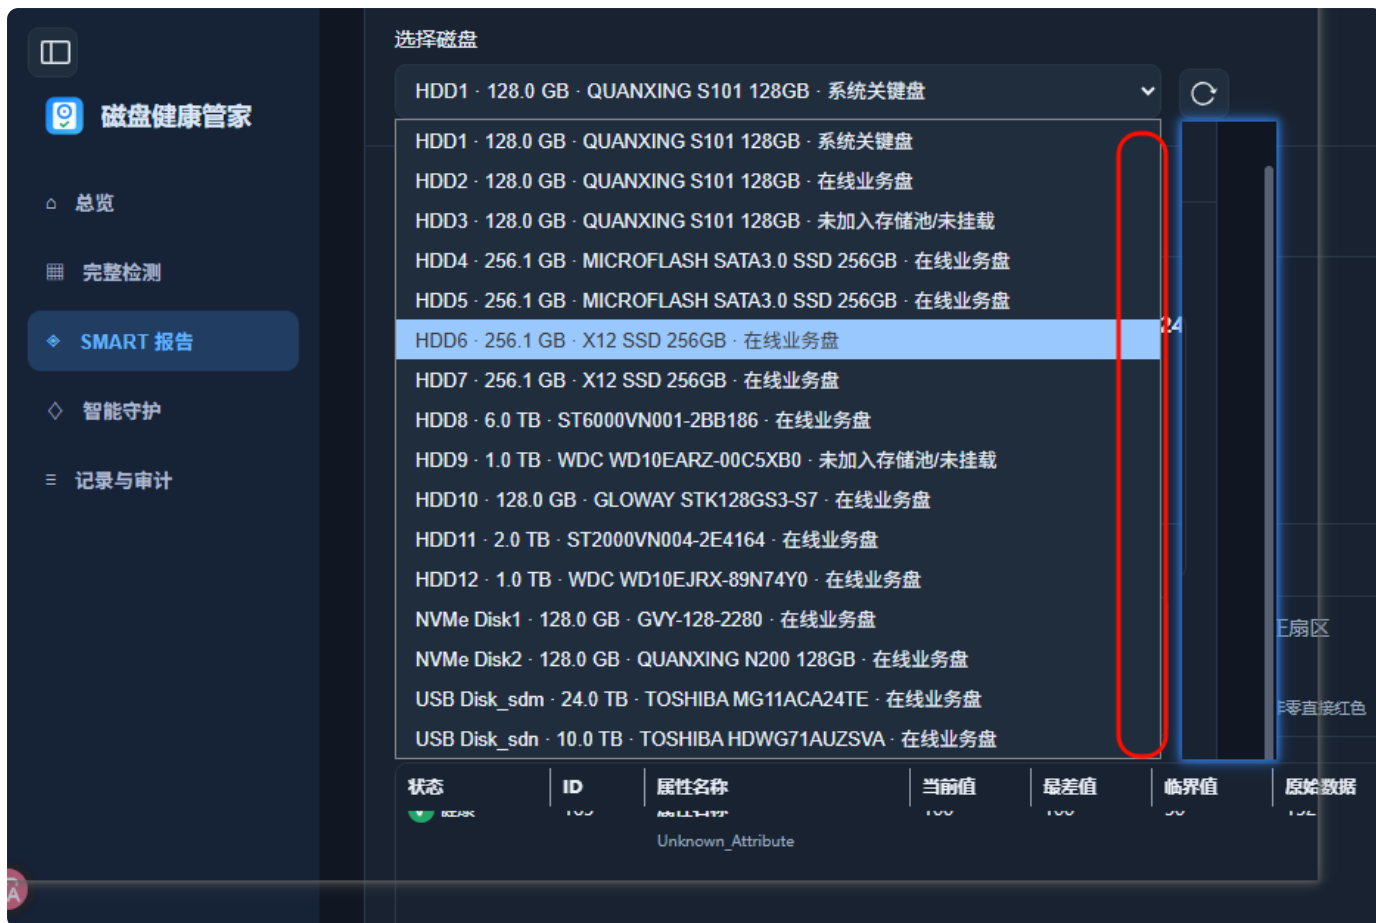

9. 建议新打开的弹窗居中展示而不是紧贴浏览器的最下方，比如弹窗拖动到红圈内

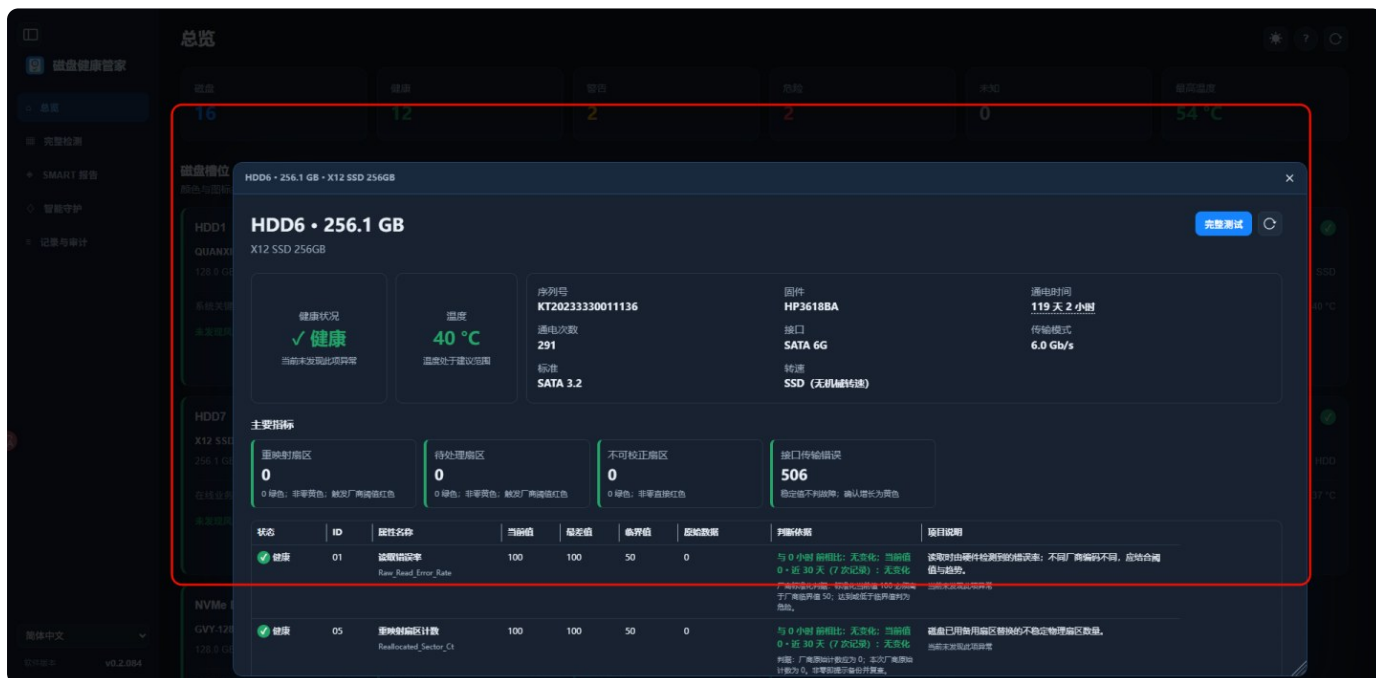


10.完整检测的正下方，右边存在大量空白但是句子换行了

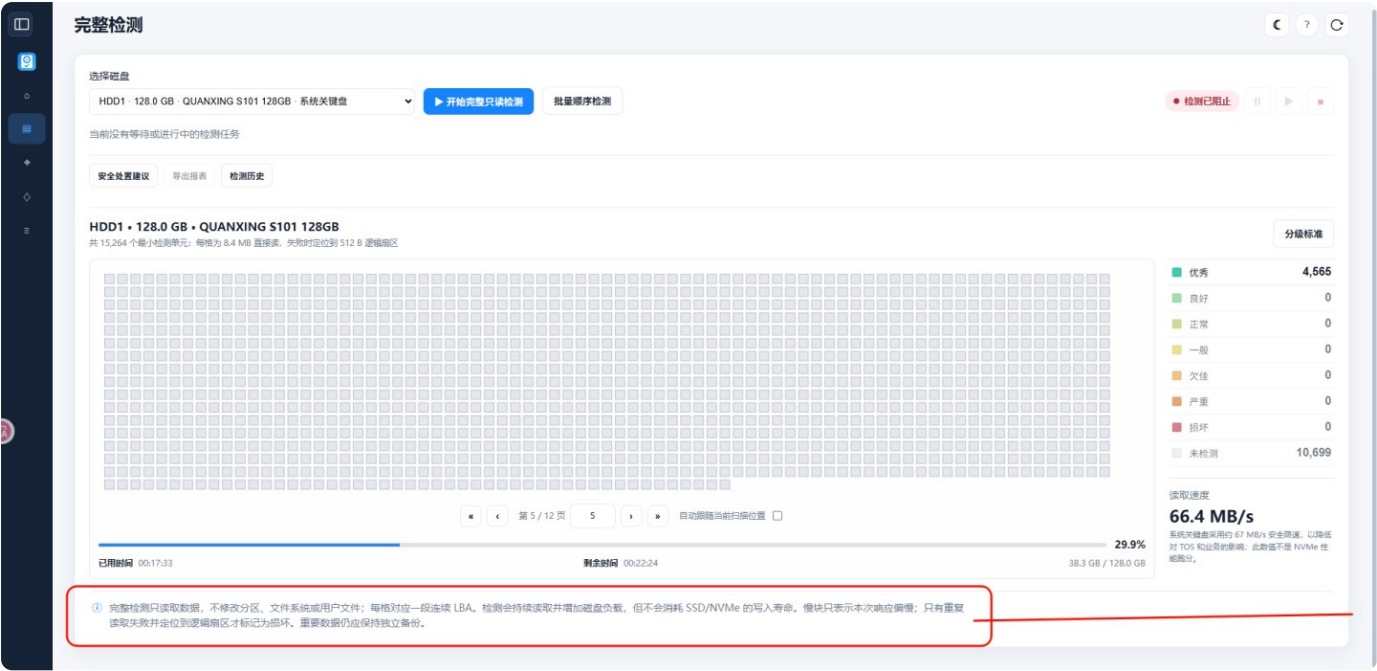

11.检测已阻止，测试过程中发现这个状态，建议给出这个应用的相关的状态说明，即写好需求文档等，根据需求文档编写帮助文档，避免用户像测试者一样出现不理解的状态、功能而无处参考，比如检测已阻止的状态的结果无法导出报表等，这个是否定义的就是检测已阻止的状态无法导出报表呢，还是说检测已阻止的状态也能够导出报表，这是bug



12.在完整检测的块设备方格的部分，滚动鼠标滑轮，发现页面回前后变化，但是不能灵活到最后一页，建议完善该功能，实现鼠标的滚轮转动可以到任意一页

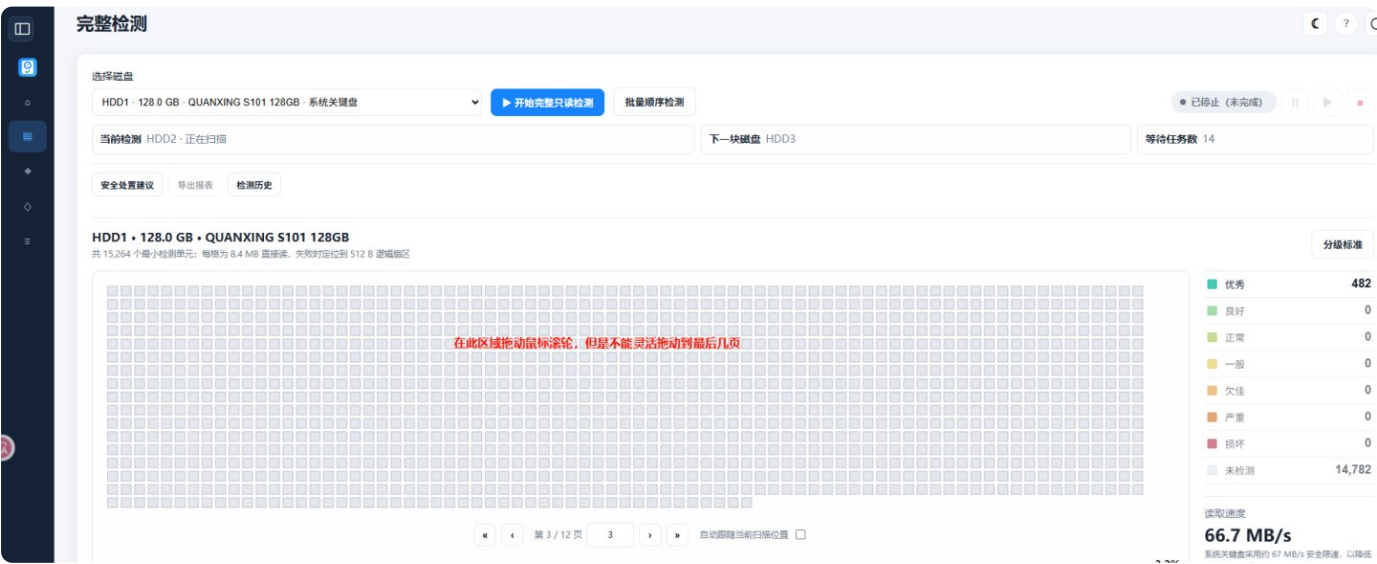

13.每次执行立即检测后，定时磁盘健康检测的时间就会变化，即定时健康检测的时间时手动执行立即检测的后几个小时或几天，这个定时少了给用户自己定准确的时间、周期天数检测的选择，建议参考系统内定时任务制定

