


Step1: Download Software



Volume (D:) > Aurdino Examples > flash_download_tool_3.9.2 > flash_download_tool_3.9.2

Name	Date modified	Type	Size
admin_littlefs	10/8/2025 3:32 PM	File folder	
bin	10/7/2025 7:05 PM	File folder	
combine	10/7/2025 2:08 PM	File folder	
configure	10/7/2025 2:08 PM	File folder	
dl_temp	10/7/2025 2:08 PM	File folder	
doc	10/7/2025 2:08 PM	File folder	
logs	10/7/2025 2:08 PM	File folder	
config.bin	10/8/2025 3:32 PM	BIN File	128 KB
firmware.bin	10/8/2025 3:30 PM	BIN File	4,096 KB
flash_download_tool_3.9.2.exe	10/7/2025 11:53 AM	Application	15,231 KB
Readme.txt	10/8/2025 3:34 PM	Text Document	1 KB

Step2: Open flash_download_tool 3.9.2.exe file

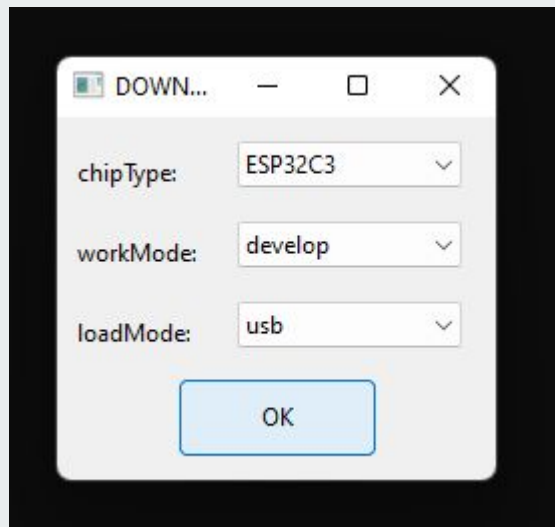

Step3 :


Select Bin Files

firmware.bin 0x0000

config.bin 0x3D0000


Bottom : Select ComPort : COM11

Click to Start

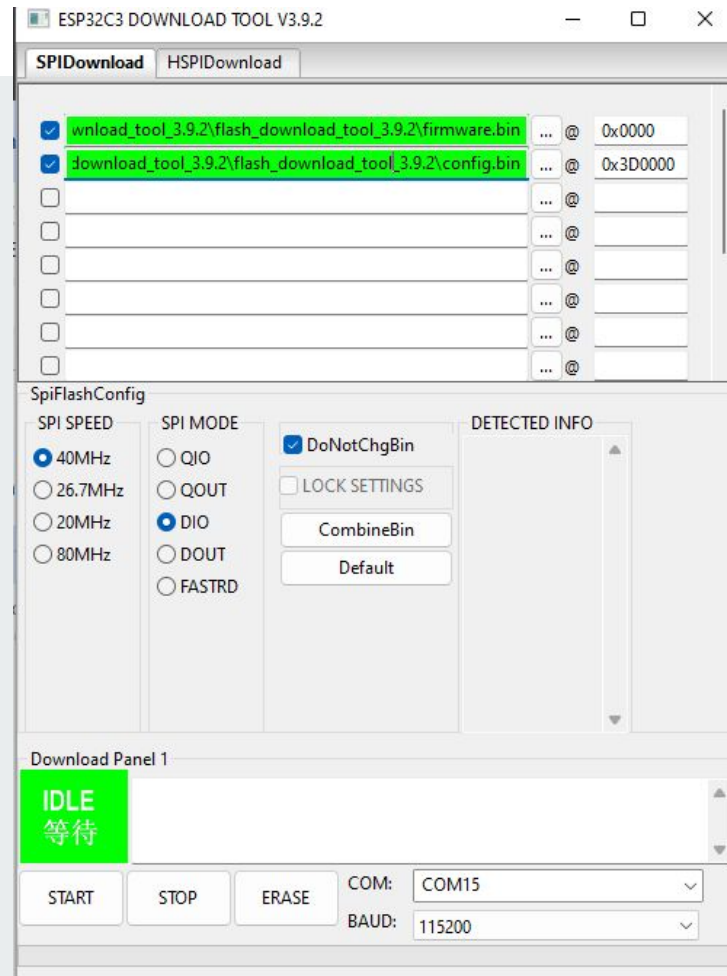

Step4: Open Website and click connect and select COM PORT number (Console Window- Device Monitoring)

<https://terminal.spacehuhn.com/>

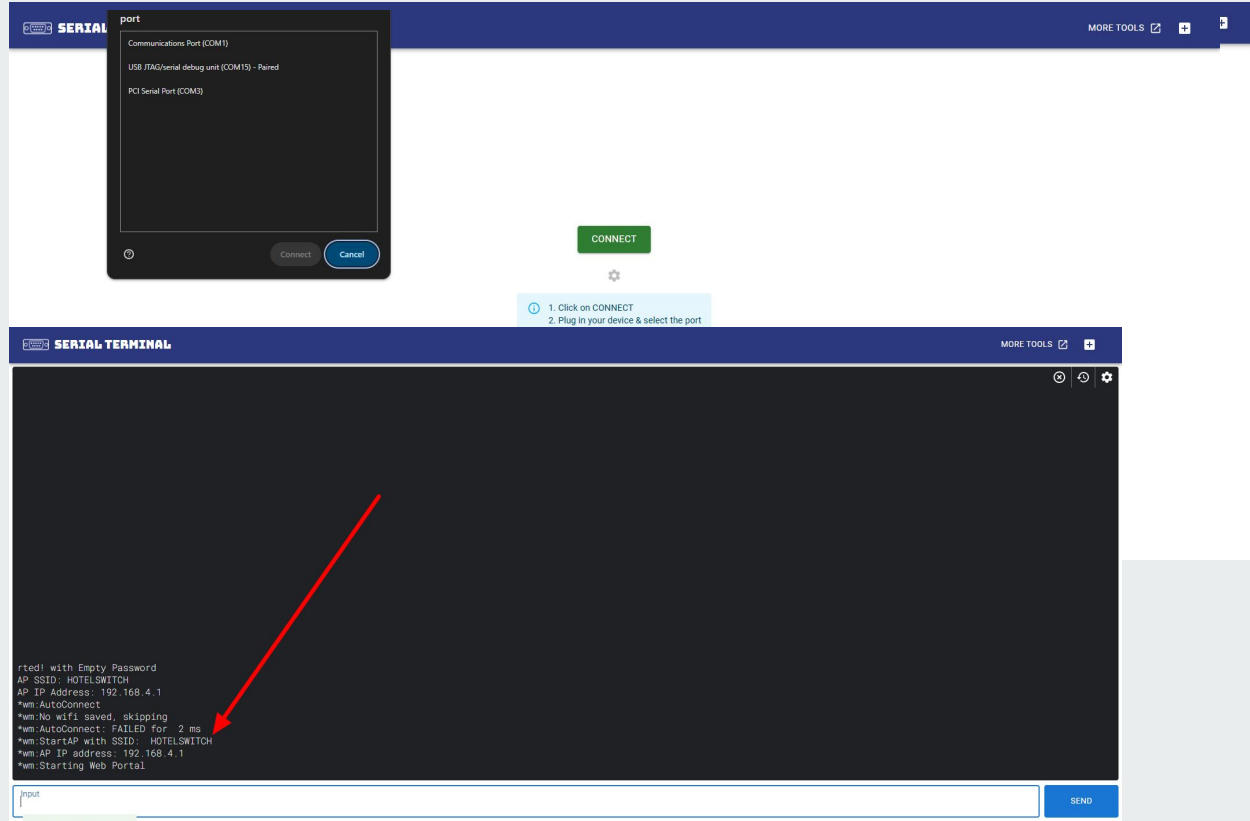

The screenshot displays the SERIAL TERMINAL interface. A 'port' selection dialog is open, showing the following options:

- Communications Port (COM1)
- USB /TAG/serial debug unit (COM15) - Paired
- PCI Serial Port (COM3)

Below the dialog, a green 'CONNECT' button is visible. A tooltip below the button reads:


1. Click on CONNECT
2. Plug in your device & select the port

The SERIAL TERMINAL window below shows the following output:


```
rted! with Empty Password
AP SSID: HOTELSWITCH
AP IP Address: 192.168.4.1
*wm.AutoConnect
*wm.No wifi saved, skipping
*wm.AutoConnect: FAILED for 2 ms
*wm.StartAP with SSID: HOTELSWITCH
*wm.AP IP address: 192.168.4.1
*wm.Starting Web Portal
```

A red arrow points to the line '*wm.No wifi saved, skipping' in the terminal output. At the bottom of the terminal window, there is an input field labeled 'input' and a 'SEND' button.

Step5 : HOTELSWITCH wifi hotspot is open. Connect HOTELSWITCH Wifi on mobile

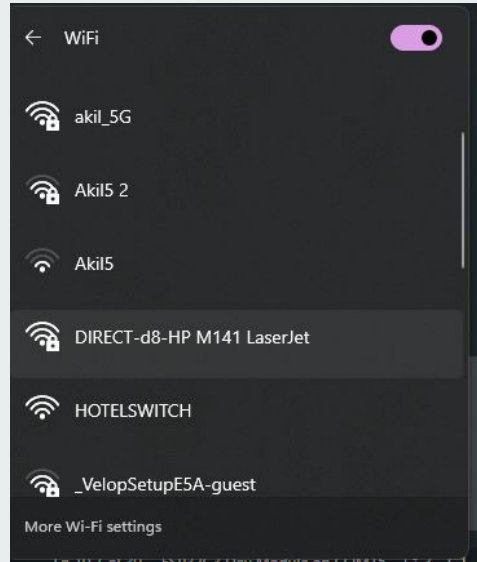

Step6 : Click on Configure wifi and Connect Your Wifi for Internet connection

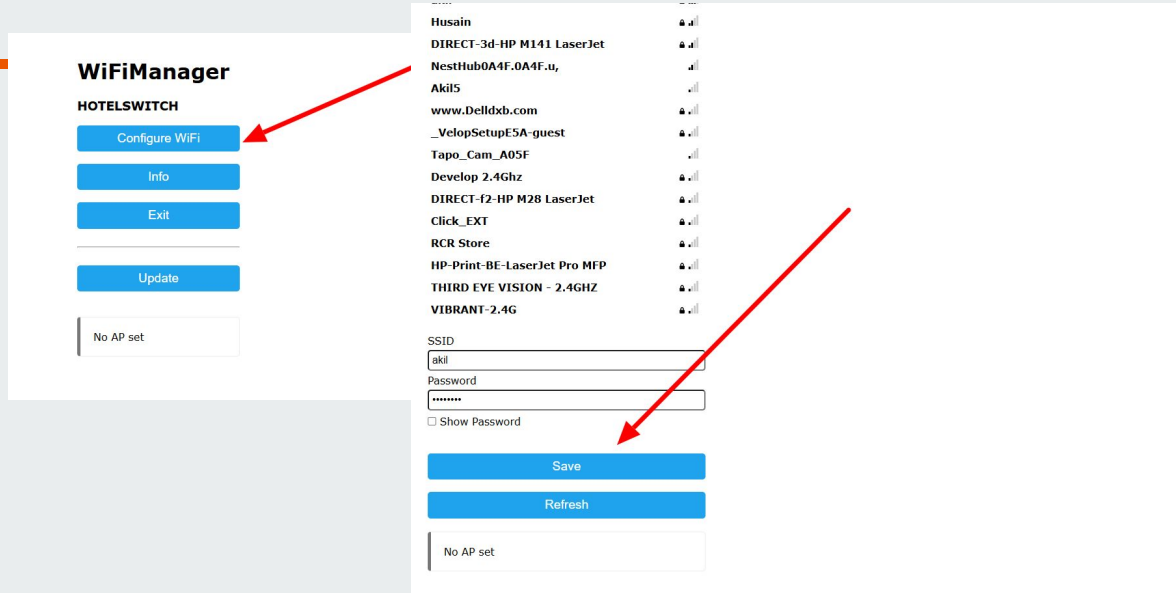

The screenshot displays the WiFiManager web interface, which is used for configuring a device's WiFi settings. The interface is divided into two main sections: a left sidebar and a main content area.

Left Sidebar (WiFiManager):


- HOTELSWITCH**
- Configure WiFi** (highlighted with a red arrow)
- Info**
- Exit**
- Update**
- No AP set**

Main Content Area:

- A list of detected WiFi networks with their SSIDs and signal strength indicators. The networks listed are:
 - Husain
 - DIRECT-3d-HP M141 LaserJet
 - NestHub0A4F.0A4F.u
 - Aki5
 - www.DellDxb.com
 - _VelopSetupE5A-guest
 - Tapo_Cam_A05F
 - Develop 2.4Ghz
 - DIRECT-f2-HP M28 LaserJet
 - Click_EXT
 - RCR Store
 - HP-Print-BE-LaserJet Pro MFP
 - THIRD EYE VISION - 2.4GHZ
 - VIBRANT-2.4G
- Fields for **SSID** (containing 'aki') and **Password** (containing '*****').
- A checkbox labeled **Show Password**.
- Save** and **Refresh** buttons.
- No AP set** (at the bottom).

Red arrows indicate the sequence of actions: clicking on 'Configure WiFi' in the sidebar and then clicking on the 'Save' button in the main content area.

Step7: Console Window has Output with IP address (website <https://terminal.spacehuhn.com/>)

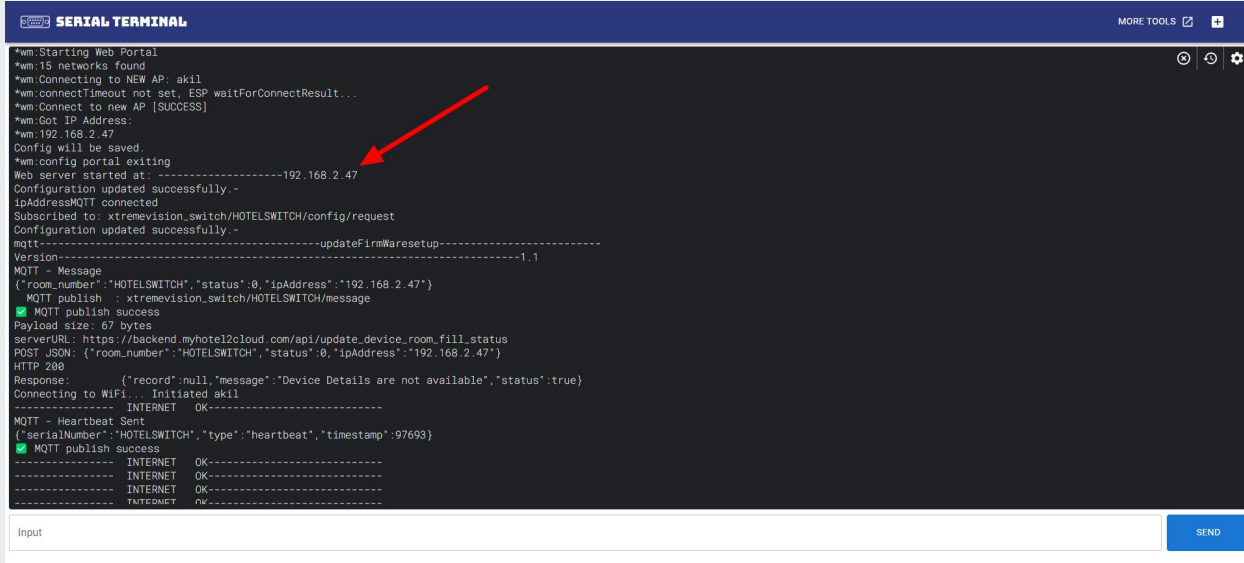

```
*wm:Starting Web Portal
*wm:15 networks found
*wm:Connecting to NEW AP: akil
*wm:connectTimeout not set, ESP waitForConnectResult...
*wm:Connect to new AP [SUCCESS]
*wm:Got IP Address:
*wm:192.168.2.47
Config will be saved.
*wm:config portal exiting
Web server started at: -----192.168.2.47
Configuration updated successfully.-
ipAddressMQTT connected
Subscribed to: xtremevision_switch/HOTELSWITCH/config/request
Configuration updated successfully.-
mqtt-----updateFirmwareSetup-----1.1
MQTT - Message
{"room_number":"HOTELSWITCH","status":0,"ipAddress":"192.168.2.47"}
MQTT publish : xtremevision_switch/HOTELSWITCH/message
✔ MQTT publish success
Payload size: 67 bytes
serverURL: https://backend.myhotel2cloud.com/api/update_device_room_fill_status
POST JSON: {"room_number":"HOTELSWITCH","status":0,"ipAddress":"192.168.2.47"}
HTTP 200
Response: {"record":null,"message":"Device Details are not available","status":true}
Connecting to WiFi... Initiated akil
----- INTERNET OK-----
MQTT - Heartbeat Sent
{"serialNumber":"HOTELSWITCH","type":"heartbeat","timestamp":97693}
✔ MQTT publish success
----- INTERNET OK-----
----- INTERNET OK-----
----- INTERNET OK-----
----- INTERNET OK-----
```

Input SEND

Step8: Now open Device IP address on Browser url: <http://192.168.2.47/>

Username: admin

Password: password



XTREME
GUARD

Login

Username:

Password:

Login

Step8: Device IP address - Add Wifi Password and Device Unique Serial Number XTRHS00001 and click save

192.168.2.47SN: HOTELSWITCHInternet: 100%Version: 1.116:01:55Logout

Device Configuration / Settings

Heartbeat Interval(Seconds):

Wifi SSID:

Wifi Password:

Serial Number:

MQTT Server:

MQTT Port:

MQTT Cleint id:

Server URL(Events):

IP Address:

Password:

Add Wifi Password

Change Serial number XTRHS00001

Update Firmware (.bin)

No file chosen

0%


Update HTML Files

No file chosen

0%

[Restart](#)

Step7: Console Window has Output with Device serial Number (website <https://terminal.spacehuhn.com/>)

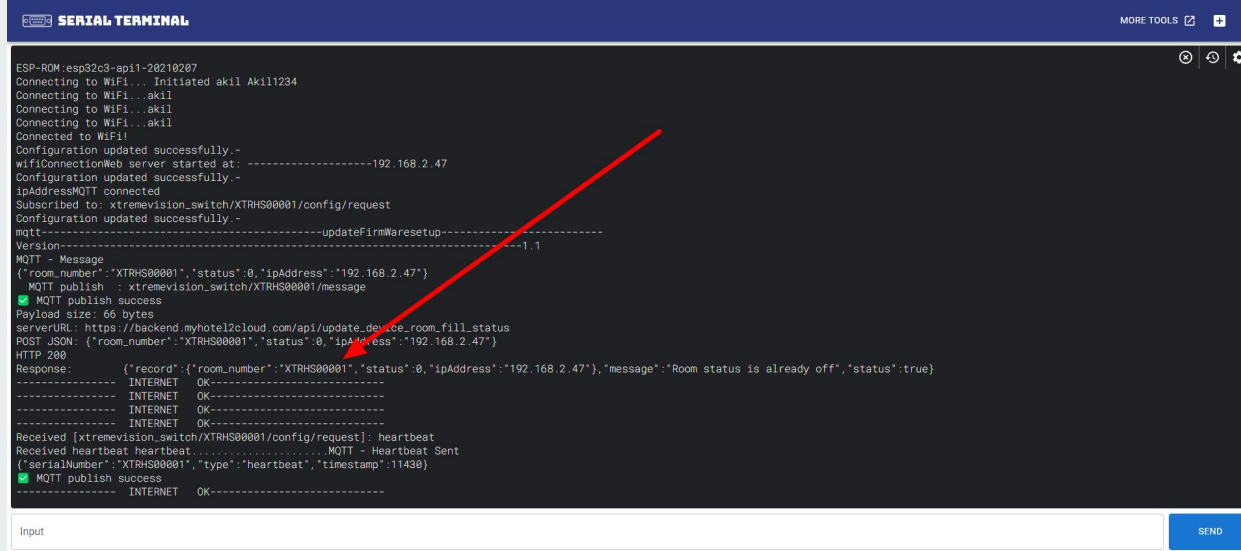

```
ESP-ROM:esp32c3-ap11-20210207
Connecting to WiFi... Initiated akil Akil1234
Connecting to WiFi...akil
Connecting to WiFi...akil
Connecting to WiFi...akil
Connected to WiFi!
Configuration updated successfully.-
wifiConnectionWeb server started at: -----192.168.2.47
Configuration updated successfully.-
ipAddressMQTT connected
Subscribed to: xtremevision_switch/XTRHS00001/config/request
Configuration updated successfully.-
mqtt-----updateFirmwareSetup-----
Version-----1.1
MQTT - Message
{"room_number":"XTRHS00001","status":0,"ipAddress":"192.168.2.47"}
MQTT publish : xtremevision_switch/XTRHS00001/message
✔ MQTT publish success
Payload Size: 66 bytes
serverURL: https://backend.myhotel2cloud.com/api/update_device_room_fill_status
POST JSON: {"room_number":"XTRHS00001","status":0,"ipAddress":"192.168.2.47"}
HTTP 200
Response: {"record":{"room_number":"XTRHS00001","status":0,"ipAddress":"192.168.2.47"},"message":"Room status is already off","status":true}
----- INTERNET OK-----
----- INTERNET OK-----
----- INTERNET OK-----
----- INTERNET OK-----
Received [xtremevision_switch/XTRHS00001/config/request]: heartbeat
Received heartbeat heartbeat.....MQTT - Heartbeat Sent
{"serialNumber":"XTRHS00001","type":"heartbeat","timestamp":11430}
✔ MQTT publish success
----- INTERNET OK-----
```

Input

SEND

Step8: Open Software <https://myhotel2cloud.com/devices> and Add Device Unique Serial Number XTRHS00001

<https://myhotel2cloud.com/devices>

The screenshot displays the MYHOTEL2CLOUD dashboard. The top navigation bar includes links for DASHBOARD, CUSTOMER, ACCOUNT, SALES, REPORTS, SETTING, and CHAT. The current time is 17:34:35 on 08-10-2025, Wednesday. The main content area is titled 'Devices' and features a table with columns: #, Roo No, Serial Number, Device Name, Room, Live Light, Resu.No, Check In, Check Out, Light Updated At, Device, IP Address, and Options. A '+ DEVICE' button is located in the top right corner of the table. An 'Add Device' modal is open in the center, containing fields for Serial Number (XTRHS00001), Device Type Name (Hote Switch), Time Zone (Asia/Kolkata - GMT+05:30), and Assign Room (302). The modal also has CANCEL and SAVE buttons. The table below the modal shows 8 rows of device data, including room numbers, serial numbers, device names, and IP addresses.

#	Roo No	Serial Number	Device Name	Room	Live Light	Resu.No	Check In	Check Out	Light Updated At	Device	IP Address	Options
1	104	TNJ000026	Ground Floor	Empty	🟢	---	---	---	2025-10-07 13:47:57	🔴	192.168.3.79	⋮
2	105	TNJ000027	ESP32	Empty	🟢	---	---	---	2025-10-07 21:45:19	🔴	192.168.3.59	⋮
3	107	TNJ000025	TNJ000025	Empty	🟢	---	---	---	---	🔴	---	⋮
4	108	TNJ000030	TNJ000030	Empty	🟢	---	---	---	2025-10-08 14:51:35	🟢	192.168.3.88	⋮
5	103	TNJ000028	ESP	Empty	🟢	---	---	---	2025-10-06 12:08:28	🔴	192.168.2.23	⋮
6	106	TNJ000029	Esp	Empty	🟢	---	---	---	2025-10-07 21:45:03	🟢	192.168.3.60	⋮
7	301	TNJ000031	TNJ000031	Empty	🟢	---	---	---	2025-10-07 14:03:30	🔴	192.168.3.84	⋮
8	302	TNJ000032	TNJ000032	Empty	🟢	---	---	---	2025-10-08 14:48:18	🔴	192.168.3.58	⋮

Step9: Open Software <https://myhotel2cloud.com/devices> and Device Online Status is Green

MYHOTEL

DASHBOARD

CUSTOMER

ACCOUNT

SALES

REPORTS

SETTING

CHAT

17:37:12

08-10-2025, Wednesday

Demo

54

#	Roo No	Serial Number	Device Name	Room	Live Light	Resv.No	Check In	Check Out	Light Updated At	Device	IP Address	Op
1	104	TNJ000026	Ground Floor	Empty		---	---	---	2025-10-07 13:47:57		192.168.3.79	
2	105	TNJ000027	ESP32	Empty		---	---	---	2025-10-07 21:45:19		192.168.3.59	
3	107	TNJ000025	TNJ000025	Empty		---	---	---	---		---	
4	108	TNJ000030	TNJ000030	Empty		---	---	---	2025-10-08 14:51:35		192.168.3.88	
5	103	TNJ000028	ESP	Empty		---	---	---	2025-10-06 12:08:28		192.168.2.23	
6	106	TNJ000029	Esp	Empty		---	---	---	2025-10-07 21:45:03		192.168.3.60	
7	301	TNJ000031	TNJ000031	Empty		---	---	---	2025-10-07 14:03:30		192.168.3.84	
8	302	XTRHS00001	Hote Switch	Empty		---	---	---	---		192.168.2.47	
9	302	TNJ000032	TNJ000032	Empty		---	---	---	2025-10-08 14:48:18		192.168.3.58	

Rows per page:

50

1-9 of 9

Step10: Open Software <https://myhotel2cloud.com/devices> and Device RFID card status

MYHOTEL

DASHBOARD

CUSTOMER

ACCOUNT

SALES

REPORTS

SETTING

CHAT

17:57:25 08-10-2025, Wednesday

Demo

DEVICES

Devices ↻

#	Room No	Serial Number	Device Name	Room	Live Light	Resv.No	Check In	Check Out	Light Updated At	Device	IP Address
1	104	TNJ000026	Ground Floor	Empty	💡	---	---	---	2025-10-07 13:47:57	🔒	192.168.3.79
2	105	TNJ000027	ESP32	Empty	💡	---	---	---	2025-10-07 21:45:19	🔒	192.168.3.59
3	107	TNJ000025	TNJ000025	Empty	💡	---	---	---	---	🔒	---
4	108	TNJ000030	TNJ000030	Empty	💡	---	---	---	2025-10-08 14:51:35	🔒	192.168.3.88
5	103	TNJ000028	ESP	Empty	💡	---	---	---	2025-10-06 12:08:28	🔒	192.168.2.23
6	106	TNJ000029	Esp	Empty	💡	---	---	---	2025-10-07 21:45:03	🔒	192.168.3.60
7	301	TNJ000031	TNJ000031	Empty	💡	---	---	---	2025-10-07 14:03:30	🔒	192.168.3.84
8	302	XTRHS00001	Hote Switch	Empty	💡	---	---	---	2025-10-08 16:27:22	🔒	192.168.2.47
9	302	TNJ000032	TNJ000032	Empty	💡	---	---	---	2025-10-08 14:48:18	🔒	192.168.3.58

Rows per page: 50 1-9