

				نموذج تقديم اعتماد مواد انذار الحريق			
تاريخ نهاية العقد		1.375.641.5		قيمة العقد	توريد وتركيب وتشغيل أنظمة الإطفاء وإنذار الحريق لأحد المواقع التابعة لديوان رئاسة أمن الدولة بحافظة الطائف		
باسكو سيفتي	المقاول	مكتب نسج الإبداع للاستشارات الهندسية		الاستشاري	رئاسة أمن الدولة	المالك	الطائف
بيانات التقديم							
		17/11/1447		04/05/2026	تاريخ التقديم	MAS-ELEC-07-R00	
رقم التقديم	معماري	مدني	كهرباء	ميكانيكا	نوع التقديم		
التصنيف	مخططات	مستند	مواد	اخرى			
التسليم	الوصف		الكود	التسليم	الوصف		
1	مخارج الطوارئ		10				
2	شركة ULTRA LIGHT		11				
3	الموديل Z F - 800S		12				
4	الاستلام		المقاول				
5	الختم	التوقيع	ممثل المقاول				
6			م. أحمد علي مصطفى				
7							
8							
9			04/05/2026 م - 17/11/1447 هـ				
المراجعة الفنية		الملاحظات الفنية					
☐	المدني / الانشائي	لا مانع من استخدام المواد أعلاه مع مراعاة أن تكون إشارات الخروج تحتوي على كلمة "مخرج" باللغة العربية و "Exit" باللغة الانجليزية معاً. لا التزام بتعليمات الجهة المصنعة وتعليمات كود البناء السعودي NFPA والاستشارة راجع إليه.					
☐	المعماري						
☒	الكهربائي						
☐	الميكانيكي						
مدير المشروع							
التوقيع							
التاريخ		9/5/2026					
☐	☒	☐	الكود	العدد	المرفقات	التاريخ	ممثل المالك
مرفوض ويعاد التقديم: C	مقبول حسب الملاحظات: B	مقبول: A		5			
يتعهد المقاول المذكور أعلاه بأنه قد راجع كافة تفاصيل التقديم وطبقها مع شروط ومواصفات ومخططات المشروع المعتمدة وإن هذه الموافقة لا تخلي مسؤوليته حسب متطلبات العقد							



الترالايت
ULTRALIGHT

EMERGENCY LED LIGHTING

ZF-800S | SERIES

3W

Diverse Exit Signs , 4 Years Battery Life



| Benefits

- Aluminum Housing.
- Suitable for Different Application.
- Easy to Install.
- Glass Substitute.
- Indoor Use.

| Features

- From -10° to 50° celsius operating temperature.
- Battery Life Expectancy 4 years.
- Color Rendering Index >80.
- Emergency Mode Transfer Time With 1 Second.
- Battery Built-in.
- 10 VDC Output Voltage.

| Characteristics



Charging Time
24 Hours

Battery 3.6V 900mAh

EXIT SIGN

Glass Substitut

180 Minutes
Emergency Time



| Technical Operating & Electrical Data

Input Voltage : Frequency	220-240VAC 50/60Hz
Output Voltage	10VDC
Rated Color Rendering Index	80
Emergency Time	3 hours
Displacement	-
Operating Temperature	-10° to 50°
Battery	3.6V 900mAh Ni-Cd
Protection Class	I


| Mechanical Data

Housing Material	Aluminum
Cover Material	Polycarbonate Clear
Available Colors	Silver

| Areas Of Application



Public Indoor



Hospital



Shopping Center



Commercial



WorkPlace



Education Center






Specifications

Model No	Power	CCT	Luminous	Efficacy	PF	Current
ZF-800S	3W	6000K	-	-	-	120mA

Dimensions

No	Model No	Cable Length	Lenght	Width	Height	Wiegth
1	ZF-800S	-	363mm	45mm	225mm	1200g

Product Dimensions

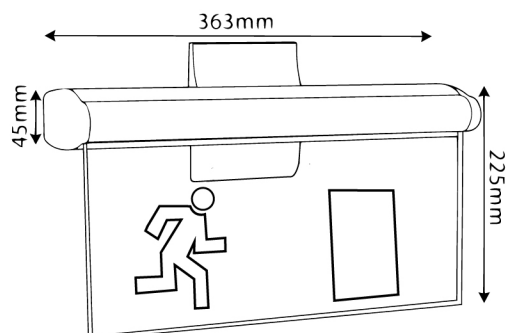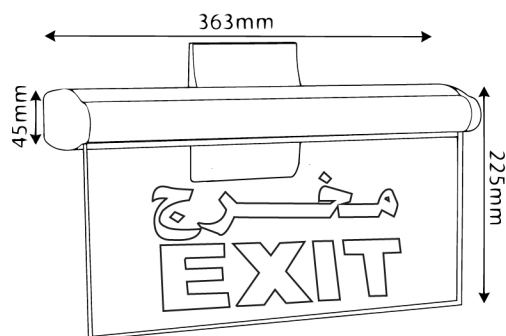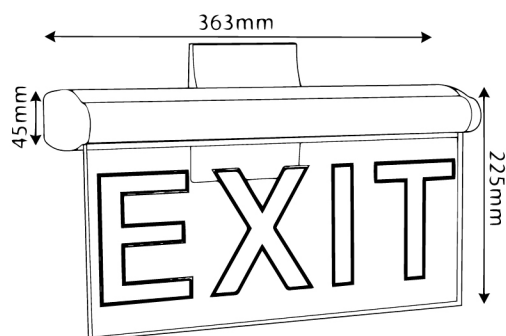

Automatic Emergency Light

Installation Instruction

MODEL: ZF-800S

I . Features:

Adopted with smart IC controlled charger. When the AC power supply is off, the lamp will light up immediately in the emergency mode. When AC power supply regains, the lamp will be off and turn to the mode of charging . The circuit has the function of over low and high voltage cut off protection.

Standard: GB17945-2010

II.Product Description:

Input: AC 220-240V 50/60Hz

Output: DC10V 120mA

Operating Temp:-10°C to +50°C

Emergency Mode Transfer Time: With 1 second

Emergency Time: ≥ 3 hours

Lamp Type: 3W LED

Battery: 3.6V 900mAh Ni-Cd

Battery Life Expectancy: 4 year

Charging Time: about 24 hours

III. Instruction

1. When the indicator lights not bright, the 220V AC may not connect well, you should check the AC power and the connect way; When the yellow lights up, the plug may got loose or the battery keep for too long, you should check the plug or change the battery; When the charge time is shorten than before, you should recharge the battery more than 20 hours or replace the new battery.
2. The lamp will automatically light up when the power supply fails. Pressing the test button could also control the lamp at this moment.

IV. Notice:

1. It should connects to the electricity all the time so the battery can be floating charged. The Li-on battery stays in the mode of empty electricity. It should be recharged for 24 hour before operating.
2. Repeated charge and discharge will shorten the life span of the battery, so please forbid the work style like switch on in the daytime and off at night.
3. The battery function will be affected if keep it free for a long time; The life span of Li-on battery usually 4 years. When the discharge time less than 50% of base time, you should replace the new battery, and please noticed that the new battery should keep same as the original battery, including model, polarity, voltage and capacity.
4. The working life of LED is generally 80,000 hours. Please use the new bulb as the same size offered by manufacturer when replacement needed.