Bally GAMING • SYSTEMS ®

ProSlot® 6000

MODULE 14

MK14-S6MOD-0001

SCHEMATICS

©2003 BALLY GAMING, INC. ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 14 - Schematics

Bill Acceptor 14-5
LED Board, JCM WBA AS-03356-0431 14-5
Cabinet 14-6
Backplane Board AS-03356-0423 14-6
Cabinet 14-7
Backplane Board AS-03356-0643 14-7
Backplane Board (1 of 2) AS-03356-0445 14-8
Backplane Board (2 of 2) AS-03356-0445 14-9
Meter Detect Board, 5-Meter AS-03356-0609 14-10
Card Rack / MPU Board 14-11
MPU Board (1 of 5) AS-03356-0438 14-11
MPU Board (2 of 5) AS-03356-0438 14-12
MPU Board (3 of 5) AS-03356-0438 14-13
MPU Board (4 of 5) AS-03356-0438 14-14
MPU Board (5 of 5) AS-03356-0438 14-15
MPU Board (1 of 9) AS-03356-0424 14-16
MPU Board (2 of 9) AS-03356-0424 14-17
MPU Board (3 of 9) AS-03356-0424 14-18
MPU Board (4 of 9) AS-03356-0424 14-19
MPU Board (5 of 9) AS-03356-0424 14-20
MPU Board (6 of 9) AS-03356-0424 14-21
MPU Board (7 of 9) AS-03356-0428 14-22
MPU Board (8 of 9) AS-03356-0424 14-23
MPU Board (9 of 9) AS-03356-0424 14-24
Coin Acceptor 14-25
Coin Optic Decoder 2 Board AS-03356-0303 14-25
Door 14-26
Display Board with Hit and Run Connector AS-03356-0525 14-26
Display Board with Hit and Run Connector, Left AS-03356-0623 14-27
Door Optic Emitter Board AS-03356-0427 14-28
Hopper 14-29
Hopper Controller Board, FET, Dual Optic AS-03356-0368 14-29
Logic 14-30
Data Vault™ Memory Board (France) AS-03356-0466 14-30
Reel Mechanism 14-31
Reel Drive Board AS-03356-0205 14-31
Sound Board 14-32
Deluxe Sound Board AS-03356-0362 14-32
Sound Board 14-33
Pro Sound 2 Board (1 of 2) AS-03356-0512 14-33
Pro Sound 2 Board (2 of 2) AS-03356-0512 14-34
Systems / Communication 14-35
LSAMS Fiber Optic Board AS-03356-0185 14-35
Display Board, Horse Play AS-03356-0524 14-36


©2003 Bally Gaming and Systems

Marquee 14-37
LED Board with Power Connector, Diamond AS-03356-0621 14-37
LED Board, Diamond AS-03356-0622 14-37
LED Power Board, Round AS-03356-0577 14-38
Marquee Board, To Tell the Truth AS-03356-0551 14-38
Printed Circuit Board “A” - Generic Oval AS-03356-0592 14-39
Printed Circuit Board “B”- Generic Oval AS-03356-0593 14-39
Power Board, Movie Star Marquee AS-03356-0557 14-40

Bill Acceptor


LED Board, JCM WBA AS-03356-0431


☑Upright ☑Slant

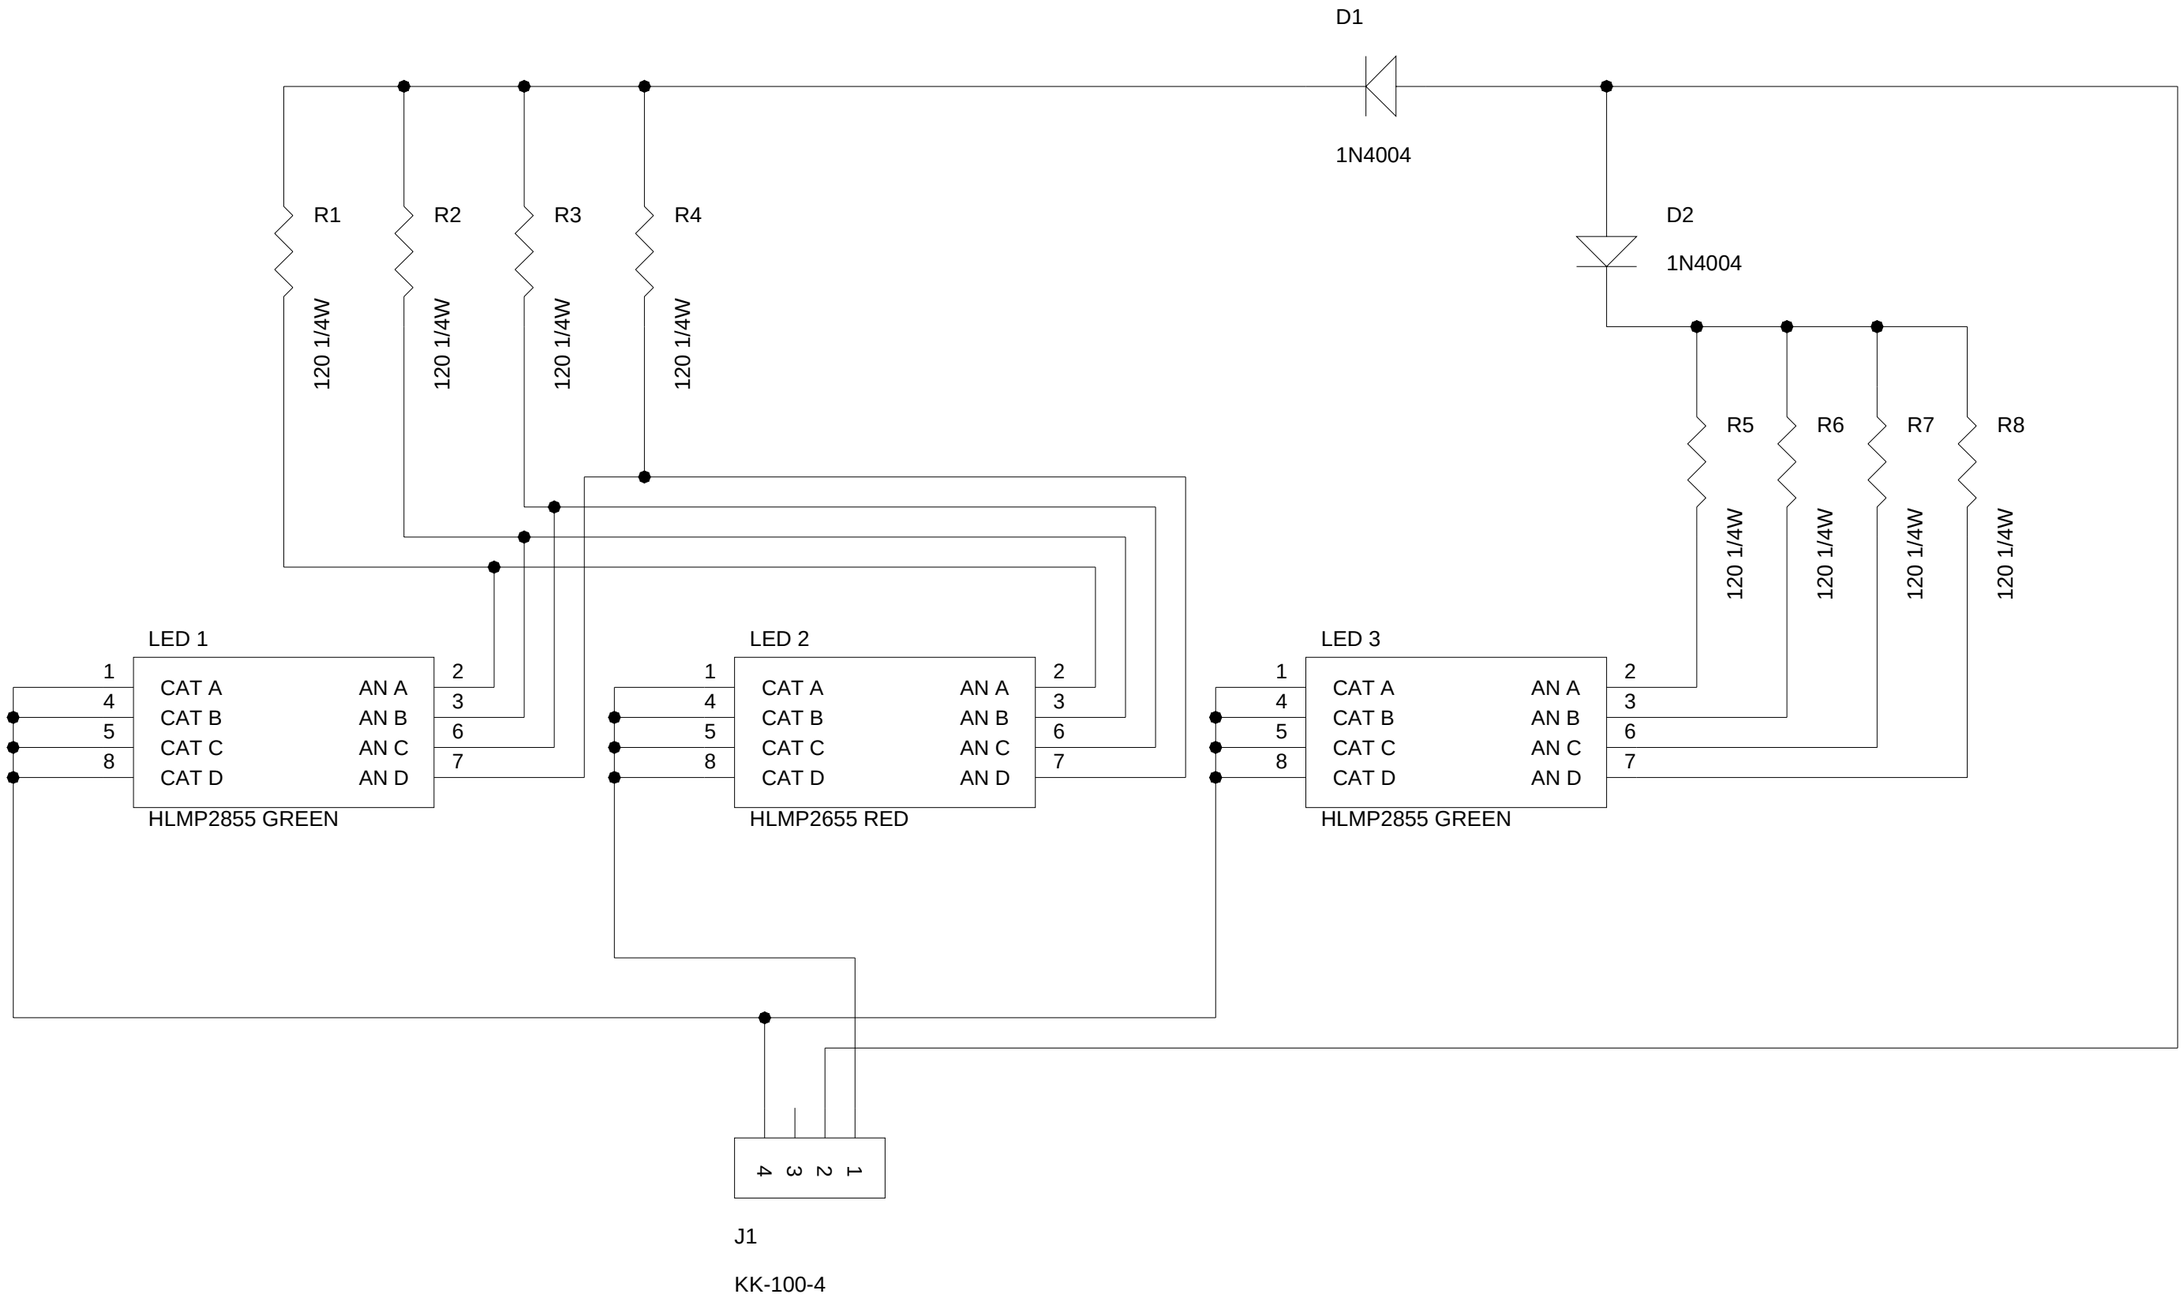

©2003 BALLY GAMING AND SYSTEMS

|| Backplane Board AS-03356-0423 ☑Slant

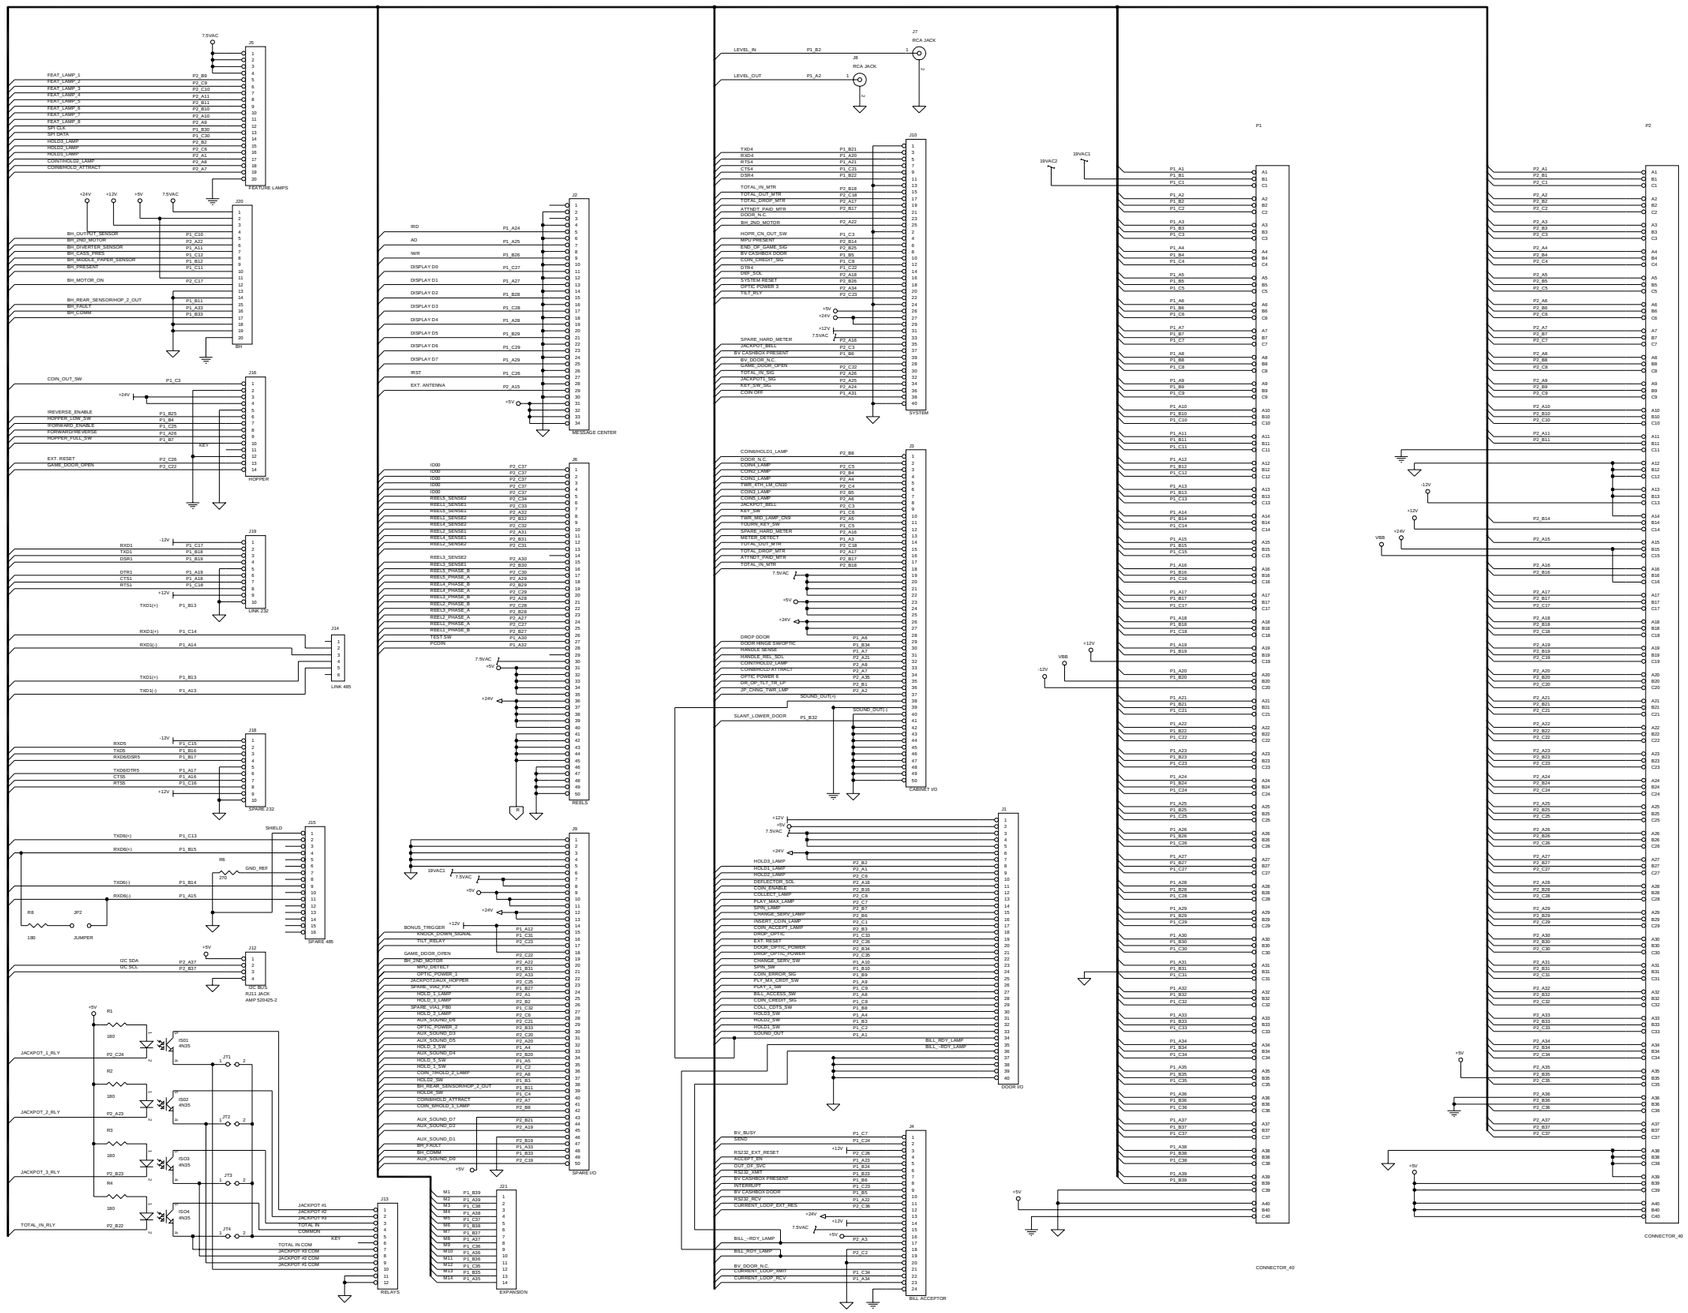

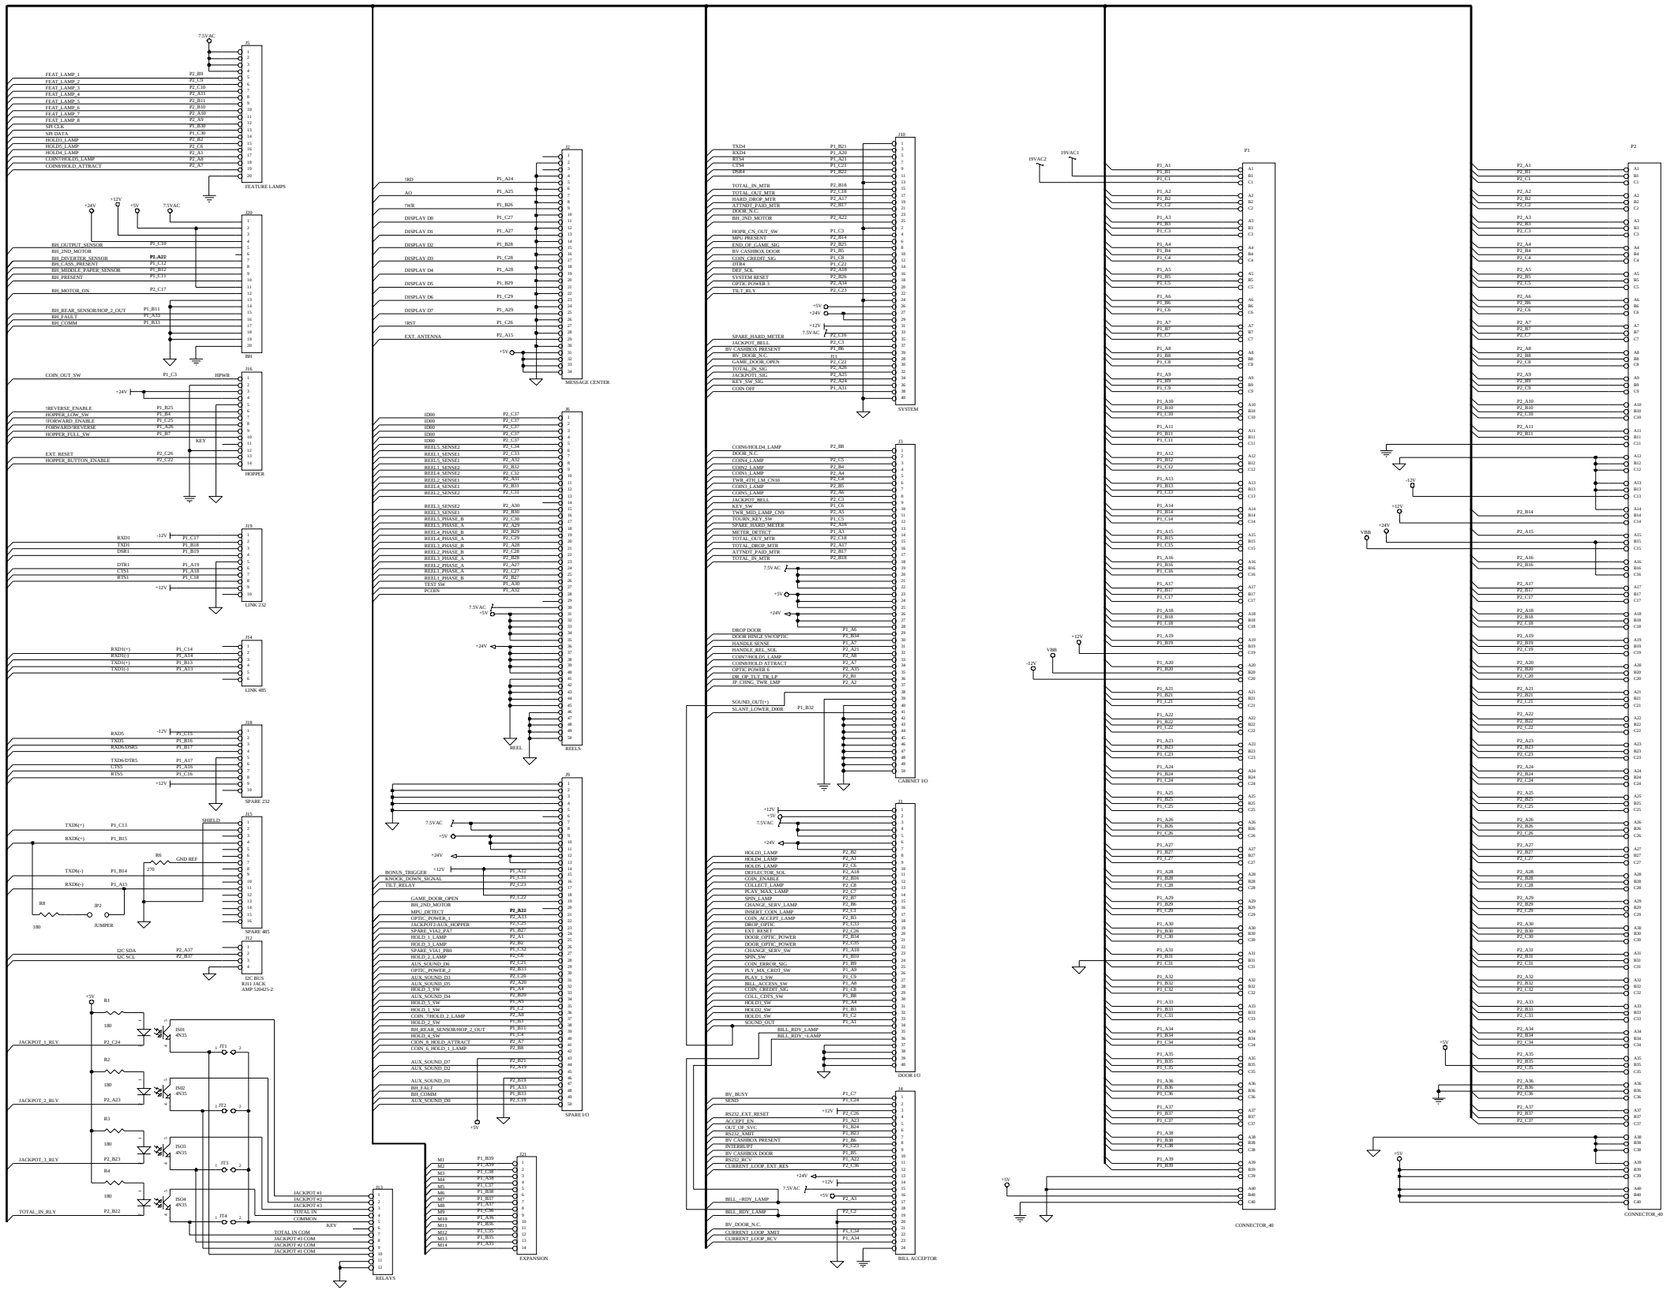


©2003 BALLY GAMING AND SYSTEMS


Backplane Board (1 of 2) AS-03356-0445


☑Upright


P1

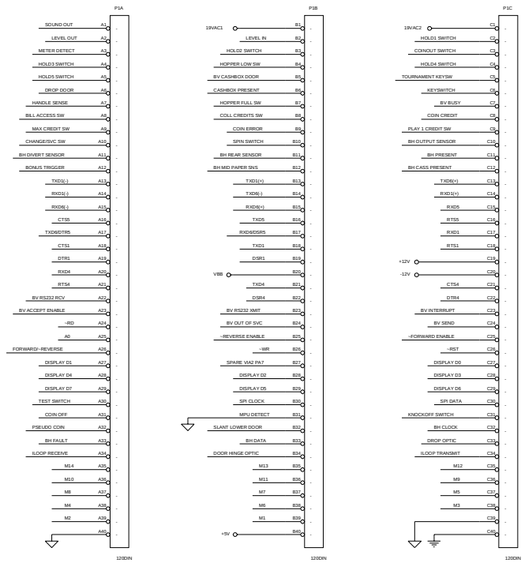



P2

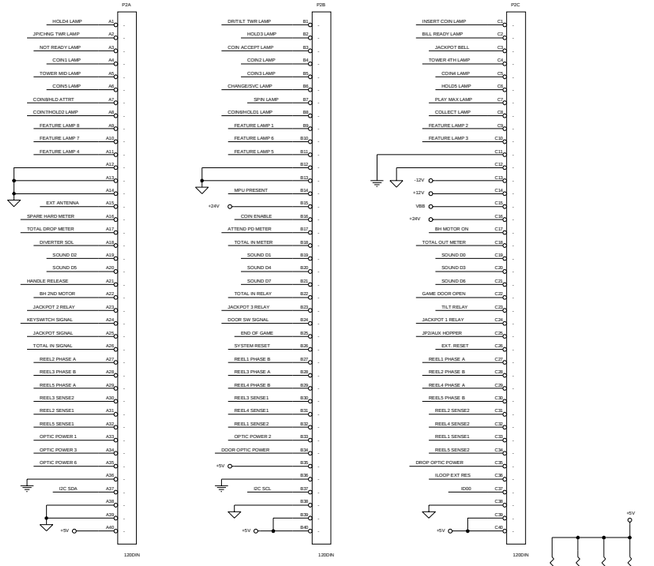


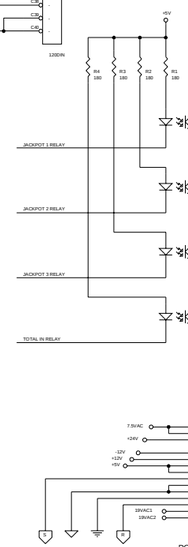













































Cabinet

Backplane Board (2 of 2) AS-03356-0445

☑Upright

SIGNAL	CONNECTIONS			
	A	B	C	D
~FORWARD ENABLE	P1,C25	J16,8		
~RD	P1,A24	J2,5		
~REVERSE ENABLE	P1,B25	J16,6		
~RST	P1,C26	J2,27		
~WR	P1,B26	J2,9		
19VAC1	P1,B1	J9,6	J17,14	
19VAC2	P1,C1	J17,15		
A0	P1,A25	J2,7		
ATTEND PD METER	P2,B17	J3,17	J10,21	
BH 2ND MOTOR	P2,A22	J9,20	J10,25	J20,6
BH CASS PRESENT	P1,C12	J20,8		
BH CLOCK	P1,C32	J9,27	J20,1	
BH DATA	P1,B33	J9,49	J20,17	
BH DIVERT SENSOR	P1,A11	J20,7		
BH FAULT	P1,A33	J20,16		
BH MID PAPER SNS	P1,B12	J20,9		
BH MOTOR ON	P2,C17	J20,12		
BH OUTPUT SENSOR	P1,C10	J20,5		
BH PRESENT	P1,C11	J20,10		
BH REAR SENSOR	P1,B11	J9,39	J20,15	
BILL ACCESS SW	P1,A8	J1,28		
BILL READY LAMP	P2,C2	J1,35	J4,19	
BONUS TRIGGER	P1,A12	J9,15		
BV ACCEPT ENABLE	P1,A23	J4,5		
BV BUSY	P1,C7	J4,1		
BV CASHBOX DOOR	P1,B5	J4,10	J10,10	
BV DOOR NC	J4,21	J10,28		
BV INTERRUPT	P1,C23	J4,9		
BV OUT OF SVC	P1,B24	J4,6		
BV RS232 RCV	P1,A22	J4,11		
BV RS232 XMIT	P1,B23	J4,7		
BV SEND	P1,C24	J4,2		
CASHBOX PRESENT	P1,B6	J4,8	J10,39	
CHANGE/SVC LAMP	P2,B6	J1,16		
CHANGE/SVC SW	P1,A10	J1,23		
COIN ACCEPT LAMP	P2,B3	J1,18		
COIN CREDIT	P1,C8	J1,29	J10,12	
COIN ENABLE	P2,B16	J1,12		
COIN ERROR	P1,B9	J1,25		
COIN OFF	P1,A31	J10,38		
COIN1 LAMP	P2,A4	J3,5		
COIN2 LAMP	P2,B4	J3,4		
COIN3 LAMP	P2,B5	J3,7		
COIN4 LAMP	P2,C5	J3,3		
COIN5 LAMP	P2,A6	J3,8		
COIN6/HOLD1 LAMP	P2,B8	J3,1	J9,42	
COIN7/HOLD2 LAMP	P2,A8	J3,33	J5,18	J9,37
COIN8/HOLD ATTR	P2,A7	J3,34	J5,19	J9,41
COINOUT SWITCH	P1,C3	J16,1	J10,4	
COLL CREDITS SW	P1,B8	J1,30		
COLLECT LAMP	P2,C8	J1,13		
CTS1	P1,A18	J19,7		
CTS4	P1,C21	J10,9		
CTS5	P1,A16	J18,7		
DISPLAY D0	P1,C27	J2,11		
DISPLAY D1	P1,A27	J2,13		
DISPLAY D2	P1,B28	J2,15		
DISPLAY D3	P1,C28	J2,17		
DISPLAY D4	P1,A28	J2,19		
DISPLAY D5	P1,B29	J2,21		
DISPLAY D6	P1,C29	J2,23		
DISPLAY D7	P1,A29	J2,25		
DIVERTER SOL	P2,A18	J1,11	J10,16	
DOOR HINGE OPTIC	P1,B34	J3,30		
DOOR NC	J10,23	J3,2		
DOOR OPTIC POWER	P2,B34	J1,21		
DOOR SW SIGNAL	P2,B24	J9,48		
DR/TILT TWR LAMP	P2,B1	J3,36		
DROP DOOR	P1,A6	J3,29		
DROP OPTIC	P1,C33	J1,19		
DROP OPTIC POWER	P2,C35	J1,22		
DSR1	P1,B19	J19,4		
DSR4	P1,B22	J10,11		
DTR1	P1,A19	J19,6		
DTR4	P1,C22	J10,14		
END OF GAME	P2,B25	J10,8		
EXT ANTENNA	P2,A15	J2,29		
EXT. RESET	P2,C26	J1,20	J4,4	J16,13 J20,13
FEATURE LAMP 1	P2,B9	J5,5		
FEATURE LAMP 2	P2,C9	J5,6		
FEATURE LAMP 3	P2,C10	J5,7		
FEATURE LAMP 4	P2,A11	J5,8		
FEATURE LAMP 5	P2,B11	J5,9		
FEATURE LAMP 6	P2,B10	J5,10		
FEATURE LAMP 7	P2,A10	J5,11		
FEATURE LAMP 8	P2,A9	J5,12		
FORWARD/~REVERSE	P1,A26	J16,9		
GAME DOOR OPEN	P2,C22	J9,19	J10,30	J16,14


SIGNAL	CONNECTIONS			
	A	B	C	D
HANDLE RELEASE	P2,A21	J3,32		
HANDLE SENSE	P1,A7	J3,31		
HOLD1 SWITCH	P1,C2	J1,33	J9,36	
HOLD2 SWITCH	P1,B3	J1,32	J9,38	
HOLD3 LAMP	P2,B2	J1,8	J5,15	J9,26
HOLD3 SWITCH	P1,A4	J1,31	J9,33	
HOLD4 LAMP	P2,A1	J1,9	J5,17	J9,25
HOLD4 SWITCH	P1,C4	J9,40		
HOLD5 LAMP	P2,C6	J1,10	J5,16	J9,28
HOLD5 SWITCH	P1,A5	J9,35		
HOPPER FULL SW	P1,B7	J16,10		
HOPPER LOW SW	P1,B4	J16,7		
I2C SCL	P2,B37	J12,3		
I2C SDA	P2,A37	J12,2		
ID00	P2,C37	J6,1	J6,2 J6,4	J6,3 J6,5
ILOOP EXT RES	P2,C36	J4,12		
ILOOP RECEIVE	P1,A34	J4,23		
ILOOP TRANSMIT	P1,C34	J4,22		
INSERT COIN LAMP	P2,C1	J1,17		
JACKPOT #1	ISO1,COLL	J13,1		
JACKPOT #1 COM	ISO1,EMITTER	J13,10	JT1,1	
JACKPOT #2	ISO2,COLL	J13,2		
JACKPOT #2 COM	ISO2,EMITTER	J13,9	JT2,1	
JACKPOT #3	ISO3,COLL	J13,3		
JACKPOT #3 COM	ISO3,EMITTER	J13,8	JT3,1	
JACKPOT 1 RELAY	P2,C24	ISO1,CATHODE		
JACKPOT 2 RELAY	P2,A23	ISO2,CATHODE		
JACKPOT 3 RELAY	P2,B23	ISO3,CATHODE		
JACKPOT BELL	P2,C3	J3,9	J10,37	
JACKPOT SIGNAL	P2,A25	J10,34		
JP/CHNG TWR LAMP	P2,A2	J3,37		
JP2/AUX HOPPER	P2,C25	J9,23		
KEYSWITCH	P1,C6	J3,10		
KEYSWITCH SIGNAL	P2,A24	J10,36		
KNOCKOFF SWITCH	P1,C31	J9,16		
LEVEL IN	P1,B2	J7,CENTER		
LEVEL OUT	P1,A2	J8,CENTER		
M1	P1,B39	J21,1		
M2	P1,A39	J21,2		
M3	P1,C38	J21,3		
M4	P1,A38	J21,4		
M5	P1,C37	J21,5		
M6	P1,B38	J21,6		
M7	P1,B37	J21,7		
M8	P1,A37	J21,8		
M9	P1,C36	J21,9		
M10	P1,A36	J21,10		
M11	P1,B36	J21,11		
M12	P1,C35	J21,12		
M13	P1,B35	J21,13		
M14	P1,A35	J21,14		
MAX CREDIT SW	P1,A9	J1,26		
METER DETECT	P1,A3	J3,14		
MPU PRESENT	P2,B14	J10,6		
NOT READY LAMP	P2,A3	J1,36	J4,17	
OPTIC POWER 1	P2,A33	J9,22		
OPTIC POWER 2	P2,B33	J9.30		
OPTIC POWER 3	P2,A34	J10,20		
OPTIC POWER 6	P2,A35	J3,35		
PLAY 1 CREDIT SW	P1,C9	J1,27		
PLAY MAX LAMP	P2,C7	J1,14		
PSEUDO COIN	P1,A32	J6,28		
REEL1 PHASE A	P2,C27	J6,25		
REEL1 PHASE B	P2,B27	J6,26		
REEL1 SENSE1	P2,C33	J6,7		
REEL1 SENSE2	P2,B32	J6,9		
REEL2 PHASE A	P2,A27	J6,24		
REEL2 PHASE B	P2,C28	J6,22		
REEL2 SENSE1	P2,A31	J6,11		
REEL2 SENSE2	P2,C31	J6,13		
REEL3 PHASE A	P2,B28	J6,23		
REEL3 PHASE B	P2,A28	J6,21		
REEL3 SENSE1	P2,B30	J6,16		
REEL3 SENSE2	P2,A30	J6,15		
REEL4 PHASE A	P2,C29	J6,20		
REEL4 PHASE B	P2,B29	J6,19		
REEL4 SENSE1	P2,B31	J6,12		
REEL4 SENSE2	P2,C32	J6,10		
REEL5 PHASE A	P2,A29	J6,18		
REEL5 PHASE B	P2,C30	J6,17		
REEL5 SENSE1	P2,A32	J6,8		
REEL5 SENSE2	P2,C34	J6,6		
RTS1	P1,C18	J19,8		
RTS4	P1,A21	J10,7		
RTS5	P1,C16	J18,8		
RXD1	P1,C17	J19,2		
RXD1(+)	P1,C14	J14,2		
RXD1(-)	P1,A14	J14,3		
RXD4	P1,A20	J10,5		

SIGNAL	CONNECTIONS			
	A	B	C	D
RXD5	P1,C15	J18,2		
RXD6(+)	P1,B15	J15,4	R8,1	
RXD6(-)	P1,A15	J15,11	JP2,1	
RXD6/DSR5	P1,B17	J18,4		
SLANT LOWER DOOR	P1,B32	J3,41		
SOUND D0	P2,C19	J9,50		
SOUND D1	P2,B19	J9,47		
SOUND D2	P2,A19	J9,45		
SOUND D3	P2,C20	J9,31		
SOUND D4	P2,B20	J9,34		
SOUND D5	P2,A20	J9,32		
SOUND D6	P2,C21	J9,29		
SOUND D7	P2,B21	J9,44		
SOUND OUT	P1,A1	J1,34	J3,38	
SPARE HARD METER	P2,A16	J3,13	J10,35	
SPARE VIA2 PA7	P1,B27	J9,24		
SPI CLOCK	P1,B30	J5,13		
SPI DATA	P1,C30	J5,14		
SPIN LAMP	P2,B7	J1,15		
SPIN SWITCH	P1,B10	J1,24		
SYSTEM RESET	P2,B26	J10,18		
TEST SWITCH	P1,A30	J6,27		
TILT RELAY	P2,C23	J9,17	J10,22	
TOTAL DROP METER	P2,A17	J3,16	J10,19	
TOTAL IN	ISO4,COLL	J13,4		
TOTAL IN COM	ISO4,EMITTER	J13,7	JT4,1	
TOTAL IN METER	P2,B18	J3,18	J10,15	
TOTAL IN RELAY	P2,B22	ISO4,CATHODE		
TOTAL IN SIGNAL	P2,A26	J10,32		
TOTAL OUT METER	P2,C18	J3,15	J10.17	
TOURNAMENT KEYSW	P1,C5	J3,12		
TOWER 4TH LAMP	P2,C4	J3,6		
TOWER MID LAMP	P2,A5	J3,11		
TXD1	P1,B18	J19,3		
TXD1(+)	P1,B13	J14,4		
TXD1(-)	P1,A13	J14,5		
TXD4	P1,B21	J10,3		
TXD5	P1,B16	J18,3		
TXD6(+)	P1,C13	J15,2		
TXD6(-)	P1,B14	J15,9		
TXD6/DTR5	P1,A17	J18,6		
VBB	P1,B20	P2,C15		

©2003 BALLY GAMING AND SYSTEMS

|| Meter Detect Board, 5-Meter AS-03356-0609


☑Upright ☑Slant

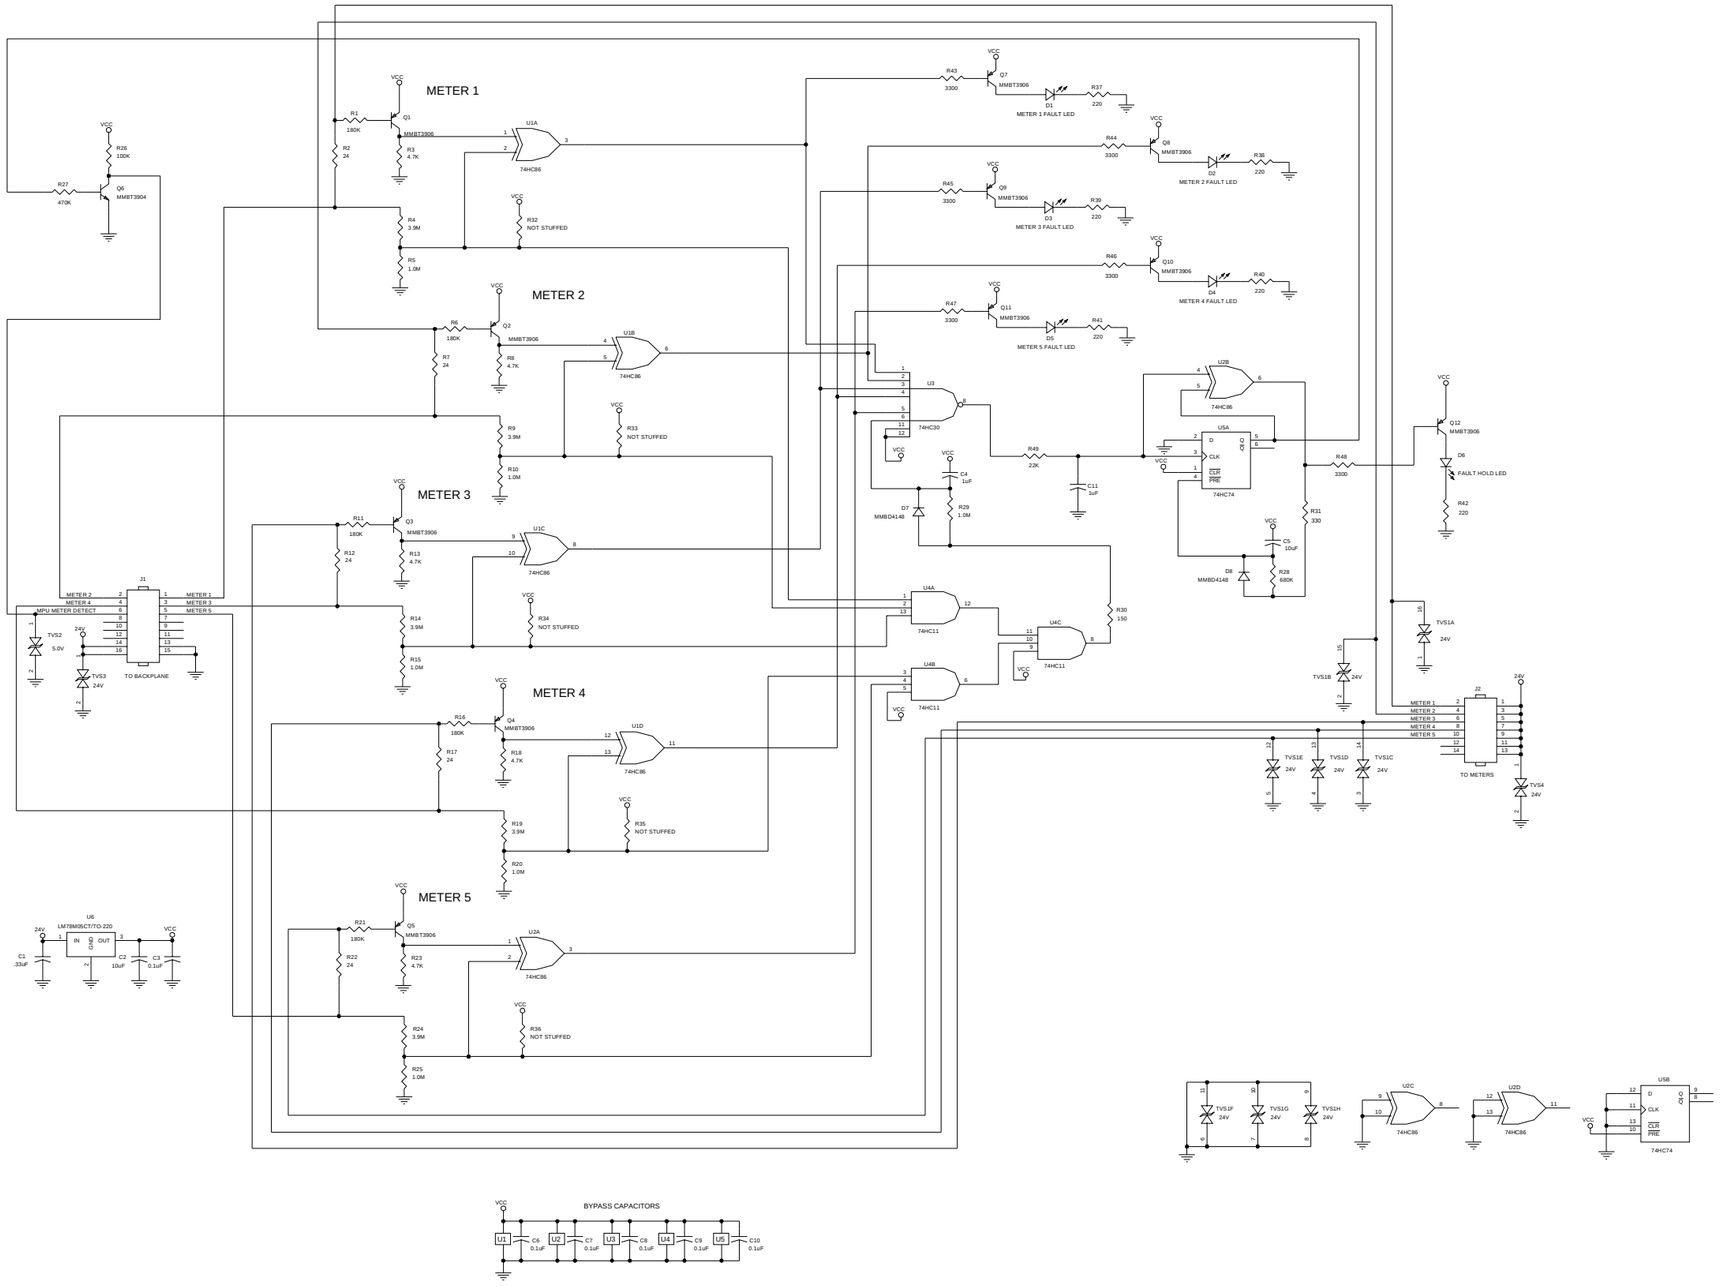

Card Rack / MPU Board

MPU Board (1 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

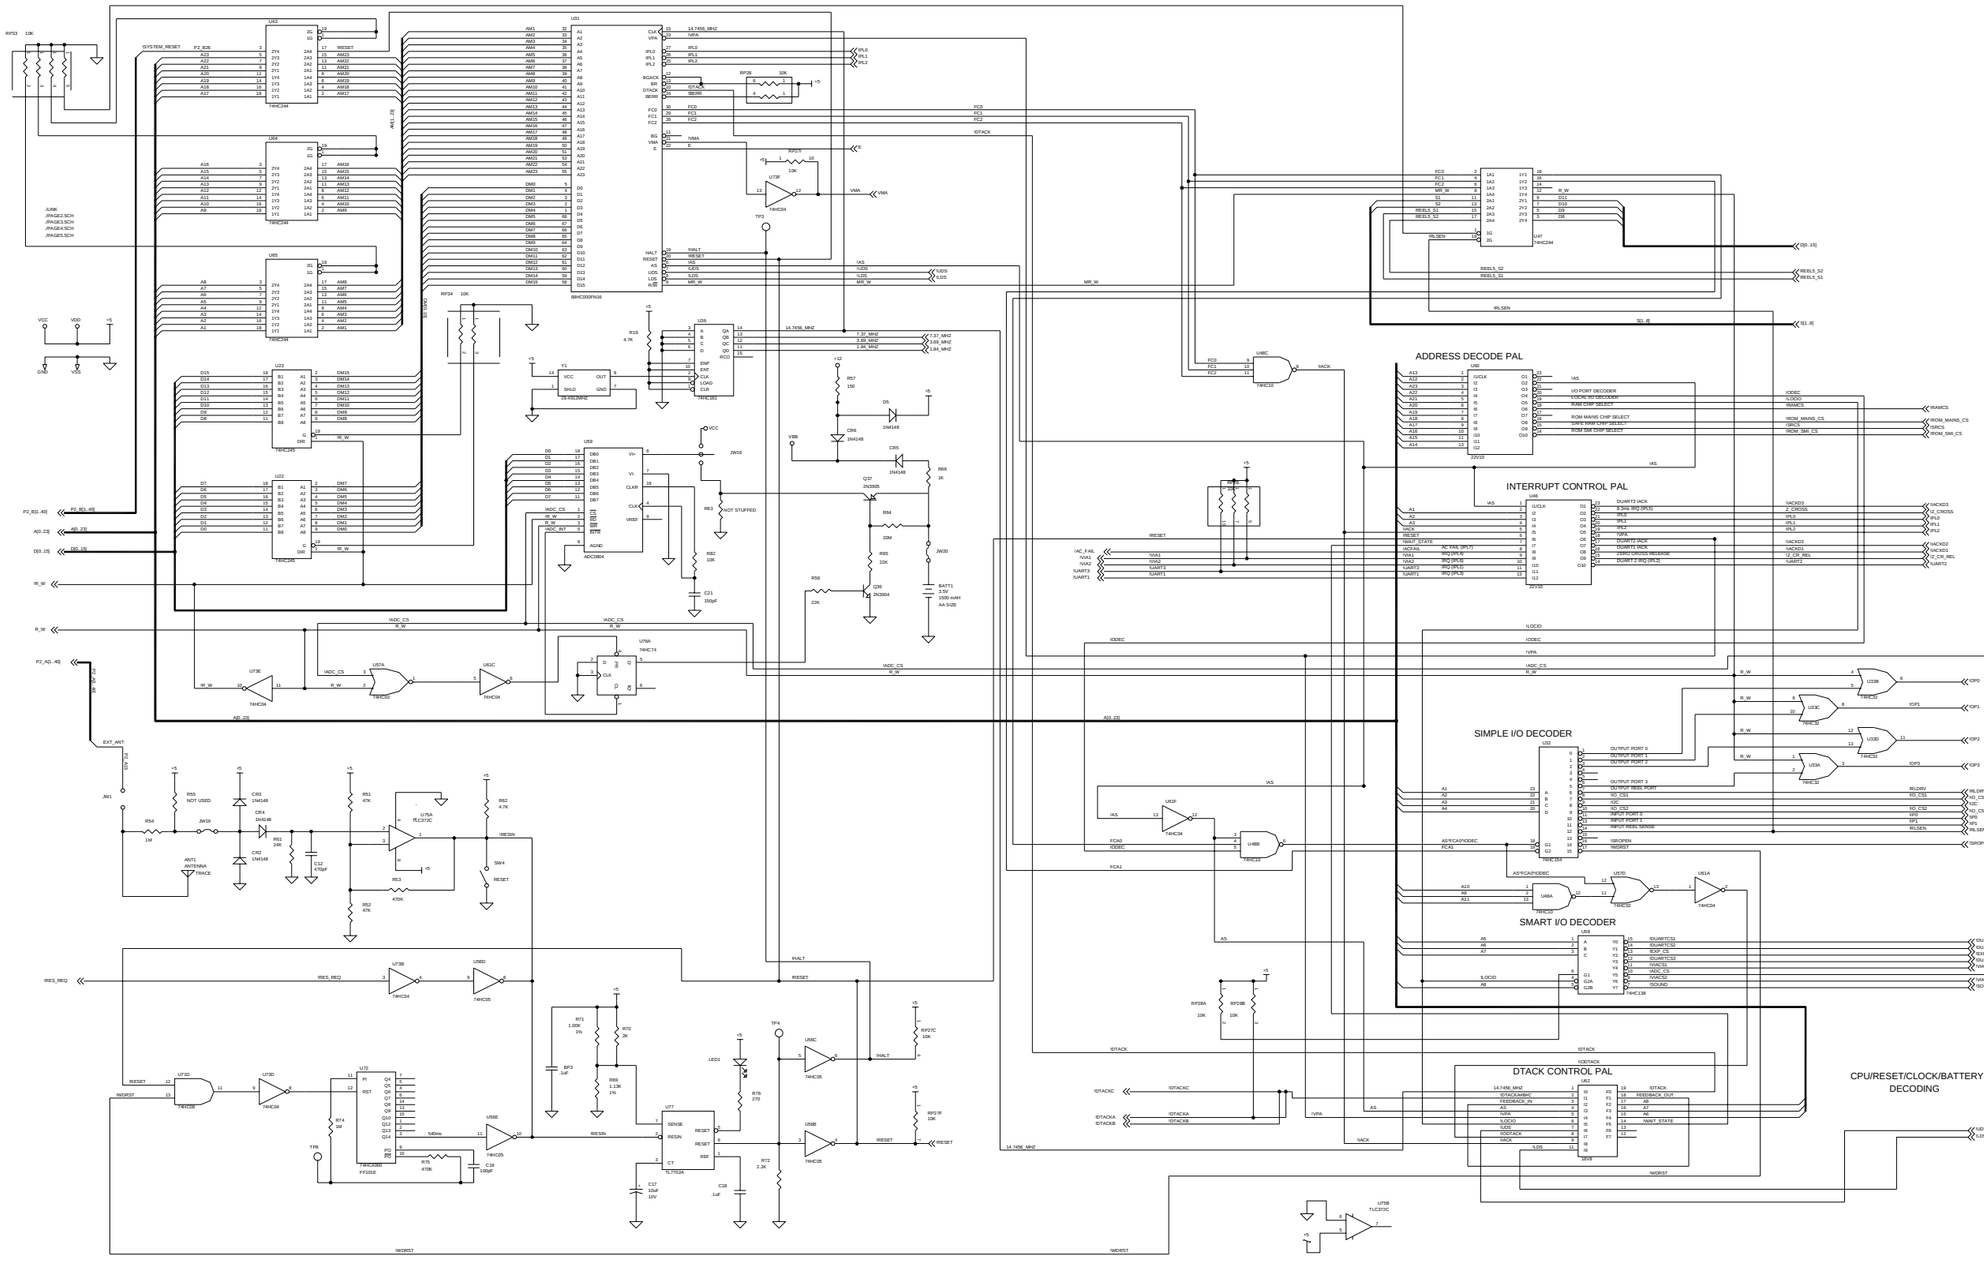



©2003 BALLY GAMING AND SYSTEMS


Card Rack / MPU Board

MPU Board (2 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

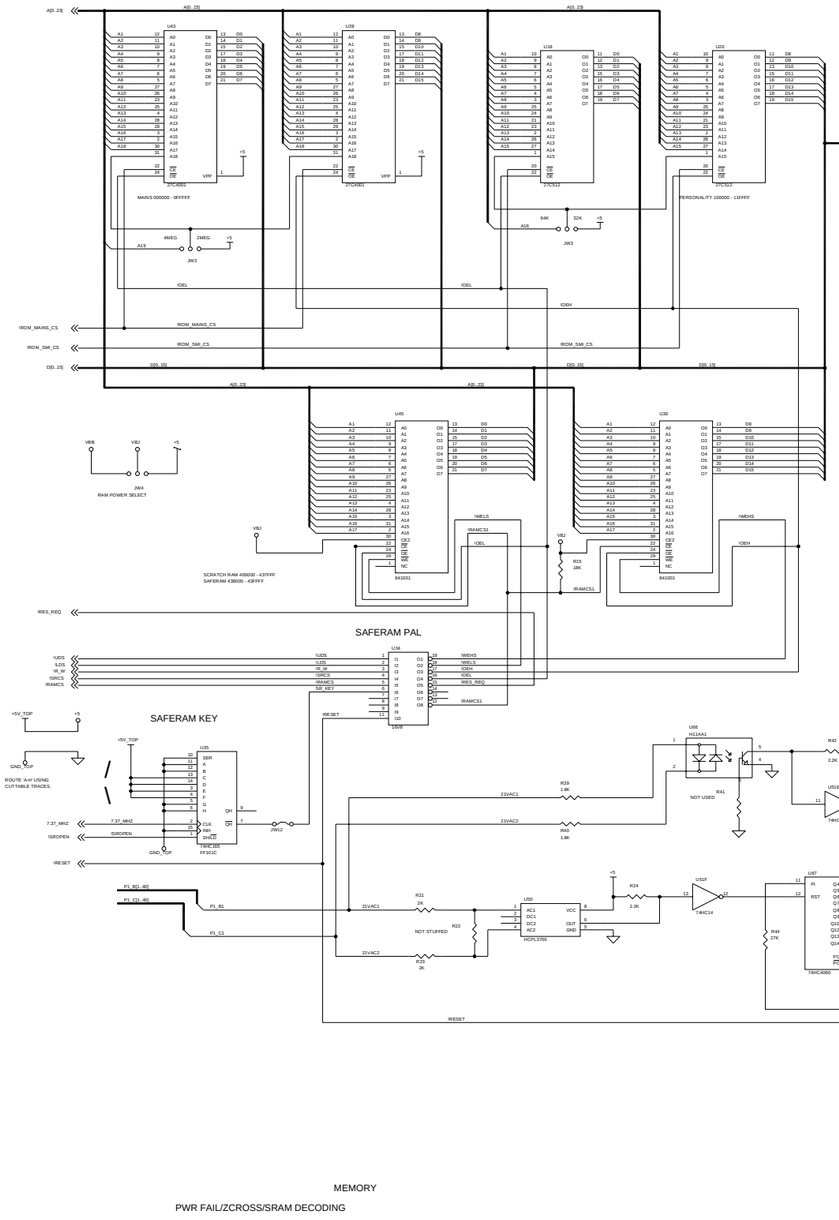

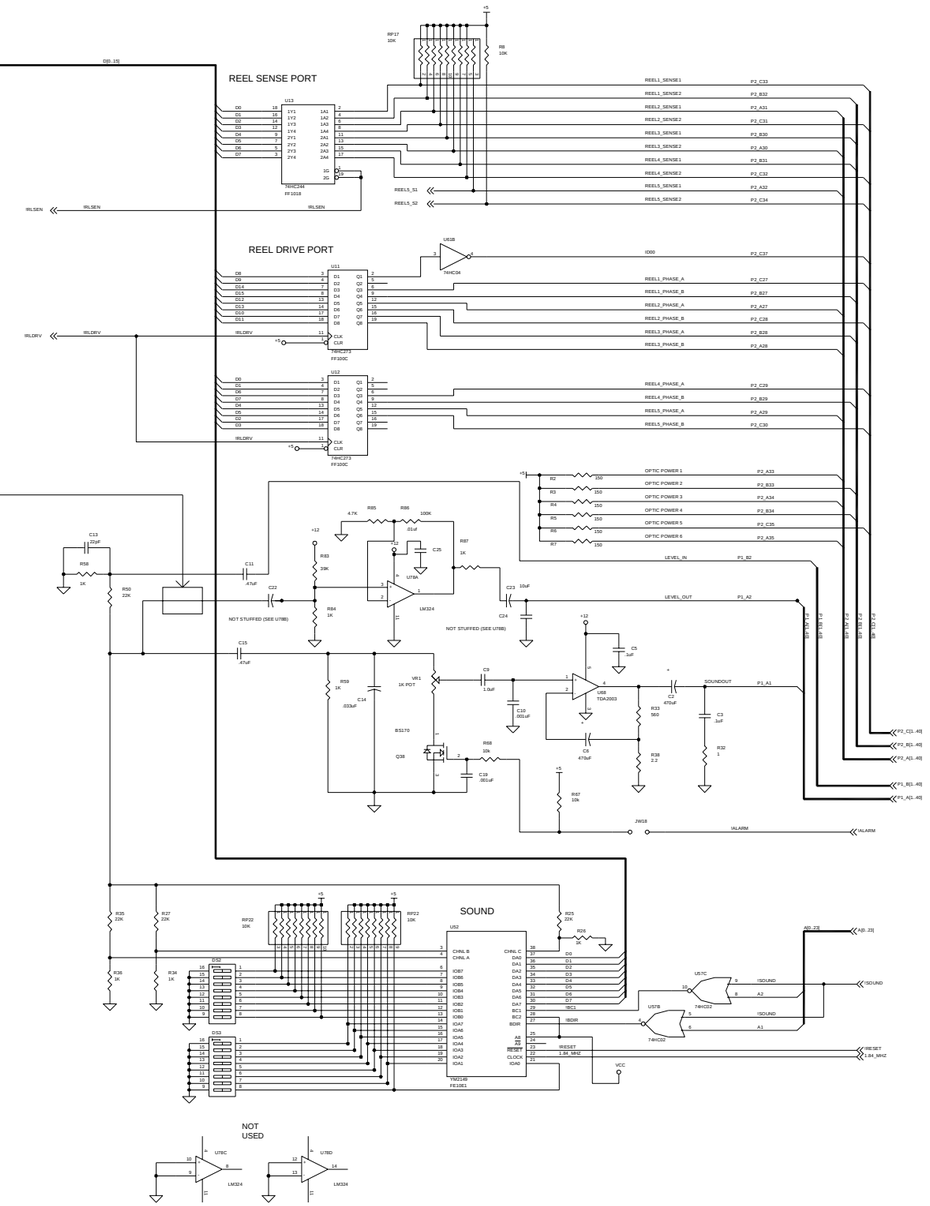

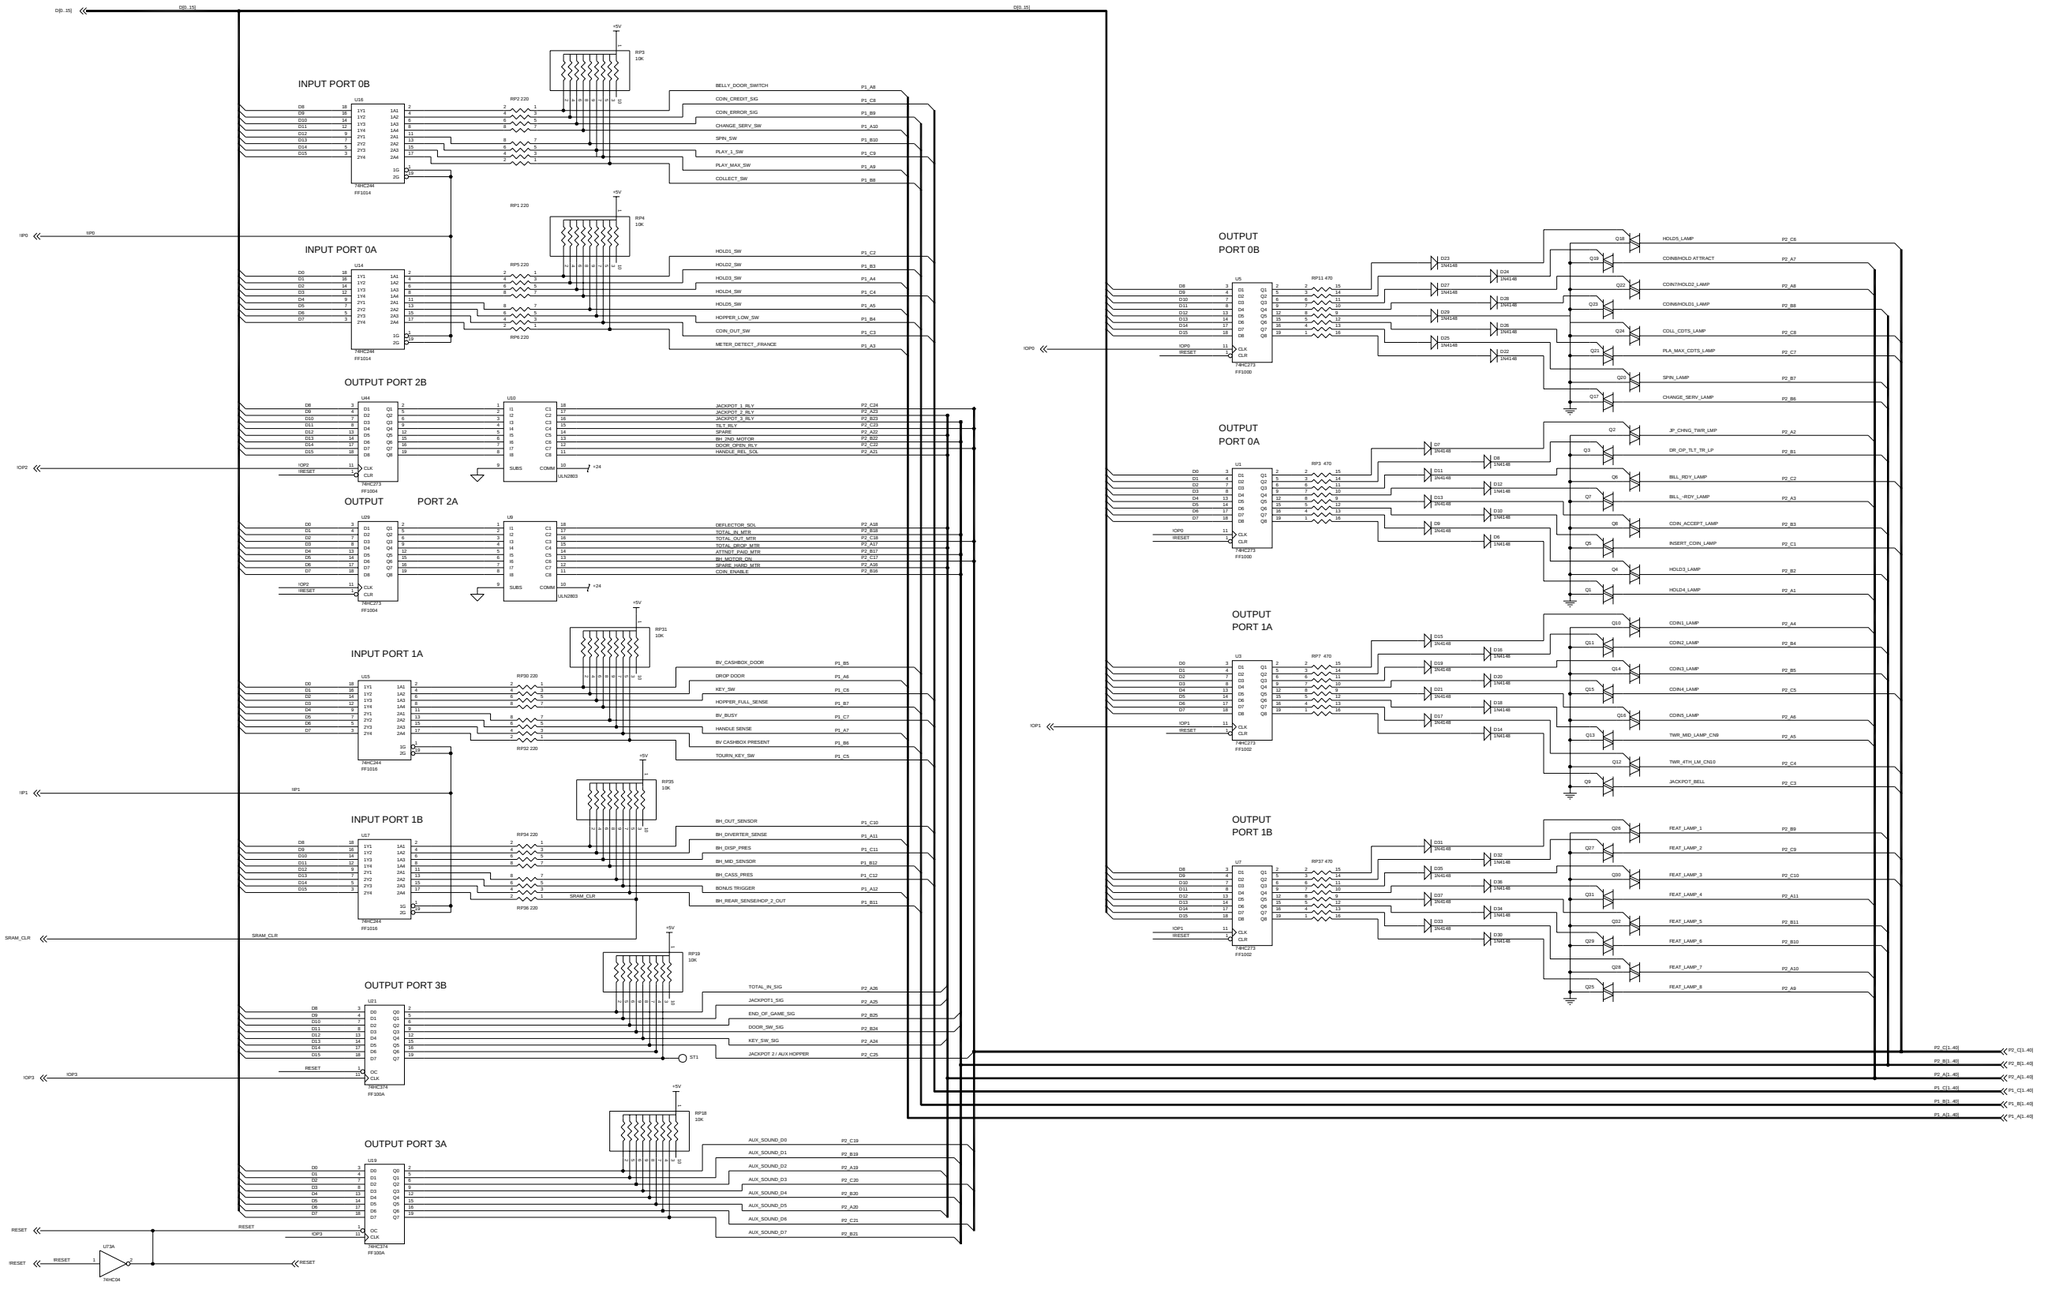


©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (4 of 5) AS-03356-0438


☑Upright ☑Slant ☑ESlant

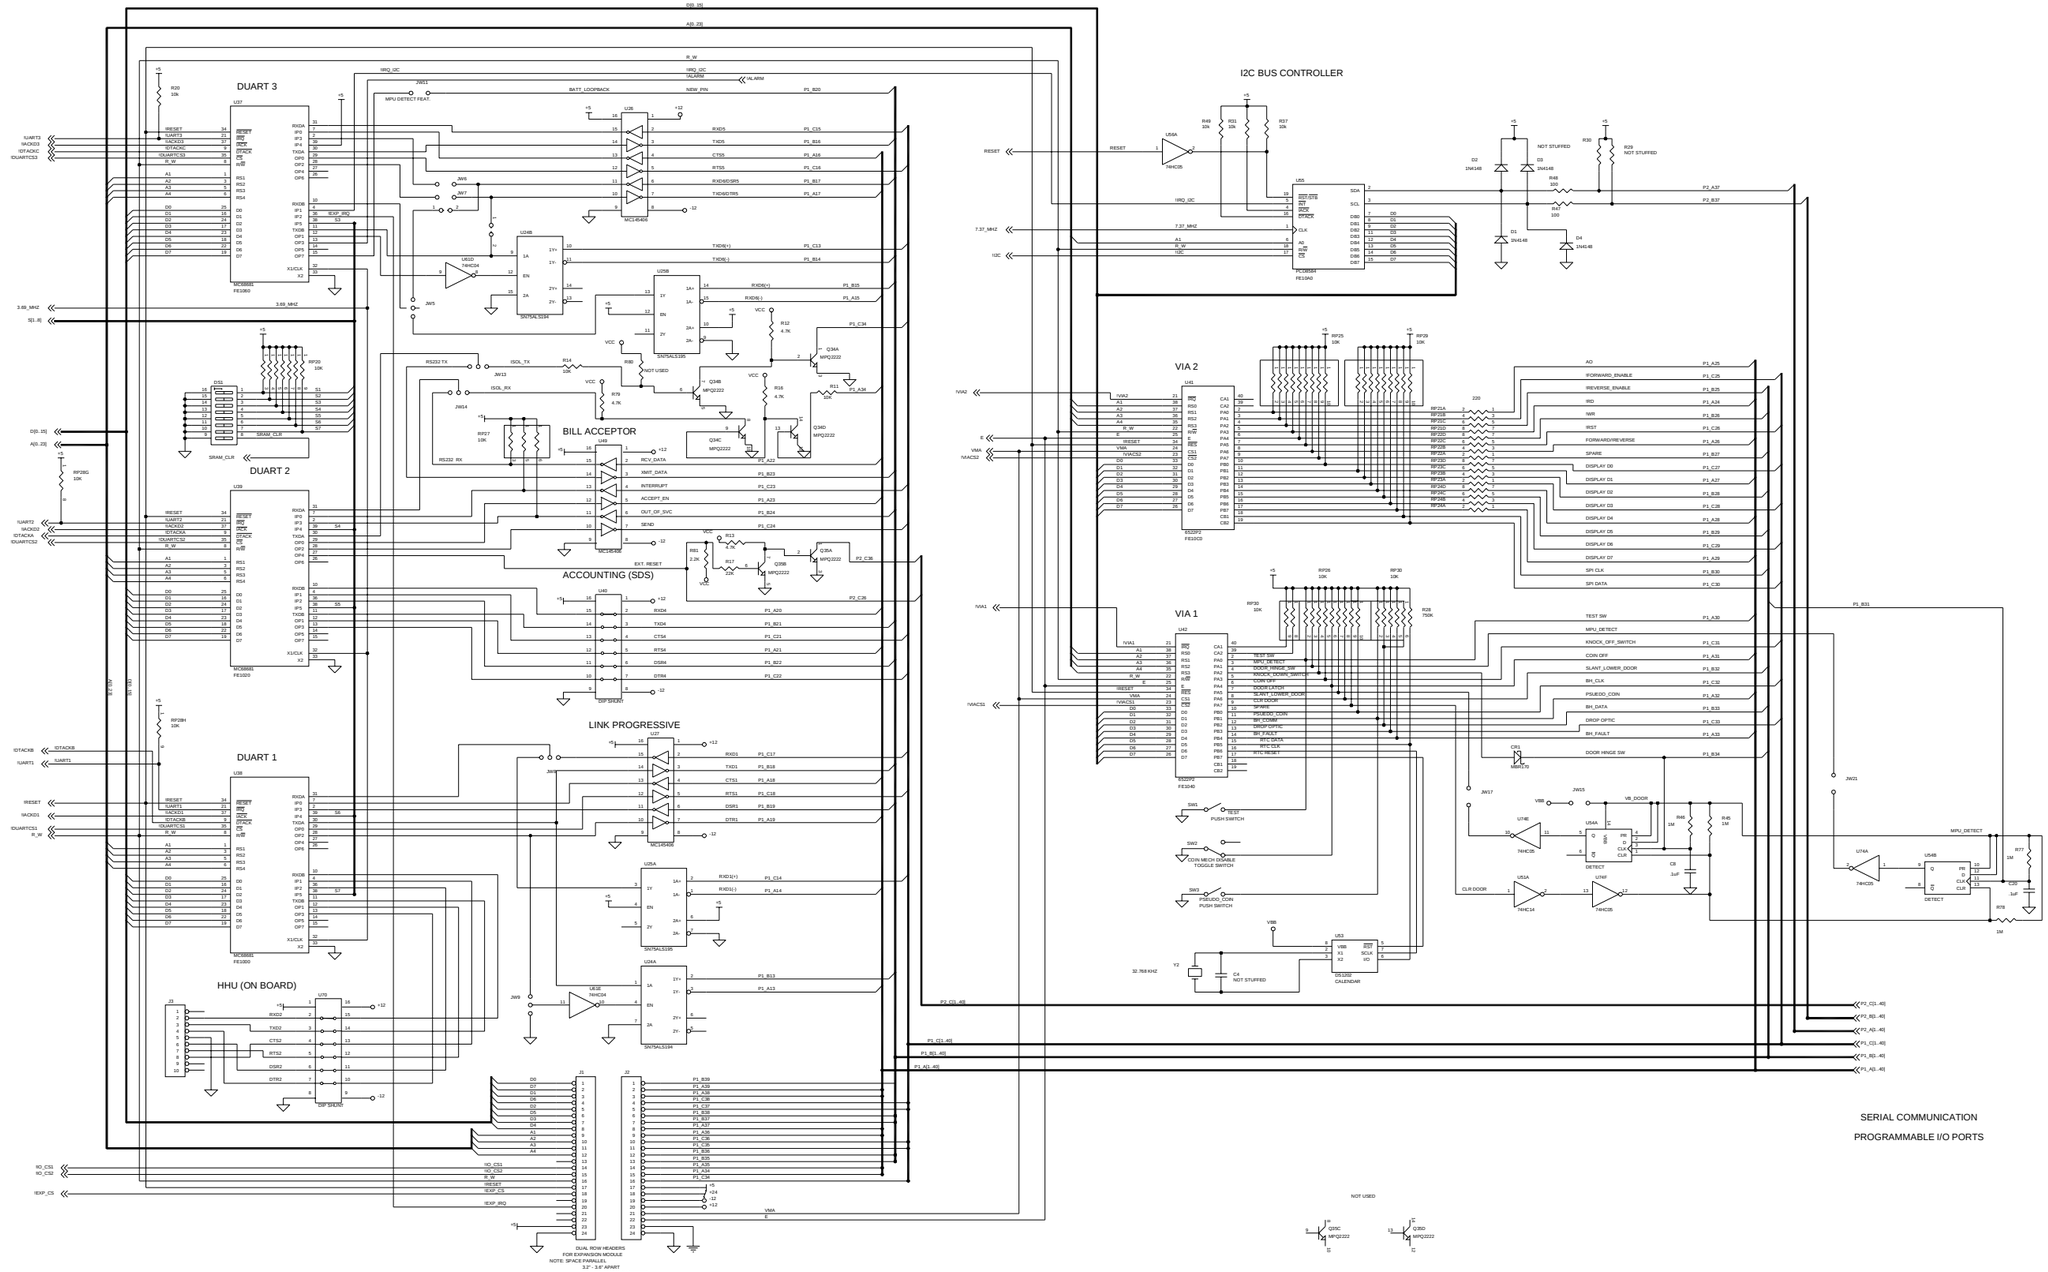

Card Rack / MPU Board


MPU Board (5 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

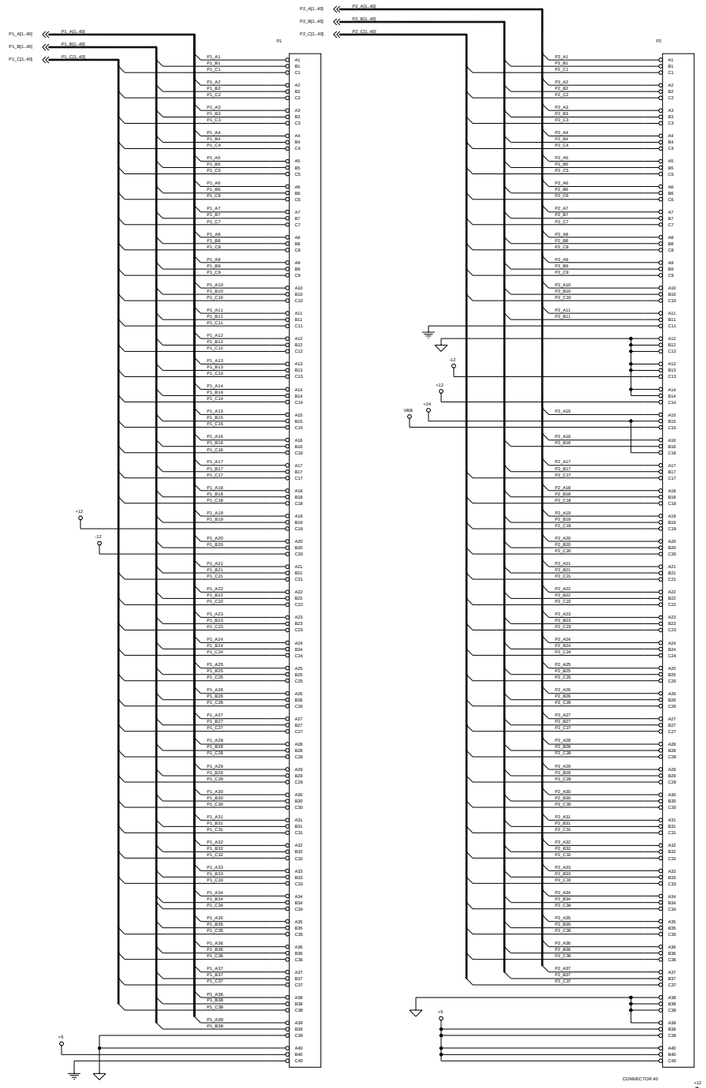

Refer	Part	Sheet
ANT1	ANTENNA	1
BATT1	3.5V	1
BP1	.01uf	5
BP3	.1uF	1
BP5-BP65	.01uf	5
BP66	.1uF	5
BP67	.01uf	5
BP68	.1uF	5
BP69-BP76	.01uf	5
BP77-BP84	.1uF	5
CR1	MBR170	4
CR2	1N4148	1
CR3	1N4148	1
CR4	1N4148	1
CR5	1N4148	1
CR6	1N4148	1
C2	470uF	2
C3	.1uF	2
C4	NOT STFD	4
C5	.1uF	2
C6	470uF	2
C7	100pF	2
C8	.1uF	4
C9	1.0uF	2
C10	.001uF	2
C11	.47uF	2
C12	470pF	1
C13	22pF	2
C14	.033uF	2
C15	.47uF	2
C16	100pF	1
C17	10uF	1
C18	.1uF	1
C19	.001uF	2
C20	.1uF	4
C21	150pF	1
C22	NOT	2
C23	10uF	2
C24	NOT STFD	2
C25	.01uf	2
DS1	SW	4
DS2	SW	2
DS3	SW	2
D1-D4	1N4148	4
D5	1N4148	1
D6-D37	1N4148	3
JT1	JTRACE	4
JT2	JTRACE	1
JW1	JUMPER	4
JW2	J3	2
JW3	J3	2
JW4	J3	2
JW5	J3	1
JW6-JW7	JUMPER	4
JW8	J3	4
JW9	J3	4
JW11	JUMPER	4
JW12	JUMPER	2
JW13	Jumper3	4
JW14	Jumper3	4
JW15	JUMPER	4
JW16	Jumper3	1
JW17	JUMPER	4
JW18	JUMPER	2
JW19	JUMPER	1
JW20	JUMPER	1
JW21	JUMPER	4
J1	HEAD24	4
J2	HEAD24	4
J3	HEAD10	4
LED1	LED	1
P1	CONN	5
P2	CONN	5
Q1-Q32	2N6070	3
Q34-Q35	MPQ2222	4
Q36	2N3904	1
Q37	2N3905	1
Q38	BS170	2
RP1-RP4	10K	3
RP5-RP12	220	3
RP13-RP16	470	3
RP17	10K	2
RP18-RP19	10K	3
RP20	10K	4
RP21-RP24	220	4
RP25-RP30	10K	4
RP31-RP32	10K	2
RP33-RP34	10K	1
R2-R7	150	2
R8	10K	2
R11	4.7K	4
R12	4.7K	4
R13	4.7K	4
R14	470	4
R15	18K	2
R16	4.7K	4
R17	22K	4
R19	4.7K	1
R20	10K	4
R21	2K	2
R22	NOT STFD	2
R23	2K	2
R24	2.2K	2
R25	22K	2
R26	1K	2
R27	22K	2
R28	750K	4
R29	NOT STFD	4
R30	NOT STFD	4
R31	10K	4
R32	1	4
R33	560	2
R34	1K	2
R35	22K	2
R36	1K	2
R37	10K	4
R38	2.2	2
R39	1.8K	2
R40	1.8K	2
R41	NOT STFD	2
R42	2.2K	2
R43	6.2K	2
R44	27K	2
R45	1M	4
R46	1M	4
R47	100	4
R48	100	4
R49	10K	4
R50	22K	2
R51	47K	1
R52	47K	1
R53	470K	1
R54	1M	1
R55	NOT STFD	1
R56	22K	1
R57	150	1
R58	1K	2
R59	1K	2
R60	2.2K	2
R61	24K	1
R62	4.7K	1
R63	NOT STFD	1
R64	20M	1
R65	22K	1
R66	1K	1
R67	10K	2
R68	10K	2
R69	1.13K	1
R70	2K	1
R71	1.00K	1
R72	2.2K	1
R73	2.2K	2
R74	1M	1
R75	470K	1
R76	270	1
R77	1M	4
R78	1M	4
R79	4.7K	4
R80	4.7K	4
R81	2.2K	4
R82	10K	1
R83	39K	2
R84	1K	2
R85	4.7K	2
R86	100K	2
R87	1K	2
ST1	SPARETP	3
SW1	PUSH	4
SW2	TOGGLSW	4
SW3	PUSH	4
SW4	RESET	1
TP1	TEST	2
TP2	TEST	2
TP3	TEST	1
TP4	TEST	1
TP5	TEST	2
TP6	TEST	2
TP7	TEST	2
TP8	TEST	1
U1	74HC273	3
U2	DELETED	3
U3	74HC273	3
U4	DELETED	3
U5	74HC273	3
U6	DELETED	3
U7	74HC273	3
U8	DELETED	3
U9	ULN2803	3
U10	ULN2803	3
U11	74HC273	2
U12	74HC273	2
U13	74HC244	2
U14	74HC244	3
U15	74HC244	3
U16	74HC244	3
U17	74HC244	3
U18	27C512	2
U19	74HC374	3
U20	27C512	2
U21	74HC374	3
U22	74HC245	1
U23	74HC245	1
U24A	75194	4
U24B	75194	4
U25A	75195	4
U25B	75195	4
U26	MAX1406	4
U27	MAX1406	4
U28	27C4001	2
U29	74HC273	3
U30	841001	2
U31	68FN16	1
U32	74HC154	1
U33	74HC32	1
U34	16V8	2
U35	74HC165	2
U36	74HC161	1
U37-U38	MC68681	4
U40	MAX1406	4
U41,U42	6522P2	4
U43	27C4001	2
U44	74HC273	3
U45	841001	2
U46	22V10	1
U47	74HC244	1
U48	74HC10	1
U49	MAX1406	4
U50	HCPL37	2
U51A	74HC14	4
U51E	74HC14	2
U51F	74HC14	2
U52	YM2149	2
U53	DS1202	4
U54	DETECT	4
U55	PCD8584	4
U56A	74HC05	4
U56B	74HC05	1
U56C	74HC05	1
U56D	74HC05	1
U56E	74HC05	1
U57A	74HC02	1
U57B	74HC02	2
U57C	74HC02	2
U57D	74HC02	1
U58	74HC138	1
U59	ADC0804	1
U60	22V10	1
U61A	74HC04	1
U61B	74HC04	2
U61C	74HC04	1
U61D	74HC04	4
U61E	74HC04	4
U61F	74HC04	1
U62	16V8	1
U63-U66	74HC244	1
U66	H11AA1	2
U67	744060	2
U68	TDA2003	2
U69A	74HC74	2
U69B	74HC74	2
U70	MAX1406	4
U71D	74HC08	1
U72	744060	1
U73A	74HC04	3
U73B	74HC04	1
U73C	74HC04	2
U73D	74HC04	1
U73E	74HC04	1
U73F	74HC04	1
U74	74HC05	4
U75A	TLC372C	1
U75B	TLC372C	1
U76A	74HC74	1
U77	TL7702A	1
U78	LM324	2
VR1	1K	2
Y1	29.4MHZ	1
Y2	32.7KHZ	4

SIGNAL NAME	PAGE
!AC_FAIL	1,2
!ADC_CS	1
!ADC_INT	1
!ALARM	2,4
!AS	1
!BC1	2
!BDIR	2
!BERR	1
!DTACK	1
!DTACKA	1,4
!DTACKB	1,4
!DTACKC	1,4
!DUARTCS1	1,4
!DUARTCS2	1,4
!DUARTCS3	1,4
!EXP_CS	1,4
!EXP_IRQ	4
!HALT	1
!I2C	1,4
!IACK	1
!IACKD1	1,4
!IACKD2	1,4
!IACKD3	1,4
!IC_CS1	1,4
!IC_CS2	1,4
!IODTACK	1,4
!IP0	1,3
!IP1	1,3
!IRQ_I2C	4
!LDS	1,2
!LOCIO	1
!OEH	2
!OEL	2
!OP0	1,3
!OP1	1,3
!OP2	1,3
!OP3	1,3
!R_W	1,2
!RAMCS	1,2
!RAMCS1	2
!RES_REQ	1,2
!RESET	1,2,3,4
!RESIN	1
!RLDRV	1,2
!RLSEN	1,2
!ROM_MAINS_CS	1,2
!ROM_SMI_CS	1,2
!SOUND	1,2
!SRCS	1,2
!SROPEN	1,2
!UART1	1,4
!UART2	1,4
!UART3	1,4
!UDS	1,2
!VIA1	1,4
!VIA2	1,4
!VIACS1	1,4
!VIACS2	1,4
!VMA	1
!VPA	1
!WAIT_STATE	1
!WDRST	1
!WEHS	2
!WELS	2
/Z_CR_REL	1,2
/Z_CROSS	1,2
1.84_MHZ	1,2
14.7456_MHZ	1
21VAC2	2
3.69_MHZ	1,4
7.37_MHZ	1,2,4
E	1,4
FC0	1
FC1	1
FC2	1
FCA0	1
FEEDBACK_IN	1
IODEC	1
IPL0	1
IPL1	1
IPL2	1
MR_W	1
R_W	1,4
RESET	3,4
SR_KEY	2
SRAM_CLR	3,4
VMA	1,4
ZCROSS	1

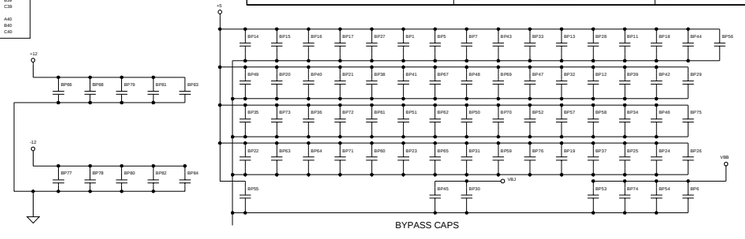

BACKPLANE CONNECTIONS




BYPASS CAPS

©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (1 of 9) AS-03356-0424


☑Upright ☑Slant ☑ESlant

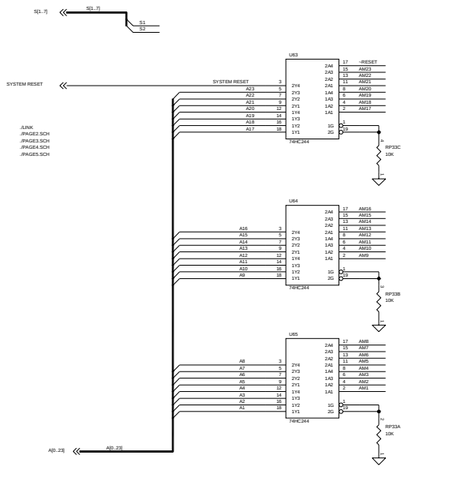
SYSTEM RESET
/LINK
/PAGE2.SCH
/PAGE3.SCH
/PAGE4.SCH
/PAGE5.SCH
A[0..23]
D[0..15]
/R/W
R/-W
/RESET
/RESET REQ
/WD RESET
/ADC SELECT
/ADC INT
EXT ANTENNA
ANTENNA TRACE
/RESN
/HALT
/IACK
/VMA
/E
/AS
/UDS
/LDS
/ROM BIM CS
/SAFERAM CS
/ROM MAINS CS
/RAM CS
/LOCAL I/O
/IO DECODE
/WAIT STATE
/DTACK
/VPA
/VIA CS
/UART CS
/ACIA CS
/VIA SELECT2
/EXPAND SELECT
/SOUND
/UART SELECT1
/UART SELECT2
/UART SELECT3
/VIA SELECT1
/ADC SELECT
/IO SELECT1
/IO SELECT2
/IO SELECT3
/INPORT0
/INPORT1
/OUTPORT0
/OUTPORT1
/OUTPORT2
/OUTPORT3
/REELDRIVE
/REELSENSE
/SR OPEN
/WD RESET
/ZEROCROSS
/ZEROCROSS REL
/UART2
/UART2 2 MHZ (PL12)
/IACKD3
/IACKD2
/IACKD1
/IACKD0
/DTACKA
/DTACKB
/DTACKC
/AC FAIL
/IRQ (PL6)
/IRQ (PL5)
/IRQ (PL4)
/IRQ (PL3)
/AC FAIL (PL7)
/NOT STUFFED
UNUSED
ADDRESS DECODE PAL
INTERRUPT CONTROL PAL
SIMPLE I/O DECODER
SMART I/O DECODER
DTACK CONTROL PAL
REELS SENSE1
REELS SENSE2
14.7456_MHZ
7.37 MHZ
3.69 MHZ
1.84 MHZ
2 MHZ
DUART3 IACK
DUART2 IACK
8.3mS IRQ (PL5)
2 MHZ (PL12)
OUTPUT PORT 0
OUTPUT PORT 1
OUTPUT PORT 2
OUTPUT PORT 3
AS/FC/A0*/ODEC
A0*/FC/AS*/ODEC
FC/AS*/ODEC
R/-W
SW1
SW2
SW3
SW4
RESET
JW1
JW2
JW3
JW4
JW5
JW6
JW7
JW8
JW9
JW10
JW11
JW12
JW13
JW14
JW15
JW16
JW17
JW18
JW19
JW20
BATT1
3.5V
1500 mAh
AA
Q27
2N2905
Q36
2N3904
LED1
TP1
TP2
TP3
TP4
TP5
TP6
TP7
TP8
TP9
TP10
TP11
TP12
TP13
TP14
TP15
TP16
TP17
TP18
TP19
TP20
TP21
TP22
TP23
TP24
TP25
TP26
TP27
TP28
TP29
TP30
TP31
TP32
TP33
TP34
TP35
TP36
TP37
TP38
TP39
TP40

Card Rack / MPU Board

MPU Board (2 of 9) AS-03356-0424


☑Upright ☑Slant ☑ESlant

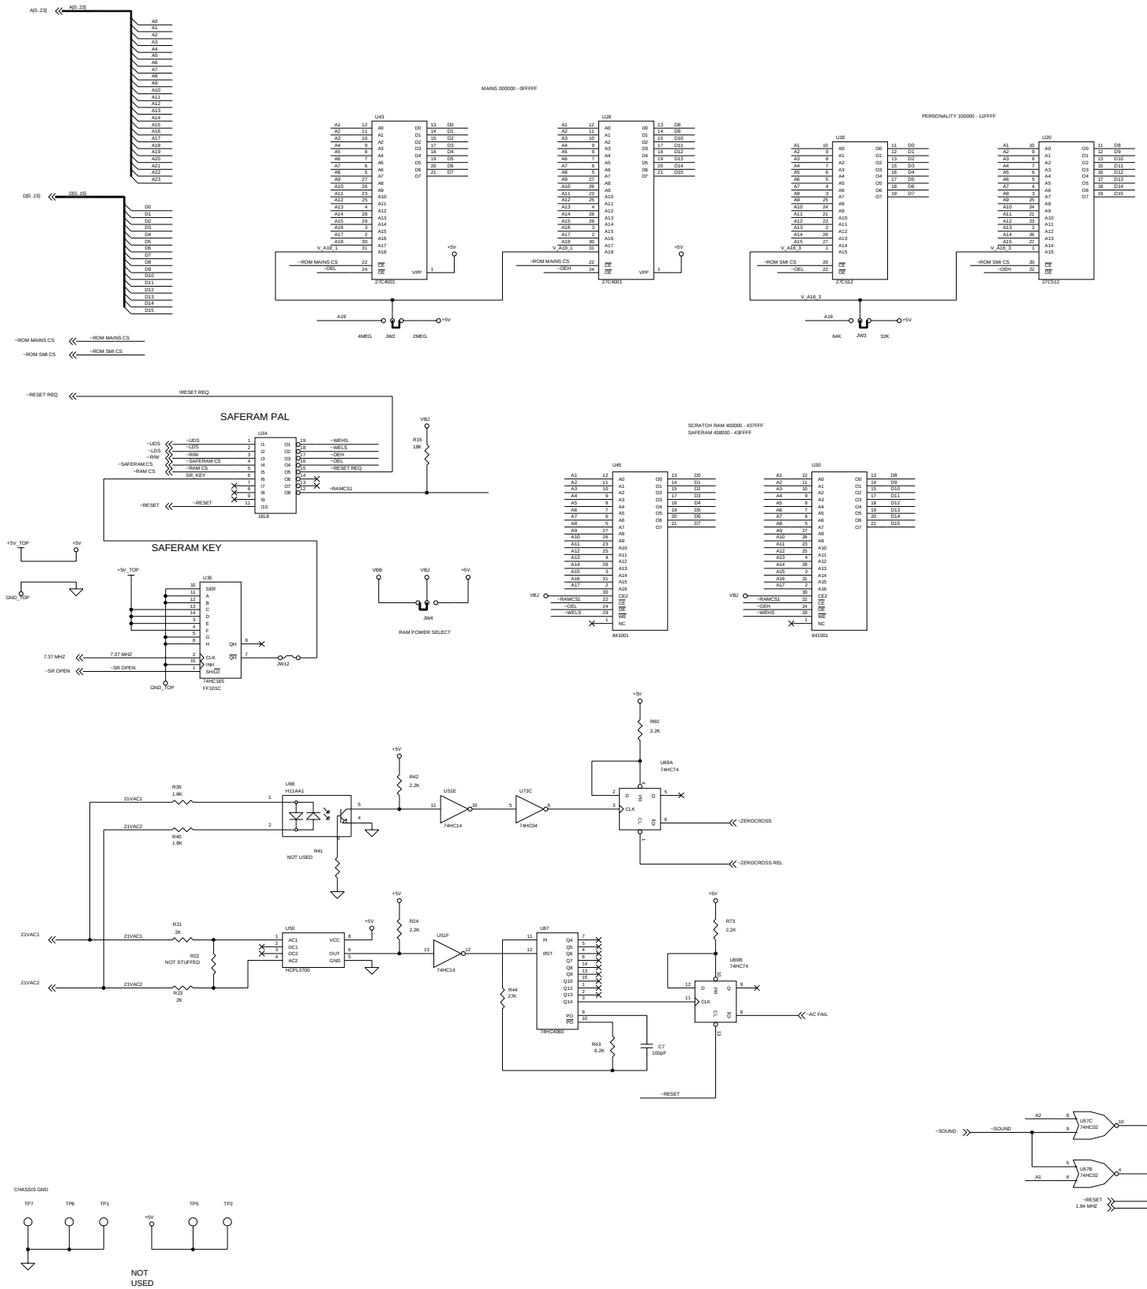

A[0..23]
D[0..15]
MAINS 000000 - 0FFFFF
PERSONALITY 100000 - 1FFFFF
U43
U28
U18
U20
27C4001
27C512
~ROM MAINS CS
~ROM SMI CS
~OEL
~OEH
V_A16_3
V_A17_3
V_A18_3
A19
A16
4MEG
JW2
2MEG
64K
JW3
32K
+5V
VPP
~RESET REQ
SAFERAM PAL
U34
~UDS
~LDS
~RW
~SAFERAM CS
~RAM CS
SR_KEY
~WEHS
~WELS
~RESET
~RAMCS1
R15
10K
18L8
SAFERAM KEY
+5V_TOP
GND_TOP
U35
74HC165
FF101C
7.37 MHZ
~SR OPEN
JW12
SCRATCH RAM 400000 - 437FFF
SAFERAM 438000 - 43FFFF
U45
U50
B41001
RAM POWER SELECT
J944
VBB
VBJ
R60
2.2K
U6A
74HC74
U6
H11AA1
NOT USED
R39
1.8K
R40
1.8K
R41
21VAC1
21VAC2
U5E
74HC14
U7C
74HC04
~ZEROCROSS
~ZEROCROSS REL
R42
2.2K
R24
2.2K
U5
HCPL3700
R21
2K
R22
NOT STUFFED
R23
2K
U5F
U67
74HC4060
R44
2.2K
R43
6.2K
C7
100pF
R73
2.2K
U6B
74HC74
~AC FAIL
~RESET
CHASSIS GND
TP7
TP6
TP1
TP5
TP2
NOT
USED
REEL SENSE PORT
U13
74HC244
FF1018
RP17
10K
R8
10K
RSENSE[0..9]
~REELSENSE
REELS SENSE1
REELS SENSE2
REEL1 SENSE1
REEL1 SENSE2
REEL2 SENSE1
REEL2 SENSE2
REEL3 SENSE1
REEL3 SENSE2
REEL4 SENSE1
REEL4 SENSE2
REEL5 SENSE1
REEL5 SENSE2
RSENSE0
RSENSE1
RSENSE2
RSENSE3
RSENSE4
RSENSE5
RSENSE6
RSENSE7
RSENSE8
RSENSE9
REEL DRIVE PORT
U11
U12
74HC273
FF100C
U16B
74HC04
~REELDRIVE
RDRIVE[0..10]
REEL1 PHASE A
REEL1 PHASE B
REEL2 PHASE A
REEL2 PHASE B
REEL3 PHASE A
REEL3 PHASE B
REEL4 PHASE A
REEL4 PHASE B
REEL5 PHASE A
REEL5 PHASE B
RDRIVE1
RDRIVE2
RDRIVE3
RDRIVE4
RDRIVE5
RDRIVE6
RDRIVE7
RDRIVE8
RDRIVE9
RDRIVE10
SOUND
U52
YM2149
F81E3
U17C
74HC02
U17B
74HC02
~SOUND
~RESET
1.84 MHZ
~BDIR
RP31
10K
RP32
10K
DS2
DS3
OPTIC POWER 1
OPTIC POWER 2
OPTIC POWER 3
DOOR OPTIC POWER
DROP OPTIC POWER
OPTIC POWER 6
OPTIC POWER 7
OPTIC POWER 8
OPTIC POWER 9
OPTIC POWER 10
OPTIC POWER 11
OPTIC POWER 12
OPTIC POWER 13
OPTIC POWER 14
OPTIC POWER 15
OPTIC POWER 16
OPTIC POWER 17
OPTIC POWER 18
OPTIC POWER

Card Rack / MPU Board

MPU Board (3 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

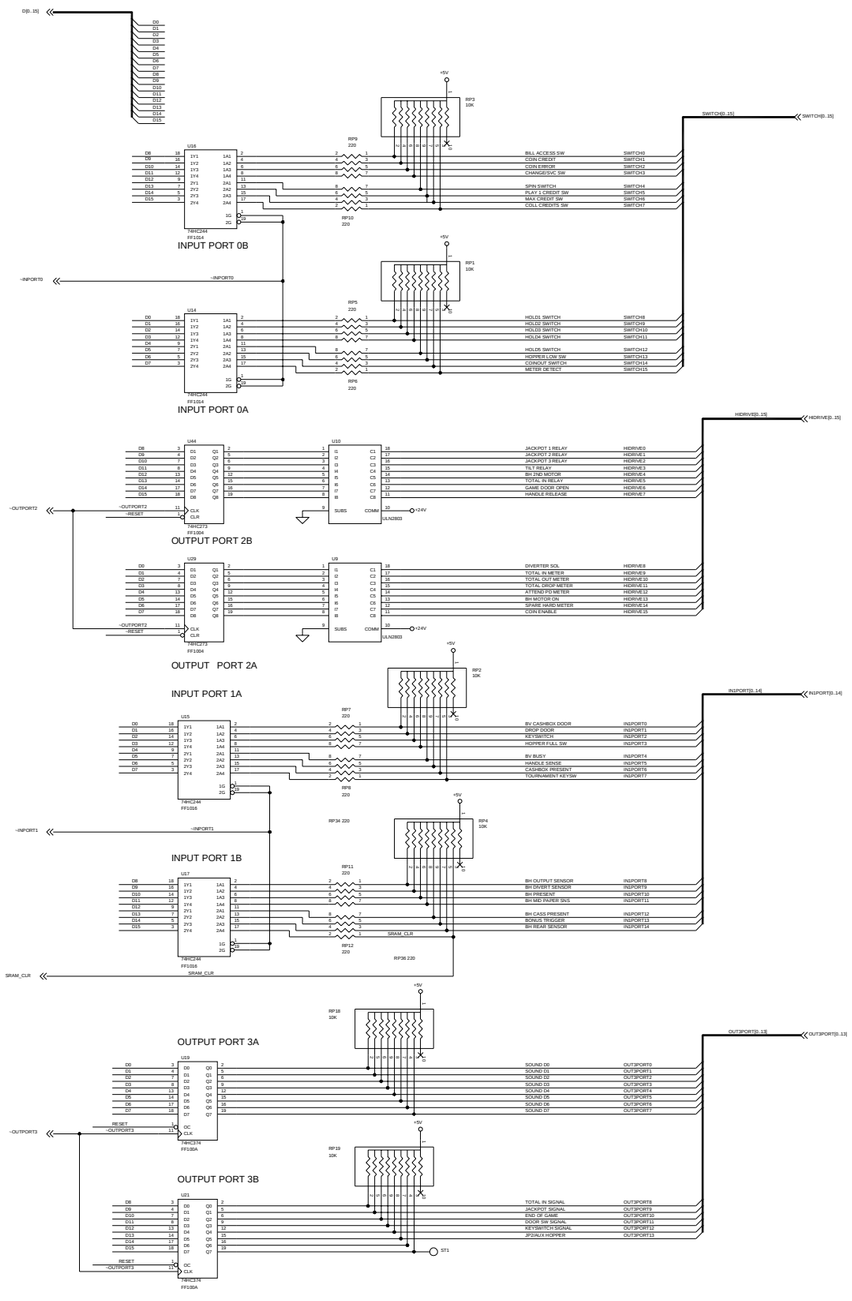


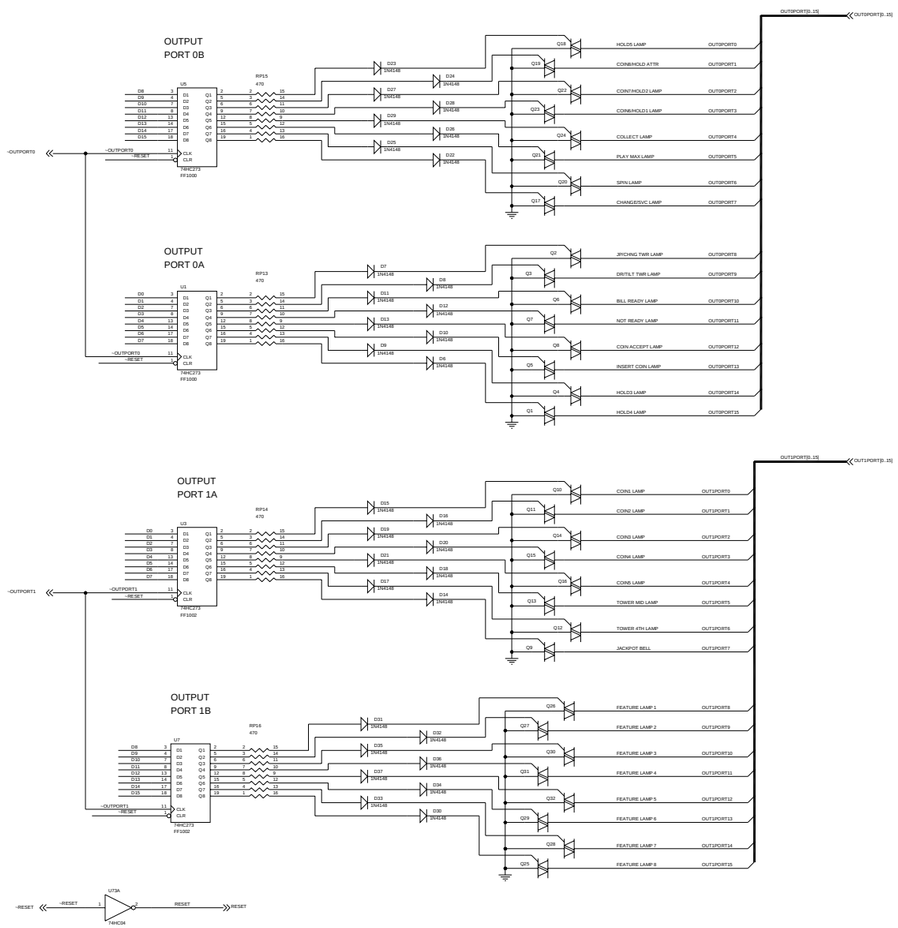

Card Rack / MPU Board

MPU Board (4 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

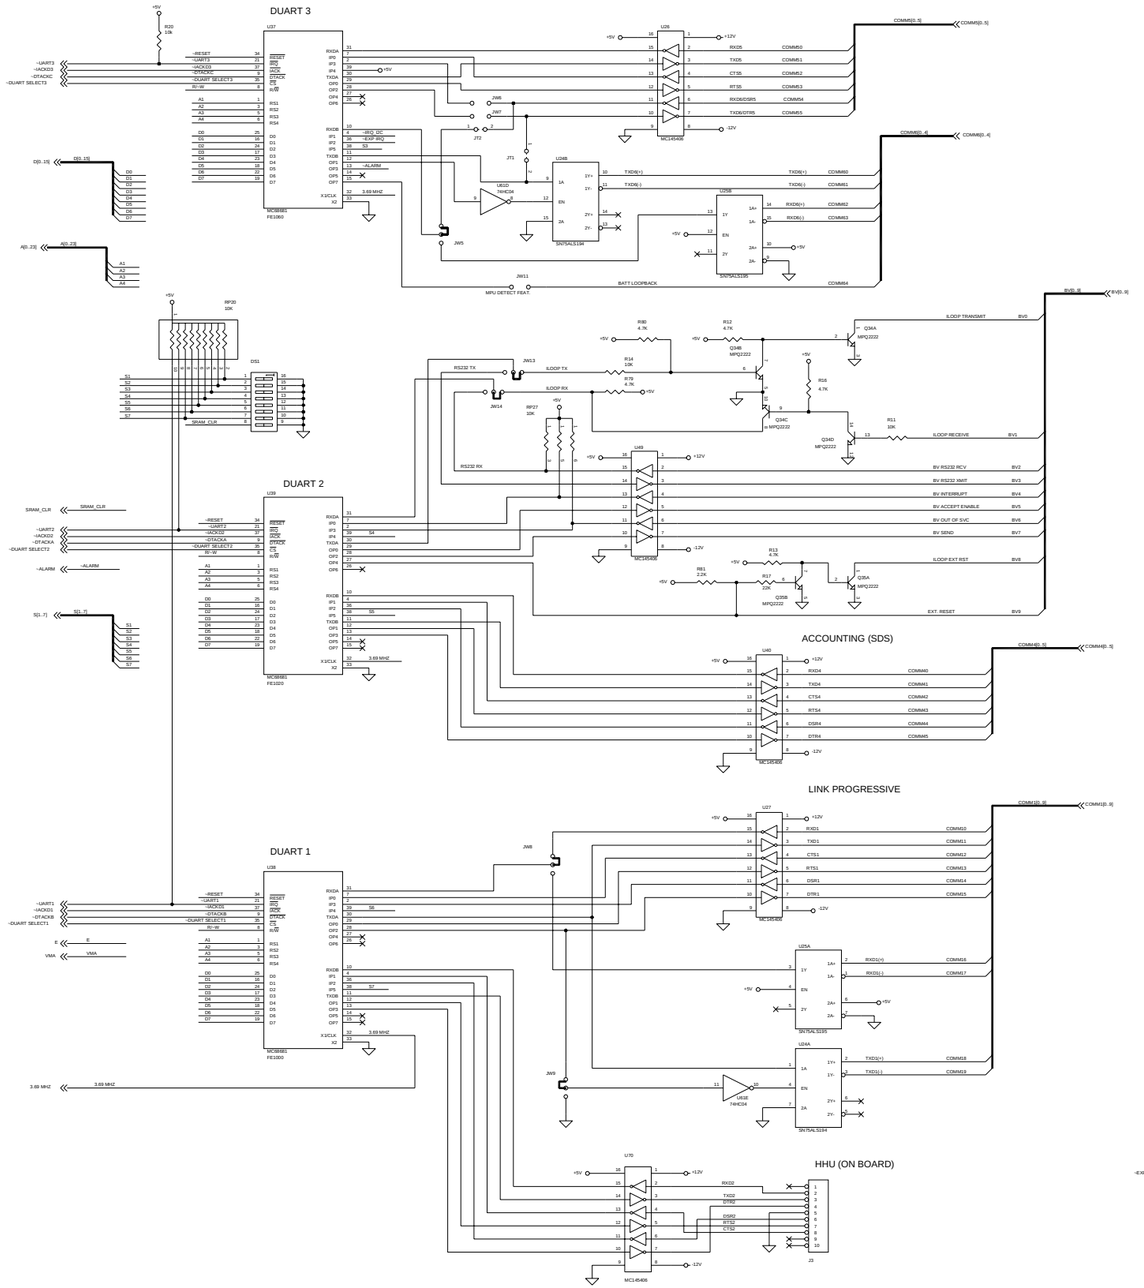

©2003 BALLY GAMING AND SYSTEMS


| - Revised, || - New

Card Rack / MPU Board


MPU Board (5 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant


P1

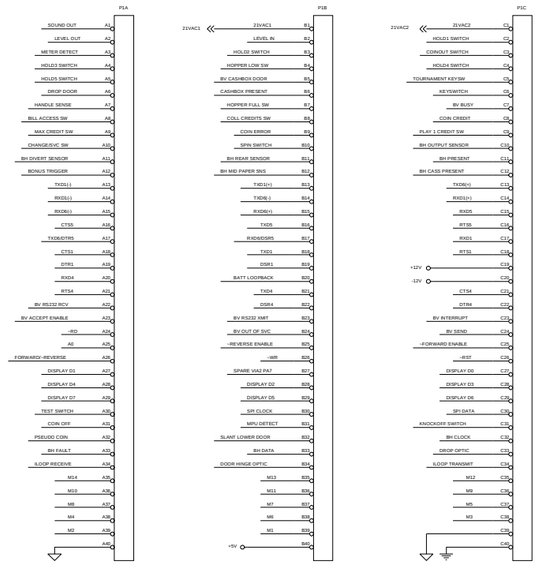


P2

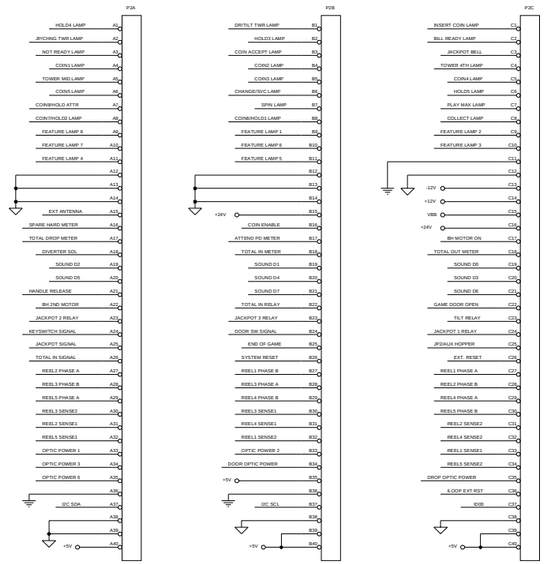

BYPASS CAPACITORS

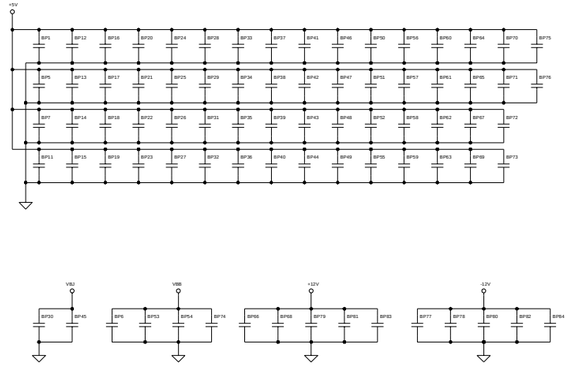

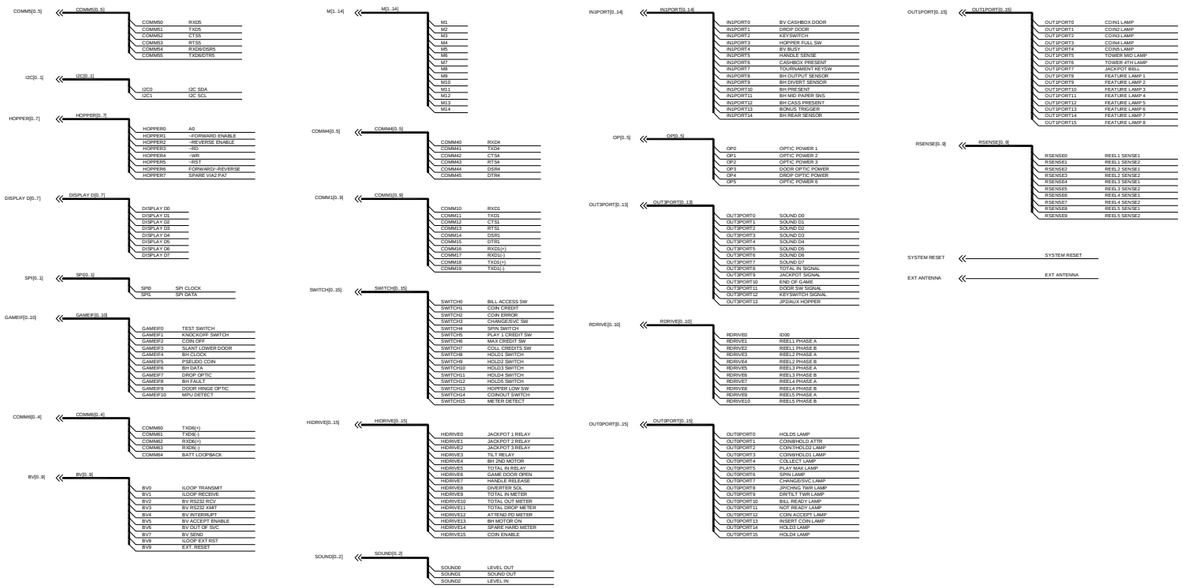

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot-6000™

COMPONENT LOCATOR CHART

COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID
ANT1	ANTENNA TRACE	1	C-10	BP74	.01uF	5	C-2	D27	1N4148	3	G-4	Q28	2N6070	3	C-3
BATT1	3.5V	1	D-6	BP75	.01uF	5	D-1	D28	1N4148	3	G-4	Q29	2N6070	3	C-4
BP1	.01uF	5	D-3	BP76	.01uF	5	D-1	D29	1N4148	3	G-4	Q30	2N6070	3	C-3
BP3	.1uF	1	B-8	BP77	.1uF	5	C-2	D30	1N4148	3	C-4	Q31	2N6070	3	C-4
BP5	.01uF	5	D-3	BP78	.1uF	5	C-1	D31	1N4148	3	C-4	Q32	2N6070	3	C-3
BP6	.01uF	5	C-3	BP79	.1uF	5	C-2	D32	1N4148	3	C-4	Q34A	MPQ2222	4	F-7
BP7	.01uF	5	D-3	BP80	.1uF	5	C-1	D33	1N4148	3	C-4	Q34B	MPQ2222	4	F-7
BP11	.01uF	5	D-3	BP81	.1uF	5	C-2	D34	1N4148	3	C-4	Q34C	MPQ2222	4	F-7
BP12	.01uF	5	D-3	BP82	.1uF	5	C-1	D35	1N4148	3	C-4	Q34D	MPQ2222	4	F-7
BP13	.01uF	5	D-3	BP83	.1uF	5	C-2	D36	1N4148	3	C-4	Q35A	MPQ2222	4	E-7
BP14	.01uF	5	D-3	BP84	.1uF	5	C-1	D37	1N4148	3	C-4	Q35B	MPQ2222	4	E-7
BP15	.01uF	5	D-3	CR1	MBR170	4	D-3	JT1	JUMPER TRACE	4	H-8	Q35C	MPQ2222	4	B-2
BP16	.01uF	5	D-3	CR2	1N4148	1	C-9	JT2	JUMPER TRACE	4	H-8	Q35D	MPQ2222	4	B-1
BP17	.01uF	5	D-3	CR3	1N4148	1	C-9	JW1	JUMPER 2	1	C-10	Q36	2N3904	1	D-6
BP18	.01uF	5	D-3	CR4	1N4148	1	C-9	JW2	JUMPER 3	2	G-9	Q37	2N3905	1	E-6
BP19	.01uF	5	D-3	CR5	1N4148	1	E-6	JW3	JUMPER 3	2	G-7	Q38	BS170	2	D-4
BP20	.01uF	5	D-3	CR6	1N4148	1	E-5	JW4	JUMPER 3	2	E-9	RP1	10K	3	G-9
BP21	.01uF	5	D-3	C2	470uF	2	D-2	JW5	JUMPER 3	4	G-8	RP2	10K	3	E-9
BP22	.01uF	5	D-3	C3	.1uF	2	D-2	JW6	JUMPER 2	4	H-8	RP3	10K	3	H-9
BP23	.01uF	5	D-3	C4	NOT STUFFED	4	C-4	JW7	JUMPER 2	4	H-8	RP4	10K	3	D-9
BP24	.01uF	5	D-3	C5	.1uF	2	D-3	JW8	JUMPER 3	4	C-8	RP5A	220	3	G-9
BP25	.01uF	5	D-3	C6	470uF	2	D-3	JW9	JUMPER 3	4	B-8	RP5B	220	3	G-9
BP26	.01uF	5	D-3	C7	100pF	2	C-8	JW11	JUMPER 2	4	G-8	RP5C	220	3	G-9
BP27	.01uF	5	D-3	C8	.1uF	4	C-2	JW12	JUMPER 2	2	E-9	RP5D	220	3	G-9
BP28	.01uF	5	D-3	C9	1.0uF	2	D-3	JW13	JUMPER 3	4	F-8	RP6A	220	3	F-9
BP29	.01uF	5	D-3	C10	.001uF	2	D-3	JW14	JUMPER 3	4	F-8	RP6B	220	3	F-9
BP30	.01uF	5	C-3	C11	.47uF	2	C-2	JW15	JUMPER 2	4	D-2	RP6C	220	3	F-9
BP31	.01uF	5	D-3	C12	470pF	1	C-9	JW16	JUMPER 3	1	E-7	RP6D	220	3	F-9
BP32	.01uF	5	D-3	C13	22pF	2	C-2	JW17	JUMPER 2	4	D-3	RP7A	220	3	D-9
BP33	.01uF	5	D-2	C14	.033uF	2	D-4	JW18	JUMPER 2	2	C-3	RP7B	220	3	D-9
BP34	.01uF	5	D-2	C15	.47uF	2	D-4	JW19	JUMPER 2	1	C-9	RP7C	220	3	D-9
BP35	.01uF	5	D-2	C16	100pF	1	A-8	JW20	JUMPER 2	1	D-6	RP7D	220	3	D-9
BP36	.01uF	5	D-2	C17	10uF	1	A-7	JW21	JUMPER 2	4	C-3	RP8A	220	3	D-9
BP37	.01uF	5	D-2	C18	.1uF	1	A-7	J1	HEADER 24	4	B-4	RP8B	220	3	D-9
BP38	.01uF	5	D-2	C19	.001uF	2	D-3	J2	HEADER 24	4	B-4	RP8C	220	3	D-9
BP39	.01uF	5	D-2	C20	.1uF	4	C-1	J3	HEADER 10	4	B-7	RP8D	220	3	D-9
BP40	.01uF	5	D-2	C21	150pF	1	E-7	LED1	LED	1	B-7	RP9A	220	3	H-9
BP41	.01uF	5	D-2	C22	.47uF	2	E-4	P1A	120 DIN	5	H-10	RP9B	220	3	H-9
BP42	.01uF	5	D-2	C23	10uF	2	E-3	P1B	120 DIN	5	H-9	RP9C	220	3	H-9
BP43	.01uF	5	D-2	C24	.1uF	2	E-3	P1C	120 DIN	5	H-8	RP9D	220	3	H-9
BP44	.01uF	5	D-2	C25	.01uF	2	E-4	P2A	120 DIN	5	H-6	RP10A	220	3	G-9
BP45	.01uF	5	C-3	DS1	SW DIP-8	4	F-9	P2B	120 DIN	5	H-5	RP10B	220	3	G-9
BP46	.01uF	5	D-2	DS2	SW DIP-8	2	B-3	P2C	120 DIN	5	H-4	RP10C	220	3	G-9
BP47	.01uF	5	D-2	DS3	SW DIP-8	2	B-3	Q1	2N6070	3	E-3	RP10D	220	3	G-9
BP48	.01uF	5	D-2	D1	1N4148	4	G-3	Q2	2N6070	3	F-3	RP11A	220	3	C-9
BP49	.01uF	5	D-2	D2	1N4148	4	G-3	Q3	2N6070	3	F-3	RP11B	220	3	C-9
BP50	.01uF	5	D-2	D3	1N4148	4	G-3	Q4	2N6070	3	E-3	RP11C	220	3	C-9
BP51	.01uF	5	D-2	D4	1N4148	4	G-3	Q5	2N6070	3	E-3	RP11D	220	3	C-9
BP52	.01uF	5	D-2	D5	1N4148	1	E-5	Q6	2N6070	3	F-3	RP12A	220	3	C-9
BP53	.01uF	5	C-3	D6	1N4148	3	E-4	Q7	2N6070	3	F-3	RP12B	220	3	C-9
BP54	.01uF	5	C-3	D7	1N4148	3	F-4	Q8	2N6070	3	F-3	RP12C	220	3	C-9
BP55	.01uF	5	D-2	D8	1N4148	3	F-4	Q9	2N6070	3	D-3	RP12D	220	3	C-9
BP56	.01uF	5	D-2	D9	1N4148	3	F-4	Q10	2N6070	3	E-3	RP13A	470	3	F-5
BP57	.01uF	5	D-2	D10	1N4148	3	F-4	Q11	2N6070	3	E-3	RP13B	470	3	F-5
BP58	.01uF	5	D-2	D11	1N4148	3	F-4	Q12	2N6070	3	D-3	RP13C	470	3	F-5
BP59	.01uF	5	D-2	D12	1N4148	3	F-4	Q13	2N6070	3	D-3	RP13D	470	3	F-5
BP60	.01uF	5	D-1	D13	1N4148	3	F-4	Q14	2N6070	3	D-3	RP13E	470	3	F-5
BP61	.01uF	5	D-1	D14	1N4148	3	D-4	Q15	2N6070	3	D-3	RP13F	470	3	F-5
BP62	.01uF	5	D-1	D15	1N4148	3	E-4	Q16	2N6070	3	D-3	RP13G	470	3	F-5
BP63	.01uF	5	D-1	D16	1N4148	3	E-4	Q17	2N6070	3	F-3	RP13H	470	3	F-5
BP64	.01uF	5	D-1	D17	1N4148	3	D-4	Q18	2N6070	3	G-3	RP14A	470	3	D-5
BP65	.01uF	5	D-1	D18	1N4148	3	D-4	Q19	2N6070	3	G-3	RP14B	470	3	D-5
BP66	.1uF	5	C-2	D19	1N4148	3	D-4	Q20	2N6070	3	G-3	RP14C	470	3	D-5
BP67	.01uF	5	D-1	D20	1N4148	3	D-4	Q21	2N6070	3	G-3	RP14D	470	3	D-5
BP68	.1uF	5	C-2	D21	1N4148	3	D-4	Q22	2N6070	3	G-3	RP14E	470	3	D-5
BP69	.01uF	5	D-1	D22	1N4148	3	G-4	Q23	2N6070	3	G-3	RP14F	470	3	D-5
BP70	.01uF	5	D-1	D23	1N4148	3	G-4	Q24	2N6070	3	G-3	RP14G	470	3	D-5
BP71	.01uF	5	D-1	D24	1N4148	3	G-4	Q25	2N6070	3	C-4	RP14H	470	3	D-5
BP72	.01uF	5	D-1	D25	1N4148	3	G-4	Q26	2N6070	3	C-3	RP15A	470	3	G-5
BP73	.01uF	5	D-1	D26	1N4148	3	G-4	Q27	2N6070	3	C-4	RP15B	470	3	G-5

©2003 BALLY GAMING AND SYSTEMS

COMPONENT LOCATOR CHART

COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID
RP15C	470	3	G-5	R7	150	2	B-2	R80	4.7K	4	F-8	U48B	74HC10	1	D-4
RP15D	470	3	G-5	R8	10K	2	H-3	R81	2.2K	4	E-7	U48C	74HC10	1	G-6
RP15E	470	3	G-5	R11	10K	4	F-6	R82	10K	1	E-7	U49	145406	4	F-8
RP15F	470	3	G-5	R12	4.7K	4	F-7	R83	39K	2	E-4	U50	HCPL3700	2	C-9
RP15G	470	3	G-5	R13	4.7K	4	E-7	R84	1K	2	E-4	U51A	74HC14	4	C-2
RP15H	470	3	G-5	R14	10K	4	F-8	R85	4.7K	2	D-4	U51E	74HC14	2	D-8
RP16A	470	3	C-5	R15	18K	2	F-9	R86	39K	2	D-4	U51F	74HC14	2	C-8
RP16B	470	3	C-5	R16	4.7K	4	F-7	R87	1K	2	E-3	U52	YM2149	2	C-5
RP16C	470	3	C-5	R17	22K	4	E-7	ST1	SPARE TAP	3	A-9	U53	DS1202	4	C-4
RP16D	470	3	C-5	R19	4.7K	1	D-6	SW1	TEST SWITCH	4	D-4	U54A	74HC74	4	D-2
RP16E	470	3	C-5	R20	10K	4	H-10	SW2	COIN MECH DISABL	4	D-4	U54B	74HC74	4	C-2
RP16F	470	3	C-5	R21	2K	2	C-10	SW3	PSEUDO COIN	4	C-4	U55	PCD8584	4	G-4
RP16G	470	3	C-5	R22	NOT STUFFED	2	C-10	SW4	RESET	1	C-8	U56A	74HC05	4	H-4
RP16H	470	3	C-5	R23	2K	2	C-10	TP1	TEST PT GND	2	B-10	U56B	74HC05	1	B-6
RP17	10K	2	H-3	R24	2.2K	2	C-9	TP2	TEST PT 5V.	2	B-9	U56C	74HC05	1	B-6
RP18	10K	3	C-9	R25	22K	2	C-5	TP3	TEST PT ~HALT	1	F-6	U56D	74HC05	1	B-9
RP19	10K	3	B-9	R26	1K	2	C-5	TP4	TEST PT RESET	1	B-7	U56E	74HC05	1	A-8
RP20	10K	4	G-10	R27	22K	2	C-5	TP5	TEST PT +5V	2	B-10	U57A	74HC02	1	D-9
RP21A	220	4	F-3	R28	750K	4	E-3	TP6	TEST PT GND	2	B-10	U57B	74HC02	2	B-6
RP21B	220	4	F-3	R29	NOT STUFFED	4	G-2	TP7	TEST PT GND	2	B-10	U57C	74HC02	2	B-6
RP21C	220	4	F-3	R30	NOT STUFFED	4	G-2	TP8	TEST PT WDT	1	A-9	U57D	74HC02	1	B-3
RP21D	220	4	F-3	R31	10K	4	G-4	U1	74HC273	3	F-5	U58	74HC138	1	D-3
RP22A	220	4	F-3	R32	1	2	D-2	U3	74HC273	3	D-5	U59	ADC0804	1	E-8
RP22B	220	4	F-3	R33	560	2	D-3	U5	74HC273	3	G-5	U60	22V10	1	F-2
RP22C	220	4	F-3	R34	1K	2	C-5	U7	74HC273	3	C-5	U61A	74HC04	1	B-3
RP22D	220	4	F-3	R35	22K	2	C-5	U9	ULN2803	3	E-9	U61B	74HC04	2	F-3
RP23A	220	4	F-3	R36	1K	2	C-5	U10	ULN2803	3	F-9	U61C	74HC04	1	D-9
RP23B	220	4	F-3	R37	10K	4	H-4	U11	74HC273	2	F-4	U61D	74HC04	4	G-8
RP23C	220	4	F-3	R38	2.2	2	D-3	U12	74HC273	2	F-4	U61E	74HC04	4	B-7
RP23D	220	4	F-3	R39	1.8K	2	D-10	U13	74HC244	2	G-4	U61F	74HC04	1	G-5
RP24A	220	4	E-3	R40	1.8K	2	D-10	U14	74HC244	3	G-10	U62	16V8	1	C-3
RP24B	220	4	F-3	R41	NOT STUFFED	2	D-9	U15	74HC244	3	D-10	U63	74HC244	1	H-9
RP24C	220	4	F-3	R42	2.2K	2	D-9	U16	74HC244	3	H-10	U64	74HC244	1	G-9
RP24D	220	4	F-3	R43	6.2K	2	C-8	U17	74HC244	3	C-10	U65	74HC244	1	F-9
RP25	10K	4	F-4	R44	27K	2	C-8	U18	27C512	2	H-7	U66	H11AA1	2	D-9
RP26	10K	4	E-4	R45	1M	4	D-2	U19	74HC374	3	B-10	U67	74HC4060	2	C-8
RP27B	10K	4	F-8	R46	1M	4	D-2	U20	27C512	2	H-6	U68	TDA2003	2	D-3
RP27C	10K	1	B-6	R47	100	4	G-2	U21	74HC374	3	B-10	U69A	74HC74	2	D-8
RP27D	10K	4	F-8	R48	100	4	G-2	U22	74HC245	1	E-9	U69B	74HC74	2	C-7
RP27E	10K	4	F-8	R49	10K	4	G-4	U23	74HC245	1	E-9	U70	145406	4	B-8
RP27F	10K	1	B-6	R50	22K	2	C-3	U24A	75ALS194	4	B-7	U71D	74HC08	1	B-10
RP27I	10K	1	G-5	R51	47K	1	C-9	U24B	75ALS194	4	G-8	U72	74HC4060	1	B-9
RP28A	10K	1	C-3	R52	47K	1	B-9	U25A	75ALS195	4	C-7	U73A	74HC04	3	B-6
RP28B	10K	1	C-2	R53	470K	1	C-9	U25B	75ALS195	4	G-7	U73B	74HC04	1	B-9
RP28C	10K	1	G-6	R54	1M	1	C-10	U26	145406	4	H-7	U73C	74HC04	2	D-8
RP28D	10K	1	F-3	R55	NOT STUFFED	1	C-10	U27	145406	4	D-7	U73D	74HC04	1	B-9
RP28E	10K	1	G-6	R56	22K	1	D-7	U28	27C4001	2	H-8	U73E	74HC04	1	D-9
RP28F	10K	1	F-3	R57	150	1	E-5	U29	74HC273	3	E-10	U73F	74HC04	1	G-5
RP28I	10K	1	F-3	R58	1K	2	C-3	U30	841001	2	F-7	U74A	74HC05	4	C-3
RP29	10K	4	F-3	R59	1K	2	D-4	U31	68HC000FN16	1	H-7	U74E	74HC05	4	D-2
RP30A	10K	4	E-3	R60	2.2K	2	D-8	U32	74HC154	1	D-3	U74F	74HC05	4	C-2
RP30B	10K	4	E-3	R61	24K	1	C-9	U33A	74HC32	1	D-2	U75A	TLC372C	1	C-9
RP30C	10K	4	E-3	R62	4.7K	1	C-8	U33B	74HC32	1	E-2	U75B	TLC372C	1	A-5
RP30D	10K	4	E-3	R63	NOT STUFFED	1	E-7	U33C	74HC32	1	E-2	U76A	74HC74	1	D-8
RP30E	10K	4	E-3	R64	20M	1	E-6	U33D	74HC32	1	E-2	U77	TL7702A	1	B-7
RP30G	10K	4	E-4	R65	4.7K	1	E-6	U34	16L8	2	F-9	U78A	LM324	2	E-4
RP30H	10K	4	E-4	R66	1K	1	E-6	U35	74HC165	2	E-10	U78B	LM324	2	E-5
RP31	10K	2	C-4	R67	10K	2	D-3	U36	74HC161	1	C-6	U78C	LM324	2	A-10
RP32	10K	2	C-4	R68	10K	2	D-3	U37	MC68681	4	H-9	U78D	LM324	2	A-10
RP33A	10K	1	F-9	R69	1.13K	1	B-7	U38	MC68681	4	C-9	VR1	1K	2	D-4
RP33B	10K	1	G-9	R70	2K	1	B-7	U39	MC68681	4	F-9	Y1	29.4912 MHZ	1	C-7
RP33C	10K	1	H-9	R71	1.00K	1	B-7	U40	145406	4	E-7	Y2	32.768 KHZ	4	C-4
RP33D	10K	1	G-3	R72	2.2K	1	A-7	U41	6522P2	4	F-4				
RP34A	10K	1	E-9	R73	2.2K	2	C-7	U42	6522P2	4	E-5				
RP34B	10K	1	D-9	R74	1M	1	A-9	U43	27C4001	2	H-9				
R2	150	2	B-2	R75	470K	1	A-8	U44	74HC273	3	F-10				
R3	150	2	B-2	R76	270	1	B-7	U45	841001	2	F-8				
R4	150	2	B-2	R77	1M	4	D-1	U46	22V10	1	F-2				
R5	150	2	B-2	R78	1M	4	D-1	U47	74HC244	1	G-2				
R6	150	2	B-2	R79	4.7K	4	F-8	U48A	74HC10	1	B-4				

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot-6000™

SIGNAL LOCATOR CHART

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
~AC FAIL	1	E-4	2	C-7										
~ADC INT	1	E-8												
~ADC SELECT	1	C-2	1	C-9	1	E-8								
~ALARM	2	C-2	4	E-10	4	G-9								
~AS	1	F-2	1	F-3	1	F-6								
~BC1	2	B-5												
~BDIR	2	B-5												
~BERR	1	G-6												
~DTACK	1	B-3	1	G-6										
~DTACKA	1	C-1	4	E-10										
~DTACKB	1	C-1	4	C-10										
~DTACKC	1	C-1	4	H-10										
~DUART SELECT1	1	C-1	4	C-10										
~DUART SELECT2	1	C-1	4	E-10										
~DUART SELECT3	1	C-1	4	H-10										
~EXP IRQ	4	B-5	4	H-9										
~EXPAND SELECT	1	C-1	4	B-5										
~FORWARD ENABLE	4	F-3	5	C-9	5	F-8								
~HALT	1	B-6	1	F-6										
~I2C	1	D-1	2	G-4										
~IACK	1	B-2	1	F-3	1	G-5								
~IACKD1	1	E-1	4	C-10										
~IACKD2	1	E-1	4	E-10										
~IACKD3	1	F-1	4	H-10										
~INPORT0	1	D-1	3	G-10										
~INPORT1	1	D-1	3	C-10										
~IO DTACK	1	B-2												
~IO SELECT1	1	D-1	4	B-5										
~IO SELECT2	1	D-1	4	B-5										
~IRQ_I2C	4	G-4	4	H-9										
~LDS	1	B-1	1	F-5	2	F-10								
~LOCAL I/O	1	C-2	1	C-3	1	F-2								
~OEH	2	E-7	2	F-9	2	G-6	2	G-8						
~OEL	2	E-8	2	F-9	2	G-7	2	G-9						
~OUTPORT0	1	E-1	3	F-6										
~OUTPORT1	1	E-1	3	D-6										
~OUTPORT2	1	D-1	3	E-10										
~OUTPORT3	1	D-1	3	B-10										
~R/W	1	D-10	1	E-9	2	F-10								
~RAM CS	1	F-1	2	E-8	2	F-9								
~RAMCS1	2	E-7	2	F-9										
~RD	4	F-3	5	C-9	5	F-10								
~REELDRIVE	1	D-1	2	E-4										
~REELSENSE	1	D-1	1	G-3	2	F-4								
~RESET	1	B-6	1	B-10	1	F-3	1	F-6	1	H-9	2	B-5	2	B-7
	2	F-10	3	A-10	3	B-5	3	B-6	3	B-10	3	D-5	3	E-5
	3	E-10	3	F-5	4	B-5	4	C-9	4	D-5	4	E-9	4	F-4
	4	H-9												
~RESET REQ	1	B-10	2	F-10										
~RESIN	1	A-7	1	C-8										
~REVERSE ENABLE	4	F-3	5	C-9	5	F-9								
~ROM MAINS CS	1	F-1	2	F-10	2	G-8	2	G-9						
~ROM SMI CS	1	F-1	2	F-10	2	G-6	2	G-7						
~RST	4	F-3	5	C-9	5	F-8								
~RTC RESET	4	D-4												
~SAFERAM CS	1	F-1	2	F-10										
~SOUND	1	C-1	2	B-6										
~SR OPEN	1	D-1	2	E-10										
~UART1	1	E-4	4	C-10										
~UART2	1	E-1	4	E-10										
~UART3	1	E-4	4	H-10										
~UDS	1	B-1	1	F-5	2	F-10								
~VIA SELECT1	1	C-1	4	D-5										
~VIA SELECT2	1	C-1	4	F-5										
~VIA1	1	E-4	4	E-5										
~VIA2	1	E-4	4	F-5										
~VMA	1	F-6												
~VPA	1	C-2	1	F-2	1	G-6								
~WAIT STATE	1	C-3	1	E-3										
~WD RESET	1	A-10	1	D-3										

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
~WEHS	2	E-7	2	F-9										
~WELS	2	E-8	2	F-9										
~WR	4	F-3	5	C-9	5	F-9								
~ZEROCROSS	1	F-1	2	D-7										
~ZEROCROSS REL	1	E-1	2	D-7										
1.84 MHZ	1	C-5	2	B-5										
3.69 MHZ	1	C-5	4	B-10	4	E-9	4	G-9						
7.37 MHZ	1	C-5	2	E-10	4	G-4								
14.7456 MHZ	1	C-2	1	C-6	1	G-6								
21VAC1	2	C-10	5	H-9										
21VAC2	2	C-10	5	H-8										
A[0..23]	1	F-10	2	H-10	4	G-10								
A[1..3]	1	F-3												
A[1..4]	1	D-3	4	B-5	4	C-9	4	E-5	4	E-9	4	F-4	4	H-9
A[1..15]	2	G-6	2	G-7										
A[1..17]	2	F-7	2	F-8										
A[1..18]	2	H-8	2	H-9										
A[5..7]	1	C-3												
A[6..8]	1	C-3												
A[9..11]	1	B-4												
A[12..23]	1	F-3												
A0	4	F-3	5	C-9	5	F-10								
A1	4	G-4												
A16	2	F-7												
A19	2	F-9												
AS	1	C-2	1	D-4	1	F-5								
AS*FCA0*IODEC	1	B-3	1	D-3										
ATTEND PD METER	E	E-8	5	A-8	5	G-5								
BATT LOOPBACK	4	G-8	5	B-9	5	F-9								
BH 2ND MOTOR	3	F-8	5	B-8	5	F-6								
BH CASS PRESENT	3	C-8	5	D-7	5	G-8								
BH CLOCK	4	D-3	5	B-9	5	E-8								
BH DATA	4	D-3	5	B-9	5	E-9								
BH DIVERT SENSOR	3	C-8	5	D-7	5	G-10								
BH FAULT	4	D-3	5	B-9	5	E-10								
BH MID PAPER SNS	3	C-8	5	D-7	5	G-9								
BH MOTOR ON	3	E-8	5	A-8	5	G-4								
BH OUTPUT SENSOR	3	C-8	5	D-7	5	G-8								
BH PRESENT	3	C-8	5	D-7	5	G-8								
BH REAR SENSOR	3	C-8	5	D-7	5	G-9								
BILL ACCESS SW	3	G-8	5	B-8	5	G-10								
BILL READY LAMP	3	F-3	5	A-7	5	H-4								
BONUS TRIGGER	3	C-8	5	D-7	5	G-10								
BV ACCEPT ENABLE	4	E-6	5	A-9	5	F-10								
BV BUSY	3	D-8	5	D-7	5	G-8								
BV CASHBO DOOR	3	D-8	5	D-7	5	G-9								
BV INTERRUPT	4	F-6	5	A-9	5	F-8								
BV OUT OF SVC	4	E-6	5	A-9	5	F-9								
BV RS232 RCV	4	F-6	5	A-9	5	F-10								
BV RS232 MIT	4	F-6	5	A-9	5	F-9								
BV SEND	4	E-6	5	A-9	5	F-8								
BV[0..9]	4	F-5	5	A-10										
CASHBO PRESENT	3	D-8	5	D-7	5	G-9								
CHANGE/SVC LAMP	3	F-3	5	A-7	5	G-5								
CHANGE/SVC SW	3	G-8	5	B-8	5	G-10								
CLEAR DOOR	4	D-4												
COIN ACCEPT LAMP	3	E-3	5	A-7	5	H-5								
COIN CREDIT	3	G-8	5	B-8	5	G-8								
COIN ENABLE	3	E-8	5	A-8	5	G-5								
COIN ERROR	3	G-8	5	B-8	5	G-9								
COIN OFF	4	E-3	5	B-9	5	E-10								
COIN1 LAMP	3	D-3	5	D-5	5	H-6								
COIN2 LAMP	3	D-3	5	D-5	5	H-5								
COIN3 LAMP	3	D-3	5	D-5	5	G-5								
COIN4 LAMP	3	D-3	5	D-5	5	G-4								
COIN5 LAMP	3	D-3	5	D-5	5	G-6								
COIN6/HOLD1 LAMP	3	G-3	5	B-7	5	G-5								
COIN7/HOLD2 LAMP	3	G-3	5	B-7	5	G-6								
COIN8/HOLD ATTR	3	G-3	5	B-7	5	G-6								
COINOUT SWITCH	3	F-8	5	B-8	5	H-8								

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
COLL CREDITS SW	3	G-8	5	B-8	5	G-9						
COLLECT LAMP	3	G-3	5	B-7	5	G-4						
COMM1[0..9]	4	D-5	5	C-9								
COMM4[0..5]	4	E-5	5	C-9								
COMM5[0..5]	4	H-6	5	D-10								
COMM6[0..4]	4	G-6	5	B-10								
CTS1	4	C-7	5	C-8	5	F-10						
CTS2	4	A-7										
CTS4	4	D-7	5	C-8	5	F-8						
CTS5	4	H-7	5	D-9	5	G-10						
D[0..15]	1	D-10	2	G-10	3	H-10	4	G-10				
D[0..7]	1	E-8	2	B-5	2	E-4	2	F-7	2	G-4	2	G-6	2	H-8
	3	B-10	3	D-5	3	D-10	3	E-5	3	E-10	3	F-10	4	B-5
	4	C-9	4	D-5	4	E-9	4	F-4	4	G-3	4	H-9		
D[8..15]	1	G-2	2	F-4	2	F-6	2	G-5	2	H-7	3	A-10	3	C-5
	3	C-10	3	F-10	3	G-5	3	G-10						
DISPLAY D[0..7]	4	F-1	5	C-10										
DISPLAY D0	4	F-2	5	C-9	5	F-8								
DISPLAY D1	4	F-2	5	C-9	5	F-10								
DISPLAY D2	4	F-2	5	C-9	5	F-9								
DISPLAY D3	4	F-2	5	C-9	5	F-8								
DISPLAY D4	4	F-2	5	C-9	5	F-10								
DISPLAY D5	4	F-2	5	C-9	5	F-9								
DISPLAY D6	4	E-2	5	C-9	5	F-8								
DISPLAY D7	4	E-2	5	C-9	5	F-10								
DIVERTER SOL	3	E-8	5	A-8	5	F-6						
DOOR HINGE	4	E-4										
DOOR HINGE OPTIC	4	D-3	5	B-9	5	E-9						
DOOR LATCH	4	D-4										
DOOR OPTIC POWER	2	B-2	5	C-7	5	E-5						
DOOR SW SIGNAL	3	A-8	5	C-7	5	F-5						
DR/TILT TWR LAMP	3	F-3	5	A-7	5	H-5						
DROP DOOR	3	D-8	5	D-7	5	G-10						
DROP OPTIC	4	D-3	5	B-9	5	E-8						
DROP OPTIC POWER	2	B-2	5	C-7	5	E-4						
DSR1	4	C-7	5	C-8	5	F-9						
DSR2	4	A-7										
DSR4	4	D-7	5	C-8	5	F-9						
DTR1	4	C-7	5	C-8	5	F-10						
DTR2	4	A-7										
DTR4	4	D-7	5	C-8	5	F-8						
E	1	F-6	4	A-4	4	C-10	4	D-5	4	F-4		
END OF GAME	3	A-8	5	C-7	5	F-5						
EXT ANTENNA	1	B-10	5	C-6	5	G-6						
EXT. RESET	4	E-6	5	A-9	5	F-4						
FC0	1	G-3	1	G-6								
FC1	1	G-3	1	G-6								
FC2	1	G-3	1	G-6								
FCA0	1	D-4	1	G-2								
FCA1	1	D-3	1	G-2								
FEATURE LAMP 1	3	C-3	5	D-5	5	G-5						
FEATURE LAMP 2	3	C-3	5	D-5	5	G-4						
FEATURE LAMP 3	3	C-3	5	D-5	5	G-4						
FEATURE LAMP 4	3	C-3	5	D-5	5	G-6						
FEATURE LAMP 5	3	C-3	5	D-5	5	G-5						
FEATURE LAMP 6	3	C-3	5	D-5	5	G-5						
FEATURE LAMP 7	3	B-3	5	D-5	5	G-6						
FEATURE LAMP 8	3	B-3	5	D-5	5	G-6						
FORWARD/~REVERSE	4	F-3	5	C-9	5	F-10						
GAME DOOR OPEN	3	E-8	5	B-8	5	F-4						
GAMEIF[0..10]	4	E-1	5	B-10								
HANDLE RELEASE	3	E-8	5	A-8	5	F-6						
HANDLE SENSE	3	D-8	5	D-7	5	G-10						
HIDRIVE[0..15]	3	F-7	5	B-9								
HOLD1 SWITCH	3	F-8	5	B-8	5	H-8						
HOLD2 SWITCH	3	F-8	5	B-8	5	H-9						
HOLD3 LAMP	3	E-3	5	A-7	5	H-5						
HOLD3 SWITCH	3	F-8	5	B-8	5	H-10						
HOLD4 LAMP	3	E-3	5	A-7	5	H-6						
HOLD4 SWITCH	3	F-8	5	B-8	5	H-8						

| - Revised, || - New

©2003 BALLY GAMING AND SYSTEMS

SIGNAL LOCATOR CHART

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
HOLD5 LAMP	3	G-3	5	B-7	5	G-4								
HOLD5 SWITCH	3	F-8	5	B-8	5	G-10								
HOPPER FULL SW	3	D-8	5	D-7	5	G-9								
HOPPER LOW SW	3	F-8	5	B-8	5	H-9								
HOPPER[0..7]	4	F-1	5	D-10										
I2C SCL	4	G-2	5	D-9	5	E-5								
I2C SDA	4	G-2	5	D-9	5	E-6								
I2C[0..1]	4	G-1	5	D-10										
ID00	2	F-3	5	B-7	5	E-4								
ILOOP E T RST	4	E-6	5	A-9	5	E-4								
ILOOP RECEIVE	4	B-4	4	F-6	5	A-9	5	E-10						
ILOOP TRANSMIT	4	B-4	4	F-6	5	A-9	5	E-8						
IN1PORT[0..14]	3	D-7	5	D-7										
INSERT COIN LAMP	3	E-3	5	A-7	5	H-4								
IO DECODE	1	D-4	1	F-2										
IPL0	1	F-2	1	G-6										
IPL1	1	F-2	1	G-6										
IPL2	1	F-2	1	G-6										
JACKPOT 1 RELAY	3	F-8	5	B-8	5	F-4								
JACKPOT 2 RELAY	3	F-8	5	B-8	5	F-6								
JACKPOT 3 RELAY	3	F-8	5	B-8	5	F-5								
JACKPOT BELL	3	D-3	5	D-5	5	H-4								
JACKPOT SIGNAL	3	A-8	5	C-7	5	F-6								
JP/CHNG TWR LAMP	3	F-3	5	A-7	5	H-6								
JP2/AUX HOPPER	3	A-8	5	C-7	5	F-4								
KEYSWITCH	3	D-8	5	D-7	5	G-8								
KEYSWITCH SIGNAL	3	A-8	5	C-7	5	F-6								
KNOCKOFF SWITCH	4	E-3	5	B-9	5	F-8								
LEVEL IN	2	C-2	5	A-8	5	H-9								
LEVEL OUT	2	D-2	5	A-8	5	H-10								
M[1..14]	4	B-3	5	D-8										
M1	5	E-9												
M2	5	E-10												
M3	5	E-8												
M4	5	E-10												
M5	5	E-8												
M6	5	E-9												
M7	5	E-9												
M8	5	E-10												
M9	5	E-8												
M10	5	E-10												
M11	5	E-9												
M12	5	E-8												
M13	5	E-9												
M14	5	E-10												
MAX CREDIT SW	3	G-8	5	B-8	5	G-10								
METER DETECT	3	F-8	5	B-8	5	H-10								
MPU DETECT	4	C-1	5	B-9	5	F-9								
MPU_DETECT	4	C-3	4	E-4										
MR_W	1	F-6	1	G-3										
NOT READY LAMP	3	E-3	5	A-7	5	H-6								
OP[0..5]	2	B-1	5	C-7										
OPTIC POWER 1	2	B-2	5	C-7	5	E-6								
OPTIC POWER 2	2	B-2	5	C-7	5	E-5								
OPTIC POWER 3	2	B-2	5	C-7	5	E-6								
OPTIC POWER 6	2	B-2	5	C-7	5	E-6								
OUT0PORT[0..15]	3	G-2	5	B-7										
OUT1PORT[0..15]	3	E-2	5	D-6										
OUT3PORT[0..13]	3	B-7	5	C-7										
OUTPUT PORT 0	1	D-3												
OUTPUT PORT 1	1	D-3												
OUTPUT PORT 2	1	D-3												
OUTPUT PORT 3	1	D-3												
PLAY 1 CREDIT SW	3	G-8	5	B-8	5	G-8								
PLAY MAX LAMP	3	F-3	5	B-7	5	G-4								
PSEUDO COIN	4	D-3	5	B-9	5	E-10								
R/~W	1	D-2	1	D-10	1	E-2	1	E-8	1	G-2	4	B-5	4	C-9
	4	E-5	4	E-9	4	F-4	4	G-4	4	H-9				
RDRIVE[0..10]	2	F-1	5	B-7										

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
REEL1 PHASE A	2	F-3	5	B-7	5	F-4								
REEL1 PHASE B	2	F-3	5	B-7	5	F-5								
REEL1 SENSE1	2	G-3	5	C-5	5	E-4								
REEL1 SENSE2	2	G-3	5	C-5	5	E-5								
REEL2 PHASE A	2	F-3	5	B-7	5	F-6								
REEL2 PHASE B	2	F-3	5	B-7	5	F-4								
REEL2 SENSE1	2	G-3	5	C-5	5	F-6								
REEL2 SENSE2	2	G-3	5	C-5	5	F-4								
REEL3 PHASE A	2	F-3	5	B-7	5	F-5								
REEL3 PHASE B	2	F-3	5	B-7	5	F-6								
REEL3 SENSE1	2	G-3	5	C-5	5	F-5								
REEL3 SENSE2	2	G-3	5	C-5	5	F-6								
REEL4 PHASE A	2	E-3	5	B-7	5	F-4								
REEL4 PHASE B	2	E-3	5	B-7	5	F-5								
REEL4 SENSE1	2	G-3	5	C-5	5	F-5								
REEL4 SENSE2	2	G-3	5	C-5	5	E-4								
REEL5 PHASE A	2	E-3	5	B-7	5	F-6								
REEL5 PHASE B	2	E-3	5	B-7	5	F-4								
REEL5 SENSE1	1	G-3	2	F-3	5	C-5	5	E-6						
REEL5 SENSE2	1	G-3	2	F-3	5	C-5	5	E-4						
RESET	3	B-5	4	G-5										
RSENSE[0..9]	2	G-1	5	C-6										
RTC CLOCK	4	D-4												
RTC DATA	4	D-4												
RTS1	4	C-7	5	C-8	5	F-8								
RTS2	4	A-7												
RTS4	4	D-7	5	C-8	5	F-10								
RTS5	4	H-7	5	D-9	5	G-8								
RXD1	4	D-7	5	C-8	5	G-8								
RXD1(-)	4	C-8	5	C-8	5	G-10								
RXD1(+)	4	C-8	5	C-8	5	G-9								
RXD2	4	A-7												
RXD4	4	E-7	5	C-8	5	F-10								
RXD5	4	H-7	5	D-9	5	G-8								
RXD6(-)	4	G-7	5	B-9	5	G-10								
RXD6(+)	4	G-7	5	B-9	5	G-9								
RXD6/DSR5	4	H-7	5	D-9	5	G-9								
S[1..7]	1	H-10	4	E-10										
S1	1	G-3												
S2	1	G-3												
S3	4	H-9												
S4	4	E-9												
S5	4	E-9												
S6	4	C-9												
S7	4	C-9												
SLANT LOWER DOOR	4	D-3	5	B-9	5	E-9								
SOUND D0	3	B-8	5	C-7	5	F-4								
SOUND D1	3	B-8	5	C-7	5	F-5								
SOUND D2	3	B-8	5	C-7	5	F-6								
SOUND D3	3	B-8	5	C-7	5	F-4								
SOUND D4	3	B-8	5	C-7	5	F-5								
SOUND D5	3	B-8	5	C-7	5	F-6								
SOUND D6	3	B-8	5	C-7	5	F-4								
SOUND D7	3	B-8	5	C-7	5	F-5								
SOUND OUT	2	D-2	5	A-8	5	H-10								
SOUND[0..2]	2	E-1	5	A-9										
SPARE HARD METER	3	E-8	5	A-8	5	G-6								
SPARE VIA2 PA7	4	F-3	5	C-9	5	F-9								
SPI CLOCK	4	E-3	5	C-9	5	F-9								
SPI DATA	4	E-3	5	C-9	5	F-8								
SPI[0..1]	4	F-1	5	C-10										
SPIN LAMP	3	F-3	5	B-7	5	G-5								
SPIN SWITCH	3	G-8	5	B-8	5	G-9								
SR_KEY	2	F-9												
SRAM_CLR	3	C-10	4	E-10										
SWITCH[0..15]	3	G-7	5	B-9										
SYSTEM RESET	1	H-10	5	C-6	5	F-5								
TEST SWITCH	4	E-3	5	B-9	5	F-10								
TILT RELAY	3	F-8	5	B-8	5	F-4								


SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
TOTAL DROP METER	3	E-8	5	A-8	5	G-6								
TOTAL IN METER	3	E-8	5	A-8	5	F-5								
TOTAL IN RELAY	3	E-8	5	B-8	5	F-5								
TOTAL IN SIGNAL	3	A-8	5	C-7	5	F-6								
TOTAL OUT METER	3	E-8	5	A-8	5	F-4								
TOURNAMENT KEYSW	3	D-8	5	D-7	5	G-8								
TOWER 4TH LAMP	3	D-3	5	D-5	5	H-4								
TOWER MID LAMP	3	D-3	5	D-5	5	G-6								
TXD1	4	D-7	5	C-8	5	F-9								
TXD1(-)	4	B-8	5	C-8	5	G-10								
TXD1(+)	4	B-8	5	C-8	5	G-9								
TXD2	4	A-7												
TXD4	4	D-7	5	C-8	5	F-9								
TXD5	4	H-7	5	D-9	5	G-9								
TXD6(-)	4	G-7	5	B-9	5	G-9								
TXD6(+)	4	G-7	5	B-9	5	G-8								
TXD6/DTR5	4	H-7	5	D-9	5	G-10								
V_1A6_3	2	G-6	2	G-7										
V_A19_1	2	G-8	2	G-9										
VB_DOOR	4	D-2												
VMA	1	G-5	4	A-4	4	C-10	4	D-5	4	F-4				

©2003 BALLY GAMING AND SYSTEMS


Coin Acceptor

Coin Optic Decoder 2 Board AS-03356-0303


☑Upright ☑Slant ☑ESlant

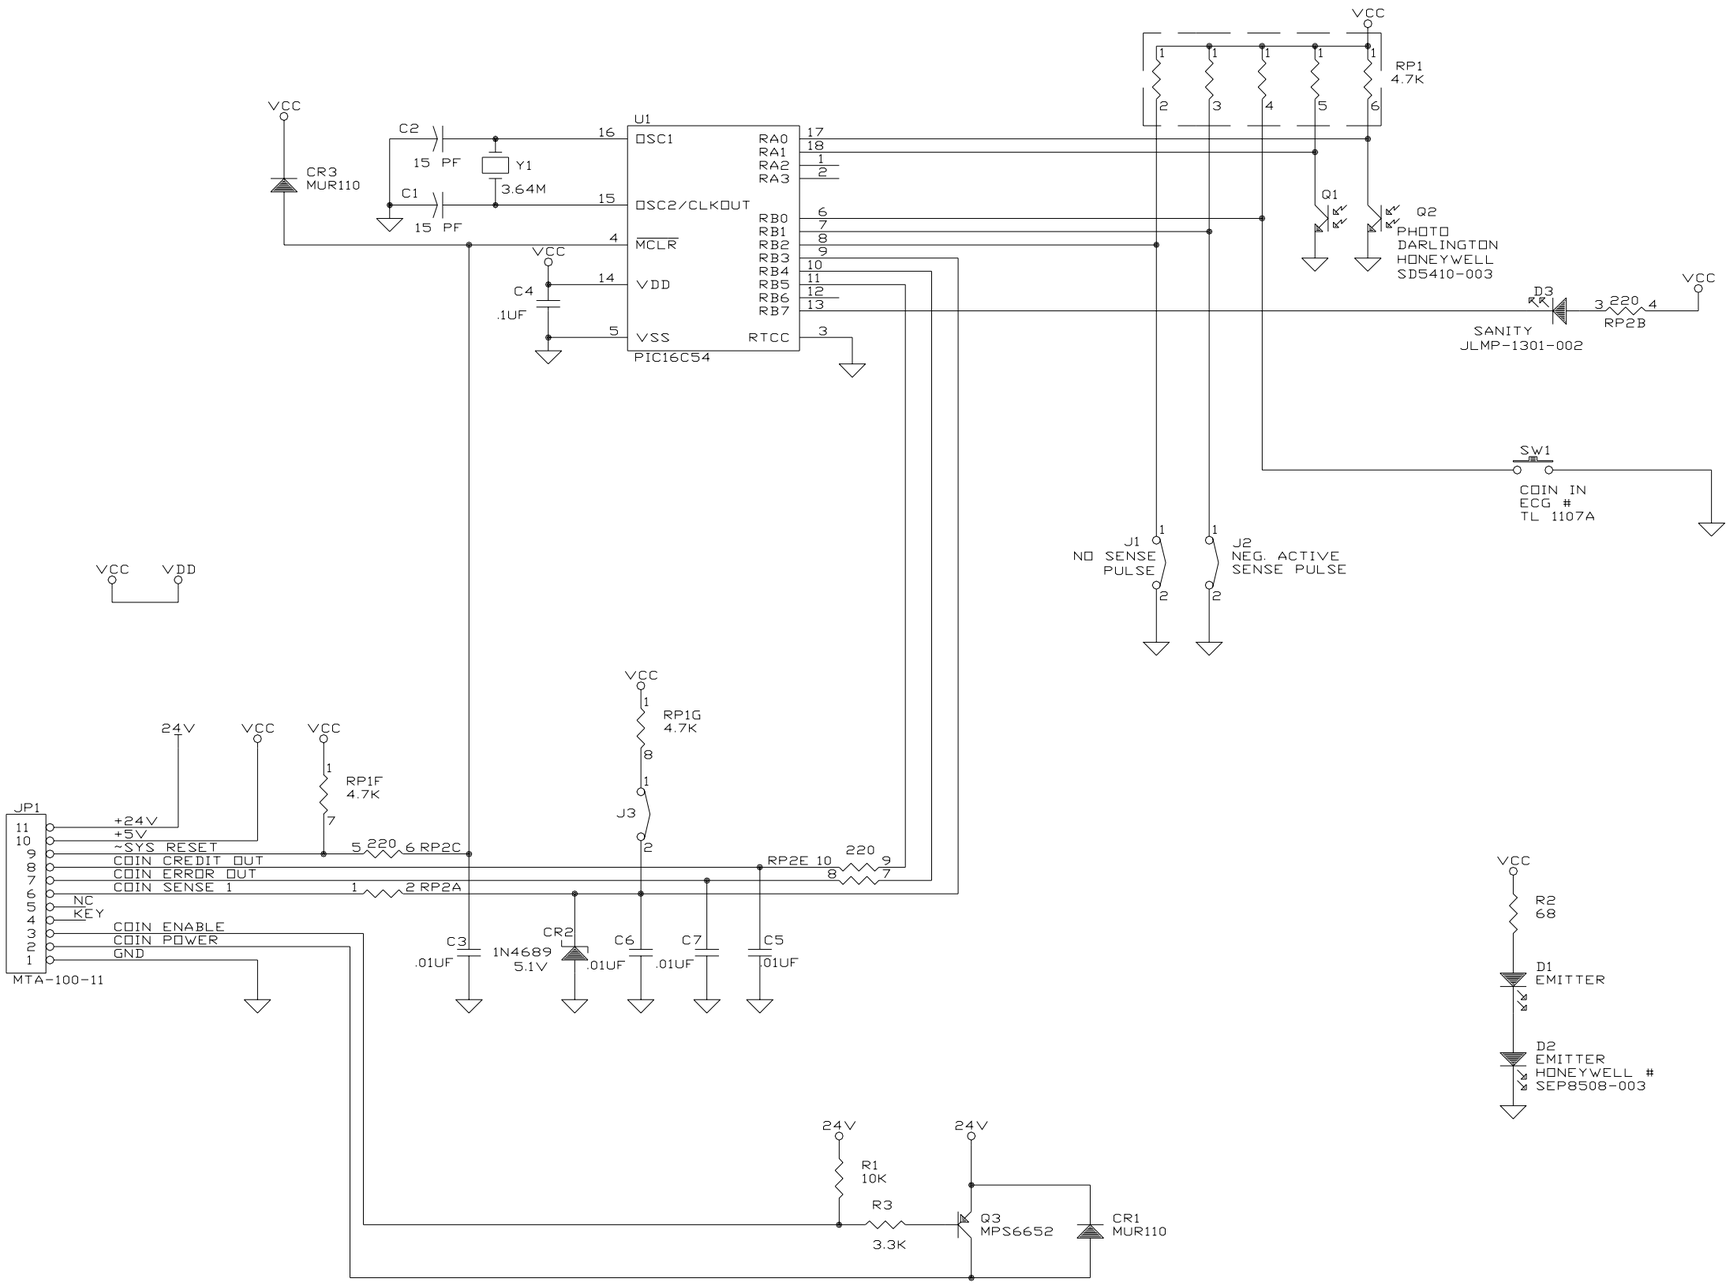

©2003 BALLY GAMING AND SYSTEMS

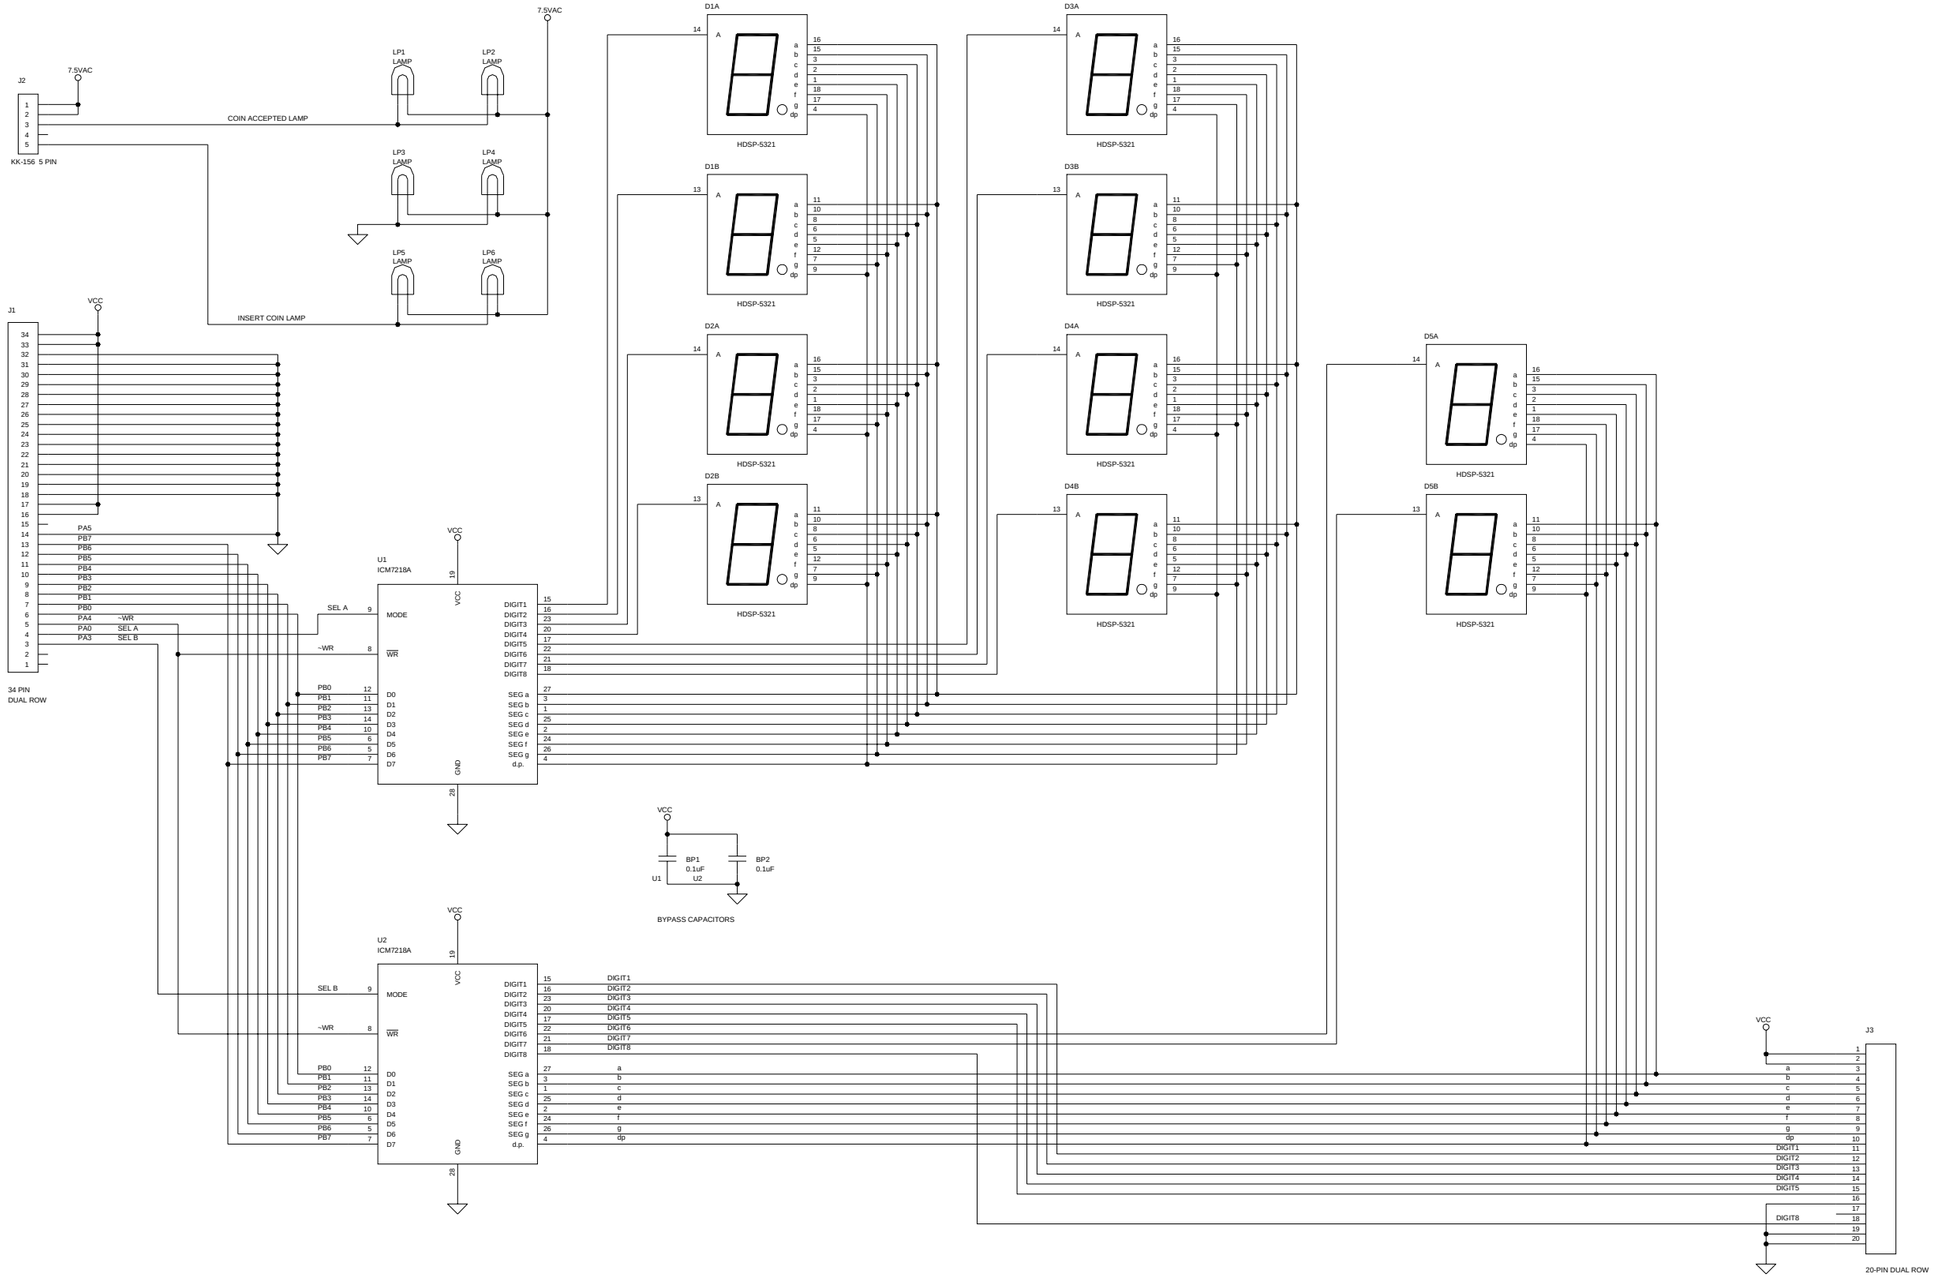
J2
KK-156 5 PIN
7.5VAC
COIN ACCEPTED LAMP
INSERT COIN LAMP
LP1 LAMP
LP2 LAMP
LP3 LAMP
LP4 LAMP
LP5 LAMP
LP6 LAMP
J1
34 PIN DUAL ROW
VCC
U1 ICM7218A
U2 ICM7218A
MODE
WR
D0
D1
D2
D3
D4
D5
D6
D7
GND
SEL A
SEL B
~WR
DIGIT1
DIGIT2
DIGIT3
DIGIT4
DIGIT5
DIGIT6
DIGIT7
DIGIT8
SEG a
SEG b
SEG c
SEG d
SEG e
SEG f
SEG g
d.p.
D1A
D1B
D2A
D2B
D3A
D3B
D4A
D4B
D5A
D5B
HDSP-5321
BP1 0.1uF
BP2 0.1uF
BYPASS CAPACITORS
J3
20-PIN DUAL ROW


|| **Display Board with Hit and Run Connector, Left AS-03356-0623** ☑Upright

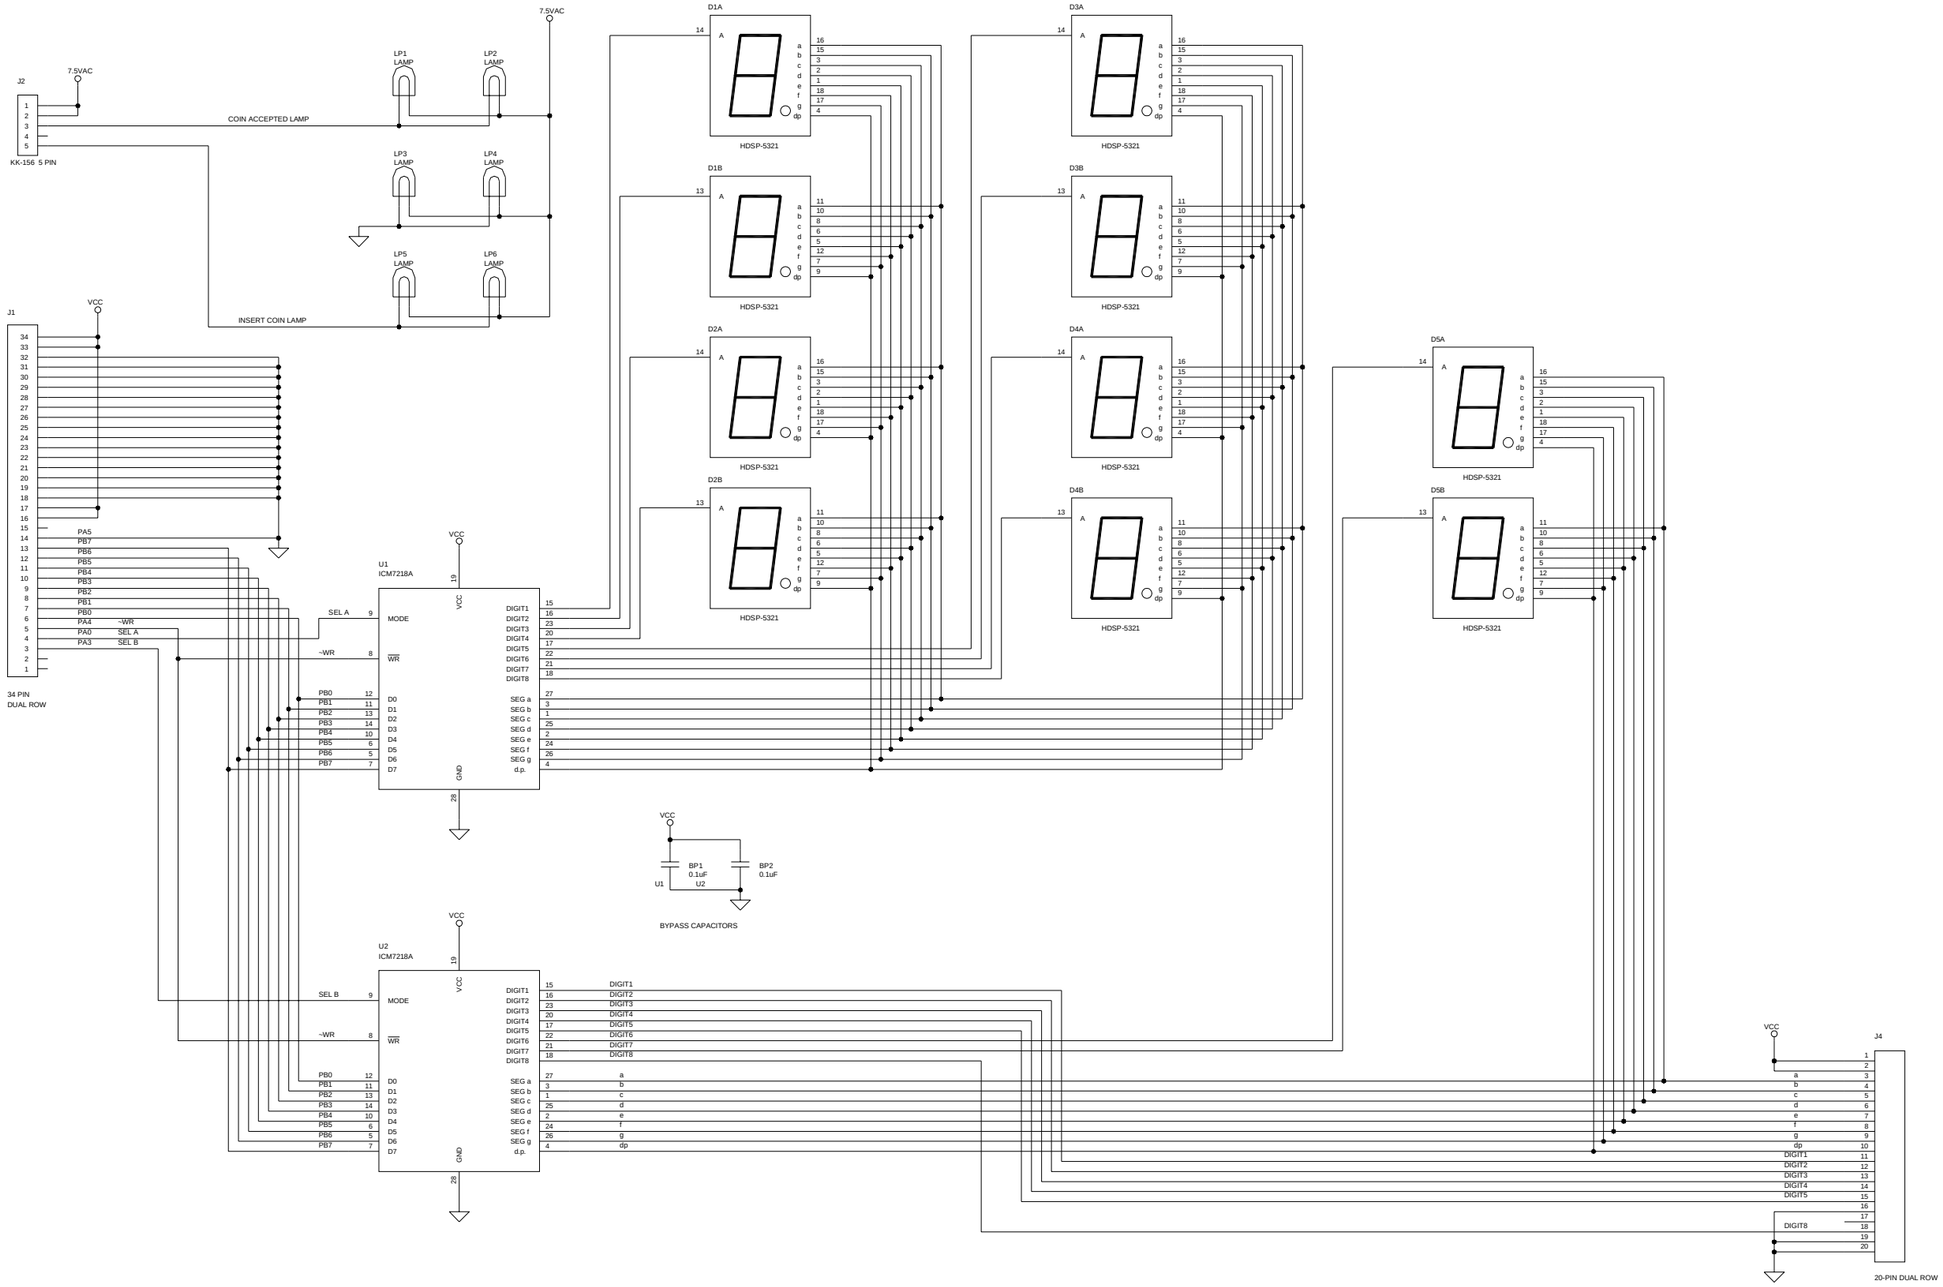

©2003 BALLY GAMING AND SYSTEMS


Door Optic Emitter Board AS-03356-0427

☑Upright ☑Slant ☑ESlant

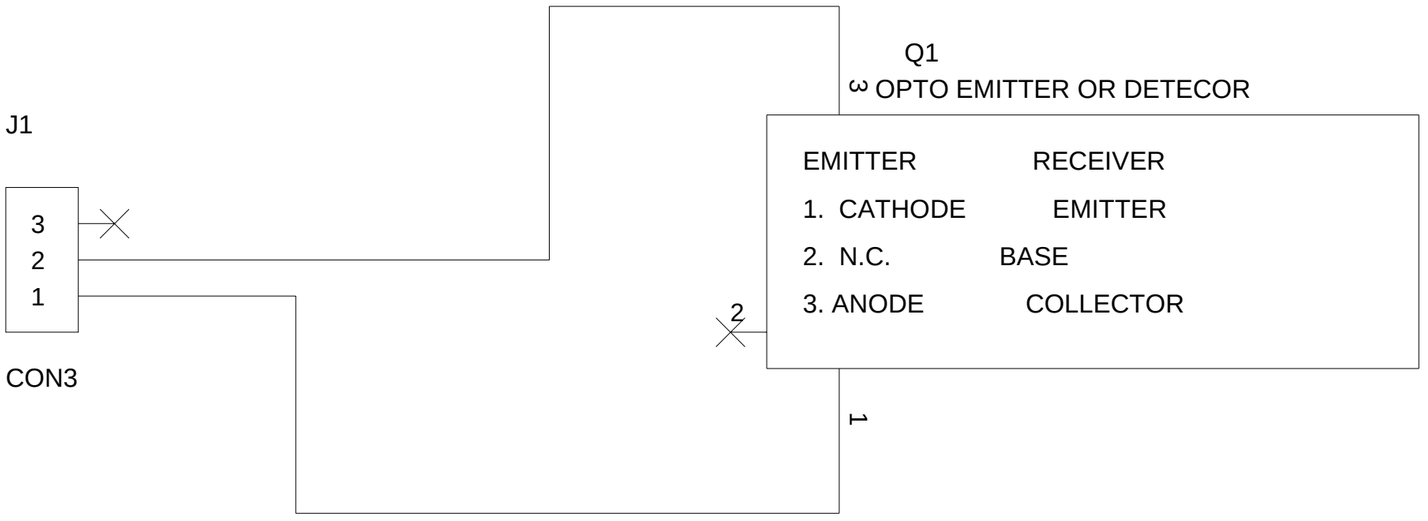


Hopper

Hopper Controller Board, FET, Dual Optic AS-03356-0368 ☑Upright ☑Slant ☑ESlant

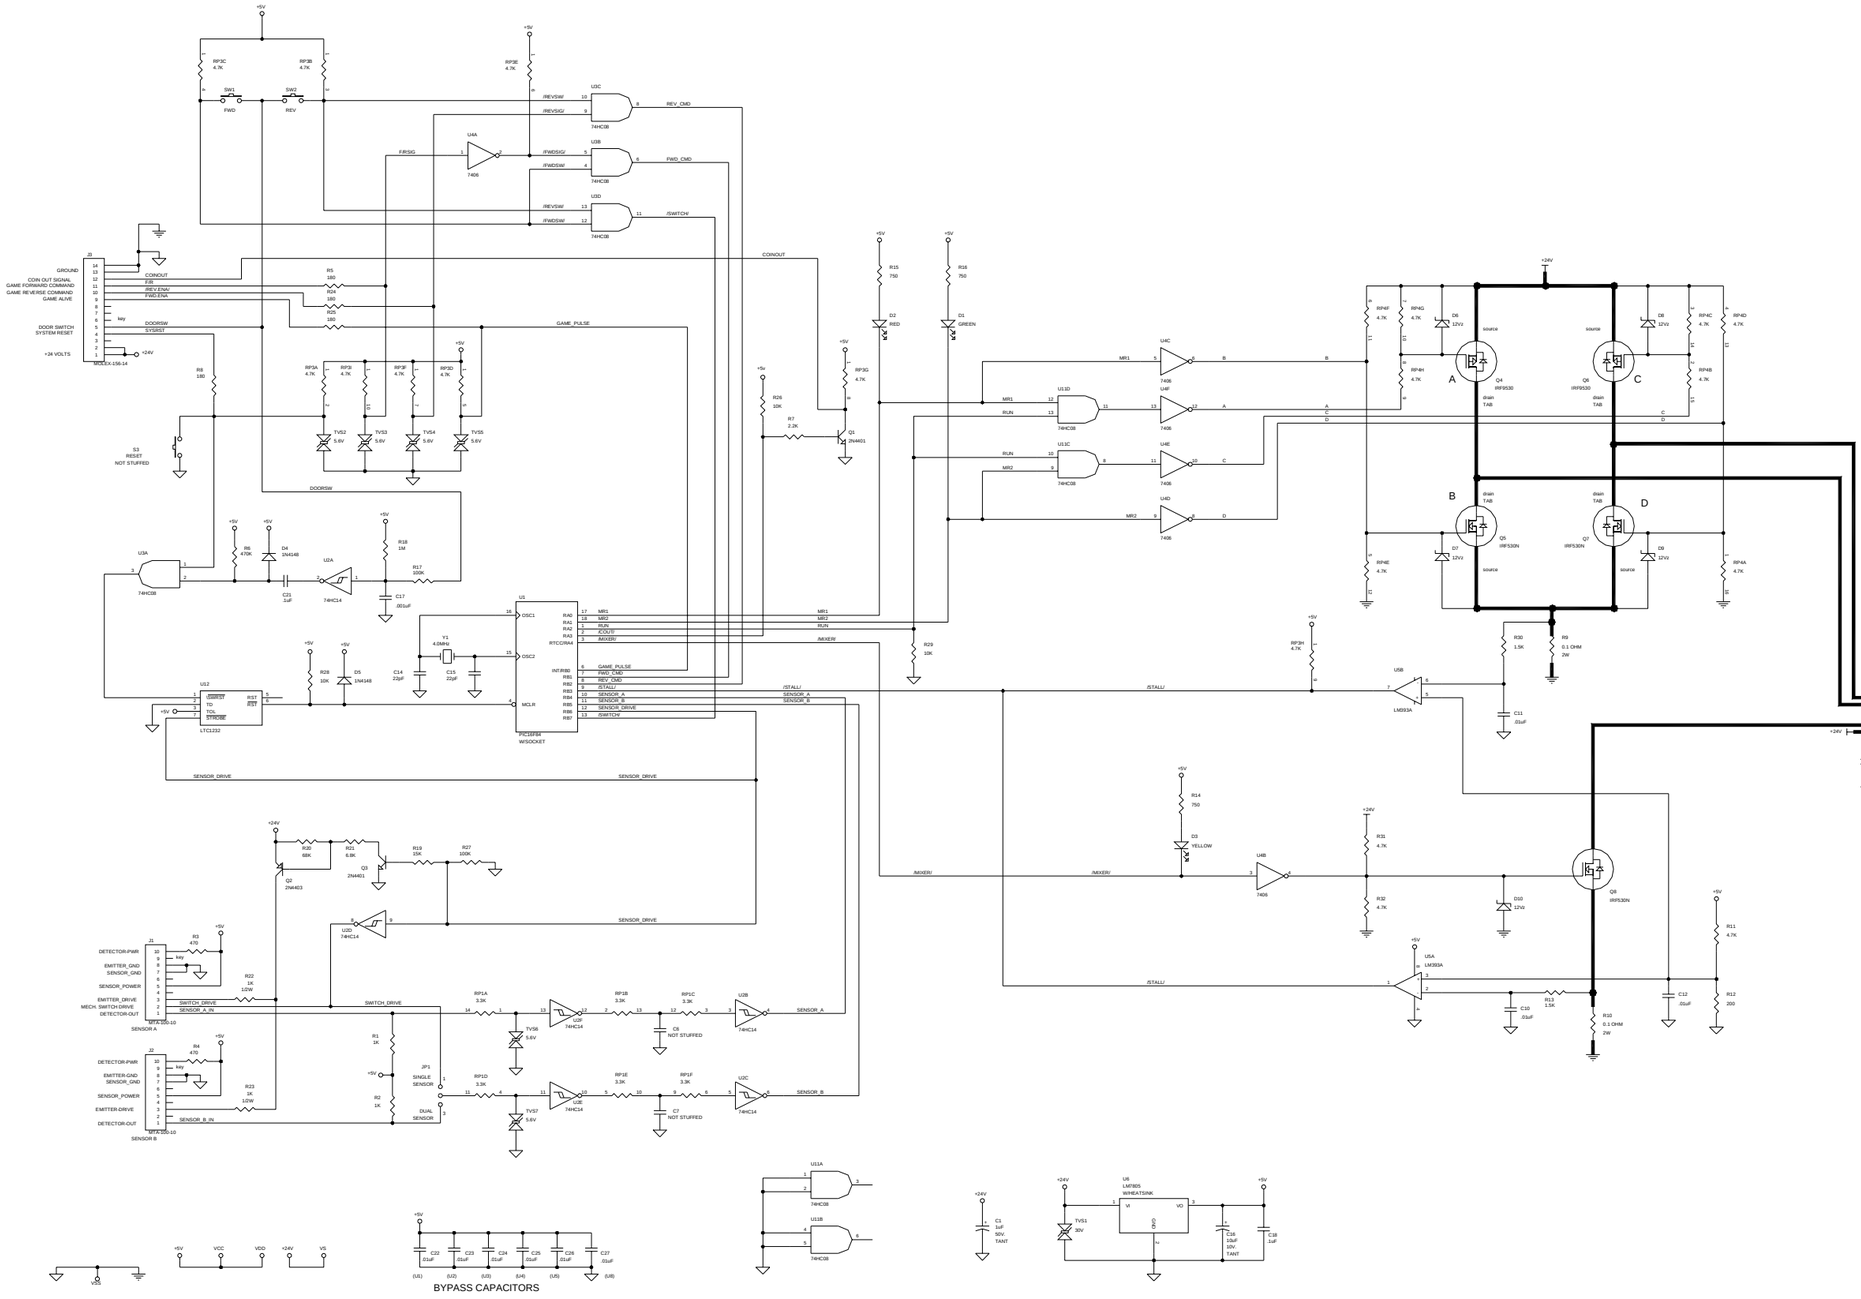

©2003 BALLY GAMING AND SYSTEMS

Data Vault™ Memory Board (France) AS-03356-0466 ☑Upright ☑Slant

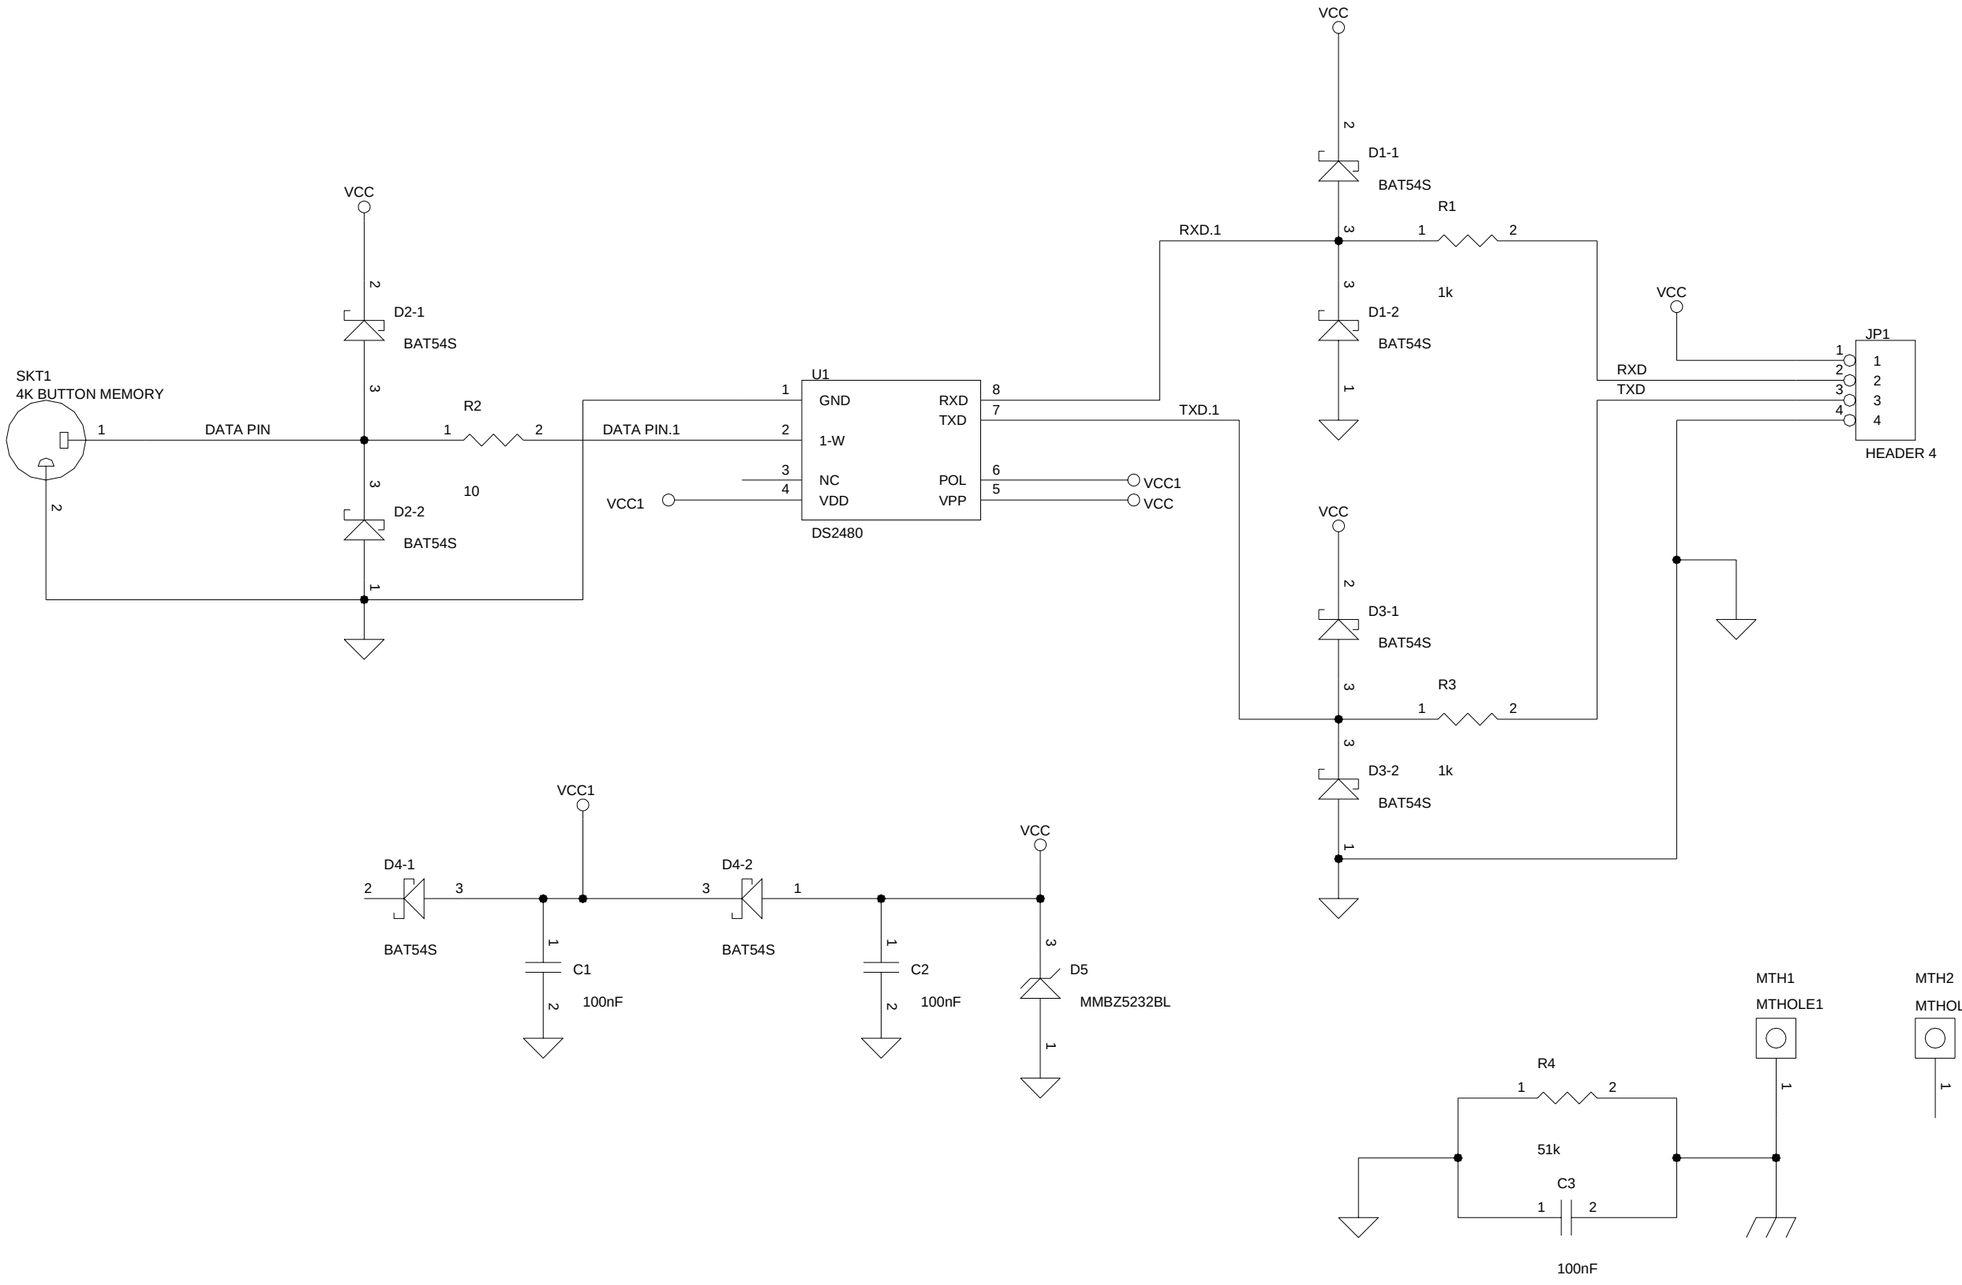


©2003 BALLY GAMING AND SYSTEMS

Reel Mechanism

Reel Drive Board AS-03356-0205

☑Upright ☑Slant ☑ESlant

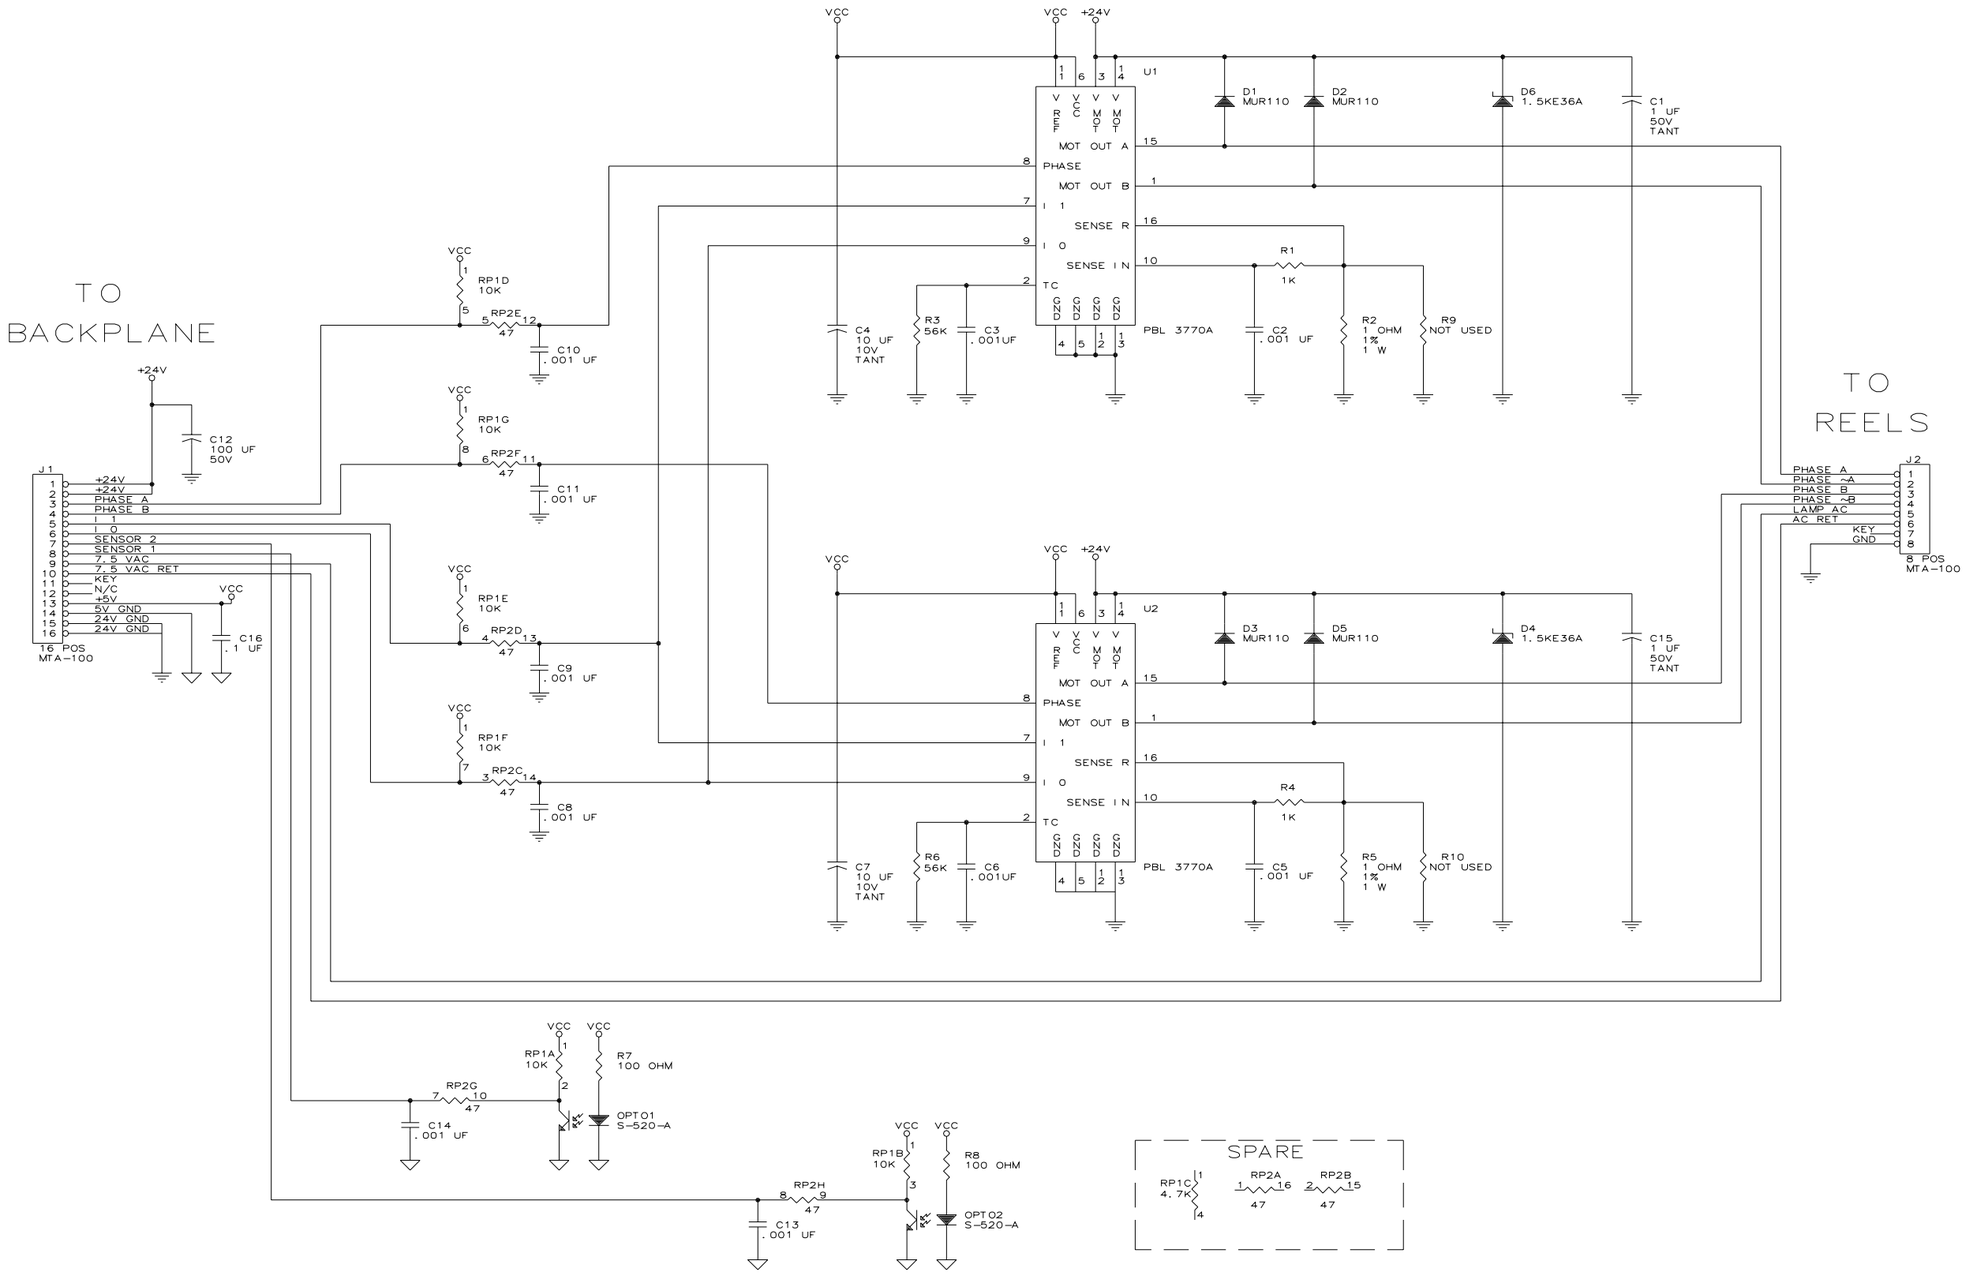


©2003 BALLY GAMING AND SYSTEMS

Sound Board

Deluxe Sound Board AS-03356-0362


☑Upright ☑Slant ☑ESlant

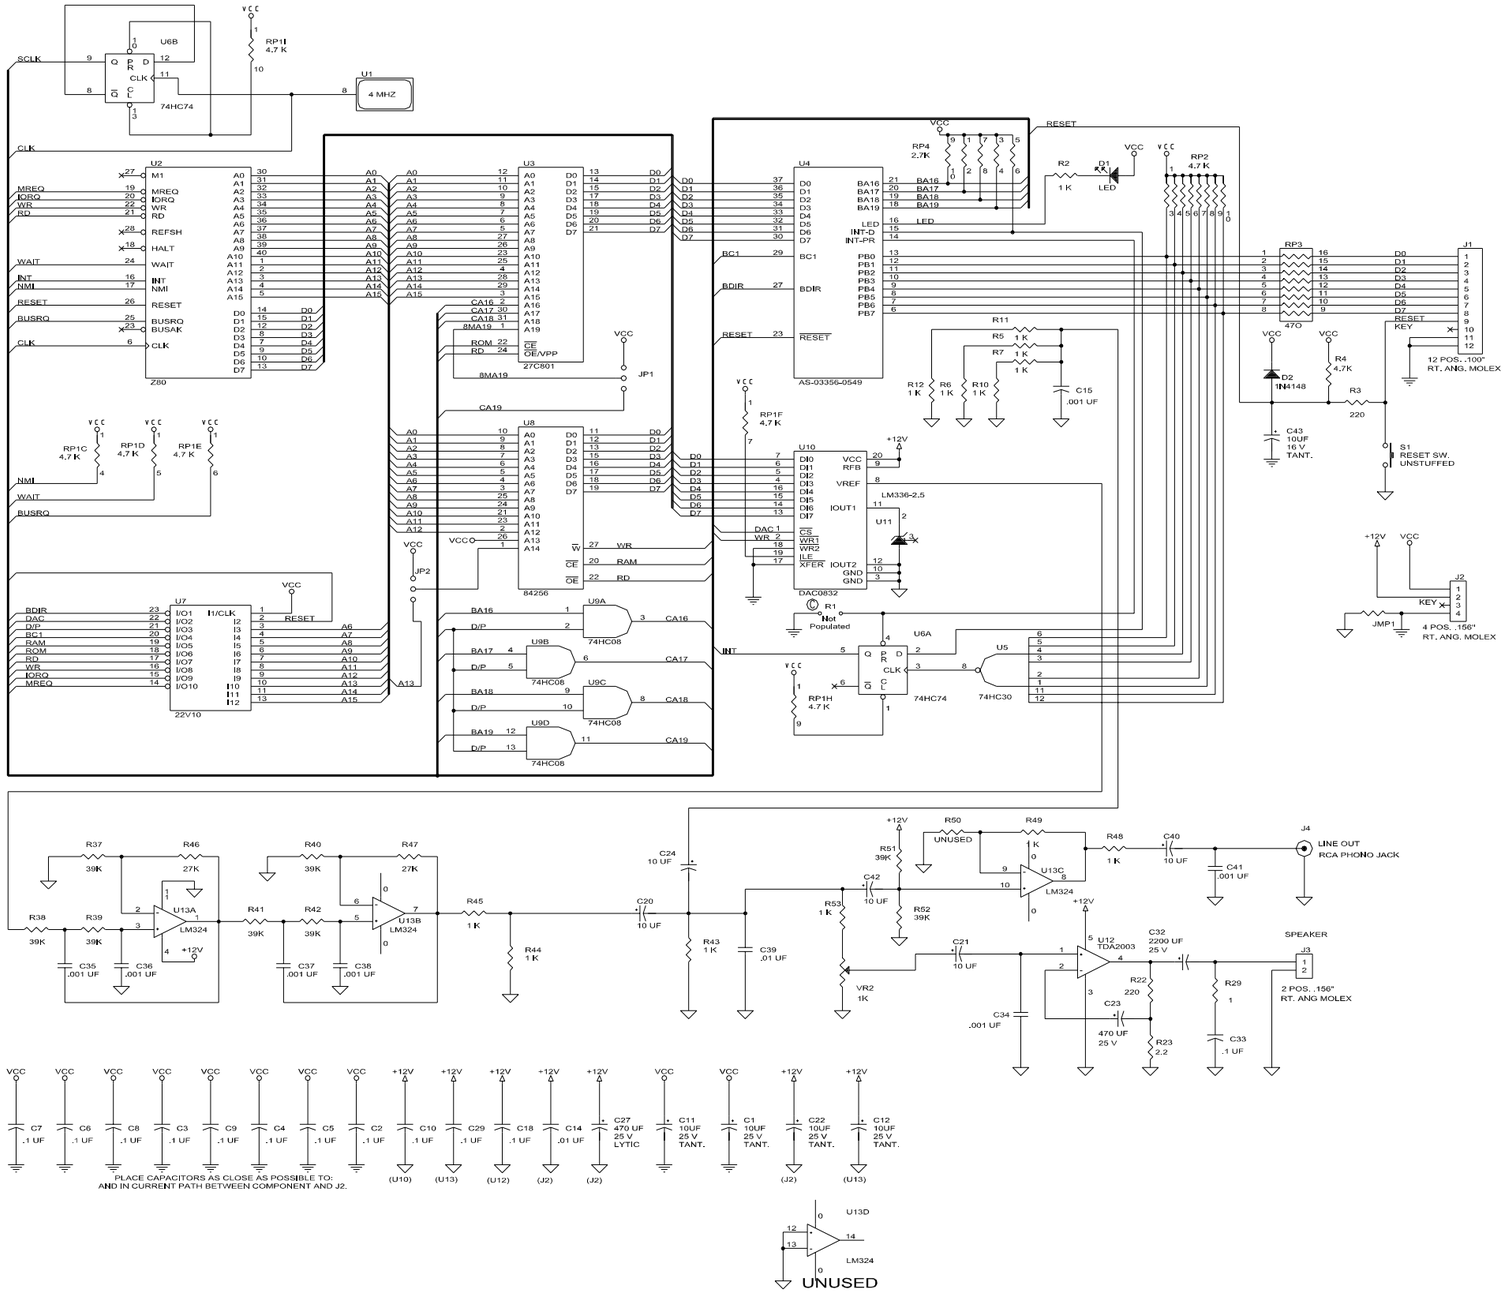

Sound Board

|| Pro Sound 2 Board (1 of 2) AS-03356-0512

☑Upright

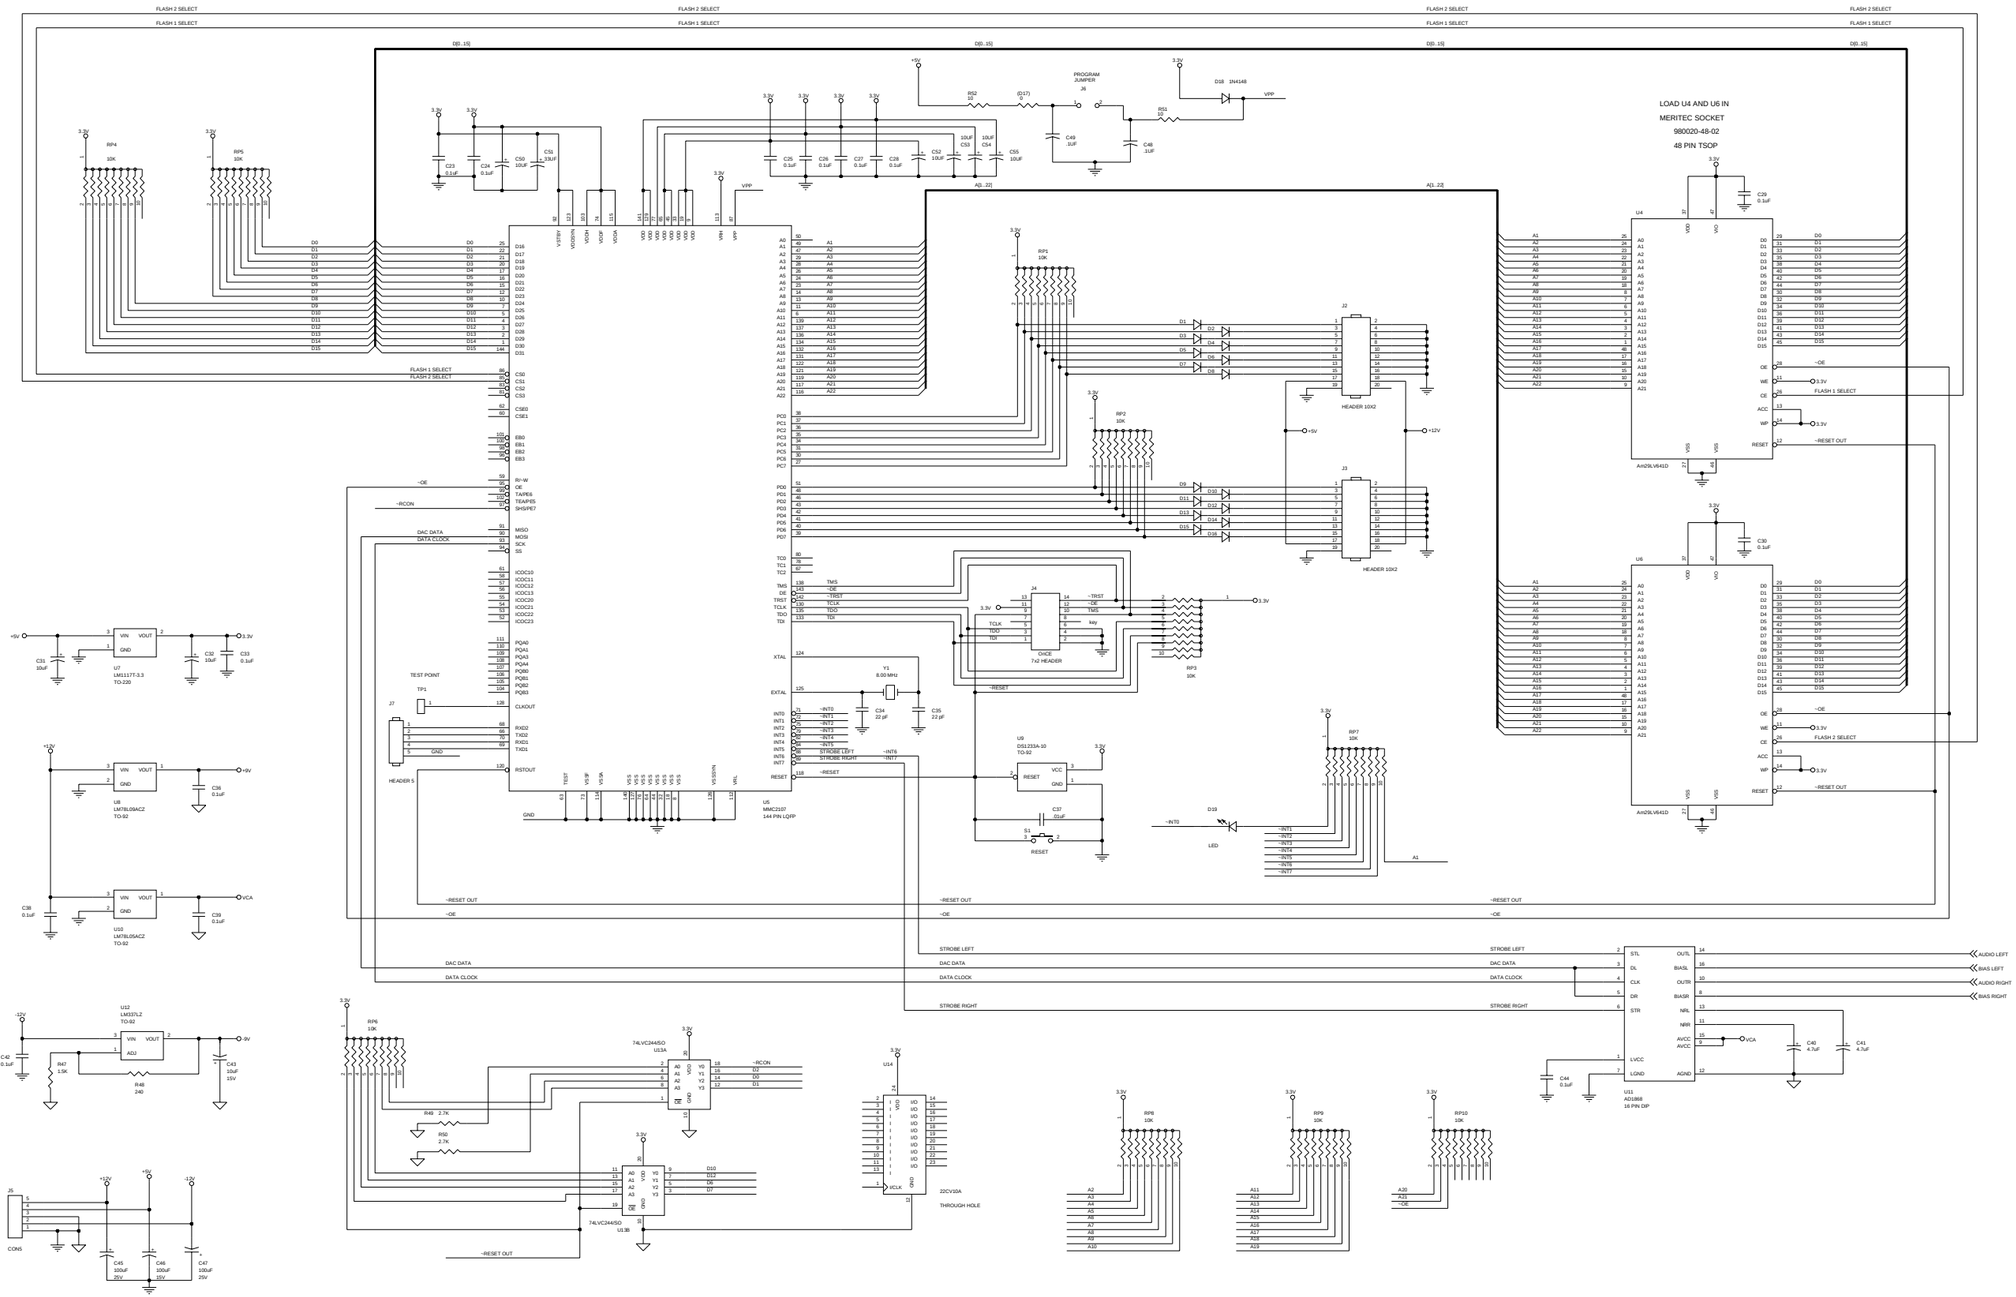


©2003 BALLY GAMING AND SYSTEMS

Sound Board

Pro Sound 2 Board (2 of 2) AS-03356-0512


☑Upright

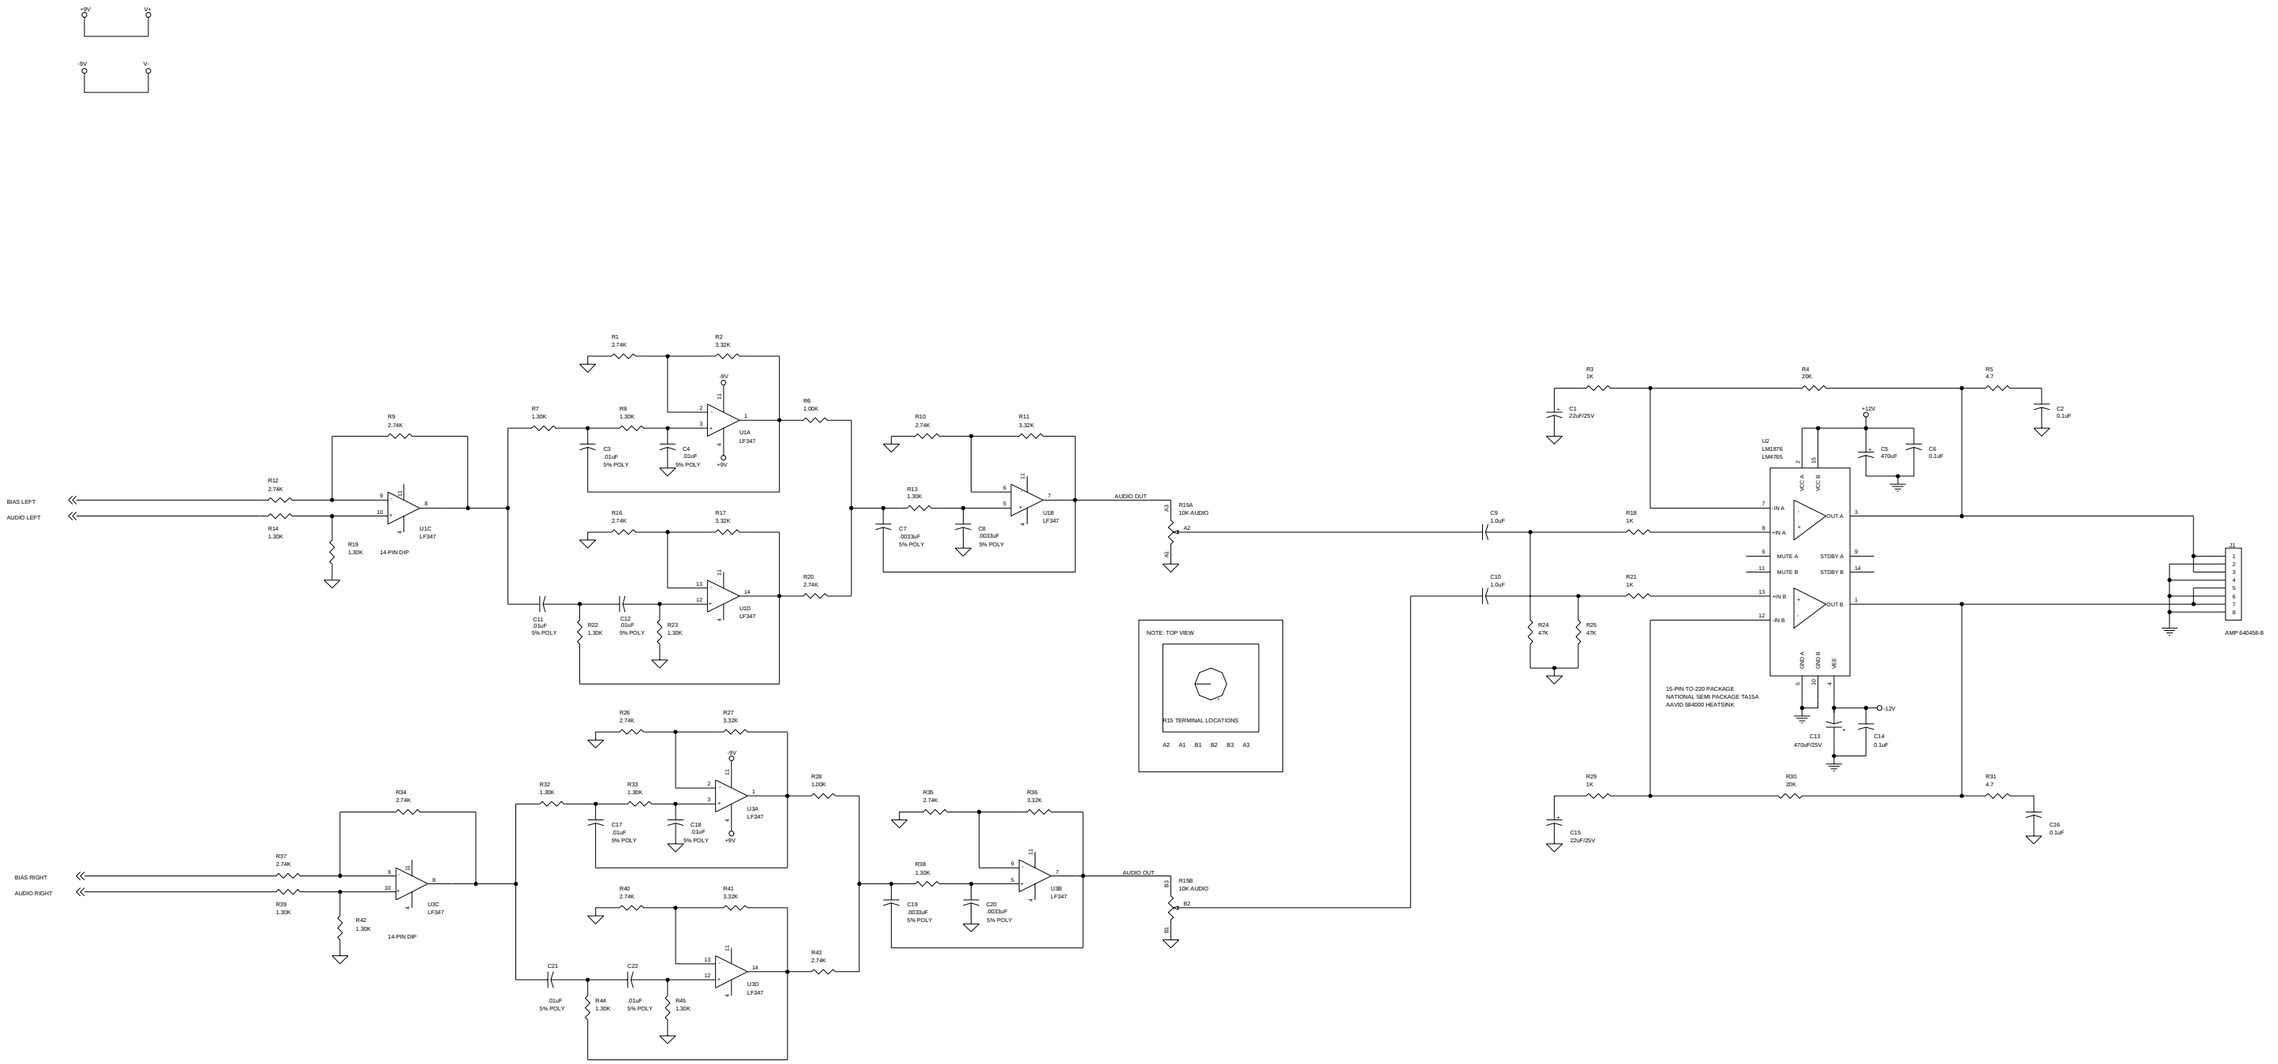

©2003 BALLY GAMING AND SYSTEMS

|| LSAMS Fiber Optic Board AS-03356-0185


☑Upright ☑Slant

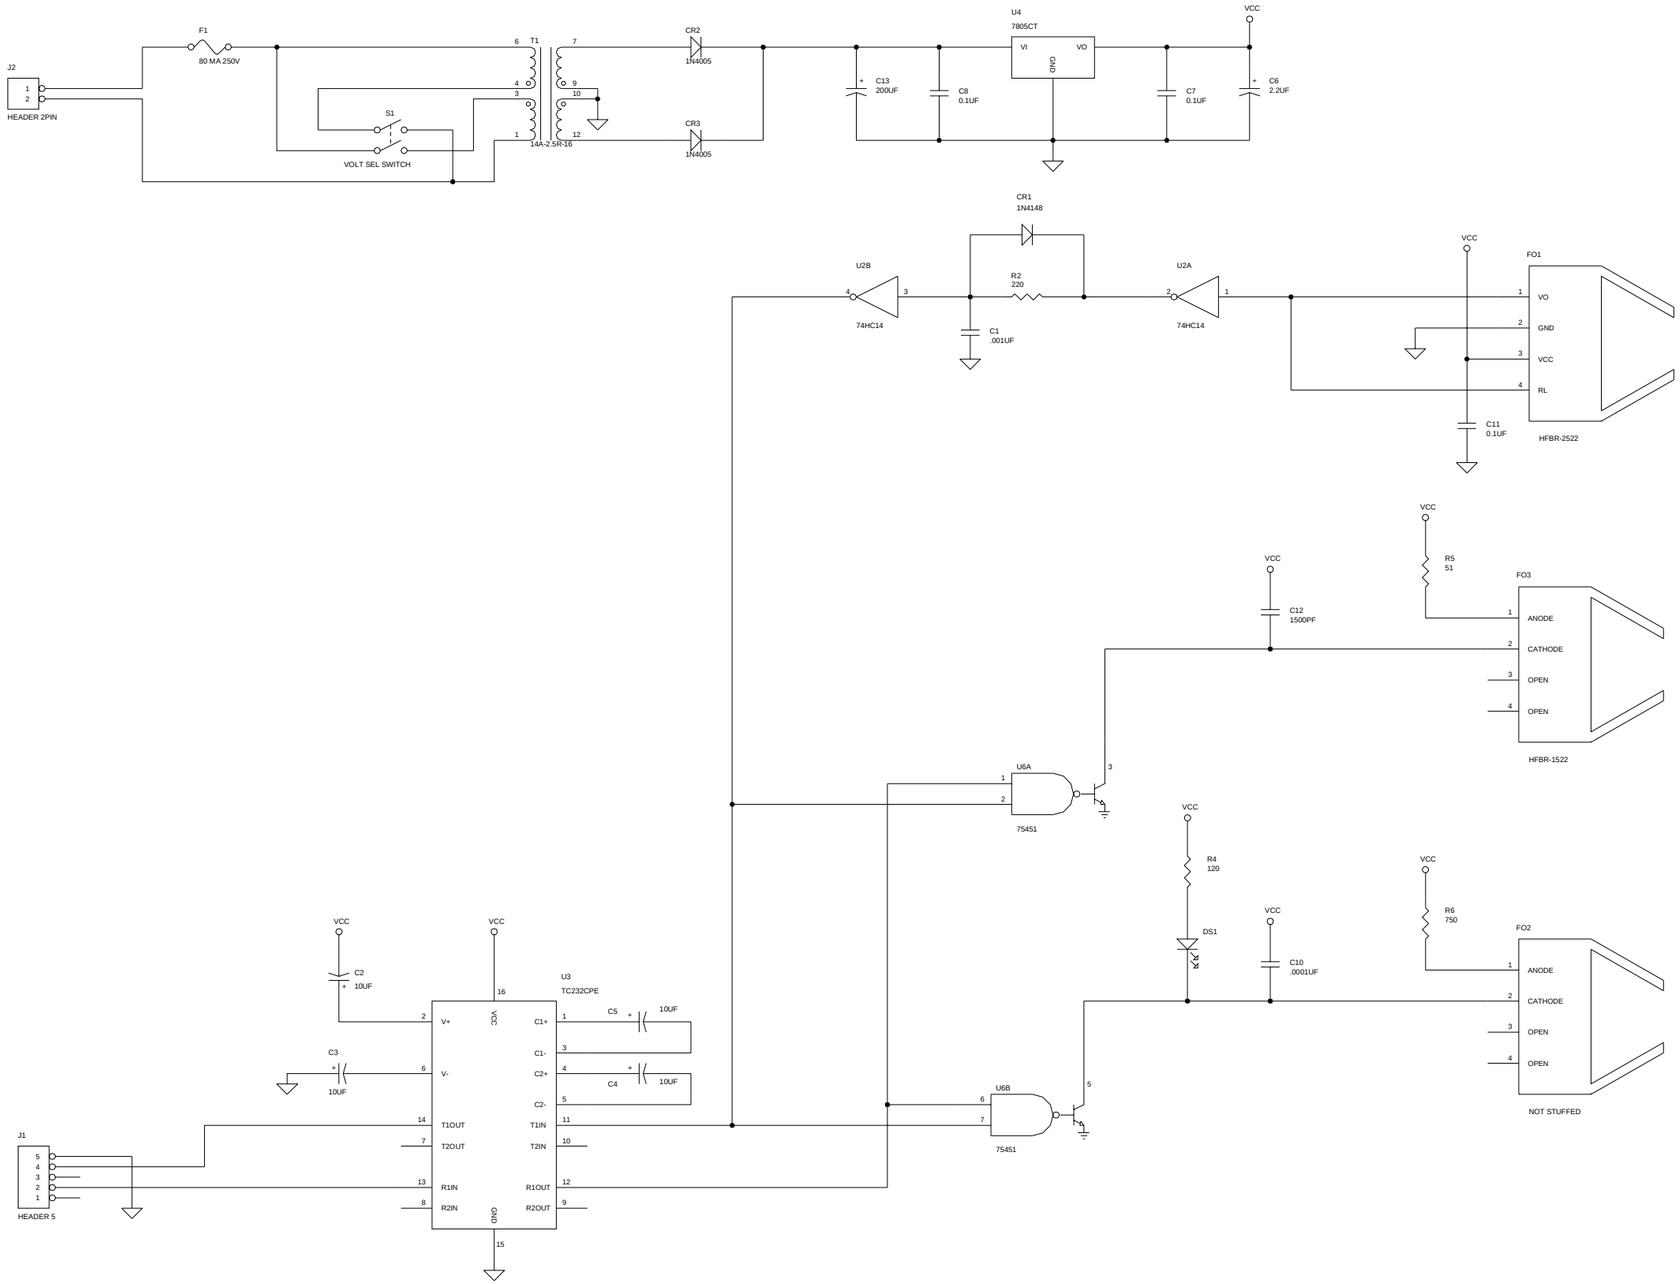

©2003 BALLY GAMING AND SYSTEMS

|| Display Board, Horse Play AS-03356-0524


☑Upright

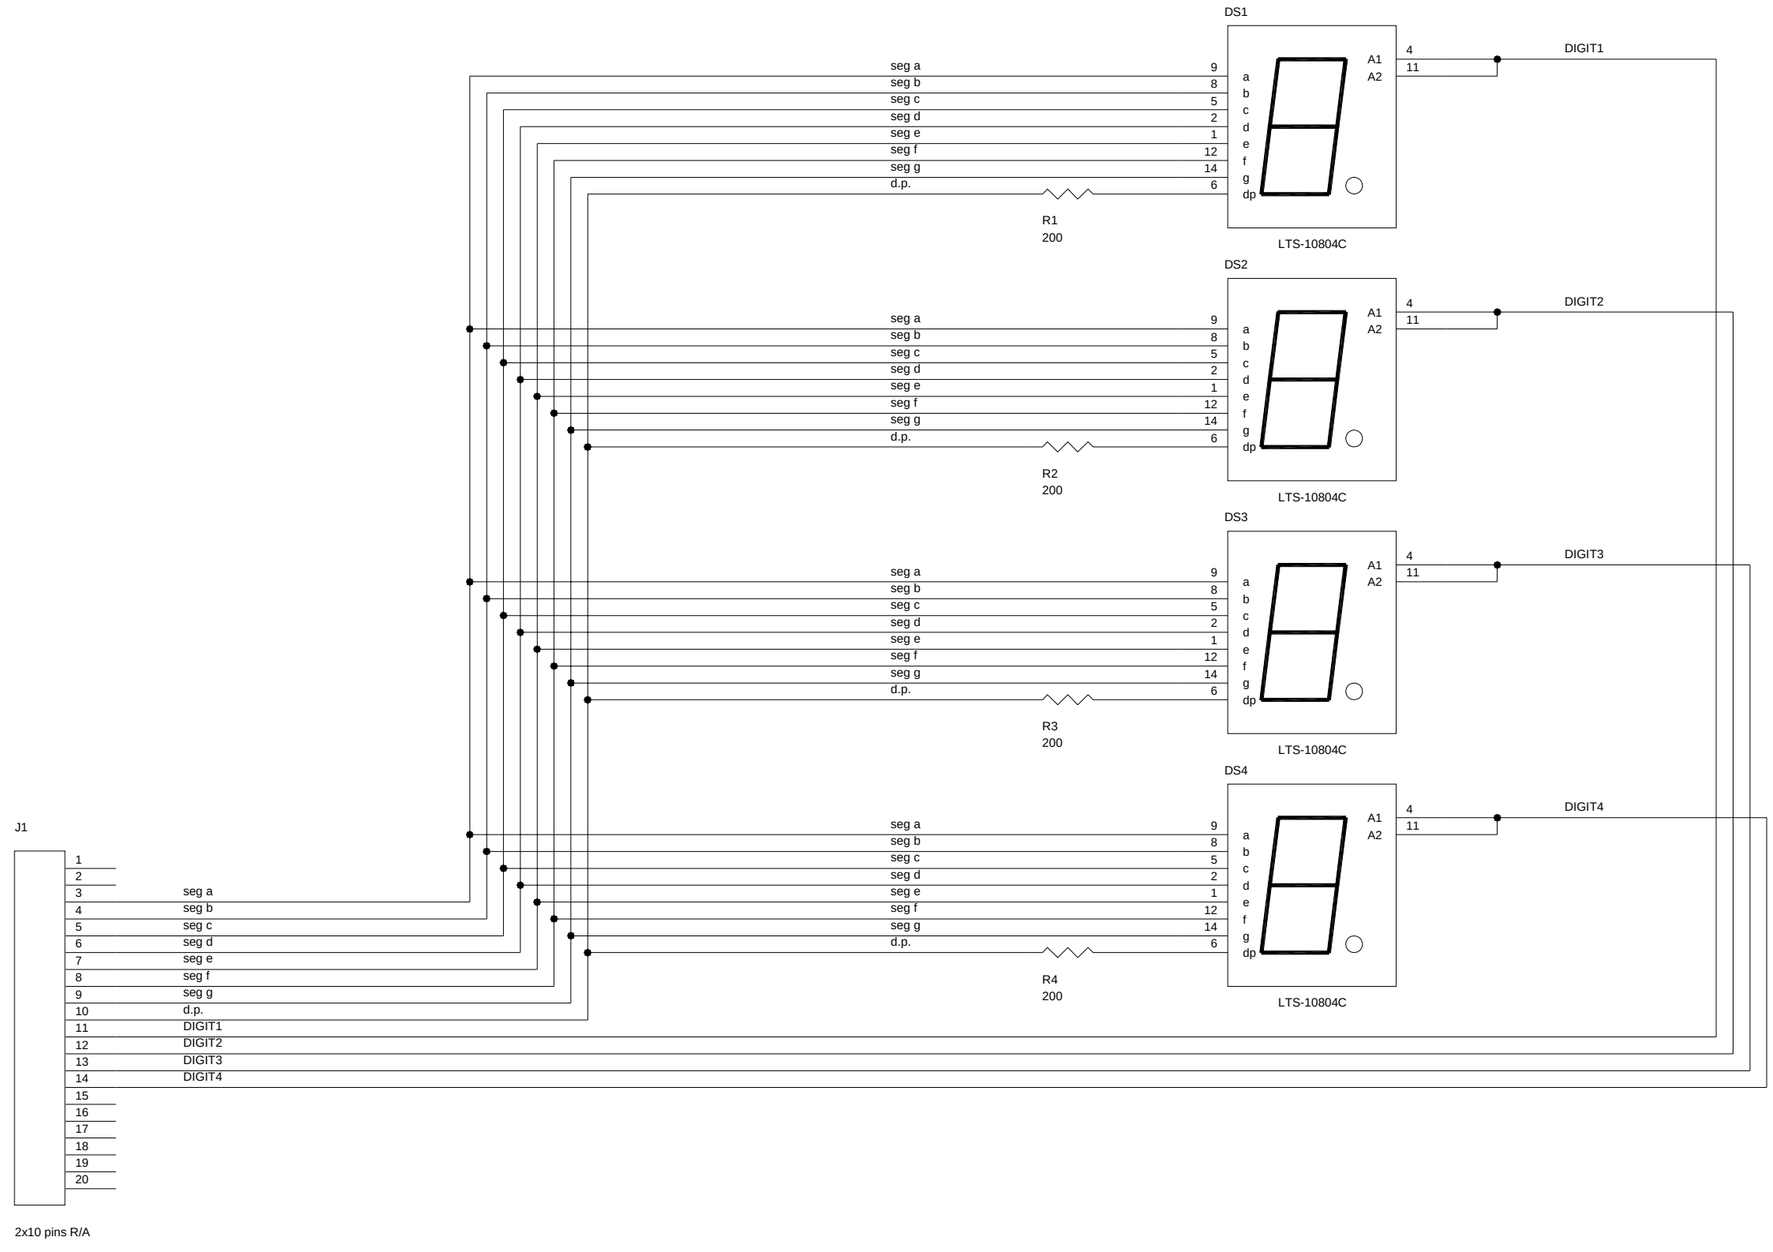

©2003 BALLY GAMING AND SYSTEMS

Marquee


|| **LED Board with Power Connector, Diamond AS-03356-0621** ☑Upright

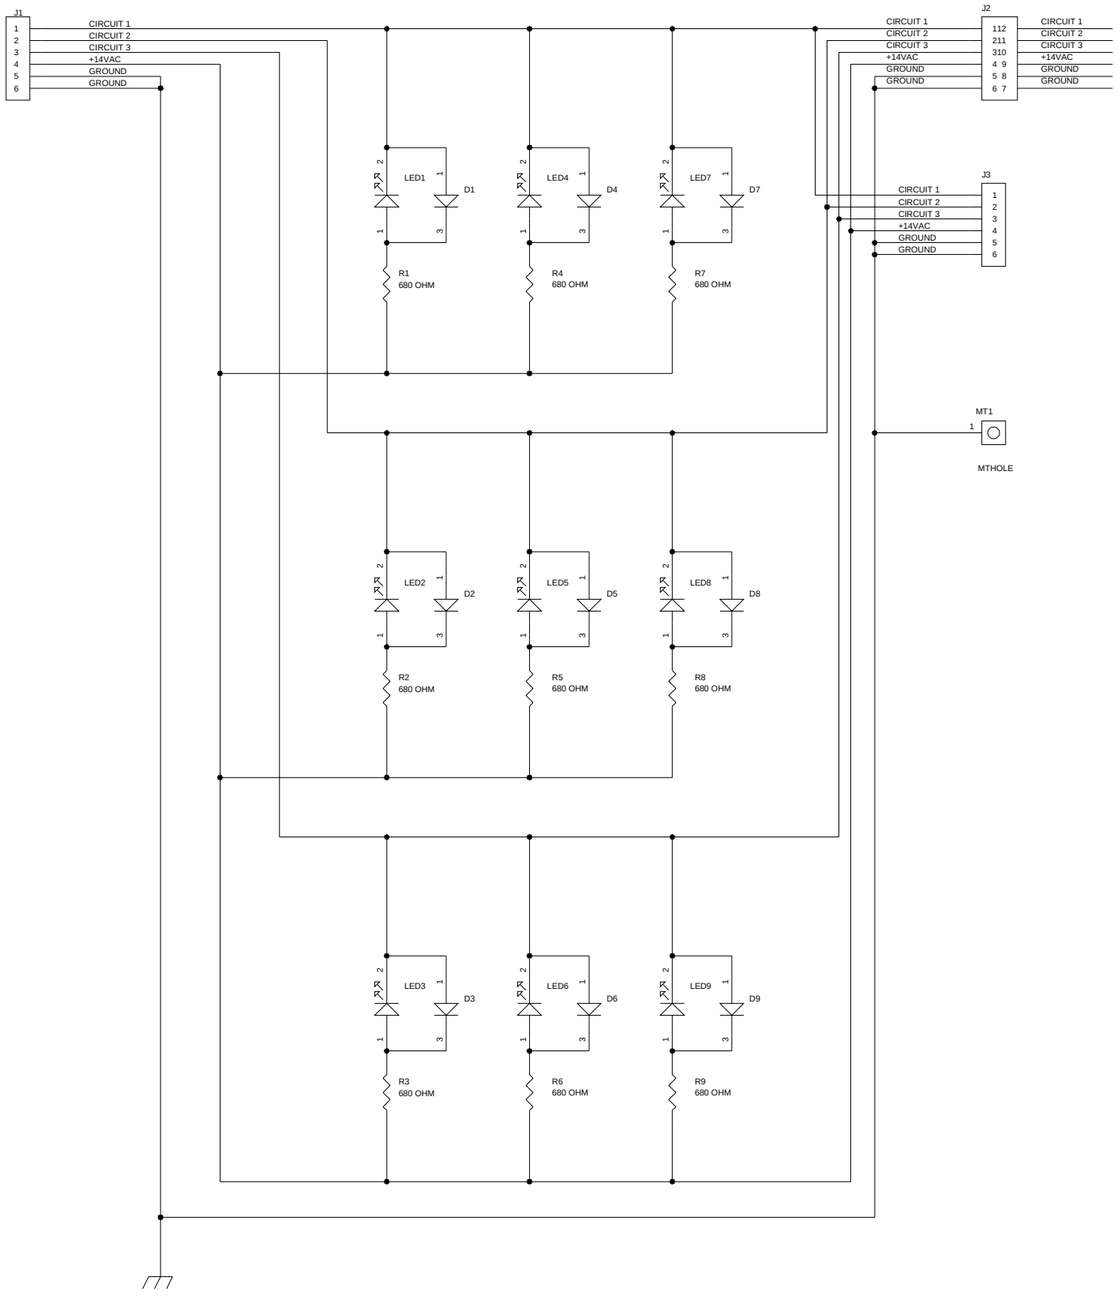

Marquee

|| **LED Board, Diamond AS-03356-0622**

☑Upright

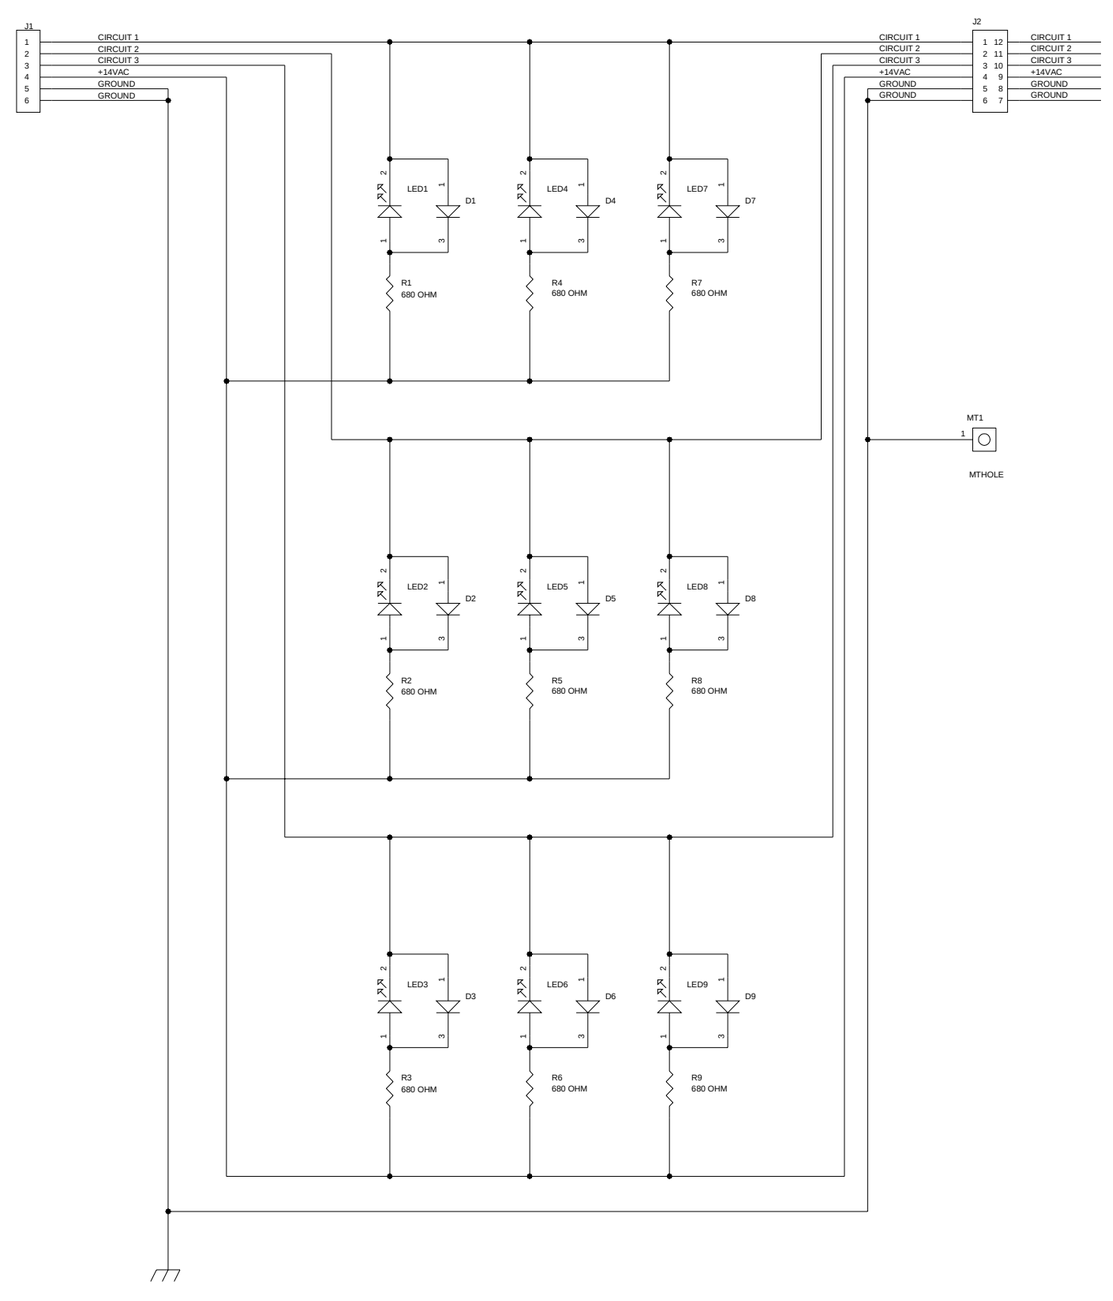


©2003 BALLY GAMING AND SYSTEMS

Marquee

|| LED Power Board, Round AS-03356-0577


☑Upright

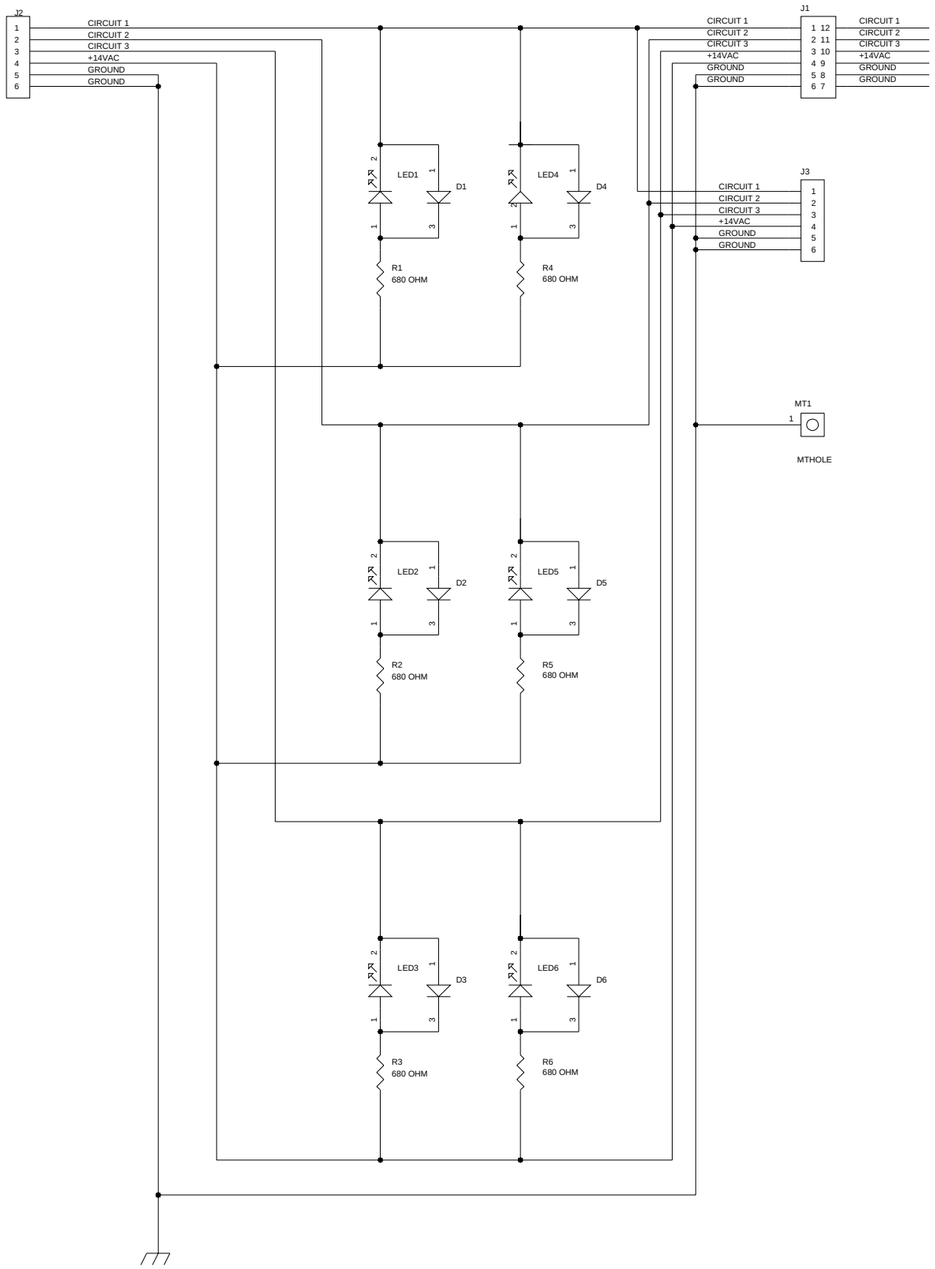

Marquee

|| Marquee Board, To Tell the Truth AS-03356-0551

☑Upright

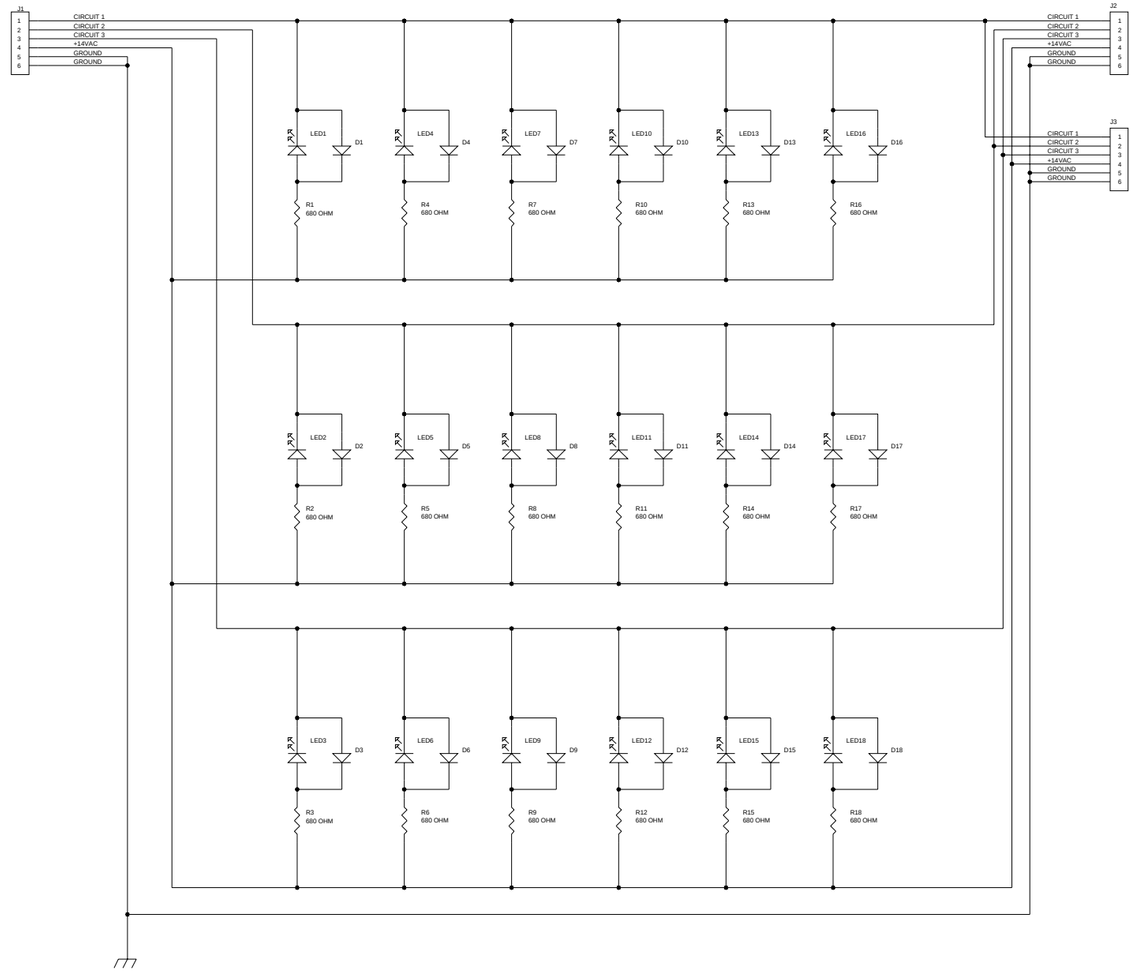


©2003 BALLY GAMING AND SYSTEMS

Marquee

Printed Circuit Board “A” - Generic Oval AS-03356-0592


☑ Upright

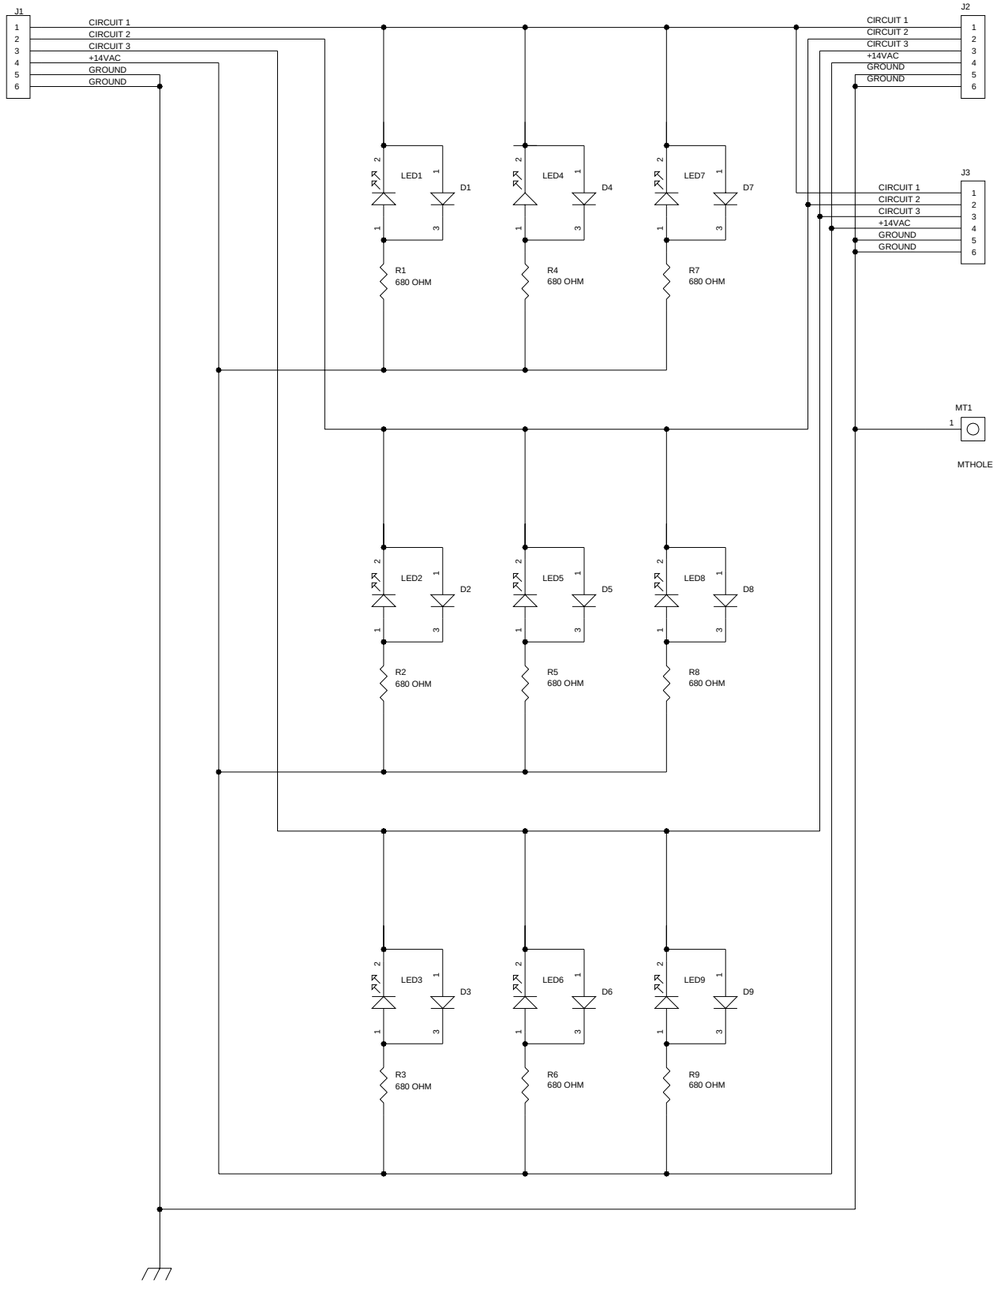

Marquee

|| Printed Circuit Board “B”- Generic Oval AS-03356-0593


☑ Upright

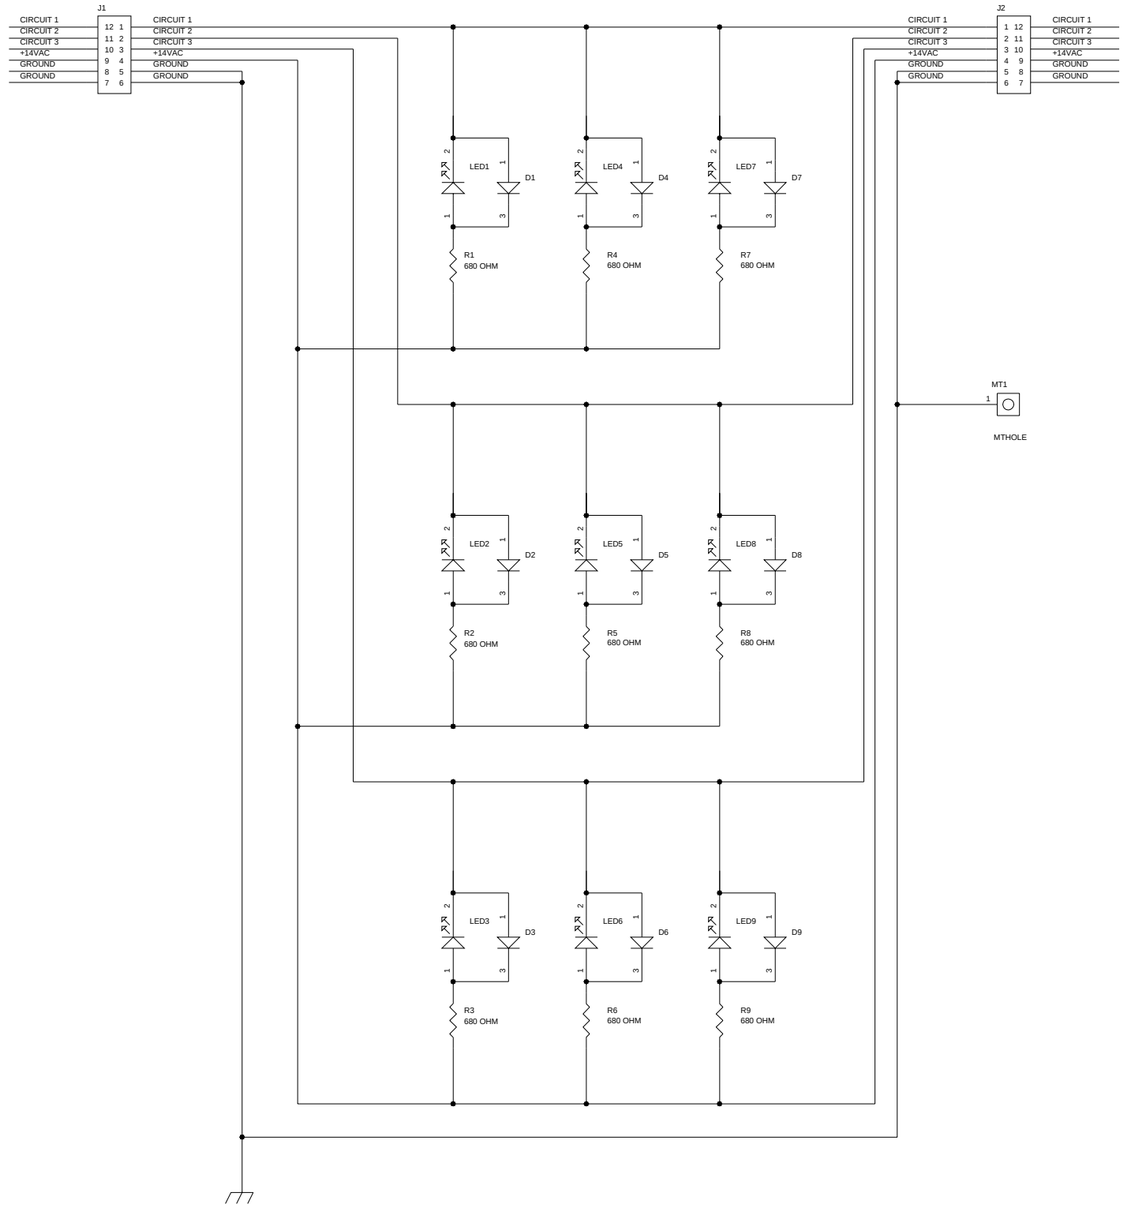

©2003 BALLY GAMING AND SYSTEMS

Power Board, Movie Star Marquee AS-03356-0557

|| ☑Upright

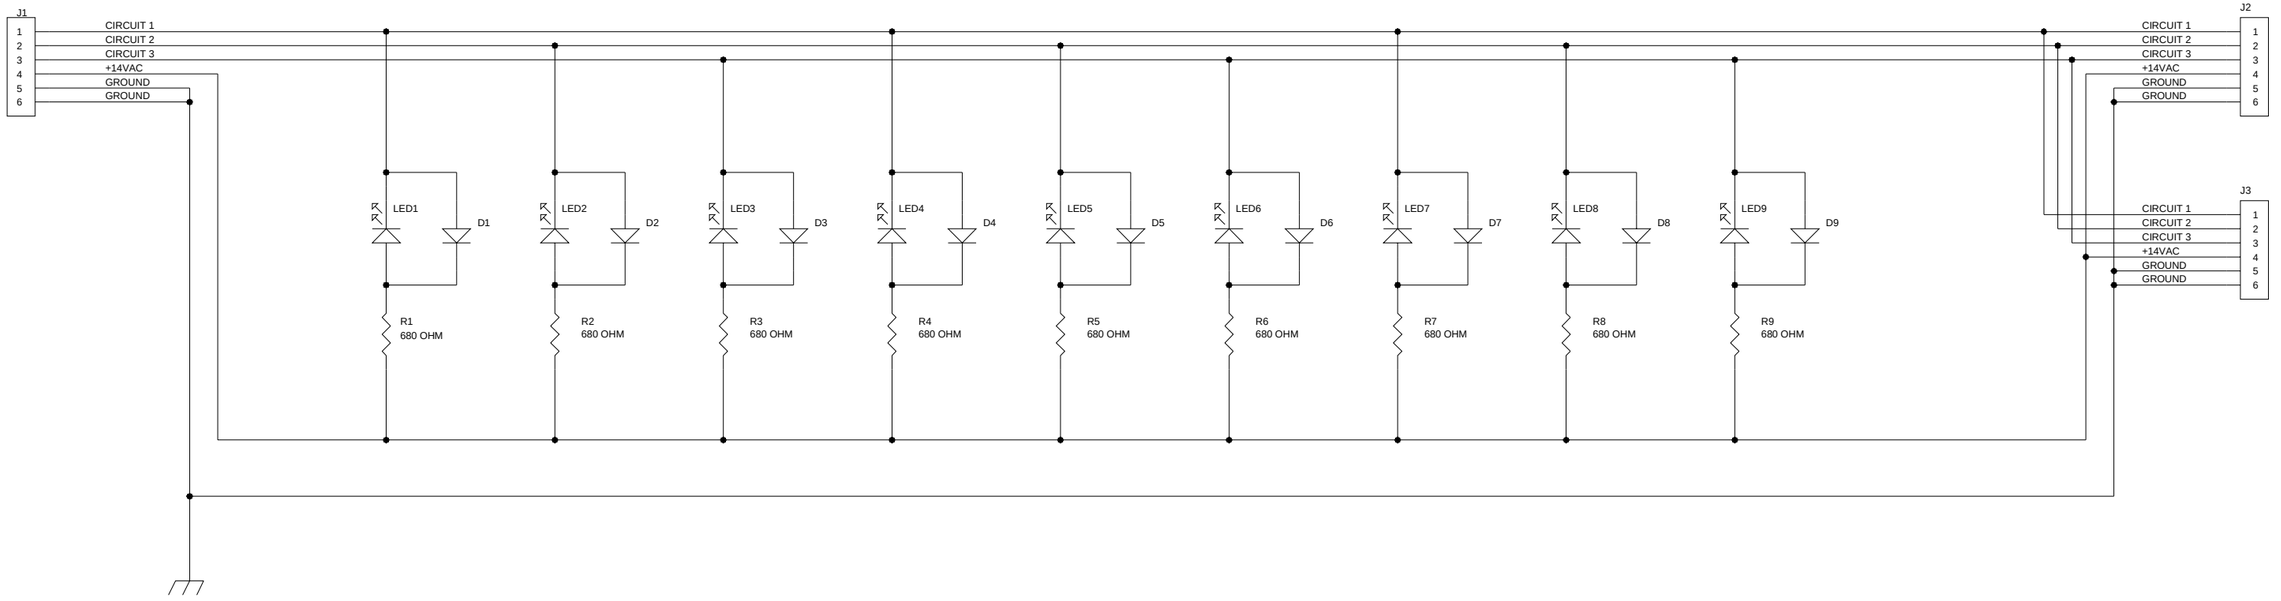

©2003 BALLY GAMING AND SYSTEMS