# Servo Characterization for the SOFIA Modular Kinetic Surface

Marco Heimdal Castro Magaña, Alejandro Amador Franco, Karen Alejandra Guevara Vasquez, María Alicia Vela Contreras, Juan Pablo Contreras Quiñones, Jorge A. Lizarraga, Luis E. González-Jiménez, Luis F. Luque-Vega

***Abstract*—The SOFIA modular kinetic surface consists of 16 electromechanical modules arranged in a honeycomb configuration, each actuated by two servomotors, requiring the coordinated control of 32 actuators. Differences in the dynamic response of these servomotors may affect the synchronization and positioning performance of the system. This work proposes an experimental methodology for characterizing the dynamic response of the two servomotors in a single SOFIA module, temporarily removed from the complete structure for testing. A removable crown-shaped measurement device incorporating limit switches is proposed to establish repeatable angular reference positions and record the time intervals associated with servo movement. The control architecture consists of an ESP32-C3 microcontroller and two PCA9685 PWM drivers, providing independent control of the 32 actuators in the complete system. The proposed methodology includes repeatedmovement tests under defined operating conditions, analysis of the measured response times, and evaluation of an appropriate dynamic model for estimating effective servomotor time constants. The experimental scope is limited to the two servomotors of the selected module, with the aim of establishing a measurement procedure for evaluating their dynamic behavior.**

***Index Terms*—Servomotor characterization, dynamic response, time constant estimation, limit switches, modular robotics, kinetic surfaces.**

## I. Introduction

SOFIA is a modular robotic installation composed of 16 mechatronic units arranged in a two-dimensional honeycomb configuration, with each unit providing two rotational degrees of freedom actuated by servomotors. The system aims to achieve coordinated control of the multiple actuators while enabling interaction through static and dynamic human gestures. For this purpose, SOFIA integrates embedded control, inter-module communication, and an external computer vision system for gesture recognition.

The SOFIA system requires the integration of mechanical actuation, servo control, embedded processing, and communication subsystems. Since each of the 16 units uses two servomotors, the complete demonstrator requires the coordinated control of 32 actuators and the generation of multiple PWM signals. The embedded controller must coordinate the desired actuator positions, while the communication architecture should support the future integration of additional SOFIA modules without significantly increasing wiring and control complexity. This work proposes an experimental method to estimate individual servo time constraints with a mechanical solution.

The authors are affiliated with the Instituto Tecnológico de Estudios Superiores de Occidente (ITESO), Tlaquepaque, Jalisco, Mexico.

### A. Problem Statement and Research Question

Standard low-cost micro-servos exhibit manufacturing tolerances that result in non-uniform actuation speeds and transient response times across different units. In a 16-unit, 32-actuator modular kinetic surface like SOFIA, driving all servos with uniform control signals creates dynamic motion desynchronization and mechanical stress during normal use.

To address this limitation, this work investigates the following research question: *Can experimental estimation of individual servo mechanical time constants ($\tau_m$) and their integration into a trajectory controller improve dynamic positional synchronization across a 32-actuator kinetic surface?*

This encompasses three primary objectives: (1) designing a PCB integrating an ESP32-C3 microcontroller, dual PCA9685 drivers, and RS-485 interfaces; (2) developing an automated micro-test protocol to capture step-response and extract individual time constants; and (3) integrating individual compensation parameters into the surface tracking controller to equalize dynamic settling times across all actuators.

### B. Related shape-changing interface systems

Motorized arrays have been widely explored as a mechanism for generating dynamic physical surfaces. Relief introduced an actuated tabletop composed of 120 individually addressable motorized pins and emphasized a scalable hardware and software architecture [1]. This concept was extended through inFORM, where shape actuation was employed to generate dynamic physical affordances and constraints and to manipulate physical objects [2]. At a larger scale, TRANSFORM explored the transformation of static physical structures into dynamic systems driven by streams of data and energy [3]. These approaches demonstrate the potential of coordinated arrays of actuators, although their architectures primarily focus on large pin-based or installation-scale physical surfaces.

Alternative approaches have explored different actuation principles and modular configurations. PneUI demonstrated shape-changing interfaces based on pneumatically actuated soft composite materials, integrating sensing and active shape output within deformable structures [4]. In contrast, LineFORM investigated electromechanical shape transformation through serial chains of one-degree-of-freedom servo actuators [5]. This concept evolved toward greater hardware modularity in ChainFORM, where identical modules incorporate motor actuation, sensing, visual output, and embedded processing [6]. These systems highlight modularity and distributed actuation as relevant design characteristics for reconfigurable physical interfaces.

TABLE I
COMPARATIVE MATRIX OF RELATED SHAPE-CHANGING INTERFACE SYSTEMS

| Reference | Method / technology | Metric / focus | Main result | Gap with respect to SOFIA |
|---|---|---|---|---|
| Relief [1] | Array of 120 motorized pins, scalable low-cost control | Actuation density, hardware/software scalability | Continuous surface capable of rendering and animating 3D shapes, with per-pin input sensing | Translational actuation only (1 DOF per pin); no independent rotation per unit |
| inFORM [2] | Pin-based shape display on a pre-existing platform | Dynamic physical affordances and constraints, object manipulation | Real-time direct-touch interaction and physical rendering of content | Same translational limitation as Relief; centralized architecture, not modular per unit |
| TRANSFORM [3] | Three large-scale pin displays, kinetic energy as input | Aesthetic transformation from static furniture to dynamic system | Over one thousand pins coordinated in real-time wave motion | Installation-scale system; no per-module orientable control or distributed communication between units |
| PneUI [4] | Pneumatically actuated multi-layer soft composite materials | Integrated input sensing and shape output in the material itself | Four functional applications (phicons, mobile, case, lamp) with controllable shape change | Soft/pneumatic actuation, not discrete rotational motion; difficult to scale to precise angular control |
| LineFORM [5] | Serial chain of one-DOF servo actuators | Line/curve-based interaction affordances | Cord, mobile, and body-constraint interfaces through line-shaped actuation | Serial (chain) configuration, not a two-dimensional array; 1 DOF per unit, not 2 |
| ChainFORM [6] | Identical modules with servo, touch sensing, visual output and embedded processing | Hardware modularity and reconfigurability | Modular, reconfigurable platform with rich per-module I/O | Modularity demonstrated, but still a linear chain, not a 2D array with 2 DOF per node |

TABLE II
BENCHMARKING AGAINST RELATED SHAPE-CHANGING SYSTEMS

| Solution | Configuration | DOF/ unit | Modularity / scalability |
|---|---|---|---|
| inFORM [2] | Pin array on fixed platform | 1 (translational) | Low – centralized control, not designed for modular expansion |
| LineFORM / ChainFORM [5], [6] | Serial chain of modules | 1 per module | Medium – modular, but limited to a linear configuration |
| PneUI [4] | Pneumatic soft composite material | Continuous (non-discrete) | Low – difficult to discretize into individually addressable nodes |
| **SOFIA (proposed)** | 2D array, honeycomb modules | **2 (rotational)** | **High – I2C bus + RS-485 designed for future module expansion** |

The main technological characteristics and differences identified among the reviewed shape-changing interfaces are summarized in Table I.

In contrast to the reviewed shape-changing interfaces, SOFIA combines a two-dimensional honeycomb arrangement with two rotational degrees of freedom per unit. Unlike pin-based displays, which predominantly constrain motion to a single translational axis, or line-based modular systems organized as serial chains, each SOFIA unit can independently modify its orientation while remaining part of the same physical surface. This configuration introduces design challenges related to coordinated actuation, modularity, scalability, control architecture, electrical integration, and communication. Based on the reviewed literature, these characteristics were identified as relevant criteria for evaluating the technological architecture of the demonstrator. Table I summarizes the comparative analysis of the reviewed systems, while Table II contrasts SOFIA with the reviewed solutions using the established comparison criteria.

From the functional decomposition of the demonstrator and its comparison with the literature, several technological opportunities were identified. One is the development of a scalable control architecture capable of independently coordinating all actuators while reducing the processing load on the main controller. Another is the implementation of an inter-module communication architecture that allows multiple SOFIA modules to operate as part of a larger system. Additional opportunities include the implementation of software-defined motion limits and smoothing strategies to prevent abrupt servo movements and reduce mechanical stress.

Based on these opportunities, this work focuses on the proposed experimental characterization of servomotor dynamic response, supported by a preliminary electronic and control architecture for the SOFIA demonstrator. The selected hardware provides the PWM generation, embedded processing, and communication interfaces required by the test system, while the main research contribution is the methodology for measuring and analyzing individual actuator response. Automatic Modbus address assignment is outside the experimental scope.

## II. MATERIALS AND METHODS

The SOFIA kinetic surface consists of 16 electromechanical modules arranged in a honeycomb configuration, each providing two rotational degrees of freedom actuated by MG90S servomotors [7], [8]. Although the complete system incorporates 32 actuators, the experimental characterization proposed in this study is limited to the two servomotors of a single module removed from the SOFIA structure.

The methodology is divided into three main stages: hardware configuration, experimental measurement, and dynamic response analysis. The first stage involves the selection and verification of the electronic components required for servomotor control, considering the established hardware requirements [9]. The second stage proposes the use of a removable crown-shaped measurement device equipped with limit switches to detect predefined angular positions during controlled movements. The third stage involves analyzing the recorded timing data and evaluating an appropriate dynamic model to estimate the effective time constant of each servomotor.

The experimental procedure is intended to provide repeatable measurements under defined operating conditions. Relevant variables include the commanded angular displacement, movement direction, supply voltage, and measured time intervals. These variables will be considered when evaluating differences in the dynamic response of the two servomotors.

TABLE III
SOFIA MAIN REQUIREMENTS

| Requirement | Specification | Verification |
|---|---|---|
| Power | 5 V servo supply | Compatible with MG90S range |
| Logic voltage | 3.3 V MCU logic | Required for ESP32-C3 GPIO |
| Communication | WiFi/Bluetooth + I2C | Supported by ESP32-C3 |
| PWM control | 32 servo channels, 50 Hz | Two PCA9685 drivers required |
| Mechanical | 16 modules, 2 DOF each | 32 servos required |

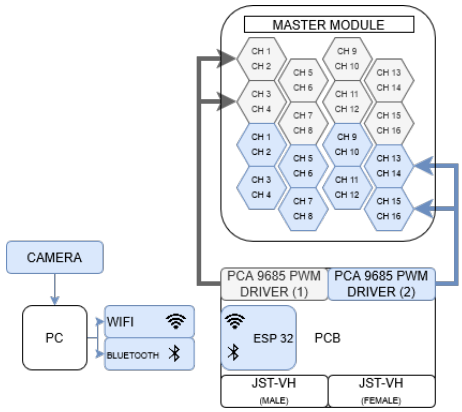



Fig. 1. Block diagram describing SOFIA components and connections.

The electronic architecture of the complete SOFIA system includes an ESP32-C3 microcontroller and two PCA9685 PWM drivers, which provide the 32 PWM channels required for actuator control [7], [10], [11]. However, only the two servomotors of the selected module will be evaluated experimentally in thisstudy.

The main electrical, communication, and mechanical requirements of the SOFIA demonstrator are summarized in Table III. These requirements are based on the system architecture and the established technical verification criteria [7], [9].

Figure 1 illustrates the system architecture and signal flow of the SOFIA demonstrator. Telemetry and motion commands are communicated wirelessly between a central host PC (equipped with an external vision camera) and the main PCB via Wi-Fi or Bluetooth protocols. Onboard processing is handled by an ESP32 microcontroller, which interfaces with two PCA9685 PWM drivers over $I^2C$ to control a total of 32 servos. Driver 1 manages channels CH1–CH16 (grey group), while Driver 2 addresses channels CH17–CH32 (blue group, labeled CH1–CH16 on the second module) across the Master Module actuator array. Interconnectivity between boards is planned using JST-PH connectors.

### A. ESP32-C3 Technical Analysis

The main technical specifications of the ESP32-C3 microcontroller are presented in Table IV.

### B. PCA9685 Technical Analysis

The specifications of the PCA9685 PWM driver are summarized in Table V.

TABLE IV
ESP32-C3 MAIN SPECIFICATIONS AND DATASHEET VERIFICATION [10]

| Parameter | Value | Source (Doc / Ver / Pg) | Justification | Verification |
|---|---|---|---|---|
| Supply Voltage | 3.0–3.6 V | ESP32-C3 Datasheet v2.4, p. 18 | Match system main power operating limits | Requires regulated 3.3 V supply |
| Wi-Fi | 802.11 b/g/n | ESP32-C3 Datasheet v2.4, p. 2 | Enable 2.4 GHz wireless transmission | Complies; integrated 2.4 GHz subsystem |
| Bluetooth | BLE 5 | ESP32-C3 Datasheet v2.4, p. 2 | Support low-energy configuration and monitoring | Complies; Bluetooth LE 5.0 supported |
| Logic Level | 3.3 V GPIO | ESP32-C3 Datasheet v2.4, p. 19 | Ensure digital signal levels meet peripheral logic thresholds | 5 V logic cannot be applied directly without level shifting |
| Boot Pins | GPIO2, 8, 9 | ESP32-C3 Datasheet v2.4, p. 12 | Prevent unintended strapping state selection during power-up | PCB design hardware strapping verification required |
| Temperature | Up to 105 °C | ESP32-C3 Datasheet v2.4, p. 18 | Ensure reliable continuous execution under thermal load | Suitable for industrial and laboratory operating environments |

TABLE V
PCA9685 MAIN SPECIFICATIONS AND DATASHEET VERIFICATION [11]

| Parameter | Value | Source (Doc / Ver / Pg) | Justification | Verification |
|---|---|---|---|---|
| Channels | 16 PWM | PCA9685 Datasheet Rev. 7.5, p. 1 | Control multiple servos with minimal MCU pin overhead | Two devices provide 32 outputs |
| Resolution | 12 bits | PCA9685 Datasheet Rev. 7.5, p. 1 | High-precision duty-cycle control for smooth motion | Complies; 4096-step resolution |
| Interface | $I^2C$ FM+ | PCA9685 Datasheet Rev. 7.5, p. 1 | Standardized serial bus compatible with host controller | Compatible with ESP32-C3 $I^2C$ peripheral |
| Supply Voltage | 2.3–5.5 V | PCA9685 Datasheet Rev. 7.5, p. 52 | Operate on standard 3.3 V logic power rail | Uses 3.3 V logic power supply |
| PWM Frequency | 24–1526 Hz | PCA9685 Datasheet Rev. 7.5, p. 1 | Match standard RC servo control signal requirements | Configured to 50 Hz output frequency |
| Addressing | Up to 62 ICs | PCA9685 Datasheet Rev. 7.5, p. 12 | Support unique addressing for cascading multiple ICs | Configured with distinct fixed addresses (0x40 and 0x41) |

### C. MG90S Servo Technical Analysis

The nominal operating characteristics of the MG90S servomotor are presented in Table VI.

### D. Checklist Verification

The preliminary component compatibility assessment is summarized in Table VII.

TABLE VI
MG90S MAIN SPECIFICATIONS AND DATASHEET VERIFICATION [8]

| Parameter | Value | Source (Doc / Ver / Pg) | Justification | Verification |
|---|---|---|---|---|
| Voltage | 4.8–6.0 V | TowerPro MG90S documentation, p. 1 | Match system 5 V main power | Compatible with 5 V |
| Torque | 1.8 kgf·cm at 4.8 V; 2.2 kgf·cm at 6.0 V | TowerPro MG90S documentation, p. 1 | Provide required joint actuation torque under load | 1.88 kgf·cm available at 5.0 V; validation required |
| Speed | 0.10 s/60° at 4.8 V; 0.08 s/60° at 6.0 V | TowerPro MG90S documentation, p. 1 | Ensure joint angular velocity meets dynamic motion profile | Reference value; complies for target control loop speed |
| Mass | 13.4 g | TowerPro MG90S documentation, p. 1 | Minimize total end-effector and leg inertia | Must be considered in structural mass budget and CAD model |
| PWM Frequency | 50 Hz | TowerPro MG90S documentation, p. 1 | Standard RC servo control signal frame timing (20 ms period) | Compatible with PCA9685 PWM output driver |
| Stall Current | Not reported | TowerPro MG90S documentation, p. 1 | Sizing power supply current limits for worst-case loading | Not specified in datasheet; physical current measurement required |

TABLE VII
VERIFICATION SUMMARY

| Component | Status | Comment |
|---|---|---|
| ESP32-C3 | **Complies** | Requires 3.3 V regulation and boot verification |
| PCA9685 | **Complies** | Requires unique I2C addresses and 50 Hz configuration |
| MG90S | **Partial** | Torque and current require validation |

### *E. RS-485 Logic-Level Compatibility*

To enable communication with an additional set of 16 SOFIA modules, the proposed architecture incorporates the MAX13487E TTL485-V2.0 transceiver module. The MAX13487E provides half-duplex RS-485 communication with automatic direction control, reducing the need for additional transmission-direction control signals [12].

According to the manufacturer's datasheet, the MAX13487E operates with a nominal 5 V supply, whereas the ESP32-C3 uses 3.3 V GPIO logic [10], [12]. A preliminary electrical test identified a receiver-output voltage of approximately 5.00 V at the TXD terminal of the TTL485-V2.0 module. This voltage exceeds the permitted input range of the ESP32-C3.

To address this incompatibility, a resistive voltage divider was incorporated into the PCB schematic between the TTL485-V2.0 TXD output and the ESP32-C3 UART receive input. The divider consists of a 10 kOhm series resistor and an 18 kOhm resistor connected to ground, producing approximately 3.21 V from a nominal 5 V input.

The ESP32-C3 UART transmit output remains directly connected to the TTL485-V2.0 RXD input, since the MAX13487E specifies a minimum logic-high input voltage of 2.0 V [12].

TABLE VIII
SOFIA DEMONSTRATOR BILL OF MATERIALS (BOM) SUMMARY

| Item | Component | Qty / Unit | Qty / Sys | Technical Description | Manufacturer | Location |
|---|---|---|---|---|---|---|
| 1 | Sofia003-P001-03 | 1 | 16 | Sofia Module Base | In-house (LabDST) | ITESO, MX |
| 2 | MG90S / SG90 Servo | 2 | 32 | Micro Servo Motor | Tower Pro | Hong Kong |
| 3 | Sofia003-E002-01 | 1 | 16 | Lower Joint Subassembly | In-house (LabDST) | ITESO, MX |
| 3.1/4.4 | Pro3 | 2 | 32 | Servo Horn | Tower Pro | Hong Kong |
| 3.2 | Sofia003-P004-02 | 1 | 16 | Lower Joint Support Left | In-house (LabDST) | ITESO, MX |
| 3.3 | Sofia003-P004-03 | 1 | 16 | Lower Joint Support Right | In-house (LabDST) | ITESO, MX |
| 3.4/3.5/ 4.3/7/8 | M2 Screws (various) | 10 | 160 | Servo Arm Screw ($M2 \times 10/12$ mm) | Walfront | Shenzhen, CN |
| 3.6 | Axis 1 (9 × 9 mm) | 1 | 16 | Joint Shaft (9 mm × 9 mm) | Mae | Local |
| 3.7 | Sofia003-P002-02 | 1 | 16 | Lower Joint Link | In-house (LabDST) | ITESO, MX |
| 4 | Sofia003-E003-01 | 1 | 16 | Upper Joint Subassembly | In-house (LabDST) | ITESO, MX |
| 4.1 | Sofia003-P005-01 | 1 | 16 | Upper Joint Support Left | In-house (LabDST) | ITESO, MX |
| 4.2 | Sofia003-P005-02 | 1 | 16 | Upper Joint Support Right | In-house (LabDST) | ITESO, MX |
| 5 | Sofia003-P008-01 | 1 | 16 | Sofia Top Module Linkage | In-house (LabDST) | ITESO, MX |
| 6 | Sofia003-P009-01 | 1 | 16 | Top Platform Support | In-house (LabDST) | ITESO, MX |
| 9 | Inser M3x5x4 | 1 | 16 | M3 Threaded Insert (5 × 4 mm) | ZWMSSLL | Shenzhen, CN |
| 10 | Sofia003-P000-01 | 1 | 16 | Sofia Hexagonal Top Platform | In-house (LabDST) | ITESO, MX |
| – | ESP32-C3 SuperMini | – | 1 | Central MCU (Wi-Fi/BLE telemetry) | Espressif | Shanghai, CN |
| – | PCA9685 Servo Driver | – | 2 | 16-channel 12-bit $I^2C$ PWM driver board | NXP Semi | Eindhoven, NL |
| – | MAX13487E TTL485 | – | 1 | Controller-side half-duplex RS-485 transceiver | Analog Devices | Wilmington, US |
| – | LED RGB | – | 1 | System state status indicator LED | Mexbit | Local |
| – | JST-PH Male | – | 1 | High-current power PCB header and MODBUS communication | JTAREA | Local |
| – | JST-PH Female | – | 1 | High-current power harness plug and MODBUS communication | JTAREA | Local |
| – | R1–R5 (Resistors) | – | 5 | RGB LED: 470 Ω (R1), 330 Ω (R2–R3); RS-485 divider: 10 kΩ (R4), 18 kΩ (R5) | Mexbit | Local |

TABLE IX
TRADE-OFF ANALYSIS FOR ACTUATION

| Alternative | Stall Torque | Mass | Key Limitation / Feature | Sel. |
|---|---|---|---|---|
| MG996R [13] | 9.4–11.0 kgf · cm | 55 g | Excessive size and high current draw | |
| SG90 [14] | 1.8 kgf · cm | 9 g | Fragile nylon gears wear out under load | |
| **MG90S [8]*** | 1.8–2.2 kgf · cm | 13.4 g | Metal gears; optimal torque/size ratio | ✓ |

TABLE X
TRADE-OFF ANALYSIS FOR PWM EXPANSION

| Alternative | Channels | Key Limitation / Feature | Sel. |
|---|---|---|---|
| Software PWM [10] | Limited | High MCU timer overhead; Limited GPIO | |
| Auxiliary MCU [15] | Flexible | Requires custom firmware and PCB space | |
| **PCA9685 [11]*** | 16 | Hardware 12-bit PWM over $I^2C$ bus | ✓ |

### *F. Bill of Materials*

The components required for the SOFIA demonstrator, including mechanical parts, actuators, and electronic devices, are summarized in Table VIII.

### *G. Justification of Technological Selection*

The technological architecture was selected according to the functional and scalability requirements of the SOFIA demonstrator. MG90S servomotors as stated in Table IX were selected to provide controlled angular positioning for each degree of freedom, while two PCA9685 drivers as stated

TABLE XI
TRADE-OFF ANALYSIS FOR MAIN CONTROLLER

| Alternative | Telemetry | Key Limitation / Feature | Sel. |
|---|---|---|---|
| Arduino Nano [16] | None | 8-bit AVR; lacks integrated wireless | |
| STM32F4 Core [15] | External | High compute; larger board area | |
| **ESP32-C3 SuperMini [10]*** | Native | 32-bit RISC-V with Wi-Fi/BLE | ✓ |

TABLE XII
TRADE-OFF ANALYSIS FOR INTER-MODULE COMMUNICATION

| Alternative | Topology | Key Limitation / Feature | Sel. |
|---|---|---|---|
| Direct UART [10] | Point-to-Point | Poor multi-drop scalability | |
| CAN Bus [17] | Multi-drop | High protocol/driver complexity | |
| **RS-485 (MAX13487E) [12]*** | Multi-drop | Differential noise immunity + auto direction | ✓ |

in Table X were selected to provide the 32 PWM channels required by the system through a shared I2C bus. The ESP32-C3 SuperMini as stated in Table XI was selected as the main controller due to its integrated wireless connectivity and support for the required communication interfaces. Finally, RS-485 as stated in Table XII was selected for inter-module communication because its differential and multi-node architecture supports the future connection of multiple SOFIA modules.

### H. Servo Mechanical Time Constant Estimation

The first-order dynamic model for the angular position response $\theta(t)$ to a step input is defined by:

$$\theta(t) = \theta_f + (\theta_0 - \theta_f)e^{-t/\tau_m} \tag{1}$$

where $\theta_0$ represents the initial angular position, $\theta_f$ denotes the commanded step target angle, and $\tau_m$ is the servo mechanical time constant.

To characterize $\tau_m$, no-load step responses of 60° will be applied while measuring the transient velocity profile. As noted in Table VI, the manufacturer datasheet [8] lists nominal angular speed (0.10 s/60° at 4.8 V and 0.08 s/60° at 6.0 V) but omits the explicit value for $\tau_m$, necessitating experimental identification.

## III. DESIGN AND IMPLEMENTATION OF THE TECHNOLOGICAL SOLUTION

### A. Simulation of the 16 module SOFIA structure

Figure 2 shows the simulated response of the sixteen-module SOFIA structure while tracking the moving point. The sequence illustrates each module reorientation at different instants, where each module adjusts its two rotational degrees of freedom to maintain alignment with reference position.

Algorithm 1 summarizes the inverse kinematics and smoothing strategy used by each SOFIA module to orient its platform toward the moving target.

### B. Mechanical assembly

The mechanical assembly was documented using an exploded view generated in SolidWorks, as shown in Fig. 3.

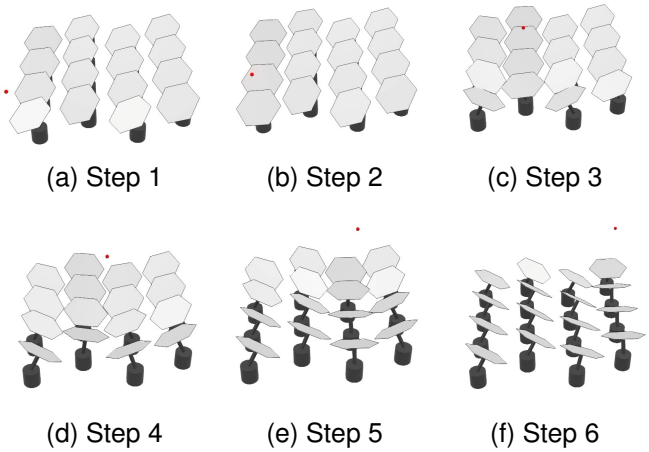




Fig. 2. Simulation of the SOFIA module tracking a moving reference point using inverse kinematics.

**Algorithm 1** SOFIA module target tracking control

**Require:** Target position $\mathbf{p}$, module base position $\mathbf{r}_{0,2}$, joint limits $[q_{1\,\min}, q_{1\,\max}]$ and $[q_{2\,\min}, q_{2\,\max}]$, EMA smoothing factor $\alpha \in (0, 1]$

**Ensure:** Servo command angles $q_1, q_2$

$\mathbf{v} \leftarrow \mathbf{p} - \mathbf{r}_{0,2}$
$\hat{\mathbf{r}}_{2,p} \leftarrow \frac{\mathbf{v}}{\|\mathbf{v}\|} = [u_x, u_y, u_z]^\top$
$q_1^* \leftarrow \operatorname{atan2}(-u_y, u_z)$
$q_2^* \leftarrow \arcsin(u_x)$
$q_1^* \leftarrow \textsc{ClampAngle}(q_1^*, q_{1\,\min}, q_{1\,\max})$
$q_2^* \leftarrow \textsc{ClampAngle}(q_2^*, q_{2\,\min}, q_{2\,\max})$
$q_1 \leftarrow q_{1,\text{old}} + \alpha(q_1^* - q_{1,\text{old}})$ ▷ First-order EMA low-pass filter update
$q_2 \leftarrow q_{2,\text{old}} + \alpha(q_2^* - q_{2,\text{old}})$
Apply $q_1, q_2$ to servo motors
**return** $q_1, q_2$

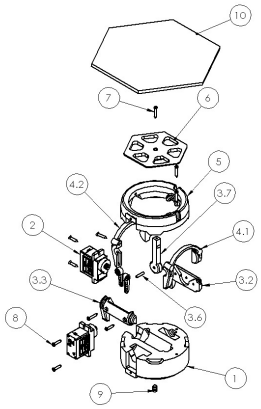

| N.º DE ELEMENTO | N.º DE PIEZA | CANTIDAD |
|---|---|---|
| 1 | Sofia003-P001-03 | 1 |
| 2 | MG90S | 2 |
| 3 | Sofia003-E002-01 | 1 |
| 3.1 | Pro3 | 1 |
| 3.2 | Sofia003-P004-02 | 1 |
| 3.3 | Sofia003-P004-03 | 1 |
| 3.4 | sk_screw_arm | 1 |
| 3.5 | sk_screw_arm | 1 |
| 3.6 | Eje_1_9mmx9mm | 1 |
| 3.7 | Sofia003-P002-02 | 1 |
| 4 | Sofia003-E003-01 | 1 |
| 4.1 | Sofia003-P005-01 | 1 |
| 4.2 | Sofia003-P005-02 | 1 |
| 4.3 | sk_screw_arm | 2 |
| 4.4 | Pro3 | 1 |
| 5 | Sofia003-P008-01 | 1 |
| 6 | Sofia003-P009-01 | 1 |
| 7 | sk_screw_arm | 3 |
| 8 | sk_screw_arm | 4 |
| 9 | Inser_M3x5x4 | 1 |
| 10 | Sofia003-P000-01 | 1 |

Fig. 3. Exploded assembly drawing of the SOFIA electromechanical module, including component identification.

The drawing illustrates the arrangement of the structural components, joint mechanisms, and fastening elements, while the accompanying bill of materials identifies their part numbers and quantities.

### C. Computer Vision System Architecture

The computer vision subsystem of SOFIA recognizes human gestures in real time and translates them into discrete action labels. Using a webcam, the modular Python application captures user movements to establish a gesture-based interaction method for future integration with the robot's control and actuation systems.

The implementation combines OpenCV for image acquisition and visualization with MediaPipe Tasks for landmark detection. It utilizes two pretrained models—Pose Landmarker (33 body landmarks) and Hand Landmarker (up to two hands with 21 landmarks each)—bypassing custom neural network training by classifying gestures through predefined geometric rules.

Organized within the `Vision/` directory, the modular architecture uses `main.py` to orchestrate frame capture, model execution, evaluation, and visualization. Landmark detection is handled by `pose_detector.py` and `hand_detector.py`, while `gesture_detector.py` performs classification using `geometry_utils.py` for geometric calculations and `smoothing.py` for temporal stabilization.

Captured BGR frames are converted to RGB for MediaPipe processing. Body landmarks are filtered via an Exponential Moving Average (EMA) to reduce frame-to-frame fluctuations, enabling the system to evaluate normalized distances, joint angles, and relative positions. Hand landmarks are concurrently analyzed to identify specific finger configurations.

The system recognizes five gestures divided into dynamic gestures (INICIO and FIN, requiring movement sequences over time) and static gestures (RECARGAR, ESCUDO, and ATAQUE, defined by specific body and hand configurations). Once recognized, the interface displays the gesture label, detected landmarks, and a real-time frames-per-second (FPS) indicator.

Currently, the subsystem operates as an independent perception prototype. Although designed for human-robot interaction, direct communication with the ESP32-C3 controller and physical module actuation have not yet been experimentally verified.

### D. Geometric Gesture Recognition

The gesture recognition system was designed to identify five predefined human gestures through geometric analysis of body and hand landmarks. Instead of training a custom classification model, the implementation uses deterministic rules based on normalized distances, joint angles, relative positions, and movement sequences. This approach allows each gesture to be defined through specific conditions while keeping the recognition process modular and interpretable.

To reduce the influence of the user's distance from the camera, several geometric measurements are normalized using anatomical references, such as shoulder width and torso height. The normalized distance between two landmarks is calculated as:

$$D_{\text{norm}} = \frac{\sqrt{(x_A - x_B)^2 + (y_A - y_B)^2}}{d_{\text{ref}}} \tag{2}$$

TABLE XIII
SUMMARY OF GESTURE RECOGNITION CONDITIONS

| Gesture | Type | Main recognition conditions |
|---|---|---|
| INICIO | Dynamic | Three wrist-to-hip contacts within 3s |
| FIN | Dynamic | One raised hand and two horizontal direction changes |
| RECARGAR | Static | Wrists near shoulders, approximately vertical forearms, no two recognized pistol hands |
| ESCUDO | Static | Crossed arms, wrists near opposite shoulders, elbow below shoulders |
| ATAQUE | Static | Elbow angles of 35°–125° and two pistol-shaped hands |

where $A$ and $B$ represent the selected landmarks, and $d_{\text{ref}}$ is the distance between two anatomical reference points.

For gestures involving arm positioning, joint angles are calculated using three landmarks. The angle between two vectors, with the elbow as the central point, is defined as:

$$\theta = \cos^{-1}\left(\frac{\mathbf{u}\cdot\mathbf{v}}{\|\mathbf{u}\|\|\mathbf{v}\|}\right) \tag{3}$$

These angles are calculated from the two-dimensional projection of the detected landmarks and are used to evaluate arm configurations.

The five gestures are divided into two dynamic gestures and three static gestures, depending on whether recognition requires a movement sequence or a specific body configuration described in Table XIII.

The system evaluates these conditions using the body landmarks estimated by MediaPipe Pose Landmarker and the finger landmarks provided by MediaPipe Hand Landmarker. The resulting geometric conditions are used to determine the recognized gesture, while temporal confirmation mechanisms are applied to improve the stability of static gesture classification.

### E. Temporal Filtering and Gesture Validation

To optimize stability, an Exponential Moving Average (EMA) filter is applied to body landmarks using the next equation:

$$S_t = \alpha X_t + (1-\alpha)S_{t-1} \tag{4}$$

implemented with $\alpha = 0.3$ resulting in:

$$S_t = 0.3X_t + 0.7S_{t-1} \tag{5}$$

Additionally, static gestures require a five-consecutive-valid-frame confirmation, and the system manages display priorities during simultaneous activations by prioritizing ESCUDO, ATAQUE, RECARGAR, INICIO, and FIN.

### F. Integration Challenges and Design Refinements

During development, challenges in landmark stability, gesture overlap, and software integration prompted targeted algorithmic and architectural revisions. To prevent `AttributeError` crashes when users left the camera frame, missing-landmark validation was added prior to processing.

Coordinate fluctuations near recognition thresholds were mitigated by incorporating an EMA filter ($\alpha = 0.3$) alongside a 5-consecutive-frame static confirmation requirement.

RECARGAR was converted from a dynamic gesture to a static posture (bent arms, hands near shoulders), refined with constraints on wrist-to-shoulder proximity, vertical bounds, and vertical forearm orientation. To resolve spatial overlap with ATAQUE, RECARGAR classification is suppressed whenever both hands are detected in a pistol configuration. ATAQUE itself was redefined—discarding strict torso proximity, depth restrictions, and an ineffective 90°–165° elbow range—in favor of a W-shaped posture requiring elbow angles between 35° and 125°, wrists above elbows, and outward hand orientation.

### G. PCB Design and Electronic Integration

A custom printed circuit board (PCB) was designed to integrate the electronic control and communication modules of the SOFIA kinetic surface. The PCB functions as a carrier board, providing mechanical mounting and electrical interconnections for the ESP32-C3 SuperMini microcontroller, two PCA9685 PWM driver modules, and the MAX13487E RS-485 transceiver interfaces.

The ESP32-C3 serves as the main controller, communicating with the PCA9685 modules through the I2C interface. Each PCA9685 provides 16 PWM channels, allowing the proposed architecture to control up to 32 servomotors. The RS-485 interfaces enable differential serial communication with additional SOFIA modules.

The PCB incorporates JST-PH connectors with a 2.0 mm pitch, selected to meet the physical interconnection requirements of the system. Dedicated mounting positions and electrical connections are also provided for the control modules, communication interfaces, and an RGB LED.

To address the logic-level incompatibility between the 5 V MAX13487E transceiver and the 3.3 V ESP32-C3 microcontroller, a resistive voltage divider was incorporated into the PCB schematic. The circuit consists of a 10 kOhm resistor (R4) and an 18 kOhm resistor (R5), reducing a nominal 5 V receiver-output signal to approximately 3.21 V at the ESP32-C3 UART input. The electrical compatibility analysis is detailed in the RS-485 Logic-Level Compatibility subsection of Materials and Methods.

The electronic schematic is presented in Fig. 4, illustrating the connections between the microcontroller, PWM drivers, communication interfaces, and peripheral components.

Based on the electronic schematic, a two-layer PCB layout was developed to organize component placement and signal routing. The resulting design, shown in Fig. 5, provides a compact integration platform for the electronic modules and their connections.

### H. Power Budget and Current Constraints

Power supply limitations present a critical physical constraint during simultaneous multi-actuator operation. At nominal load, each MG90S micro-servo draws approximately 250 mA during movement, with peak stall currents reaching

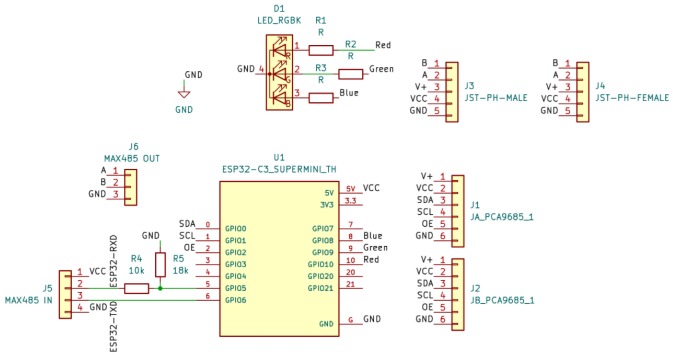



Fig. 4. Electronic schematic of the SOFIA carrier PCB, showing the ESP32-C3 microcontroller, PCA9685 PWM driver interfaces, MAX13487E RS-485 connections, and peripheral circuitry.

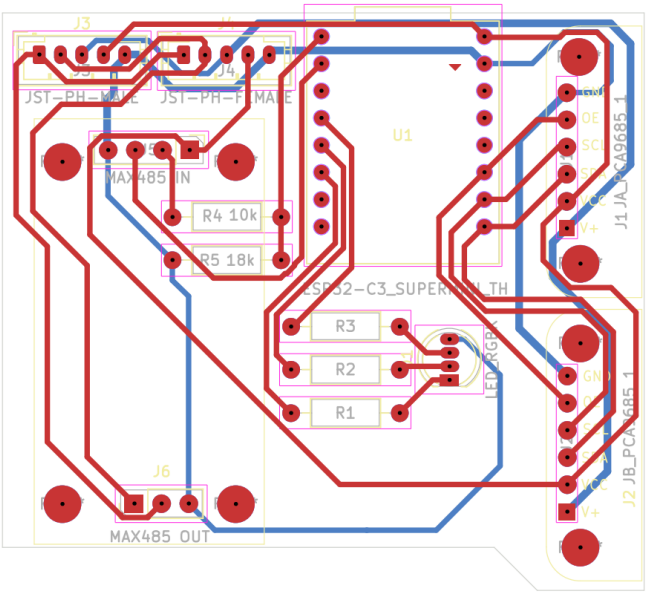



Fig. 5. Completed two-layer PCB layout developed for the SOFIA electronic control system.

up to 700 mA. Simultaneous actuation of all 32 servos in the complete kinetic surface could result in transient current spikes exceeding 22 A, triggering severe voltage sags and brownout resets on the ESP32-C3 controller. Consequently, current power distribution limits prevent driving all actuators concurrently at peak torque, reinforcing the need for the experimental characterization of single modules, peak-current aware firmware sequencing, and smooth trajectory filtering to minimize transient current demand.

It is worth noting that the PCA9685 PWM drivers do not incorporate active current-limiting mechanisms [11]. The breakout boards route power directly from the main 5 V power source. As a result, the current drawn by each MG90S servo depends entirely on its mechanical load, operating voltage, and movement profile. Because the driver chip does not regulate or restrict motor current, power supply stability and protection against voltage sags must be managed through software-level trajectory smoothing in the ESP32-C3 firmware.

# IV. Results

## A. Preliminary Servomotor Dynamic Response

Preliminary speed profiling was conducted on a single module across 12 setpoints ($30°/s$ to $600°/s$). The servomotors demonstrated smooth trajectory execution at low-to-medium velocities ($30°/s$–$350°/s$). Beyond $500°/s$, little mechanical chatter and motion desynchronization occurred, establishing $350°/s$ as the maximum operational threshold for smooth servo motor actuation. This is a preliminary measure to prevent current spikes, before obtaining the mechanical time constant estimation.

## B. Time Constant Estimation Status

Quantitative identification of individual time constants ($\tau_m$) is scheduled for the next iteration upon final assembly and wiring of the crown-shaped limit-switch fixture. Preliminary observations from the velocity sweeps confirm small timing variations between identical micro-servos, reinforcing the need for hardware-triggered time-constant calibration.

## C. Functional Validation of the Vision Subsystem

The computer vision subsystem was tested through real-time webcam experiments to verify its ability to recognize the five predefined gestures. The tests focused on body and hand landmark detection, geometric gesture classification, and temporal validation.

The system successfully captured and processed video frames using OpenCV and MediaPipe, displaying the detected landmarks, recognized gesture labels, and approximate FPS in real time.

Functional tests confirmed the recognition of INICIO through three consecutive hand-to-thigh movements and FIN through two horizontal direction changes of a raised hand. For static gestures, ESCUDO was recognized through crossed-arm positioning, RECARGAR through the defined arm configuration near shoulder height, and ATAQUE through the combination of W-shaped arms and two pistol-shaped hands.

The implementation of EMA filtering and five-frame temporal confirmation maintained the functionality of the recognition system while providing mechanisms to reduce unstable detections. Additionally, the final adjustments to RECARGAR and ATAQUE were verified, confirming that the updated gesture definitions could be recognized during functional testing.

These results demonstrate the functional operation of the five-gesture recognition subsystem as an independent software prototype. However, recognition accuracy, average response time, and robustness under different environmental conditions still require quantitative evaluation.

## D. Gesture Recognition Performance Evaluation

Preliminary performance tests were conducted to evaluate gesture recognition and identify classification errors. These tests recorded the expected gesture, detected gesture, response time, and instantaneous frames per second (FPS).

Performance metrics across gesture classes are detailed in Table XIV. Dynamic gestures (INICIO and FIN) achieved $100\%$ accuracy with average response times of $1.33$ s and $0.95$ s. Static gestures exhibited lower recall ($75.00\%$ for ESCUDO and ATAQUE, $88.89\%$ for RECARGAR) due to pose ambiguity near decision boundaries.

TABLE XIV
Detailed Performance Metrics per Gesture Class

| Gesture | Trials | Hits | Accuracy | Precision | Recall | F1-Score | Resp. (s) |
|---|---|---|---|---|---|---|---|
| INICIO | 6 | 6 | 100.00% | 100.00% | 100.00% | 100.00% | 1.33 |
| RECARGAR | 9 | 8 | 88.89% | 100.00% | 88.89% | 94.12% | 4.17 |
| ESCUDO | 12 | 9 | 75.00% | 100.00% | 75.00% | 85.71% | 1.06 |
| ATAQUE | 16 | 12 | 75.00% | 100.00% | 75.00% | 85.71% | 1.14 |
| FIN | 7 | 7 | 100.00% | 70.00% | 100.00% | 82.35% | 0.95 |

TABLE XV
Preliminary Performance Evaluation for ESCUDO Gesture

| Attempt | Expected | Detected | Time (ms) | FPS |
|---|---|---|---|---|
| Initial | ESCUDO | RECARGAR | 1841.65 | 26.62 |
| 1 | ESCUDO | ESCUDO | 2072.08 | 21.95 |
| 2 | ESCUDO | ESCUDO | 2306.67 | 20.27 |
| 3 | ESCUDO | RECARGAR | 2410.98 | 27.05 |

During the initial evaluation of ESCUDO, four attempts were recorded. Two were correctly classified, while the other two were incorrectly identified as RECARGAR.

These preliminary measurements helped identify overlapping recognition conditions between gestures, leading to refinements in the geometric classification rules.

The recorded response times included user reaction and gesture execution, as well as software processing. Therefore, they do not represent the algorithm's computational latency.

Following these observations, the recognition conditions for RECARGAR and ATAQUE were adjusted and their final functionality was verified. However, the preliminary measurements correspond to an earlier implementation and cannot be used to calculate the final system's accuracy.

# V. Discussion

# VI. Conclusions

# References


[1] D. Leithinger and H. Ishii, "Relief: A scalable actuated shape display," in *Proceedings of the Fourth International Conference on Tangible, Embedded, and Embodied Interaction*. Association for Computing Machinery, 2010, pp. 221–222.

[2] S. Follmer, D. Leithinger, A. Olwal, A. Hogge, and H. Ishii, "inform: Dynamic physical affordances and constraints through shape and object actuation," in *Proceedings of the 26th Annual ACM Symposium on User Interface Software and Technology*. Association for Computing Machinery, 2013, pp. 417–426.

[3] H. Ishii, D. Leithinger, S. Follmer, A. Zoran, P. Schoessler, and J. Counts, "TRANSFORM: Embodiment of "Radical Atoms" at Milano Design Week," in *Proceedings of the 33rd Annual ACM Conference Extended Abstracts on Human Factors in Computing Systems*. Association for Computing Machinery, 2015, pp. 687–694.

[4] L. Yao, R. Niiyama, J. Ou, S. Follmer, C. Della Silva, and H. Ishii, "Pneui: Pneumatically actuated soft composite materials for shape changing interfaces," in *Proceedings of the 26th Annual ACM Symposium on User Interface Software and Technology*. Association for Computing Machinery, 2013, pp. 13–22.

[5] K. Nakagaki, S. Follmer, and H. Ishii, "LineFORM: Actuated Curve Interfaces for Display, Interaction, and Constraint," in *Proceedings of the 28th Annual ACM Symposium on User Interface Software and Technology*. Association for Computing Machinery, 2015, pp. 333–339.

[6] K. Nakagaki, A. Dementyev, S. Follmer, J. A. Paradiso, and H. Ishii, "ChainFORM: A Linear Integrated Modular Hardware System for Shape Changing Interfaces," in *Proceedings of the 29th Annual Symposium on User Interface Software and Technology*. Association for Computing Machinery, 2016, pp. 87–96.
[7] J. A. Lizárraga, "Presentación del labdst: Sesión 1 - contexto, metodología d-lab y sofia," 2026, iTESO, 17 de agosto de 2026.
[8] Tower Pro Hong Kong, "MG90S Product Specification," accessed: 27 August 2026. [Online]. Available: https://towerpro.com.tw/product/mg90s-3/
[9] J. A. Lizárraga, "Sesión técnica 1 - análisis de componentes de hardware y revisión de especificaciones técnicas," 2026, iTESO, 20 de agosto de 2026.
[10] Espressif Systems, "ESP32-C3 Series Datasheet, Version 2.4," May 2026, accessed: 2026-08. [Online]. Available: https://documentation.espressif.com/ESP32-C3_Datasheet_en.pdf
[11] NXP Semiconductors, "PCA9685 - 16-channel, 12-bit PWM Fm+ I2C-bus LED controller, Product data sheet Rev. 4," Apr. 2015, 16 April 2015. [Online]. Available: https://www.nxp.com/docs/en/data-sheet/PCA9685.pdf
[12] Analog Devices, "MAX13487E/MAX13488E - Half-Duplex RS-485/RS-422 Transceivers, Rev. 3," Sep. 2020, accessed: 13 Oct. 2026. [Online]. Available: https://www.analog.com/media/en/technical-documentation/data-sheets/MAX13487E-MAX13488E.pdf
[13] Tower Pro Hong Kong, "MG996R High Torque Metal Gear Servo Specification," accessed: 11 October 2026. [Online]. Available: https://www.towerpro.com.tw/product/mg996r-2/
[14] TowerPro, "SG90 Micro Servo Motor Specification Sheet," Jul. 2016, accessed: 13 Oct. 2026. [Online]. Available: https://www.towerpro.com.tw/product/sg90-7/
[15] STMicroelectronics, "STM32F401xD/xE - High-performance ARM Cortex-M4 MCU Datasheet, DocID025644 Rev 4," Apr. 2021, accessed: 13 Oct. 2026. [Online]. Available: https://www.st.com/resource/en/datasheet/stm32f401cd.pdf
[16] Microchip Technology Inc., "ATmega328P - 8-bit AVR Microcontroller with 32K Bytes In-System Programmable Flash Datasheet, DS40002061B," Nov. 2020, accessed: 13 Oct. 2026. [Online]. Available: https://ww1.microchip.com/downloads/en/DeviceDoc/ATmega328P-8-bit-AVR-Microcontroller-DS40002061B.pdf
[17] Texas Instruments, "SN65HVD230 3.3-V CAN Bus Transceivers Datasheet, SLLS688G," Aug. 2021, accessed: 13 Oct. 2026. [Online]. Available: https://www.ti.com/lit/ds/symlink/sn65hvd230.pdf