

Multimedia Communications

Lecture Notes

A.Y. 2025/2026

Contents

1	Multimedia Representation & Perception	2
1.1	Human Eye	2
1.1.1	CSF - Contrast Sensitivity Function	2
1.1.2	Eye Sensitivity	2
1.2	Color Spaces	2
1.2.1	RGB	2
1.2.2	HSV	2
1.2.3	YCbCr = YUV	2
1.3	Machine-centric Multimedia	2
1.4	Frequency Masking Functions	2
1.5	Image and Video Representation	3
1.5.1	Images	3
1.5.2	Color Sampling	3
1.6	Compression	3
1.6.1	Lossless Techniques	3
1.6.2	Lossy Techniques	3
1.7	Quantization	4
1.7.1	Quality Evaluation	4
1.7.2	Peak SNR (PSNR)	4
1.7.3	Weighted Peak SNR (WPSNR)	4
1.7.4	Other criteria	4
1.7.5	Criteria to evaluate a compression algorithm	5
2	Scalar and Predictive Quantization	5
2.1	Scalar Quantizer	5
2.1.1	Rate	5
2.1.2	Distortion	5
2.2	Uniform Quantization	5
2.2.1	Definitions	6
2.2.2	Unsigned Data	6
2.2.3	Signed Data (Midtread)	6
2.2.4	Dead-zone Quantization for Signed Data	6
2.2.5	Rate and Distorsion curve	6
2.3	Optimal Quantization	7
2.3.1	High Resolution (HR) Uniform Quantization	7
2.3.2	Lloyd-Max algorithm	7
2.3.3	Real-life Lloyd-Max adaptation	8
2.4	Predictive Scalar Quantization	8
2.4.1	Sparsification	8

2.4.2	Prediction	8
2.4.3	Prediction Error	8
2.4.4	Coding Gains	8
2.4.5	Linear Predictors	8
2.4.6	Optimal Predictor (Wiener-Hopf)	9
2.4.7	Worked example: AR(1) Gaussian signal	9
2.4.8	Prediction Gain: filter order impact	9
2.4.9	Local adaptation	10
2.4.10	Wrong scheme: open-loop prediction (drift)	10
2.4.11	Correct scheme: closed-loop prediction (DPCM)	10
2.4.12	Impact of entropy coding on PQ	11
2.4.13	Direct vs Predictive Quantization	11
3	Lossless Coding	11
3.1	Definitions	11
3.2	Code Types	11
3.2.1	Fixed-Length Code	11
3.2.2	Variable-Length Code	12
3.3	Variable-length codes theorems	12
3.3.1	McMillan's Theorem	12
3.3.2	Kraft's Inequality	12
3.3.3	Proof for Kraft's $\Rightarrow$ (necessity)	12
3.3.4	Proof for Kraft's $\Leftarrow$ (sufficiency)	12
3.4	Recall: Information Theory	13
3.4.1	Information	13
3.4.2	Source Entropy	13
3.4.3	Max Entropy Distribution	13
3.4.4	Joint Entropy	13
3.4.5	Conditional Entropy	13
3.5	Optimal Code	14
3.5.1	Math Formulation	14
3.5.2	Shannon's source coding theorem	14
3.5.3	Huffman Coding	14
3.5.4	Block Coding	14
3.5.5	Limits of Huffman	15
3.5.6	Arithmetic coding	15
3.5.7	Adaptivity and Context-based coding	15
3.5.8	Why Arithmetic is preferred over Huffman (wrap-up)	16
3.5.9	Context-based coding	16
3.6	Other Techniques	16
3.6.1	Unsigned Exp-Golomb	16
3.6.2	Signed Exp-Golomb	16
3.6.3	Dictionary-based coding	16
3.6.4	LZW coding	16
3.6.5	Examples of real-life Coding	17
3.6.6	Neural Lossless Coding (NLC) Techniques	17
3.6.7	Guidelines to reach $\mathcal{L} \approx \mathcal{H}$	17
4	Transform Coding and JPEG	17
4.1	Introduction with Block Coding	17
4.2	Huang-Schulteiss (HS) formula	18
4.2.1	HS formula derivation	18
4.2.2	HS formula interpretation	18

4.2.3	Why the Geometric Mean is the key quantity	18
4.3	Transform Coding	19
4.3.1	Orthogonal Transforms	19
4.3.2	Orthogonal Transforms applied to Block Coding	19
4.3.3	Transform Coding example	19
4.4	Practical Algorithms for Resource Allocation	19
4.4.1	Greedy Algorithm	19
4.4.2	Modified HS algorithm	20
4.5	Towards Optimal Transform	20
4.5.1	Karhunen-Loève Transform (KLT)	20
4.6	Frequency Transforms	20
4.6.1	1D-DFT for Compression	20
4.6.2	2D-DFT for Compression	21
4.6.3	DFT Separable Implementation	21
4.6.4	DCT Transform Matrix	21
4.6.5	1D-DCT Transform	21
4.6.6	2D-DCT Transform: Block-Based DCT	21
4.7	JPEG	21
4.7.1	Encoding Strategy	22
4.7.2	Quantization-step table	22
4.7.3	Scaling Factor and Quality	22
4.7.4	Zig-Zag Coding	22
4.8	Entropy Coding of the Coefficients	22
4.8.1	DC Coefficients	22
4.8.2	AC Coefficients	22
4.9	Frame Building	23
4.10	JPEG additional informations	23
4.10.1	JFIF: JPEG File Interchange Format	23
4.10.2	EXIF: Extended Image File Format	23
5	Wavelet-based Image Compression	23
5.1	Signal Analysis	23
5.1.1	Signal Analysis through Projection	23
5.1.2	Resolution Tradeoff: Time-Frequency Heisenberg-like Uncertainty principle	23
5.1.3	Frequency Analysis: STFT and Rigid Tilting	24
5.2	Discrete Wavelet Transform (DWT) and Multi Resolution Analysis (MRA)	24
5.2.1	1D-MRA	24
5.2.2	2D-MRA	24
5.2.3	EZW: Embedded Zerotrees of Wavelet Coefficients	24
5.2.4	Recall: Bitplanes	25
5.2.5	EZW Algorithm	25
5.3	JPEG2000	25
5.3.1	Introduction	25
5.3.2	Quantization	25
5.3.3	Comparison between JPEG and JP2K (JPEG2000)	26
5.3.4	Error Robustness in compressed data	26
5.4	Conceptual Maps	26
6	Learned Image Coding (LIC) / Neural Image Coding (NIC)	26
6.1	Coding Architecture	26
6.1.1	Optimization of the Loss Function	27
6.2	NN Recap	27
6.2.1	Gradient Descent and Backpropagation	27

6.2.2	GDN: Generalized Divisive Normalization	27
6.3	JPEG-AI standard	27
6.3.1	Core Idea	27
6.3.2	Auto-Encoder Framework	27
6.3.3	Rate-Distorsion Variable Auto-Encoder	27
6.3.4	Scale Hyperprior: spatial adaptability	28
6.3.5	Hierarchical VAE	28
6.3.6	Conclusions	28
7	Motion Estimation	28
7.1	Variational Methods	28
7.1.1	Velocity Vector Field - Optical Flow	28
7.1.2	Motion Vector Field	28
7.1.3	Data Attachment and Regularization	29
7.1.4	Optical Flow Problem	29
7.1.5	Optical Flow - Displacement Field	29
7.1.6	Optical Flow - Constant Illumination Hypothesis (CIH)	29
7.1.7	Optical Flow - Equation	29
7.1.8	Optical Flow - Solution: Horn & Schunck method	30
7.2	Block Matching	30
7.2.1	Formulation	30
7.2.2	Evaluation of the MVF	30
7.2.3	Block Matching criteria	31
7.2.4	Full-Search research strategy	32
7.2.5	Fast Research Methods: 3SS (Three step search, 2D-log)	32
7.2.6	Fast Research Methods: Diamond Search	32
7.2.7	Fast Research Methods: Hex Search	32
7.2.8	Fast Research Methods: TZSearch	32
7.2.9	BM Improvement: Sub-pixel precision	32
7.2.10	BM Improvement: Variable Blocksize	32
7.3	Parametric Methods	33
7.3.1	Affine Model	33
7.3.2	Best possible parameters	33
7.4	Deep-Learning for Motion Estimation	33
7.4.1	Time evolution	33
7.4.2	Usage Comparison	34
8	Video-coding Principles	34
8.1	Block Schema	34
8.2	Block-Matching motion estimation	34
8.2.1	Motion Compensation	34
8.2.2	Adaptive block coding	34
8.2.3	Design Parameters	34
8.3	GOP: Group of Pictures	35
8.3.1	'I' frames: Intra Frames	35
8.3.2	'B' frames: 'between' frames	35
8.3.3	'P' frames: Predictive Frames	35
8.3.4	Rate and quality of the frame types	35
8.4	Hybrid Video Encoder	35
8.4.1	Frame coding modes	35
8.4.2	Block Size: Block Partition Problem	35
8.4.3	Coding Mode i_k selection	36
8.4.4	Encoder scheme	36

8.5	Hybrid Video Decoder	36
8.5.1	Decoder scheme	36
8.5.2	Key elements	37
8.6	Video Encoding Standards	37
8.6.1	MPEG-1	37
9	Modern Video-Compression Standards	37
9.1	Universal Hybrid Video Encoder	37
9.1.1	Codecs applications	38
9.2	Rate-Distorsion Optimization	38
9.2.1	Block Partitioning Problem: H.264	38
9.2.2	Block Partitioning Problem: H.265/HEVC	38
9.2.3	Block Partitioning Problem: H.266/VVC	38
9.3	Spatial and Temporal Frame Prediction	39
9.3.1	Intra Prediction	39
9.3.2	Inter Prediction	39
9.3.3	Merge Mode	39
9.4	Filtering, Transforms and Quantization	39
9.4.1	Residual Coding	39
9.4.2	In-loop Deblocking Filter	39
9.4.3	Slices	40
9.5	Network parallelism	40
9.5.1	NALU	40
10	Audio and Speech Coding	41
10.1	Audio Modeling	41
10.1.1	Requirements	41
10.1.2	Vowels	41
10.1.3	Music	41
10.1.4	Human Speech Production System	41
10.2	Linear Predictive Coding	42
10.2.1	Yule-Walker Equation	42
10.2.2	Residuals	42
10.2.3	LPC Synthesis	42
10.3	Vector Quantization	42
10.3.1	CELP Paradigm (Code-Excited Linear Prediction)	43
10.3.2	Perceptual Coding for Audio	43
10.4	Modern Techniques	43
10.4.1	OPUS	43
10.4.2	Neural Codecs	43
10.4.3	Spatial Audio	43
10.4.4	Quality Assessment	44
11	Quality Assessment and QoE for Multimedia Services	44
11.1	What is Quality Assessment?	44
11.2	Image Quality: Subjective Assessment	44
11.2.1	Testing Conditions	44
11.2.2	1 st Technique: Single Stimulus	44
11.2.3	2 nd Technique: Double Stimulus	44
11.2.4	3 rd Technique: Pairwise Comparison	44
11.3	Human Assessment Measures	45
11.3.1	MOS: Mean Opinion Score	45
11.3.2	Standard Measures	45

11.4	Image Quality: Objective Assessment	45
11.4.1	Full Reference Techniques	45
11.4.2	Y component measures	45
11.4.3	CbCr component measures	45
11.4.4	Total PSNR measure	45
11.4.5	Bjontegaard Deltas	46
11.4.6	Perceptual Metrics	46
11.4.7	Reduced Reference	46
11.4.8	No Reference	46
12	Adaptive Streaming	46
12.1	Video Content Distribution	47
12.1.1	Challenges	47
12.1.2	Coding Rate Bottleneck	47
12.1.3	Paradigms	47
12.2	Scalable Video Coding (SVC)	47
12.2.1	Scalability Types	47
12.2.2	Smart Layer Pruning	48
12.2.3	Streaming via Legacy HTTP	48
12.2.4	QUIC and HTTP/3	48
12.3	Adaptive Bitrate Streaming	48
12.3.1	Media Presentation Description (MPD) file	48
12.3.2	Network Metrics: Throughput	49
12.3.3	Network Metrics: E-2-E Nodal Delay	49
12.4	Buffer Dynamics	49
12.4.1	Rebuffering event	49
12.4.2	Playout management	49
12.4.3	Client Scoring-Policy Design	50
12.5	ABR Strategies	50
12.5.1	Throughput-based ABR	50
12.5.2	Buffer-based ABR	50
12.5.3	Hybrid ABR strategy	51
12.5.4	Learning-Based ABR	51
12.5.5	Multiplayer Competition	51
12.5.6	Neural Video Coding	51

1 Multimedia Representation & Perception

1.1 Human Eye

1.1.1 CSF - Contrast Sensitivity Function

Draw a chart with on the x-axis the pixels per cycle in decreasing order, and on the y-axis the percentage of contrast, we'll see that at the higher corners we are not able to distinguish lines. This is position and frequency dependent.

1.1.2 Eye Sensitivity

Rods have Sensitivity to brightness, Cones can sense colors. We have 3 types of cones:

- Blue (445 nm) cones, 2% of the total
- Green (535 nm) cones, 33% of the total
- Red (575 nm) cones, 65% of the total

1.2 Color Spaces

1.2.1 RGB

We use 3 channels: Red, Green and Blue to identify each colour. Since we use 8 bits we have $2^8 = 256$ values. This means $256^3 = 16.7$ million possible colors.

1.2.2 HSV

Hue, Saturation and Value.

By applying a rotation on the 3D cube identifying the RGB space, we put the black on $z = -1$ and white on $z = 1$, we get another space.

z is the luminance axis. The longitude corresponds to the color (hue), while the radius is the saturation.

1.2.3 YCbCr = YUV

Y = Luminance, Cb and Cr (U and V) are the chrominance informations. (Polar coordinates)

Similarly to HSV, we have luminance on the z -axis, while Chrominance infos are respectively saturation and value. This is a more natural way to identify colors. (exmaple: Bright (z -axis) Magenta (angle) Pastel (radius)).

Knowing this we can lose some informations about chrominance, thus getting a **visually** lossless image (sampling 1/4 of $CbCr$, but keeping all pixel¹ Y sampled).

1.3 Machine-centric Multimedia

Given that contents are consumed by people and machines, some information that for us is irrelevant could be fatal to the machines if not available, like dropping $CbCr$. We must know the important features.

1.4 Frequency Masking Functions

$S_m(f_i, \sigma_i^2, f)$ functions. We don't encode information that couldn't be heard, like in mp3/aac/... codecs.

Basically if 2 sinewaves S_m are adjacent, we hardly distinguish them, while if they are somewhat far it is easy to distinguish them. Frequency analysis is very used in this field, still the best technique (Fourier analysis).

¹Pixel = Picture Element

1.5 Image and Video Representation

1.5.1 Images

Images are stored as a $N \times M$ matrix ($f_{n,m}$ with $n \in \{0 \cdots N - 1\}, m \in \{0 \cdots M - 1\}$). Sometimes can be useful to use a single index, we define $k = (n - 1)M + m \rightarrow$ image f_k .

1.5.2 Color Sampling

There are 4 ways to sample color, following the J:a:b schema

(J = reference horizontal size, a = chroma samples on 1st line, b = chroma samples on 2nd line)

Common schemes are (J = 4 columns):

- 4:1:1 $\rightarrow$ 1° row is 1 sample (1-4), 2° row is another sample
 $\Rightarrow$ full vertical and 1/4 horizontal resolution
- **Most Used 4:2:0** $\rightarrow$ 1° row has 2 samples (1-2 + 3-4), 2° row reuses the samples (0 further).
 $\Rightarrow$ half vertical and half horizontal resolution
- 4:2:2 $\rightarrow$ 4:2:0 but sampled also on second line
 $\Rightarrow$ full vertical and half horizontal resolution
- 4:4:4 $\rightarrow$ complete sampling, full resolution

1.6 Compression

A frame I in a DVB system is identified as:

$$I : (n, m, T, c) \rightarrow x \in \{0, \dots, 2^b - 1\} \text{ with } \begin{cases} n = \text{row} \\ m = \text{column} \\ T = \text{frame period} \\ c = \text{channel} \end{cases}$$

We need compression, keyword: redundancy (delete all unnecessary information), there are 3 types:

- Spatial and Temporal redundancy (neighbor-pixels are similar)
- Human Sensitivity redundancy (psychovisual)
- Semantical redundancy (images described by words)

$$\text{Compression Ratio} = \frac{B_{in}}{B_{out}}$$

1.6.1 Lossless Techniques

- Bit-by-bit identical representation
- useful for X-rays, and medical images.
- not so much compression

1.6.2 Lossy Techniques

- decoded $\neq$ original
- we compress much more
- visually lossy compression + then lossless to squeeze even more

1.7 Quantization

We need to have signal sparsification (information is concentrated in specific samples while other are not so much different).

1.7.1 Quality Evaluation

We need to define some parameters, given f original image matrix, and $\tilde{f}$ the reconstructed one, we can define the Error Image: $\xi(f, \tilde{f}) = f - \tilde{f}$

1.7.2 Peak SNR (PSNR)

$$PSNR(f, \tilde{f}) = 10 \log_{10} \left(\frac{V^2}{D(f, \tilde{f})} \right)$$

where D is the MSE of the difference: $D(f, \tilde{f}) = \frac{1}{NM} \|\xi(f, \tilde{f})\|^2$, and V is the max value which a color can be. Typical values:

- over 40: perfect image, lossless
- equal 40: very high quality
- between 30 and 40: some errors visible
- below 30: problems

1.7.3 Weighted Peak SNR (WPSNR)

Instead of D we use Weighted D $D_W(f, \tilde{f}) = \frac{1}{NM} \|h \star \xi(f, \tilde{f})\|^2$, such that:

$$WPSNR(f, \tilde{f}) = 10 \log_{10} \left(\frac{V^2}{D_W(f, \tilde{f})} \right)$$

1.7.4 Other criteria

- SSIM: Percepted quality metric

$$SSIM(x, y) = \frac{(2\mu_x\mu_y + C_1)(2\sigma_{xy} + C_2)}{(\mu_x^2 + \mu_y^2 + C_1)(\sigma_x^2 + \sigma_y^2 + C_2)} \in [0, 1]$$

Product of 3 components: **luminance** (μ 's), **contrast** (σ 's), **structure** (σ_{xy}). Computed per block, then averaged. Captures what MSE misses: same MSE can give very different perceived quality (contour errors least visible, high-frequency noise most visible).

- LPIPS: Neural-Network based quality metric (Deep-Perceptual Metric), distance in feature space of a pre-trained NN instead of pixel space. Low PSNR can coexist with high perceptual plausibility.

PSNR/SSIM are objective proxies; the ground truth is the human observer (**subjective criteria**): expensive and slow, so NP-OC are used in practice. Modern approach: report all three (PSNR, SSIM, LPIPS).

1.7.5 Criteria to evaluate a compression algorithm

Beyond **rate** (compression ratio, bpp) and **quality** (distortion metrics above), three more axes:

- **Complexity**: limited by real-time constraints, hardware, economic cost
- **Delay**: measured at the encoder; related to complexity but mainly driven by the *coding order* (how far ahead the encoder must look, e.g. B-frames)
- **Robustness**: sensitivity of the compressed stream to transmission losses.
In uncompressed images a bit flip stays local; with compression there is **error propagation** (problem for noisy channels)

Design tensions: quality $\uparrow$ conflicts with rate $\downarrow$; robustness $\uparrow$ conflicts with complexity $\downarrow$ and delay $\downarrow$. Modern design balances all five.

2 Scalar and Predictive Quantization

Quantization = control the number of bits used for representing some samples

θ^i are the quantization region/cells = (t^i, t^{i+1})

There is a total of $(L+1)$ thresholds and L levels, total of $2L+1$ elements. Mathematical definition:

$$Q : x \in \mathbb{R} \rightarrow y \in C = \{\hat{x}^1, \dots, \hat{x}^L\} \subset \mathbb{R}$$

Cell-size $\Delta = \frac{2\text{Amplitude}}{L}$, higher nr. of levels = smaller error

Quantization process can be seen as a coding-decoding process.

$$\xrightarrow{x} \boxed{E_{\theta^i}} \xrightarrow{i} \qquad \xrightarrow{i} \boxed{D_C} \xrightarrow{\hat{x}}$$

Note: Scalar quantization $\equiv$ we only take a sample at a time, not a vector.

2.1 Scalar Quantizer

2.1.1 Rate

Correct for average formula, no need to use ceil

$$R = \log_2 L$$

2.1.2 Distortion

We use the MSE to track the error:

$$\text{MSE } d[x(n), Q(x(n))] = |e(n)|^2 = [x(n) - Q(x(n))]^2$$

For signals of duration N:

$$D = \frac{1}{N} \sum_{n=0}^{N-1} d[x(n), Q(x(n))]$$

For random signals:

$$D = \mathbb{E} [|X(n) - Q(X(n))|^2] = \mathbb{E} [|E(n)|^2]$$

2.2 Uniform Quantization

We can use the **floor, ceil, round, fix** operators to perform a quantization, since they map $\mathbb{R} \rightarrow \mathbb{Z}$ ($\mathbb{Z}$ mapping).

2.2.1 Definitions

$\forall i$:

- Interval is $(0, A)$ for unsigned data, while $(-\frac{A}{2}, \frac{A}{2})$ for signed data
- Symbol Spacing: $\Delta^i = \Delta = \frac{A}{L}$
- Thresholds: $t^i = t^{i-1} + \Delta$
- Symbols Intervals: $\theta^i = (\hat{x}^i - \frac{\Delta}{2}, \hat{x}^i + \frac{\Delta}{2})$
- Symbols: $\hat{x}^i = \left(\frac{t^i + t^{i-1}}{2}\right)$

2.2.2 Unsigned Data

- $i = \lceil \frac{x}{\Delta} \rceil$
- $\hat{x}^i = i\Delta - \frac{\Delta}{2}$
- $t^i = (i - 1)\Delta$
- $Q(x) = \Delta \lceil \frac{x}{\Delta} \rceil - \frac{\Delta}{2}$

2.2.3 Signed Data (Midtread)

Midtread = '0' is a quantized level, not a threshold

- $i = \text{round}\left(\frac{x}{\Delta}\right)$
- $\hat{x}^i = i\Delta$
- $Q(x) = \Delta \cdot \text{round}\left(\frac{x}{\Delta}\right)$

Alternative case: Midrise = '0' is a threshold, not a level. Bad idea in most of the cases because when there are little oscillations around 0, the quantized value gets amplified.

2.2.4 Dead-zone Quantization for Signed Data

We exploit the midtread quantizer, by extending the '0' region:

$$i = \begin{cases} \text{sign}(x) \left\lfloor \frac{|x| + \frac{\tau\Delta}{2}}{\Delta} \right\rfloor & |x| \geq \tau \\ 0 & \text{otherwise} \end{cases} \quad x = \begin{cases} \text{sign}(i)\Delta \left(|i| + \frac{1-\tau}{2}\right) & |x| \geq \tau \\ 0 & \text{otherwise} \end{cases}$$

2.2.5 Rate and Distorsion curve

We are looking for a relation that allows us to write $D = f(R)$

We use uniform r.v. and the LOTUS² expected value of function of r.v., by applying this to uniform quantizers:

$$D = \sigma_Q^2 = \mathbb{E} \left[|X - \hat{X}|^2 \right] = \dots = \frac{1}{A} L \frac{\Delta^3}{12} = \frac{1}{12} \frac{A^2}{L^2} \quad \text{with } X \sim \mathcal{U} \left(-\frac{A}{2}, \frac{A}{2} \right)$$

Using the fact that $R = \log_2 L$:

$$D = \sigma_Q^2 = \frac{1}{12} \frac{A^2}{L^2} = \sigma_X^2 2^{-2R}$$

Finally we can write the SNR:

$$\text{SNR} \approx 10 \log_{10} \frac{\mathbb{E}[X]}{D} = 10 \log_{10} 2^{2R} \approx 6R$$

This is the slope of a Rate/SNR plot.

²Law of the unconscious statistician

2.3 Optimal Quantization

Hypothesis, we use High Resolution Quantization, searching for a locally-optimal solution:

- $L \rightarrow \infty \Rightarrow \max_i \Delta_i \rightarrow 0$
- $\forall i \forall u \in \theta^i : p_x(u) \approx P_i$
- Optimal R-D curve: $\sigma_Q^2 = C_x \sigma_x^2 2^{-2R}$
Shape Factor $C_x = \frac{1}{12} \left[\int_{\mathbb{R}} P_U^{\frac{1}{3}}(t) dt \right]^3$ and $U = \frac{X}{\sigma_X}$

The shape factor depends only on the PDF *shape*, not on the variance:

$$C_x = 1 \text{ (Uniform)} \quad C_x = \frac{\sqrt{3}}{2} \pi \approx 2.72 \text{ (Gaussian)}$$

Gaussian signals need $\approx 2.72 \times$ more distortion than uniform at the same rate (heavier tails).

2.3.1 High Resolution (HR) Uniform Quantization

Hypothesis:

- $L \rightarrow +\infty \Rightarrow \Delta \rightarrow 0$, X generic r.v.
- $D = \frac{\Delta^2}{12} = \frac{A^2}{12} 2^{-2R}$
- In this case: $\sigma_X^2 \neq \frac{A^2}{12}$

Computing the SNR, we get:

$$\text{SNR} \approx 10 \log_{10} \frac{\mathbb{E}[X]}{D} = 10 \log_{10} \frac{\sigma_X^2}{\frac{A^2}{12} 2^{-2R}} \approx 6R - 10 \log_{10} \frac{\gamma^2}{3} \quad \text{where } \gamma^2 = \frac{X_{\max}^2}{\sigma_X^2} = \frac{A^2}{4\sigma_X^2}$$

2.3.2 Lloyd-Max algorithm

What if we are not in high resolution hypothesis? Lloyd-Max provides a locally-optimal solution. Steps:

1. Choose an initial dictionary $C^{(0)} = \{\hat{x}_0^i\}_{i=1 \dots L}$ (uniform initialization)
2. Find Best **thresholds** from given dictionary $\Rightarrow$ nearest neighbor method
3. Find Best **dictionary** from given thresholds $\Rightarrow$ centroid condition
4. Iterate 2,3 until convergence.

Nearest Neighbor:

$$k = \arg \min_n |X - \hat{X}^n| \quad \Longrightarrow \quad Q(k) = \hat{x}^k \Rightarrow t^i = \frac{\hat{x}^i + \hat{x}^{i+1}}{2} \quad \forall i \in \{1 \dots (L-1)\}$$

Centroid Condition: computing the gradient of distortion and imposing to zero

$$\nabla D = 0 \quad \Longrightarrow \quad \hat{x}^i = \mathbb{E}[X | X \in \theta^i]$$

Stop condition:

- Threshold model

$$\frac{\sigma_{Q,(k-1)}^2 - \sigma_{Q,(k)}^2}{\sigma_{Q,(k-1)}^2} < \epsilon$$

- Reach iteration number $k = K$

2.3.3 Real-life Lloyd-Max adaptation

In real-life we don't have models, but real data:

- $\chi = \{u_1, \dots, u_m\}$
- $C^{(k)} = \{\hat{x}_0^i\}_{i=1 \dots L}$
- Nearest neighbor rule: $w_k^i = \left\{ u_m \in \chi : \forall j \neq i \quad \|u_m - \hat{x}_k^i\| \leq \|u_m - \hat{x}_k^j\| \right\}$
- Centroid rule: $\hat{x}_{k+1}^i = \frac{1}{|w_k^i|} \sum_{u_m \in w_k^i} u_m$

This guarantees better performance but not too much improve performances.

2.4 Predictive Scalar Quantization

Idea: exploit sample quantization with prediction.

We want to lower distortion $D = \sigma_x^2 2^{-2R}$: we have to reduce σ or, to keep the same distortion, lower the rate.

2.4.1 Sparsification

Starting from a signal where pixels have the same weight, after applying some sparsification function (Fourier transform for example) some components become more important. Then we make quantization based on human sensitivity.

2.4.2 Prediction

We need to encode differences or predicting the differences. How to choose the $v(n)$?

We need a $v(n)$ such that $y(n) = x(n) - v(n)$, then the reconstructed $\hat{y}(n) + v(n) = \hat{x}(n)$.

2.4.3 Prediction Error

$$q(n) = y(n) - \hat{y}(n) = x(n) - \hat{x}(n) = \bar{q}(n) \quad \text{the same of the original signal } x$$

2.4.4 Coding Gains

Goal of PQ: minimizing D

$$SNR_p = 10 \log_{10} \frac{\sigma_x^2}{D} = G_P + G_Q \quad \text{where } \begin{cases} G_P = 10 \log_{10} \frac{\sigma_x^2}{\sigma_y^2} \text{ predictive gain} \\ G_Q = 10 \log_{10} \frac{\sigma_y^2}{D} \end{cases}$$

We are gaining the G_P factor, since $\sigma_x^2 > \sigma_y^2$

We cannot be sure that any prediction is good, we need to look for optimal predictors from previous samples.

2.4.5 Linear Predictors

Linear predictors are simple and **optimal for Gaussian r.v.:**

$$v(n) = - \sum_{i=1}^P a_i x_{n-i} \quad \implies \quad y(n) = x(n) - v(n) = \sum_{i=0}^P a_i x_{n-i} \quad (a_0 = 1)$$

y is the output of the FIR filter $A(z) = 1 + \sum_{i=1}^P a_i z^{-i}$ applied to x . Goal: minimize σ_y^2 over $\vec{a} = [a_1 \dots a_P]^T$.

2.4.6 Optimal Predictor (Wiener-Hopf)

Expanding the error variance:

$$\sigma_y^2 = \sigma_x^2 + 2\vec{r}^T \vec{a} + \vec{a}^T R_x \vec{a} \quad \text{where} \quad \begin{cases} \vec{r} = [r_x(1) \cdots r_x(P)]^T \\ (R_x)_{ij} = r_x(|i-j|) \text{ (Toeplitz autocorr. matrix)} \\ r_x(k) = \mathbb{E}[X(n)X(n-k)] \end{cases}$$

Setting the gradient to zero:

$$\frac{\partial \sigma_y^2}{\partial \vec{a}} = 2\vec{r} + 2R_x \vec{a} = 0 \quad \implies \quad \vec{a}^{opt} = -R_x^{-1} \vec{r} \quad \implies \quad \sigma_{y,opt}^2 = \sigma_x^2 + \vec{r}^T \vec{a}^{opt}$$

If we want to use it in predictions, we need the autocorrelation estimation:

$$\hat{r}_x(k) = \frac{1}{N} \sum_{n=0}^{(N-1)-k} X(n)X(n-k)$$

2.4.7 Worked example: AR(1) Gaussian signal

Signal $X(n) \sim \mathcal{N}(0, \sigma^2)$ with autocorrelation $r_x(n-m) = \mathbb{E}[X(n)X(m)] = \sigma^2 \rho^{|n-m|}$.

- **Trivial predictor** $V(n) = X(n-1)$:

$$\sigma_y^2 = \mathbb{E}[(X(n) - X(n-1))^2] = 2\sigma^2 - 2\sigma^2 \rho = 2\sigma^2(1 - \rho)$$

$$G_P = 10 \log_{10} \frac{\sigma^2}{2(1-\rho)\sigma^2} = 10 \log_{10} \frac{1}{2(1-\rho)} \quad \implies \quad G_P > 0 \iff \rho > \frac{1}{2}$$

For $\rho = 0.9$: $G_P = 10 \log_{10} \frac{1}{0.2} \approx 7$ dB.

- **Optimal predictor of order $P = 1$** : applying Wiener-Hopf with $R_x = \sigma^2$, $\vec{r} = \sigma^2 \rho$:

$$a_1^{opt} = -\rho \Rightarrow V(n) = \rho X(n-1) \quad \sigma_y^2 = \sigma^2 + \sigma^2 \rho(-\rho) = \sigma^2(1 - \rho^2)$$

$$G_P = 10 \log_{10} \frac{1}{1 - \rho^2} \geq 0 \quad \forall \rho \quad (\text{never worse than no prediction})$$

Comparison: $1 - \rho^2 = (1 - \rho)(1 + \rho) < 2(1 - \rho)$ for $\rho < 1 \Rightarrow$ optimal always beats trivial.

- **Optimal predictor of order $P = 2$** : now $R_x = \sigma^2 \begin{bmatrix} 1 & \rho \\ \rho & 1 \end{bmatrix}$, $\vec{r} = \sigma^2 [\rho, \rho^2]^T$:

$$\vec{a}^{opt} = -R_x^{-1} \vec{r} = -\frac{1}{1 - \rho^2} \begin{bmatrix} 1 & -\rho \\ -\rho & 1 \end{bmatrix} \begin{bmatrix} \rho \\ \rho^2 \end{bmatrix} = \begin{bmatrix} -\rho \\ 0 \end{bmatrix}$$

Same solution as $P = 1$: the second tap is useless because in an AR(1) source all the information about $X(n)$ is contained in $X(n-1)$ (Markov property). Increasing the order brings no further gain.

2.4.8 Prediction Gain: filter order impact

- Order increase = gain improve
- Complexity vs Performance tradeoff

2.4.9 Local adaptation

Some images are not stationary, we need to split them into omogeneous blocks and compute different predictors:

- Large Blocks: small overhead but no local features
- Small Blocks: excellent tracking of features, but high overhead
- Rate increase by $\frac{N \cdot B}{m^2}$ where $N = \text{bits} \cdot \text{pixel/block}$, B number of blocks, M^2 number of blocks

If we split an image in too many blocks, we lose efficiency. For low bitrates is better to use large blocks.

2.4.10 Wrong scheme: open-loop prediction (drift)

Naive idea: encoder predicts from the *original* samples $x(n)$.



Problem: the encoder predictor uses the original $x(n)$, but the decoder can only use the reconstructed $\tilde{x}(n)$. Since $x \neq \tilde{x}$, the two predictions $v(n) \neq v'(n)$ diverge and the error accumulates over time: this is the **drift** problem.


Numerical example (3-bit quantizer, levels $\{-9, -6, -3, 0, 3, 6, 9\}$), predictor = previous sample:

step	original	ENC pred	ENC error	quantized	DEC pred	reconstr.
1	10	—	—	9	—	9
2	11	10	1	0	9	9
3	12	11	1	0	9	9
4	13	12	1	0	9	9
5	14	13	1	0	9	9
6	18	14	4	3	9	12

Encoder predicts from originals (10,11,12,...), decoder is stuck at 9: drift grows unbounded.

2.4.11 Correct scheme: closed-loop prediction (DPCM)

Solution: the encoder embeds a copy of the decoder, and predicts from the *quantized/reconstructed* samples $\tilde{x}(n)$ — exactly the same data the decoder has.

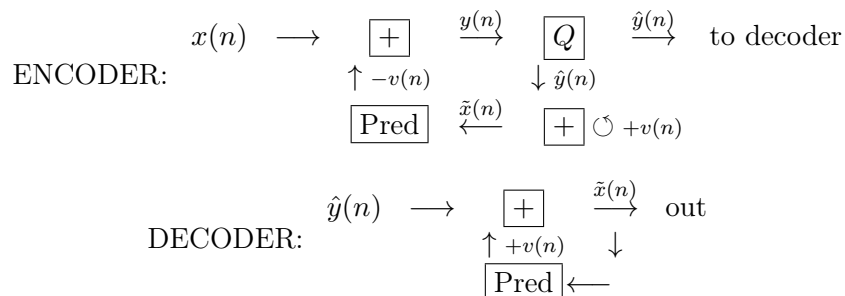

Comment on the blocks:

- Encoder: prediction error $y(n) = x(n) - v(n)$ is quantized to $\hat{y}(n)$ and sent.
- Reconstruction loop (inside the encoder): $\tilde{x}(n) = \hat{y}(n) + v(n)$, stored in a buffer of past quantized samples; the predictor reads only from this buffer.

- Decoder: computes the same $v(n)$ from the same $\tilde{x}$ buffer, then $\tilde{x}(n) = \hat{y}(n) + v(n)$.
- Encoder and decoder stay **synchronized**: same inputs to the predictor on both sides $\Rightarrow$ no drift. The quantization error on x equals the one on y (see Prediction Error above).

Same numerical example with the correct scheme:

step	original	ENC pred	ENC error	quantized	DEC pred	reconstr.
1	10	—	—	9	—	9
2	11	9	2	3	9	12
3	12	12	0	0	12	12
4	13	12	1	0	12	12
5	14	12	2	3	12	15
6	18	15	3	3	15	18

Encoder and decoder predictions always coincide: error stays bounded, no drift.

2.4.12 Impact of entropy coding on PQ

Without entropy coding ($R = \log_2 L$) PQ looks disappointing: that rate estimate is **too pessimistic**, because most quantization indexes are zero (e.g. $L = 19$ levels $\Rightarrow \approx 84\%$ of indexes are 0). A variable-length code (short codeword for index 0, longer for rare indexes) reveals the true gain:

- $\Delta\text{PSNR} \approx +20$ dB at 1 bpp vs direct UQ
- equivalently -86% rate at 30 dB target quality

PQ works only if: (1) prediction computed on **quantized** data, (2) signal sufficiently correlated ($\rho > 1/2$ for trivial first-order prediction), (3) followed by **entropy coding**.

2.4.13 Direct vs Predictive Quantization

With predictive I still have to use a lot of bits to represent information. Idea: why should we use fixed-length coding? Using PQ + Entropy coding we outperform direct quantization, since quantization indexes are Gaussian distributed. At 1bpp we have $\Delta\text{PSNR} = 20\text{dB}$.

3 Lossless Coding

3.1 Definitions

- **Alphabet**: $\mathcal{X} = \{x_1, \dots, x_M\}$ Symbols to encode
- **Code**: Application $\mathcal{C} : \mathcal{X} \rightarrow \{0, 1\}^*$ set of finite-length bit strings, can be Fixed or Variable length.

3.2 Code Types

3.2.1 Fixed-Length Code

Good: straight forward parsing of the codewords.

Bad: Very large rate $R = \log_2 L$, we are assuming all symbols are equally probable.

Needed bits: $\lceil \log_2 M \rceil$

3.2.2 Variable-Length Code

- Statistical Approach: we make use of source entropy $H(x)$, to build an optimal Huffman code. We could use also suboptimal arithmetic codes, which scale very well.
- Heuristic Approach: if we don't know data statistics, universal coding (LZW)

We define l_i as the length of the codeword c_i .

We need also two conditions:

- Decodability condition / prefix condition (each word is not a prefix for other words)
- Non-equiprobable symbols

How to write this in math terms?

$$f : x_i \rightarrow c_i \quad \text{avg. length } \bar{L} = \sum p_i l_i$$

We want to minimize the average length.

3.3 Variable-length codes theorems

3.3.1 McMillan's Theorem

Decodable codes do not improve performance w.r.t. instantaneous/prefix codes.

The best possible prefix code = the best possible decodable code. We have to focus on prefix codes.

3.3.2 Kraft's Inequality

$$\sum_i 2^{-l_i} \leq 1 \quad \Longleftrightarrow \quad \exists \text{ instantaneous code with lengths } \{l_1, \dots, l_M\}$$

If the equality is verified, we say the code is **complete**, otherwise we can try to push more from the code.

We can associate a binary code to a binary tree.

3.3.3 Proof for Kraft's $\Rightarrow$ (necessity)

Build a binary tree with $L_{\max} = \max(l_i)$ depth.

We remove nodes which have prefix equal to a codeword, then each removed subset is disjoint from the others:

$$\text{Removed nodes} : \sum_i 2^{L_{\max}-l_i} \leq 2^{L_{\max}}$$

3.3.4 Proof for Kraft's $\Leftarrow$ (sufficiency)

Greedy Construction Algorithm:

- Sort Length $l_1 \leq \dots \leq l_N$
- $\forall$ step k : pick available node at depth l_k
- Mark descendants as forbidden

Finally: there is no way to improve it.

3.4 Recall: Information Theory

3.4.1 Information

$$I(x_i) = -\log_2 p(x_i) = -\log_2 p_i$$

Joint Information:

$$I(x_i, x_j) \leq I(x_i) + I(x_j)$$

Equality only if symbols are independent.

3.4.2 Source Entropy

$$H(X) = \sum_i p_i I(x_i) = -\sum_i p_i \log_2 p_i$$

3.4.3 Max Entropy Distribution

We want p^* such that:

$$p^* = \arg \max_p \sum_{i=1}^M p_i H(x_i) \quad \text{with} \quad \sum_{i=1}^M p_i = 1$$

Using Lagrange Multipliers:

- we consider a function $f : \mathbb{R}^n \rightarrow \mathbb{R}$
- then we build a function $J(x, \lambda) = f(x) + \lambda \cdot \varphi(x)$
- then we set $\forall i$ the $\nabla J(x_i, \lambda) = 0$

In this case:

- $f(p) = -\sum_{i=1}^M p_i \log_2(p_i)$
- $\varphi(p) = \sum_{i=1}^M p_i - 1$

Thus the gradient is:

$$\frac{\partial J}{\partial x_i} = -(\log_2 e + \log_2 p_i) + \lambda \qquad \frac{\partial J}{\partial p_i}(p^*) = \varphi(p) = 0$$

By imposing $=0$ to the x_i component of gradient:

$$\log_2 p_i^* = \lambda - \log_2 e$$

3.4.4 Joint Entropy

$$H(X, Y) = -\sum_{i,j} p_{ij} \log p_{ij}$$

3.4.5 Conditional Entropy

$$H(X|Y) = \sum_j p_j H(X|Y = Y_j)$$

Using chain rule:

$$H(X, Y) = H(Y) + H(X|Y) = H(X) + H(Y|X)$$

3.5 Optimal Code

3.5.1 Math Formulation

- $\forall i = 1 \dots M, l_i \in \mathbb{N}$ satisfies Kraft Inequality
- Average length $\mathcal{L} = \sum_{i=1}^M p_i l_i$

Constrained Minimization Problem to find the optimal length $\mathcal{L}$ (it is a lowerbound):

$$\vec{l}^* = \arg \min_{\vec{l}} \sum_i p_i l_i \quad \text{subject to Kraft: } \sum_i 2^{-l_i} = 1$$

Applying the Lagrangian Multipliers method we end up with:

$$p_i = 2^{-l_i^*} \quad \implies \quad \mathcal{L}^* = - \sum_i p_i \log_2 p_i = H(x)$$

3.5.2 Shannon's source coding theorem

$$\forall i \in \{1 \dots M\} \quad \exists k \in \mathbb{N} \quad : \quad H(x) \leq \mathcal{L}^* \leq \mathcal{L} < H(x) + 1$$

Upper band proof: using $l_i = \lceil -\log_2 p_i \rceil$, we prove that satisfies Kraft's (having $\delta_i \in \{0, 1\}$, $\epsilon_i = 2^{\delta_i}$)

$$l_i = -\log_2 p_i + \delta_i \quad \implies \quad 2^{-l_i} = p_i 2^{\delta_i} \quad \implies \quad \sum_i 2^{-l_i} = \sum_i p_i \epsilon_i \leq \sum_i p_i = 1$$

Average length proof

$$l_i = \lceil -\log_2 p_i \rceil < -\log_2 p_i + 1 \quad \implies \quad \sum_i p_i l_i < \sum_i (-p_i \log_2 p_i + p_i) \implies \mathcal{L} < H(x) + 1$$

3.5.3 Huffman Coding

1. Build leaves nodes with respective probability
2. Take the two least probable nodes
3. Merge these nodes, keeping the sum of the probabilities
4. Re-sort all the nodes in descending order of probability
5. Iterate these steps (from 2.) until we reach a single node with $p = 1$
6. Assign at each branch either 0 or 1.

Using only PQ + Huffman Coding we cannot reach < 1 bpp coding rate, how can we do better?

3.5.4 Block Coding

We take X^K as blocks of K symbols: we also know that $H(X^K) \leq \mathcal{L}^* < H(X^K) + 1$ for Shannon, by scaling:

$$H(X^K) \leq \mathcal{L}^* < H(X^K) + 1 \quad \implies \quad \frac{H(X^K)}{K} \leq \frac{\mathcal{L}^*}{K} < \frac{H(X^K)}{K} + \frac{1}{K}$$

We can make $\frac{1}{K} \rightarrow 0$ if we grow block size to $K \rightarrow \infty$.

$$\text{Avg. length per symbol } \mathcal{L}_s^* \approx \frac{H(X^K)}{K} \leq H(x)$$

We define now the Entropic Rate of the source (ultimate bound for lossless coding):

$$\lim_{k \rightarrow \infty} \frac{H(X^k)}{k} = \mathcal{H}(X)$$

3.5.5 Limits of Huffman

- Complexity **exponential** in K : block alphabet has M^K words
- Joint probability estimation for large blocks is costly and unreliable
- Cannot handle $H(X) < 1$ efficiently symbol by symbol (min 1 bit/symbol)

Arithmetic coding solves at least the complexity problem: **block coding with linear complexity** $O(n)$, encoding the whole sequence as a single interval in $[0, 1)$. Penalty only +2 bits *per block*, vs Huffman's +1 bit *per symbol*.

3.5.6 Arithmetic coding

The alphabet is M long, we take a K block. Huffman Alphabet has M^K possible words. Since complexity increases with growing K , we take a suboptimal code (excluding non-sensed words). IDEA:

- Take a sequence
- Each symbol $\in [0, 1]$
- For each new symbol use 2 multiplications and 2 sums to update interval.
- We encode each symbol with a number (the center of the probability interval $c_i = c_{i-1} + \frac{p_i - p_{i-1}}{2}$)

How many bits do we need?

$$\lceil -\log_2 p_i \rceil + 1 < -\log_2 p_i + 2$$

So basically we have:

- Length:

$$L(n) = - \left\lceil \sum_{i=1}^n \log_2 p(x_i) \right\rceil + 1 = E[\bar{L}(n)]$$

- Average Length:

$$\bar{L}(n) = \frac{-\sum_{i=1}^n \log_2 p(x_i) + 2}{n}$$

- Precision:

$$\frac{\prod_{i=1}^n p_i}{2}$$

We have that

$$\mathcal{L} < H(x) + \frac{2}{n} \quad \xrightarrow{n \rightarrow \infty} \quad H(x)$$

It is a context based encoding, it uses conditional probabilities.

3.5.7 Adaptivity and Context-based coding

- **Adaptivity**: symbol statistics learned during encoding via occurrence counts, updated at both encoder and decoder with an agreed rule $\Rightarrow$ handles non-stationary sources.
- **Context-based**: instead of estimating $P(X^K)$ directly, condition on the N_S previous symbols ($N_C = M^{N_S}$ contexts $\equiv N_C$ arithmetic encoders switching among each other). Reaches the entropy rate $\mathcal{H}$ without massive block sizes.
- Context design rule: too large $\rightarrow$ sparse data, unreliable estimation; too small $\rightarrow$ misses dependencies.

3.5.8 Why Arithmetic is preferred over Huffman (wrap-up)

Advantages: linear complexity $O(n)$; exploits high-order dependencies removing the non-dyadic penalty; context coding models high-order statistics cheaply; adaptive.

Disadvantages: tricky implementation (precision, carry propagation); needs initialization; context selection non-trivial; adaptivity needs large training data.

3.5.9 Context-based coding

It is based on context (near pixels), so joint probability.

How to choose the context? Look the data, or use learning-based techniques to learn prob. distribution.

3.6 Other Techniques

3.6.1 Unsigned Exp-Golomb

Encoder:

- start with $n = 0$
- $\forall n \in \{1, 2, \dots\}$ we write $n + 1$ in binary
- we compute $b = \lfloor \log_2(n + 1) \rfloor + 1$
- we add $b - 1$ zeros in front of the binary number

Decoder:

- if next bit is 1 $\rightarrow$ set to 0
- count how leading zeros ($b - 1$) we have
- we read the b -sized bitstring
- we get the decimal representation and subtract 1

3.6.2 Signed Exp-Golomb

Encoder:

- $m(n) = \begin{cases} 2n - 1 & \text{if } n > 0 \\ -2n & \text{if } n \leq 0 \end{cases}$
- encode $m(n)$ with previous method

Decoder:

- decode with unsigned exp-golomb
- remap $n = \begin{cases} \frac{m+1}{2} & \text{if odd} \\ -\frac{m}{2} & \text{if even} \end{cases}$

3.6.3 Dictionary-based coding

Asymptotic Optimality Theorem:

If stationary and ergodic source, Dictionary-based coding is asymptotically optimal.

Examples of Dictionary-based coding: LZ³77, LZ78, LZW⁴ (used in Deflate, GIF, ZIP), LZMA.

3.6.4 LZW coding

Encoder and Decoder - Greedy Matching Process + Dictionary Evolution and Merging:

- read inputstream symbol by symbol
- foreach new input, check if (prefix W + next K) exists in the dictionary
- if $\exists (W + K)$, read next symbol until new pattern.
- if $\nexists (W + K)$, index of longest known W is sent to bitstream, $W + K$ added to dictionary
- then prefix merging and update local statistics

³Lempel-Ziv

⁴Lempel-Ziv-Welsh

3.6.5 Examples of real-life Coding

- JBIG-1: template of 10 pixels, progressive coding (context-based arithmetic coding).
- JBIG-2: images classified as text, halftone or other, it is used in PDFs, (context-based arithmetic coding).
- JPEG-LS: Lossless image compression, encoding⁵ of $e = x - \hat{x}$, where $\hat{x} = \begin{cases} \min(A, B) & C \geq \max(A, B) \\ \max(A, B) & C \leq \min(A, B) \\ A + B - C & \text{otherwise} \end{cases}$
- PNG: uses LZ77 + Huffman, not so difficult, can use prediction
- DPCM⁶: 1D/2D spatial prediction, encodes error $y = x(n) - p(n) = x(n) - x(n-1)$ (zero-centered)

3.6.6 Neural Lossless Coding (NLC) Techniques

$$H(P, Q) = H(P) + D_{KL}(P \parallel Q)$$

It takes into account source entropy $H(P)$ and penalty for model inaccuracy based on Kullback-Leibler distance.

Models:

- Autoregressive models: causal density estimation
- Latent Variable Models: mapping to manifolds
- Neural Predictive Coding (Non-linear prediction), uses multi-layer Perceptron

$$\hat{y} = f_{MLP}(S, W) \rightarrow \text{INPUT } S: \text{local causal neighborhood}$$

NLC has an high complexity, is more efficient for high-resolution images. We also need to encode Biases and Weights, still convenient for small NNs but we also need HW requirements = complexity grows.

3.6.7 Guidelines to reach $\mathcal{L} \approx \mathcal{H}$

- For Memoryless: use Huffman/Arithmetic
- For stationary with memory: use Context-adaptive (Markov Chains)
- For Locally Stationary: use adaptive
- For Highly Complex: use Neural Models

Dictionary is the best if I have to compress text.

4 Transform Coding and JPEG

4.1 Introduction with Block Coding

Take a $X = [x_1 \cdots x_M]^T$ random vector as source of information of size M.

We suppose $\forall$ component to know the $\sigma_k^2 = \text{var}(x_k)$. The distortion of the k -th element then is $D_k = c_k \sigma_k^2 2^{-2R_k}$.

Globally, across all vector, we have:

$$D = \frac{1}{M} E [||X - Q(X)||^2] = \cdots = \frac{1}{M} \sum_{k=0}^{M-1} D_k = \frac{1}{M} \sum_{k=0}^{M-1} c_k \sigma_k^2 2^{-2R_k}$$

⁵using Exp-Golomb

⁶Differential Pulse Coding Modulation

4.2 Huang-Schulteiss (HS) formula

What is the optimal way to minimize distortion D ? find rate vector K with Constraint Optimization Problem:

$$\min D(K) = \frac{1}{M} \sum_{k=0}^{M-1} D = \frac{1}{M} \sum_{k=0}^{M-1} c_k \sigma_k^2 2^{-2R_k} \quad \text{s.t.} \quad \sum_{k=0}^{M-1} R_k \leq R_{tot}$$

4.2.1 HS formula derivation

Build the Lagrangian of the constrained problem:

$$J(\vec{R}, \lambda) = \frac{1}{M} \sum_{k=0}^{M-1} c_k \sigma_k^2 2^{-2R_k} + \lambda \left(\sum_{k=0}^{M-1} R_k - R_{tot} \right)$$

Setting $\frac{\partial J}{\partial R_k} = 0$:

$$2^{-2R_k^*} = \frac{M\lambda}{2 \ln 2} \cdot \frac{1}{c_k \sigma_k^2} \quad \implies \quad R_k^* = \lambda' + \frac{1}{2} \log_2 (c_k \sigma_k^2)$$

Imposing the constraint $\sum_{k=0}^{M-1} R_k^* = R_{tot}$ determines $\lambda' = \frac{R_{tot}}{M} - \frac{1}{2} \log_2 (c_{GM} \sigma_{GM}^2)$, so:

$$\text{Huang-Schulteiss' Formula: } R_k^* = \frac{R_{tot}}{M} + \frac{1}{2} \log_2 \left[\frac{c_k \sigma_k^2}{c_{GM} \sigma_{GM}^2} \right] \quad \text{with} \quad \begin{cases} c_{GM} = \sqrt[M]{\prod_{k=0}^{M-1} c_k} \\ \sigma_{GM}^2 = \sqrt[M]{\prod_{k=0}^{M-1} \sigma_k^2} \\ GM = \text{Geometrical Mean} \end{cases}$$

Reading: start from uniform allocation $\bar{R} = \frac{R_{tot}}{M}$, then components with variance above the geometric mean get more bits, those below get fewer.

4.2.2 HS formula interpretation

Recall:

- Arithmetic Mean: $Z_{AM} = \frac{1}{M} \sum_{i=0}^{M-1} z_i$
- Geometric Mean: $Z_{GM} = \sqrt[M]{\prod_{i=0}^{M-1} z_i}$
- For Jensen Inequality $Z_{GM} \leq Z_{AM}$

We are looking for a uniform resource distribution $\bar{R} = \frac{R_{tot}}{M}$, so the k -th component distortion using R_k^* is:

$$D_k^* = c_{GM} \sigma_{GM}^2 2^{-2\bar{R}} \quad \implies \quad D^* = D_k^*$$

At the optimum **all components have the same distortion**.

In the Gaussian case:

$$D^* = D_k^* = c_{\mathcal{N}} \sigma_{GM}^2 2^{-2\bar{R}}$$

4.2.3 Why the Geometric Mean is the key quantity

$D^* = c_{GM} \sigma_{GM}^2 2^{-2\bar{R}}$: at fixed total rate, the R-D performance depends *only* on the geometric mean of the variances. By Jensen $\sigma_{GM}^2 \leq \sigma_{AM}^2$ with equality iff all σ_k^2 are equal.

Identically distributed components ($\sigma_k^2 = \sigma_X^2$, $c_k = c_X \forall k$):

$$R_k^* = \bar{R} \quad D^* = c_X \sigma_X^2 2^{-2\bar{R}} = D_{PCM}$$

Block coding brings **no improvement** over sample-by-sample coding in this case. The signal must be *sparse* (diverse variances) to benefit: the whole strategy of transform coding is to reduce σ_{GM}^2 while keeping energy constant.

4.3 Transform Coding

IDEA: can we modify our signal where symbols have different distribution (sparse signal)?

We use **Linear Transforms** (change in base of the vectors, like rotations) to reach **signal sparsification** (few big samples with many lower samples). We are looking for a transform T which is:

- Reversible $Y = T(X) \iff X = T^{-1}(Y)$
- Input data is of size M
- Input X is not sparse, while output is sparse Y
- Quantization error of Y is the same of the X one

An example could be the Fourier Transform.

4.3.1 Orthogonal Transforms

Recalling Orthogonal Matrix property: $T^{-1} = T^T$, we have that $Y = TX$ and $X = T^T Y$
Orthogonal Transforms Isometry property also guarantees that $\|Y\|^2 = \|TX\|^2 = \|X\|^2$ and $D_X = \dots = D_Y$

4.3.2 Orthogonal Transforms applied to Block Coding

Assume we have X random vector of M components, $X \sim \mathcal{N}(0, \sigma_x^2) \forall k$, then:

$$\text{PCM Distorsion: } D_{PCM} = c_N \sigma_x^2 2^{-2\bar{R}}$$

Let's use a generic O.T.:

$$T : \begin{cases} Y = TX \\ D_X = D_Y \end{cases} \implies D_Y = c_{GM,Y} \sigma_{GM,Y}^2 2^{-2\bar{R}}$$

If X, Y are gaussian, we can also use $c_{GM,Y} = c_{GM,X} = c_N$, so for any $T \rightarrow \sigma_{AM,Y}^2 = \sigma_{AM,X}^2 = \sigma_X^2$, and also:

$$\text{Coding Gain: } G_T = \frac{D_{PCM}}{D_Y} = \frac{\sigma_{AM,Y}^2}{\sigma_{GM,Y}^2} = \frac{\sigma_X^2}{\sigma_{GM,Y}^2} \implies \text{Jensen's Ineq.} \rightarrow G_T \geq 1$$

4.3.3 Transform Coding example

We have a 2D random vector constrained in S , we know joint probability:

$$f_{x_1, x_2} = \begin{cases} \frac{1}{\Delta_1 \Delta_2} & (x_1, x_2) \in S \\ 0 & \text{otherwise} \end{cases} \quad \text{where } \Delta_1 \gg \Delta_2 \text{ and } x_1 \sim x_2 \sim \mathcal{U} \left[-\frac{\Delta_1}{2\sqrt{2}}, \frac{\Delta_1}{2\sqrt{2}} \right]$$

By applying the rotation, x_1 and x_2 become independent:

$$\vec{Y} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & -1 \\ 1 & 1 \end{bmatrix} \vec{X} \implies D_2 \ll \sigma^2 \implies D = D_1$$

4.4 Practical Algorithms for Resource Allocation

4.4.1 Greedy Algorithm

Requires nr. of iterations $\approx$ nr. of bits, steps:

- Start with 0 bits
- Take largest distorsion and assign 1 bit
- Recompute distorsions
- Iterate until we finish the available bits

4.4.2 Modified HS algorithm

Quicker than the Greedy Algorithm, steps:

- Compute R_K^* with HS
- If some R_K^* are negative, remove concerned components and relative variances (zero bit coded)
- Repeat until there are no more negative R s
- Remove all decimal parts from the obtained values
- Reallocate residual bits to bigger R s

4.5 Towards Optimal Transform

4.5.1 Karhunen-Loève Transform (KLT)

Assuming we have X : zero mean random vector of size M

Such that $R_X = E[XX^T]$, R_X has M orthogonal eigenvectors $u_1 \cdots u_M$

Then KLT $\equiv$ an orthogonal Matrix T_{KLT} where the rows are the eigenvectors:

$$T_{KLT} = \begin{bmatrix} u_1 & u_2 & \cdots & u_M \end{bmatrix}^T$$

Properties:

- $T_{KLT}^{-1} = T_{KLT}^T$
- Decorrelating transform, $E[y_i y_j] = \lambda_i \delta_{ij}$
- Best energy correlation (sparsity) $\forall N \in \{1 \cdots M\} : \sum E[y_i^2] \geq \sum E[z_i^2]$

3D intuition: take the spatial direction of point distribution and rotate it to the max, medium, min power axis. After transform we have sparsity and size reduction (Similar to ML PCA = Principal Component Analysis).

In the case of Gaussian data, this transform minimizes the geometric mean.

Example of usage: Multi/Hyper spectral imaging, where there is a large correlation across spectral bands.

KLT is not used typically in image codecs, due to:

- Computational Complexity $\propto O(N^3)$ for eigenvectors, $O(N^2)$ for matrix multiplications
- Signaling overhead, T_{KLT} sent apart
- Model Correctness: images are locally stationary

4.6 Frequency Transforms

4.6.1 1D-DFT for Compression

DFT = Discrete Fourier Transform

$$y[k] = \frac{1}{\sqrt{M}} \sum_{n=1}^M x[n] \exp\left(-j \frac{2\pi}{M} kn\right) \quad \forall k = \{1 \cdots M\}$$

It is the same as a T_{DFT} transform where:

$$T_{DFT} = \frac{1}{\sqrt{M}} [W_m^{i \cdot j}] \quad \text{where} \begin{cases} i \in \{0 \cdots M-1\} \\ j \in \{0 \cdots M-1\} \\ W_m = \exp\left(-j \frac{2\pi}{M}\right) \end{cases}$$

4.6.2 2D-DFT for Compression

$$y = Ax \quad \text{where } A \text{ has size } N^2 \times N^2$$

4.6.3 DFT Separable Implementation

$$Y = (TX)T^T \quad \text{with 2D basis func. } B_{kl}(n, m) = \frac{1}{N} \exp\left(j \frac{2\pi}{N}(kn + lm)\right)$$

First product TX analyses the col. (V) frequency variation, while product with T^T makes the row (H) analysis.

By sampling and periodizing the signal $\Rightarrow$ big jumps in the signal at period start/end $\Rightarrow$ **Frequency Leakage**.

In Frequency Leakage some energy leaks to the high frequencies (due to the big jumps = high variation).

Plotted DFT has a cross-like structure, usually it is plotted the $\log_{10} |DFT|$ version of the data

IDEA: why don't we put a mirror on the signal instead of periodizing, s.t. we reduce big jumps?

4.6.4 DCT Transform Matrix

DCT = Discrete Cosine Transform, steps to obtain it:

- Create a mirrored-periodic version of $x \rightarrow x_{sym}$
- DFT of x_{sym}
- Apply frequency domain modulation (to obtain real coefficients)
- Keep only M coefficients

4.6.5 1D-DCT Transform

$$T_{DCT} = \forall n = \{0 \cdots M-1\} \rightarrow \begin{cases} \frac{1}{\sqrt{M}} & k=0 \\ \sqrt{\frac{2}{M}} \cos \frac{(2n+1)k\pi}{2M} & k>0 \end{cases}$$

4.6.6 2D-DCT Transform: Block-Based DCT

We just apply the DCT on both the horizontal and vertical axis.

Usually we apply an $n \times n$ block-based DCT transform, so with 64 vector of the basis.

The $n \times n$ matrix represents no variations with the UL corner, total horizontal variation on the UR corner, total vertical variation on the BL corner and a combination of total H/V variation in the BR corner.

Using the Block-Based DCT we get a very sparse signal, it is good because we apply the transform on blocks of the image: blocks are locally stationary, if there are more informations we use more bits, otherwise no.

How to decide the quantization step of each coefficient?

- Adaptive Solutions: based on HS formula, or Greedy algorithm
- Fized Quantization Step: faster and used in JPEG

4.7 JPEG

It is a standard, guarantees interoperability and implementation competition (decoder is regulated by the standard but every producer can make its own encoder, but it needs to guarantee interoperability).

If we have 1 component $\rightarrow$ BW images, for color images $\rightarrow$ 3 components: YCbCr.

4.7.1 Encoding Strategy

- Take a block
- Subtract the average value (128)
- Apply DCT on the blocks
- Quantization using Mid-Tread UQ $\rightarrow \tilde{C}_{ij} = \text{round} \left(\frac{C_{ij}}{q_{ij}} \right)$
- Zig-Zag Scan
- Entropy Coding (Huffman)
- Compressed Data in JPEG format

4.7.2 Quantization-step table

What is the q table?

It is the quantization-step table: steps $\propto$ human sensitivity to the DCT components (64 byte table, $n \times n$ size).

Usually we use the q^* table, which has been made experimentally on scientific tests, bigger steps for lower sensitivity (BR corner), shorter steps for UL corner components.

4.7.3 Scaling Factor and Quality

The Quantization step table can be scaled by a factor S_F depending on the quality we want:

$$S_F = \begin{cases} \frac{5000}{Q} & 1 \leq Q \leq 50 \\ 200 - 2Q & 50 < Q \leq 99 \\ 1 & Q = 100 \end{cases} \quad \text{such that actual } q \leftarrow \frac{S_F}{100} q^*$$

4.7.4 Zig-Zag Coding

We need a bitstream from the matrix. To encode the sparse matrix we use prediction + Huffman for the DC component, while the others are encoded using 'run-length' coding.

Run-length coding: scanning sequentially the matrix and representing the value as (i, j) where i = number of zeros before, and j the actual value.

In this case the sequential scan is made with a zig-zag technique, final representation is:

$$\text{for the } n\text{-th block:} \quad [DC_n - DC_{n-1}, \quad (i, j) \rightarrow (\text{zig-zag}), \quad \text{EOB: End of Block}]$$

4.8 Entropy Coding of the Coefficients

4.8.1 DC Coefficients

It is a pseudo-Huffman code, we encode the value $DC_p = DC_n - DC_{n-1}$ as a "Category code" + "Amplitude Code", where the categories are defined as:

$$k\text{-th Category} \rightarrow \lceil \log_2 (|DC_p| + 1) \rceil \rightarrow \{\pm 2^{k-1} \dots \pm 2^k - 1\} \subset \text{category } k, \text{ encoded using } k \text{ bits}$$

4.8.2 AC Coefficients

The Run-length code uses the same method to encode couples of (r, k) values where $\begin{cases} r \equiv \text{number of zeros leading} \\ k \equiv \text{actual value} \end{cases}$

There are 2 special values: $\begin{cases} (15, 0) \rightarrow \text{at least 15 zeros} \\ (0, 0) \rightarrow \text{End Of Block (EOB)} \end{cases}$

4.9 Frame Building

Image is stored into a **Frame**:

- **Frame Header**: Tells the Image size, components, color sampling scheme, digitization format
- **Frame Payload** contains one scan per component (JPEG Baseline):
 - **Scan Header**: identifies the component and specifies quantization table
 - **Scan Payload** is made up of segments:
 - * **Segment Header**: define Huffman tables (4 types: DC, AC, Y, CbCr)
 - * **Segment Payload**: 8x8 blocks

4.10 JPEG additional informations

4.10.1 JFIF: JPEG File Interchange Format

Includes some metadata in JPEG, to ensure interoperability, thumbnail, JFIF version, resolution, density unit.

4.10.2 EXIF: Extended Image File Format

- Rich metadata for digital cameras
- Wide range of informations (camera details, datetime, GPS infos, Thumbnail)
- Other Manufacturer-specific data

5 Wavelet-based Image Compression

5.1 Signal Analysis

5.1.1 Signal Analysis through Projection

Given an orthonormal basis with the φ_k vectors, any signal can be represented as:

$$x(t) = \sum_k c_k \varphi_k(t)$$

We can see the transform as a scalar product:

$$c_k = \langle x(t), \varphi_k(t) \rangle = \int_{-\infty}^{+\infty} x(t) \cdot \varphi_k^*(t) dt$$

5.1.2 Resolution Tradeoff: Time-Frequency Heisenberg-like Uncertainty principle

$$(A = \Delta f \cdot \Delta t) \geq \frac{1}{4\pi}$$

The area remains constant, we cannot increase both at the same time.

We can only change shape from (wide flat $\leftrightarrow$ narrow tall).

5.1.3 Frequency Analysis: STFT and Rigid Tilting

Problem: JPEG uses 8x8 fixed size blocks, having fixed N we cannot change resolution.

We need a flexible approach, using Wavelets we have Adaptive Multiresolution, Mother Wavelet generation:

$$\psi_{a,b}(t) = \frac{1}{\sqrt{a}} \psi\left(\frac{t-b}{a}\right)$$

Using the scaling property of the Fourier Transform:

$$\mathcal{F}(x(t)) = X(f) \quad \implies \quad \mathcal{F}\left\{x\left(\frac{t}{a}\right)\right\} = |a|X(af)$$

5.2 Discrete Wavelet Transform (DWT) and Multi Resolution Analysis (MRA)

5.2.1 1D-MRA

Objective: sparsification of the signal. We start from $x[k] = c_{i=0}[k]$ then going on with increasing the i we get the c_i becomes shorter in time, almost by a factor of $\frac{1}{i+1}$. We want a symmetric FIR perfect reconstructing filter, with 4th vanishing moment, such that we are able to work on a grade of 3:

- **Daubechies 9/7** (best fit for image compression)
- **Daubechies 5/3** (integer valued filter taps)

5.2.2 2D-MRA

Imagine a black-‘squared’-ring, if we divide rows or column into the possible signals, we have only 2 possible signal: all black or a rectangular window. If the signal is constant the output is the same as the input, otherwise if we apply a LPF we get a smoother rect, while if we apply HPF we get some peaks near the color change.

We can now build a square of the combination along H,V of the LPF and HPF: we get LL,HL,LH,HH subbands.

We can also recursively apply this transform to the already transformed square.

By applying it we further sparsify the signal. How to choose decomposition level? It is a tradeoff.

5.2.3 EZW: Embedded Zerotrees of Wavelet Coefficients

It exploits similarities among the subbands, it allows progressive quality while downloading/reading an image.

- Quality Scalability
- Lossy-to-lossless coding
- Small complexity $\rightarrow$ very fast
- At low bitrates image quality is better than JPEG
- Still not used much because money was into JPEG

Idea: each new bit should convey the max possible information, first we encode big samples then progressive information about the subbands exploiting self similarity among the subbands. Problem: localization overhead.

5.2.4 Recall: Bitplanes

Take the most significant bit $b = \lfloor \log_2(\max(n)) \rfloor$ of the value of the matrix, then we plot the i -th bitplane as a binary matrix made by the values ANDed with 2^{b+1-i} . Example: $b = 4$, first bitplane is made of $(x \& 2^4)$. Bitplane is equivalent to a uniform quantization. We'll see the top left corner is the one that populates at first.

5.2.5 EZW Algorithm

Take $k = 0, n = \lfloor \log_2(|c|_{\max}) \rfloor, T_K = 2^k$

Idea: find out a smart way to reach big coefficients without expressing position.

- $\mathcal{L}$ DWT coefficient list according to SB scan order
- $\mathcal{S} = \emptyset$ list of significant coefficients
- While (actual rate < available rate)
 - Dominant Pass $\rightarrow$ while $\mathcal{L}$ not empty take c first coeff of $\mathcal{L}$:
 - * if $|c| > T_K$ encode symbol as Significant Positive (SP) or Negative (SN) depending on $\text{sign}(c)$
 - * if $|c| < T_K$ check descendants, if there is significant descendant $\rightarrow$ ZR else Isolated Zero (IZ)
 - Refining Pass: current bitplane index $b = \log_2 T_k \Rightarrow \forall c \in \mathcal{S}$ encode in b bitplane
 - Updating $T_{k+1} \leftarrow \frac{T_k}{2}$
 - Updating $k \leftarrow k + 1$
- Iteration and Termination: k -th dominant pass encodes the b -th bit plane

5.3 JPEG2000

5.3.1 Introduction

It is a standard and actually used in DB of very large images because of scalability: it allows to extract any combination of quality and resolution using some markers in the bitstream. It allows:

- Region-of-interest (ROI) coding
- Lossy-to-lossless coding
- Tiling
- Exact coding rate

How does it work? 2 Tiers:

- 1st tier: DWT + fine quantization to do lossless coding of the codeblocks
- 2nd tier: EBCOT, scalability and ROI management

5.3.2 Quantization

DWT coefficient are encoded with very small quantization steps. We encode bitplanes for every codeblock (blocks of the actual image) using lossless coding, since it is lossless we have a lot of bits. To achieve compression we just truncate bits of the samples. How do we know which bits to truncate? Lagrange:

$$\min \sum R_i \text{ s.t. } \sum_i R_i \leq R_{tot} \quad \Longrightarrow \quad \frac{\partial J}{\partial R_i} = \frac{\partial D_i}{\partial R_i} + \lambda = 0 \quad \Longrightarrow \quad \frac{\partial D_i}{\partial R_i} = -\lambda$$

In this way the target bitrate is reached with very low error, by truncating the actual computed bits.

We can also use multiple truncation points to reach the best MSE for each bitrate.

5.3.3 Comparison between JPEG and JP2K (JPEG2000)

- For high bitrates: no lots of differences
- For low bitrates: JPEG becomes very bad but still JPEG2000 has a better quality
 - Ringing Artifacts
 - Even comparing 0.2bpp JPEG with 0.1bpp JP2K, this last one is better visually
- JP2K allows the reachability of every code rate we want.

5.3.4 Error Robustness in compressed data

Errors can be introduced in TXing information, or saving it into files. Compressed streams are vulnerable, can induce error propagation. We need some ‘marker’ sequences of bits to recover errors. Tradeoff: robustness-rate.

- JPEG with $P_e = 10^{-4}$: corrupted bit = all the following part of the image corruption
- JPEG2000 with $P_e = 10^{-4}$: corrupted bit = loss of detail in ≥ 1 subbands, visually no great loss.

5.4 Conceptual Maps

DWT

- Signal model
- Filter Banks (analysis/synthesis)
- 2D-DWT: approximation, detail of the subbands
- Energy Concentration (sparsity), intra/inter band correlation


EZW/JP2K

- Wavelet Transform
- Bitplane Coding
- Coding Strategy
 - EZW
 - JP2K
- Comparison with JPEG

6 Learned Image Coding (LIC) / Neural Image Coding (NIC)

LIC algos are E2E learned from data using generative VAEs⁷/GANs⁸ models.

6.1 Coding Architecture



Legacy framework (JPEG): g_a is a Block Based DCT, while g_s is a DWT.

Learned Paradigms allow the use of the optimal g_a, g_s by learning directly from data.

⁷Variational Auto-Encoders

⁸Generative Adversarial Networks

6.1.1 Optimization of the Loss Function

It all goes toward the optimization of the loss function:

$$\mathcal{L} = D(x, \hat{x}) + \lambda R(\hat{z})$$

6.2 NN Recap

For image processing we use CNNs.

6.2.1 Gradient Descent and Backpropagation

$$\theta_{t+1} = \theta_t - \eta \nabla_{\theta} \mathcal{L}(\theta_t)$$

6.2.2 GDN: Generalized Divisive Normalization

$$w_i = \frac{v_i}{\sqrt{\beta_i + \sum_j \gamma_{ij} v_j}}$$

Given a feature v_i the parameters β_i, γ_{ij} are learned. This allows us to:

- Represent Masking effect
- Linking to the perceptron
- Gaussianization of the data (decorrelation of the signal = use entropy coding)

6.3 JPEG-AI standard

It has nothing to do with the original JPEG. Standardized as ISO/IEC 29170-2.

6.3.1 Core Idea

Going from pixels to 3D-Latent Tensor (sparse signal). JPEG AI uses $\begin{cases} 160 \text{ Luminance channels (human sensitivity)} \\ 96 \text{ Chrominance channels} \end{cases}$

6.3.2 Auto-Encoder Framework

- Encoder: Analysis Transform (g_a)
- Bottleneck: Latents y are quantized to $\hat{y}$
- Decoder: Synthesis Transform (g_s)

6.3.3 Rate-Distorsion Variable Auto-Encoder

Objective: minimizing $\mathcal{L}$ defined as

$$\mathcal{L} = R + \lambda D \quad \text{where} \quad \begin{cases} \text{Rate } R = D_{KL}[q(\hat{y}|x) || p(\hat{y})] \\ \text{Distorsion } D = E[\rho(x, \hat{x})] \end{cases}$$

Tradeoff: higher λ = higher quality, lower λ = high compression. Compressing always in latent space.

Problem: Non differentiability for the quantization function, backprop gradient not working properly. We need:

- **Hard** quantization at **test** time
- **Soft** quantization at **training** time $\rightarrow$ Additive Uniform Noise

Additive uniform noise has the statistical description of the quantization, and makes the backpropagation work.

$$\hat{z} \approx z + u \quad u \sim \mathcal{U}(-0.5, 0.5)$$

6.3.4 Scale Hyperprior: spatial adaptability

IDEA: set NN to learn statistics of the quantized data, additional side information $\hat{z}$ to predict $p_{\hat{g}}$ $\forall$ location.

We change paradigm: since JPEG-AI is a Nonlinear Transform Coding, we can outperform HEVC and VVC (intra coding) by 50% in coding efficiency. We need a Hierarchical VAE model.

6.3.5 Hierarchical VAE

Multimodality: compression can be adapted do human consumption or machine consumption. JPEG-AI (at 0.5bpp) saves up to 27% compared with VVC. HF are preserved but huge complexity. Complexity is measured in kilo Multiplication-Accumulation-Count over pixel (kMAC/px). There are 3 profiles:

- Dec0 $\rightarrow$ 8 kMAC/px (low-end CPUs)
- Dec1 $\rightarrow$ 23 kMAC/px (also for Mid-range smartphones)
- Dec2 $\rightarrow$ 214 kMAC/px (high-end GPUs)

6.3.6 Conclusions

- E2E Optimization: $\mathcal{L} = R + \lambda D$
- Data driven transforms (Non linear way)
- Current Challenges:
 - Energy Consumption
 - Cross Platform Determinism
 - Out of distribution vulnerability (Hallucinations and artifacts)
- State of the art: tradeoff
 - Pros $\rightarrow$ R-D efficiency
 - Cons $\rightarrow$ COMPLEXITY

7 Motion Estimation

7.1 Variational Methods

7.1.1 Velocity Vector Field - Optical Flow

$$V : (x, y) \in \mathcal{J} \subset \mathbb{R}^2 \rightarrow (u, v)$$

First part of the process is the formulation, then there is the discretization part.

7.1.2 Motion Vector Field

$\forall$ point $\implies \exists$ vector that represents pixel velocity of motion

Formulation:

$$\arg \min_{(u,v)} \{D[f_0, f_1, (u, v)] + R(u, v)\} \quad \text{where} \begin{cases} D \equiv \text{Data-attachment Term} \\ R \equiv \text{Regularization Term} \end{cases}$$

7.1.3 Data Attachment and Regularization

- **Data Attachment:** measures coherence of the estimated field compared to f_0, f_1
Each vector should link pixels of the same color = same pixel.
Problem: we have much more pixels than colors (assuming 2^8 colors).
- **Regularization R :** We include A-priori knowledge on the MVF.
It penalizes MVF which are different than our A-priori knowledge, it doesn't depend on data.

7.1.4 Optical Flow Problem

Optical Flow $\propto$ color of the pixels: the goal is to find the best possible predictor. Problem Statement:

- Motion = estimated on the Y component of YCbCr
- we have a Generic Point $\vec{p} = [x, y]^T$
- we have a trajectory $x(t)$

The optical flow is the estimate velocity of trajectory of point $\vec{p}$ at time t .
The associated displacement is the MVF.

7.1.5 Optical Flow - Displacement Field

Consider at a given time $t_0 \rightarrow x(t_0) = \vec{p} - D$

Then for a time step $T \rightarrow x(t_0 + T) = \vec{p}$

We can define the displacement as this difference:

$$D(\vec{p}, t_0, T) = x(t_0 + T) - x(t_0) = \begin{bmatrix} c(\vec{p}, t_0, T) \\ d(\vec{p}, t_0, T) \end{bmatrix} = \begin{bmatrix} c(x, y) \\ d(x, y) \end{bmatrix} \quad \text{where } \begin{cases} c = \text{Horizontal Displacement} \\ d = \text{Vertical Displacement} \end{cases}$$

7.1.6 Optical Flow - Constant Illumination Hypothesis (CIH)

CIH is one of the **Fundamental Hypothesis**.

'Luminance doesn't change along the motion trajectory $x(t)$ '

Mathematically we can use the brightness f to define it:

$$f(x, y, t + T) = f(x - c(x, y), y - d(x, y), t)$$

However this hypothesis is rarely satisfied, due to discretization (sampling, aliasing), noise, degradation of signal.

c, d are unknowns, we can estimate them by linearizing f , we assume f is linear w.r.t. its own data.

7.1.7 Optical Flow - Equation

By using Taylor's expansion:

$$f(\vec{p}, t + T) = f(\vec{p}, t) - \left[c(\vec{p}) \frac{\partial f(\vec{p}, t)}{\partial x} + d(\vec{p}) \frac{\partial f(\vec{p}, t)}{\partial y} \right] + o[\|D(\vec{p})\|]$$

By dividing all by T and rearranging terms:

$$\frac{f(\vec{p}, t + T) - f(\vec{p}, t)}{T} = -\frac{1}{T} \left[c(\vec{p}) \frac{\partial f(\vec{p}, t)}{\partial x} + d(\vec{p}) \frac{\partial f(\vec{p}, t)}{\partial y} \right] + \frac{1}{T} o[\|D(\vec{p})\|] = -\frac{\vec{D} \nabla f}{T} + \frac{1}{T} o[\|D(\vec{p})\|]$$

We can see the left-side term is the incremental ratio (derivative), then from CIH:

$$\frac{\partial f}{\partial t} = -\vec{V} \nabla f \quad \implies \quad u \frac{\partial f}{\partial x} + v \frac{\partial f}{\partial y} + \frac{\partial f}{\partial t} = \boxed{uf_x + vf_y + f_t = 0}$$

7.1.8 Optical Flow - Solution: Horn & Schunck method

How to find u and v ? We use the energy of the function.

Assuming the total variation of the velocity over a region $\mathcal{R}$ is:

$$\iint_{\mathcal{R}} (uf_x + vf_y + f_t)^2 dx dy = \min \text{ s.t. } \iint_{\mathcal{R}} (\|\nabla u\|^2 + \|\nabla v\|^2) dx dy \leq \tau$$

It is a combined minimization problem, it can be solved using lagrangian multipliers:

$$J = \iint_{\mathcal{R}} (uf_x + vf_y + f_t)^2 dx dy + \lambda \left[\iint_{\mathcal{R}} (\|\nabla u\|^2 + \|\nabla v\|^2) dx dy - \tau \right]$$

$$\text{Solutions} \quad \longrightarrow \begin{cases} \lambda \nabla_2 u = (uf_x + vf_y + f_t)f_x \\ \lambda \nabla_2 v = (uf_x + vf_y + f_t)f_y \end{cases} \quad \text{and with} \quad \begin{cases} \nabla u = \bar{u} - u \\ \nabla v = \bar{v} - v \end{cases} \quad \longrightarrow \begin{cases} u = \bar{u} - f_x \frac{\bar{u}f_x + \bar{v}f_y + f_t}{\lambda + \|\nabla f\|^2} \\ v = \bar{v} - f_y \frac{\bar{u}f_x + \bar{v}f_y + f_t}{\lambda + \|\nabla f\|^2} \end{cases}$$

Horn and Schunck method provides a smooth motion estimation (smooth and coherent result), very used in practice for object tracking, video compression and motion analysis.

7.2 Block Matching

We split images into blocks $B_{p,q}$ with $(p, q) \in N \times M$

We can estimate our global motion using simple motions of small blocks, simple to program.

The idea is to compare a single block luminance $f_k(B_{p,q})$ with a subblocks in a block window $f_h(B_{p-i,q-j})$

7.2.1 Formulation

Imagine we have two blocks in position $B_{p,q}$ and $B_{p-i,q-j}$, then image indexes h, k and window W (full or subset of the image). We can find the luminance values and compare them using the function d :

$$d(f_k(B_{p,q}), f_h(B_{p-i,q-j})) = J(i, j) \quad \implies \quad (\hat{i}, \hat{j}) = \arg \min_{(i,j) \in W} J(i, j)$$

Different techniques differ in:

- minimization criterion of J
- set of candidate vectors W
- Block size and shape

Basically there is a function assigning a score depending on different parameters: we try to minimize that score.

7.2.2 Evaluation of the MVF

How can we tell if the result we get is good enough?

- **Motion-Compensation (MC) prediction associated to MVF** (pretty similar to the other equations)

$$\text{Similar to CIH - Brightness } \tilde{f}_k(n, m) = f_h(n + u_{h \rightarrow k}(n, m), m + v_{h \rightarrow k}(n, m))$$

- **Prediction Error**

$$e(n, n) = f_k(n, m) - \tilde{f}_k(n, m)$$

- **MC-ed MSE**

$$\mathcal{E} = \frac{1}{NM} \sum_{n,m} e^2(n, m)$$

- **PSNR** = $10 \log_{10} \frac{255^2}{\mathcal{E}}$

Main Tradeoff on complexity is to change block size $P \times Q$.

Larger blocks reduce coding costs, complexity, and increase MSE

7.2.3 Block Matching criteria

- **SSD** (Sum of Squared Differences), norm-based criteria

$$J_{SSD}(i, j) = \sum_{(n, m) \in B_{p, q}} [f(n, m, k) - f(n - i, m - j, h)]^2$$

- PROS: Good for maximizing PSNR
- CONS: Difficult to compute, increase in entropy of MVF, doesn't account global illumination changes.

- **SAD** (Sum of Absolute Differences)

$$J_{SAD}(i, j) = \sum_{(n, m) \in B_{p, q}} |f(n, m, k) - f(n - i, m - j, h)|$$

- PROS: globally costs less bits, quality still really good
- CONS: problems with parts with same colors (unknown behavior due to noise)

- **REG** Regularized norm-based criteria $\rightarrow$ solves most of the problems

$$J_{REG}(i, j) = \left\| \vec{f}_k(B_{p, q}) - \vec{f}_h(B_{p-i, q-j}) \right\|_p^p + \lambda R(i, j)$$

7.2.4 Full-Search research strategy

We consider windows of the image, with size $= (2A + 1) \times (2B + 1)$.

Then we build a $(2A + 1) \times (2B + 1)$ SSD matrix, this brings $\propto n^2$ complexity. By searching the minimum of the SSD matrix, it is the best possible vector that can be used to approximate the window.

7.2.5 Fast Research Methods: 3SS (Three step search, 2D-log)

The use of Full-search is computationally expensive, we need strategies to test less positions in the window. Assuming error function is unimodal $\Rightarrow \exists$ one global minimum.

3SS method allows to test only 9 positions ($x \in \{0, \pm A/2\}, y \in \{0, \pm B/2\}$). Avoiding to compute 89% operations.

We recursively apply this method on the sub-windows centered in the minimum valued element of the matrix, and also reducing the size of the sub-matrix by a half, until we get a 1-pixel subwindow.

7.2.6 Fast Research Methods: Diamond Search

We rotate the initial 9-points structure by 45 degrees, thus we use a diamond pattern to search, new iteration can cost from 3 (diagonal displacement) to 5 (horizontal/vertical displacements) positions to compute.

Recursively refining until final refinement is done through a cross-shaped 5-position small diamond. Avoiding to compute 90% operations.

7.2.7 Fast Research Methods: Hex Search

As the diamond search, here we use an hexagon-like shape with 7 positions to compute. Horizontal, vertical and diagonal displacements cost 3 positions to compute. Final refinement is done through the same cross-like shape of the diamond search. Avoiding to compute 92% operations.

7.2.8 Fast Research Methods: TZSearch

Robust to local minima, phases:

- Search predictors: search time/space neighbors, if low error stop
- Adaptive loop: if no predictor is good, use diamond/square search increasing steps

7.2.9 BM Improvement: Sub-pixel precision

With half pixel precision, we can reduce cost function because we have more options.

Problem: we have to increase resolution, we can use some interpolation methods, steps:

1. select a certain pixel $(\hat{i}, \hat{j})$
2. we test $(\hat{i} \pm \frac{1}{2}, \hat{j} \pm \frac{1}{2})$
3. recursively we test all subpixels with $1/4, 1/8 \dots$

7.2.10 BM Improvement: Variable Blocksize

Foreach block b of size B in image F :

- calculate $J = D + \lambda R$
- divide b into 4 subblocks
- compute $J_i \forall i$ subblocks, $J_{sub} = \sum J_i$
- if $J_{sub} < J(v)$ apply algorithm to subblocks, else keep and store MV

7.3 Parametric Methods

We want MVF as a function of each pixel, degrees of freedom = parameters of the function.

7.3.1 Affine Model

$$\vec{v}(p) = \vec{b} + Bp = \begin{bmatrix} b_1 \\ b_2 \end{bmatrix} + \begin{bmatrix} b_3 & b_4 \\ b_5 & b_6 \end{bmatrix} p$$

Special case if $B = 0 \rightarrow$ translation (Block Matching), other possible intermediate cases are:

- Zoom In or Zoom Out
- Rotations
- Displacement (Translations)

7.3.2 Best possible parameters

Which are the best possible parameters? We know the affine model has 6 parameters $\pi = [b_1 \dots b_6]$

Indirect Estimation

$$\pi^* = \arg \min_{\pi} \sum_{n,m \in R} [u(n, m) - u_{\pi}(n, m)]^2 + [v(n, m) - v_{\pi}(n, m)]^2$$

Direct Estimation, first approach

$$\pi^* = \arg \min_{\pi} \sum_{n,m \in R} [u_{\pi}(n, m)f_x(n, m) + v_{\pi}(n, m)f_y(n, m) + f_t(n, m)]^2$$

Direct Estimation, second approach (SAD/SSD minimization)

$$\pi^* = \arg \min_{\pi} \sum_{n,m \in R} [f(n - u_{\pi}(n, m), m - v_{\pi}(n, m), t - 1) - f(n, m, t)]^2$$

7.4 Deep-Learning for Motion Estimation

- Specialized architectures (CNNs)
- Large-scale datasets for training (Synthetic or Real, used by some game video quality enhancement tools)
- High computational power of inference by using GPUs (in the last few years)

7.4.1 Time evolution

- First Generation: **FlowNet (2015)**, first CNN for motion estimation (input images, output optical flow)
- Second Generation: **FlowNet 2.0 (2017)**, better tradeoff complexity-performance
- Third Generation: **PWC-Net (2018)**, faster and quite efficient in complexity, easier to implement
- Nowadays:**RAFT (2020)**, slower than PWC-Net, precise on thin structures, iterative updates and GRU⁹.

⁹Gated Recurrent Unit

7.4.2 Usage Comparison

DL methods has the best efficiency in analysis tasks (Optical Flow).

DL methods used in real-time video coding need to be tuned by practical constraints.

Advantages: Robustness, high precision

Challenges: Generalization on different datasets, computational cost to be optimized.

8 Video-coding Principles

We want to exploit both spatial redundancy and temporal redundancy.

8.1 Block Schema



Can we swap Temporal and Spatial compression blocks? Yes but it isn't used because it doesn't make sense.

8.2 Block-Matching motion estimation

$$J(v) = d(B_k^{(p)}, B_h^{(p+v)}) + \lambda_{ME} R(v)$$

How can we build the prediction using motion estimation? Motion Compensation

8.2.1 Motion Compensation

$$\hat{I}_k(p) = I_h(p + v^*(p))$$

Sometimes MC works better and sometimes it works worse, solution: adaptive blocks.

8.2.2 Adaptive block coding

- Intra Coding: encode block as it is
- Inter Coding: use other images to predict it

$\forall B_k^{(p)}$ block of image k:

- compute $J(v)$
- find the $v^* = \arg \min_p v(p)$
- encode block:
 - If intra: encode in a JPEG-like way
 - If Inter:
 - * Decode v^* motion vector
 - * Decode predictor error blocks $E_p^{(b)}$
 - * Correct blocks

8.2.3 Design Parameters

Block size (smaller better), Cost function (SAD + regularization),

Motion Model (translational), Search Strategy (fast methods: hex, TZ)

8.3 GOP: Group of Pictures

It is a sequence of n frames, usually in the following order:

$$\boxed{I \ B \ B \ P \ B \ B \ P \ B \ B} \rightarrow n\text{-th GOP}$$

8.3.1 'I' frames: Intra Frames

Access points of our videos, decoding starts here. Useful to stop error propagation. Fast to encode, no ME. All blocks of an I frame are Intra coded. Used for: **random access** (independently decodable), **fast forward** (decode only I frames), **error robustness** (stop error propagation). Low complexity but low compression.

8.3.2 'B' frames: 'between' frames

Uses both past and future frame exploitation for prediction. This leads a change in encoding order (1,4,2,3,7,5,6,10,8,9), leading also to a **structural latency**. In Real time applications we do not use B frames due to this latency. For each block of a B frame the encoder can choose: Intra coding, **forward** prediction (from the past), **backward** prediction (from the future), or **bidirectional** prediction (average of past and future predictors). Very high complexity (double ME) but the highest compression ratio.

8.3.3 'P' frames: Predictive Frames

Predicted from the **previous anchor frame (I or P)**. Decision taken at block level: each block can be Inter or Intra coded. High complexity (ME/MC) but much higher compression than I frames at the same quality.

8.3.4 Rate and quality of the frame types

I frames are $\approx 3 \rightarrow 5\times$ larger than P frames and $\approx 10 \rightarrow 20\times$ larger than B frames. The quality of I frames is typically forced high, because they predict (directly or indirectly) the whole GOP. The GOP structure controls the tradeoff among: compression efficiency, delay, random access, error propagation.

8.4 Hybrid Video Encoder

8.4.1 Frame coding modes

Encoder tries all of these to encode a frame:

- Intra: available for all frames
- Inter: ME/MC-based temporal prediction (only NON-intra frames)
- Direct (skip): trying to infer MV from neighbors (gain in rate, loss in distortion)
- Lossless: all frames can be encoded in this way

8.4.2 Block Size: Block Partition Problem

$$D = \sum_{k=1}^K D_k(i_k, Q) \quad R = \sum_{k=1}^K R_k(i_k, Q)$$

We want the lowest distortion for a given bitrate:

$$J(\vec{i}, Q, \lambda) = D(\vec{i}, Q) + \lambda R(\vec{i}, Q) \quad \text{where } \vec{i} = \{i_k\}_{k=1}^K \text{ s.t. } i_k^* = \arg \min_{i_k} J(i_k, Q, \lambda) = \arg \min_{i_k} J_k(\vec{i})$$

How to find Q and λ ? Q is an input (set by rate control); for each Q there is an optimal λ , determined **empirically** per codec:


$$\text{MPEG-2: } \lambda = aQ^2 + b \quad \text{H.264: } \lambda = c \cdot 2^{dQ+e} \quad \lambda_{ME} = \sqrt{\lambda}$$

Joint minimization over all $\vec{i}$ is too complex $\Rightarrow$ suboptimal **block-wise** minimization of $J_k(i_k, Q, \lambda) = D_k + \lambda R_k$, one block at a time. Block partition cast as a mode too: split if $J_{split} = \sum_i J_{subblock_i} < J_B$, applied recursively from the largest block size.

8.4.3 Coding Mode i_k selection

On a R-D plane we plot all the points related to the available modes, then we select the nearest to our J slope. $D = -\lambda R + J$ is a family of lines with slope $-\lambda$: high λ (steep) $\rightarrow$ low bit budget, picks low-rate modes (e.g. Direct); low λ (flat) $\rightarrow$ prioritizes fidelity (e.g. Inter8 bidirectional). The chosen mode is the first point touched by the line moving from the origin towards the convex hull of the available modes.

8.4.4 Encoder scheme

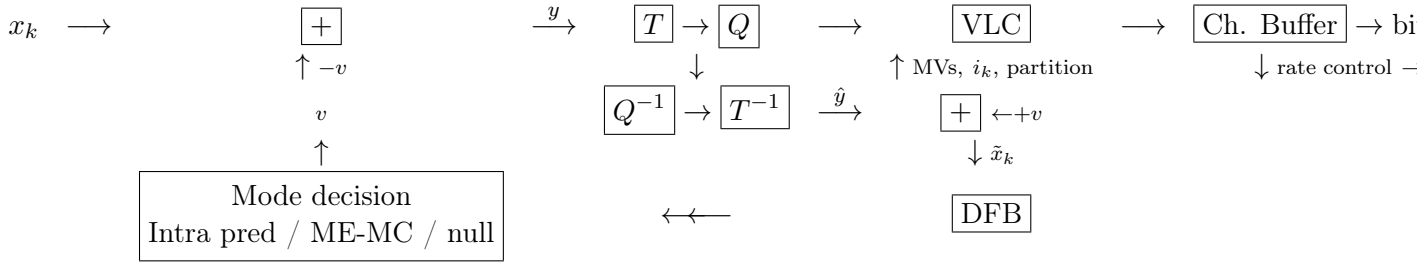


Comment on the blocks:

- Each image is split into blocks; for each block the encoder computes a prediction v : **null** (direct DCT coding), **temporal** (ME/MC, simple or bi-prediction), or **spatial** (Intra, from already encoded blocks of the same frame).
- The prediction error $y = x_k - v$ is JPEG-like compressed: Transform + Quantization.
- **Decoder loop inside the encoder:** Q^{-1} , T^{-1} , then $\tilde{x}_k = \hat{y} + v$ is stored in the **DFB** (Decoded Frame Buffer), because future temporal/spatial predictions must use the same reconstructed data the decoder will have (no drift, same principle as closed-loop DPCM).
- Side information (mode decision, block partition, motion vectors) + quantized coefficients are entropy-coded with a VLC (Huffman/Arithmetic/Exp-Golomb; MVs coded predictively, exploiting spatial coherence of the MVF).
- **Rate control:** encoded stream enters the channel buffer at rate R_C (content-dependent) and leaves at target rate R_T . Closed-loop controller: if occupancy $> \gamma_{high}$ increase quantization step (R_C drops); if $< \gamma_{low}$ decrease it (R_C grows).

Why do we have standards? Interoperability, we only standardize the decoder (able to decode anything), to leave encoding competition.

8.5 Hybrid Video Decoder

8.5.1 Decoder scheme



- First decodes the **side information**: partition, coding mode, motion vector(s).

- Then inverse quantization, inverse transform, and sum with the prediction (MC or Intra) to get the final block, stored back in the DFB.
- The decoder does **not** perform: mode decision, block partition decision, motion estimation (the heavy operations) $\Rightarrow$ decoder much faster than encoder. These are read from the bitstream.
- Since only the decoder is standardized, ME strategy / mode decision / partitioning are free: competition on encoder efficiency (hex-search, fast mode decision, ...).

8.5.2 Key elements

- Spatial Compression: Transforms
- Temporal Compression: GOP and ME
- LossLess coding: Huffman and Arithmetic codings
- Coding Mode estimation: Lagrangian ($D + \lambda R$)

8.6 Video Encoding Standards

- MPEG (1,2,4): among the first standards, since 1988
- H.264/AVC: free standard
- H.265/HEVC: some patenting
- H.266/VVC: not really free, we have some patenting
- AV1, VP8, VP9: Royalty free standards (AOM¹⁰)

8.6.1 MPEG-1

MPEG-1 Part 2 (MP3 Audio Format) was the first digital audio standard used for CDs. MPEG-1 allows:

- Rate ≤ 1.86 Mbps
- $[720 \times 576]$ @30fps max resolution
- Audio: 128 $\rightarrow$ 320 kbps

9 Modern Video-Compression Standards

9.1 Universal Hybrid Video Encoder

From MPEG-1 going on they use all the same structure, core points:

- Spatial (intra) and temporal (inter) prediction
- Residual calculation
- Transform and Quantization
- Internal closed loops to provide reliability

Rule of thumb: every generation reduces video size by 1/2 and increases complexity by 10×

¹⁰Alliance for Open Media

9.1.1 Codecs applications

- Real Time → H.264 (very diffused, also in HW implementations since 2003)
- Broadcast → H.264 + HEVC, growing HEVC market share
- Web Streaming → H.264 + HEVC + AV1 (still royalty free)
- Next-Generations → need to use massive bitrates of raw video → VVC, AV1

9.2 Rate-Distorsion Optimization

$$J = D + \lambda R$$

Using the R-D optimization method we have a huge number of options, how do we choose the best mode?

The solution is to work in blocks → Block Partitioning Problem

9.2.1 Block Partitioning Problem: H.264

In H.264 we use macroblocks 16×16 , it allows further splitting until 4×4 blocks, useful to compute edges.

Still this size is too low for High-Resolution videos, we need something more.

9.2.2 Block Partitioning Problem: H.265/HEVC

HEVC uses a Quad-Tree paradigm, it is like a 2D binary tree.

A certain CTU (Code Tree Unit) can be split into 4 CU (Coding Units), then a CU becomes a CTU and we can apply this recursively. Standards should provide only the syntax, we need to do the actual implementation.

We continue splitting until another split provides no more improvement, and complexity becomes reasonable.

CU can be split even in asymmetrical quantities into the PU (Prediction Units), then we use S and T prediction.

9.2.3 Block Partitioning Problem: H.266/VVC

It uses the same paradigm but here we have a 10-way superblock partitioning, we can binary and ternary split.

How can we build the decision tree? Depth First Search:

- Encode Block, freeze it
- Go to the next neighbor block
- Iterate until all blocks are encoded

If the block is flat, doesn't make any sense to partition it.

In this case we also have a huge number of possible partitions, but we give up in looking all possible choices.

This is like a classification among pixel groups, ML and NN are good in solving these problems.

Researchers are looking for a light NN to exploit this.

9.3 Spatial and Temporal Frame Prediction

9.3.1 Intra Prediction

We want to exploit spatial prediction among neighbors. Instead of trying just one prediction we use different predictors in parallel for the same block, then we pick the best one. We have to signal this to the Encoder.

We take one predictor-per-block instead of one-per-pixel (it is too much bits wasted):

- **H.264/AVC**: 9 modes for 4×4 blocks (**8 directional** + **DC**); 4 modes for 16×16 blocks (2 bits). A 16×16 MB split in $16 \times 4 \times 4$ subblocks has ideally 9^{16} combinations: done sequentially to cut them down.
- **H.265/HEVC**: **35 modes** = **33 directional** + **DC** + **Planar**, to handle complex textures.
- **H.266/VVC**: **65 directional modes** + **wide-angle** modes for non-square blocks.

Predictors grow exponentially with the signaling bits: $P \propto 2^B$. With 67 modes, ≈ 7 bits/block of pure signaling would destroy the gain on 4×4 blocks.

MPM: Most Probable Mode idea, ENC predicts which is the most probable direction using the spatial context: a candidate list is built from the modes chosen by top and left neighbors (HEVC: 3 candidates, VVC: 6). If the chosen mode is in the list, 1-2 bits suffice; only if it fails long codewords are used.

9.3.2 Inter Prediction

Here we use Fractional Motion Compensation, each frame is computed using multiple reference frames.

For each image in the GOP, we have to say what is the List of frames used for prediction.

Here complexity $\propto$ size of bits. How do we encode the motion vectors?

A better strategy is to produce a list of predictors and encode the indexes.

9.3.3 Merge Mode

Used in AV1/VVC, not only picks the pixels but also applies affine transformation on the blocks, thus producing a complexity increase.

9.4 Filtering, Transforms and Quantization

9.4.1 Residual Coding

DCT problem: we want floating number operations (too complex for an encoder, must be quick).

Solution: just use integer power of 2, such that multiplications are bit shifts and we have also $\pm$ operations.

We don't provide quantization table, but a similar Quantization Parameter ($\propto$ dB step size)

QP behavior (H.264/HEVC): the quantization step **doubles every +6 of QP**; empirically +1 QP $\approx -12.5\%$ rate. QP is the main knob for rate control.

Entropy coding standardized around **CABAC** (Context-Adaptive Binary Arithmetic Coding): binarizes syntax elements and adapts probabilities on spatial context; $5 \rightarrow 15\%$ rate saving over older VLC (CAVLC).

9.4.2 In-loop Deblocking Filter

Why artifacts: transform and quantization are applied *independently on disjoint blocks* $\Rightarrow$ at low bitrate strong discontinuities (**blocking artifacts**) appear at block boundaries.

Why in-loop (and not just post-processing): uncorrected artifacts would be stored in the Decoded Picture Buffer and copied around by future motion compensations, propagating the damage. The

filter is **normative** (inside the reconstruction loop, identical at encoder and decoder to keep sync).
Key insight: artifact locations are known a priori — the block edges — so we apply adaptive smart smoothing there, without blurring real image edges.

- **H.264/AVC deblocking:** analyzes edges between 4×4 blocks; filtering strength adapts dynamically to coding mode, motion vectors and quantization step of the neighboring blocks.
- **H.265/HEVC:** deblocking only on 8×8 grid (less complexity) + **SAO** (Sample Adaptive Offset): classifies pixels by edges/bands and adds offsets to fix ringing artifacts.
- **H.266/VVC:** adds **ALF** (Adaptive Loop Filter) and **LMCS** (HDR detail preservation).
- **AV1:** CDEF directional filters, Wiener loop-restoration filters, film grain synthesis (grain re-synthesized at decoder at zero rate cost).

9.4.3 Slices

Error corruption behavior: artifacts highlight due to error propagation in compression.
How can we prevent this? Slices are subparts of the frame, that are independently encoded, such that we can parallel-encode them, because we don't use them for prediction.
At Intra Frames CABAC¹¹ is reset.

9.5 Network parallelism

All the video data is encoded into a bitstream.


9.5.1 NALU

- VCL NALUs: contain all the compression data for a slice, can be IDR¹² (I + CABAC reset) or non-IDR
- non-VCL NALUs: contain SPS, PPS, SEI
 - SPS: Sequence Parameter Set (picture size, color depth,...)
 - PPS: Picture Parameter Set (coding specific parameters)
 - SEI: Supplemenetal and Enhancement Infos (Subtitles, HDR infos, ...)

NALUs are then packetized into a sequential bit stream, there are 2 ways to signal the NALU (H.264/HEVC):

- Start Code 0x00000001: it is used but we have problems if this sequence is repeated in a nalu (start code mismatch), we have to use Emulation Prevention Techniques
- Length Header: before the NALU we specify the actual NALU length, such that we can read it or skip it.

Actual Sequence using Annex-B ordering is:

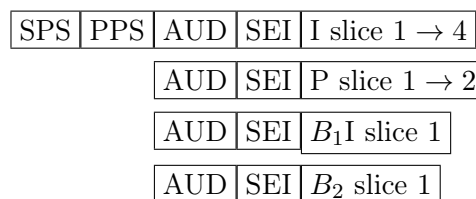

¹¹Context-Adaptive Binary Arithmetic Coding

¹²Istantaneous Decoding Refresh, video access point

AV1 drops this approach and uses OBUs (Open Bitstream Units), in CDNs there are MANE¹³ that can allow to change the bitstream on the fly to add redundancy or remove unnecessary NALUs. Decoder accesses video at RAPs (Random Access Points), there are 2 main access techniques:

- IDR: Technique to clear previous buffer at a certain intra frame. It breaks bidirectional temp. prediction
- CRA (Clear Random Access): we just skip some images because they are not decodable.

10 Audio and Speech Coding

Different uses have different requirements:

- VR and AR need low latency
- Dynamic Range, deal with 100 dB differences
- Transparency of the encoded audio w.r.t. the original signal

10.1 Audio Modeling

10.1.1 Requirements

- Speech is stationary but for small intervals ($\sim 20\text{ms}$), it uses **source based** coding, linear filters to guarantee intelligibility and low latency.
- General Audio is more homogeneous (fast transients, tonal segments), it uses **sink¹⁴ based** coding, needs to guarantee fidelity and transparency.

10.1.2 Vowels

Vowels are very correlated with zero-centered frequency.

Usually there are harmonics, ordinary FT doesn't work, here we use Short-Time Fourier Transform (STFT).

Pitch is the frequency of the most important harmonic, then the others are computed based on this.

10.1.3 Music

Histogram is less sparse, correlation is still strong. There is no harmonic structure.

We treat these sounds as images so we use an image-like analysis, using perceptual models.

10.1.4 Human Speech Production System

3 Entities:

- Power: we use the lungs
- Source: we have our vocal folds
- Filter: the vocal tract act as a filter

There are 2 main types of sounds:

- Voiced sounds: depend on a pitch period T_0 , which depends on the person (M/F, old/young)
- Unvoiced sounds: it is like filtering differently white noise (fricatives etc...)

¹³Media Aware Network Elements

¹⁴Sink = human ear

10.2 Linear Predictive Coding

$$\hat{x}(n) = -\sum_{i=1}^P a_i x(n-i) \quad \implies \quad \text{s.t. } y(n) = x(n) - \hat{x}(n) = \sum_{i=0}^P a_i x(n-i) \text{ with } a_0 = 0$$

10.2.1 Yule-Walker Equation

$$\mathbf{R}_x \vec{a} = -\vec{r}_x$$

How do we find the a_i s? We use this YW equation. The $\mathbf{R}_x$ is the Toeplitz matrix of autocorrelation, the $\vec{a} = [a_1 \cdots a_p]^T$ is the unknown coefficient vector, and the $-\vec{r}_x$ is the autocorrelation vector. There is also an efficient algorithm which has small complexity: **Levinson-Durbin** Algorithm.

$$x(n) \longrightarrow \boxed{\text{Windowing } \sim 20ms} \xrightarrow{\text{Voiced/Unvoiced, } T_0} \boxed{\text{Autocorrelation}} \longrightarrow \boxed{\text{Levinson-Durbin}} \longrightarrow \{a_i\}, G$$

How do we estimate autocorrelation? Check linear predictors (2.4.5), very similar behavior.

How do we detect the pitch? Compare $k > P$, how do we check Voiced/Unvoiced? Compare to $\mathbf{R}_x(0)$

10.2.2 Residuals

$$Y(z) = A(z)X(z) \quad \implies \quad X(z) = A^{-1}(z)Y(z)$$

Residuals are:

- If unvoiced: zero mean white noise
- If voiced: periodic spikes

If Y are impulses, then A^{-1} (inverse filter) is the $H \implies X$ is also the H .

We know a_i are numbers, how do we quantize them? We have 2 problems:

- a_i can vary a lot, we don't have an a-priori range knowledge
- Filter is not BIBO¹⁵ stable

10.2.3 LPC Synthesis

We know how to get the a_i s, but we also want BIBO stability

$$\begin{cases} P(z) = A(z) + z^{-(P+1)}A(z^{-1}) \\ Q(z) = A(z) - z^{-(P+1)}A(z^{-1}) \end{cases} \quad \text{such that} \quad P(z) + Q(z) = 2A(z)$$

It must be easy to recover A from P, Q . All the roots are on the unit circle, how do we get stability?

$$(\text{BIBO}) \text{ Stable} \quad \iff \quad \text{roots of } P(z) \text{ are alternate with the } Q(z) \text{ ones}$$

From the Itakura paper (1975): $0 < \omega_1^{(P)} < \omega_1^{(Q)} < \omega_2^{(P)} < \cdots < \pi$

If the roots are close to one another we have sharp peaks in the filter response.

10.3 Vector Quantization

We have a set of $\omega = [\omega_1 \cdots \omega_p]$, then we have a codebook (shared dictionary of most important ω_i). Between Voiced and Unvoiced saomples we have 28 bits to allocate freely:

- Voiced: 21 bits for LPC coefficients, 7 bits for T_0
- Unvoiced: all 28 bits go to the error protection

¹⁵Bounded-Input, Bounded-Output

10.3.1 CELP Paradigm (Code-Excited Linear Prediction)

3 main ideas:

- Vector Excitation: choose residual vector from codebook
- Analysis-by-synthesis: encoder is like a mini-decoder
- Closed loop shape search, and then tx the optimal shape.

CELP minimizes the perceptual weighted error, the optimal shape of the error should be something like:

$$W(z) = \frac{A(z)}{A(z/\gamma)} \quad \text{with } 0 < \gamma < 1$$

Then CELP does also pole shifting to move poles toward the origin.

The adaptive part models pitch based on previous $y(n)$:

$$\begin{cases} \text{Sample Lag } Q \\ \text{Gain } b = g_P \end{cases} \implies y_{\text{adapt}}(n) = y(n - Q)$$

Examples: G.729, G.722.2 (AMR-WB), EVS

10.3.2 Perceptual Coding for Audio

Coclea in human ear acts as a sum of critical bands (BPF), narrow bands for low frequency, wider bands for high frequency. Masking Effects:

- Frequency masking effect is still effective, the quantization mask based on frequency is defined as $\varphi(f)$
- Temporal Masking: we use pre/post masking techniques

Standards: MP3 (first actually used digital standard for audio), aac (basically it is an mp3 improvement).

10.4 Modern Techniques

10.4.1 OPUS

Makes use of CELT techniques for speech processing (xiph.org based), and uses SILK techniques for Music (Skype derived). It also provide Low-Latency and it is the de-facto standard for Discord, WebRTC,...

10.4.2 Neural Codecs

Google and Meta proposed their own solutions, they can reach very low bitrates (3/4 kbps) but at which cost? Complexity! They will be used as a fallback solution.

Currently we also have to take into account the ‘Hallucination’-challenge of NN-based codecs.

10.4.3 Spatial Audio

3 Main methods:

- Channel Based Distribution (5.1, 7.1)
- Mono + Position information approach (Object based)
- Scene-based approach

10.4.4 Quality Assessment

- Mean Opinion Score, human based, it costs much (POLQA, VISQOL)
- MUSHRA (ITU-R BS.1534)
- Transparency Test

Why SNR is not an effective parameter? We are insensitive to phase noise, perceptual methods needed.

11 Quality Assessment and QoE for Multimedia Services

11.1 What is Quality Assessment?

It is the association of a grade/number to a specific signal, called stimulus.

The assessment process can be objective (using a math. formula) or subjective (ask to people).

We have a Quality/Rate tradeoff, since these process are time/space-complex, energy and latency consuming.

QoE is a multidimensional variable.

11.2 Image Quality: Subjective Assessment

It is not easy to get consistent results, need to define carefully the equipment, such that the environmental conditions are equal for all the people that is asked. Process is costly, offline and time consuming.

Because of this it is used as the golden standard, but in a 2^{nd} phase of testing (cannot afford at first trial).

11.2.1 Testing Conditions

People must be in the same conditions to get good assessments, we have to take into account people artifacts (expert people vs non-expert people, people who prefer movements vs detail, colorblind people, myopia...)

- Space Information: lots of details and structures → Nature Documentaries
- Temporal Information: lots of movement → football matches (high difference between 2 near frames)

Users should be informed about the assessment methods, it shouldn't be too long, people can be tired.

Human Observers do not always agree. Techniques can be compared using a flowchart.

11.2.2 1st Technique: Single Stimulus

We have ACR (Absolute Category Rating) techniques. What if we have to compute a 'normal' scale? ACR-HR (Hidden Reference) technique.

11.2.3 2nd Technique: Double Stimulus

DSIS (Double Stimulus Impairment Scale) technique, very high accuracy, used for codec validation. It alternates reference video with the test video.

11.2.4 3rd Technique: Pairwise Comparison

PC technique assures a fine perceptual ranking, by comparing some times 2 different images/videos and asking which is the best among those possible answers.

11.3 Human Assessment Measures

Nowadays we can use also crowdfunded campaigns to call volunteers.

11.3.1 MOS: Mean Opinion Score

$$\text{MOS} = \frac{1}{N} \sum_{i=1}^N x_i$$

This is evaluable with std. measures


11.3.2 Standard Measures

- Standard Deviation: $s = \sqrt{\frac{1}{N} \sum_{i=1}^N (x_i - m)^2}$
- Standard Error: $\text{SE} = \frac{s}{\sqrt{N}} = \frac{1}{N} \sqrt{\sum_{i=1}^N (x_i - m)^2}$
- Confidence Interval: $\text{CI} = [-1.96 \cdot \text{SE}, 1.96 \cdot \text{SE}]$

11.4 Image Quality: Objective Assessment

It is difficult to evaluate the human perceptual system using maths.

It is always a chain of:

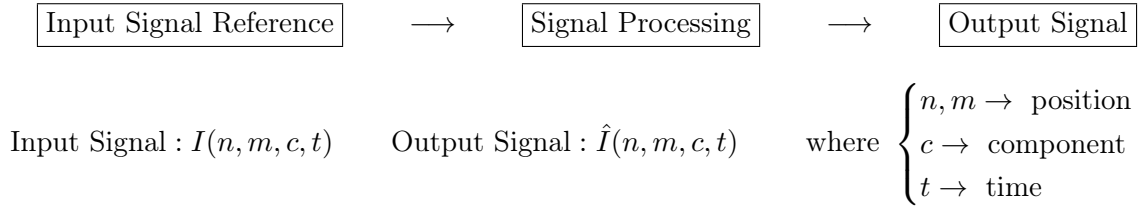

11.4.1 Full Reference Techniques

From the previous chain we take the input I and the output $\hat{I}$ and we compare them in the $\boxed{FR}$ block.

11.4.2 Y component measures

$$\text{MSE}_Y(t) = \frac{1}{NM} \sum_{n,m} \left[I(n, m, 1, t) - \hat{I}(n, m, 1, t) \right]^2$$

$$\text{PSNR}_{Y,\text{dB}}(t) \approx 48\text{dB} - 10 \log_{10} \text{MSE}_Y(t)$$

11.4.3 CbCr component measures

Analog to the Y component we can write:

$$\text{MSE}_{Cb}(t) = \frac{1}{\frac{N}{2} \cdot \frac{M}{2}} \sum_{n,m} \left[I(n, m, 2, t) - \hat{I}(n, m, 2, t) \right]^2 \quad \text{MSE}_{Cr}(t) = \frac{1}{\frac{N}{2} \cdot \frac{M}{2}} \sum_{n,m} \left[I(n, m, 3, t) - \hat{I}(n, m, 3, t) \right]^2$$

11.4.4 Total PSNR measure

$$\text{PSNR}_{YCbCr}(t) = \frac{3}{4} \text{PSNR}_Y(t) + \frac{1}{4} \left[\frac{1}{2} \text{PSNR}_{Cb}(t) + \frac{1}{2} \text{PSNR}_{Cr}(t) \right]$$

11.4.5 Bjontegaard Deltas

It measures the average improvement for the PSNR. Given two different codecs:

- Delta PSNR: Average PSNR difference (in dB) between the two codecs
- Delta Rate: Average rate difference (in percentage) at the same quality

We don't actually need to compute the integrals, we just use log-based parametric functions given 4 points.

11.4.6 Perceptual Metrics

Why PSNR is not enough? It is a Per-pixel distortion measure (no idea of the temporal perception), for videos we have to use perceptual metrics:

- SSIM: Structure-SIMilarity (compares YCbCr and structural information instead of PSNR-like methods)
- VMAF: Video Multi-method Assessment Fusion (from Netflix and Google(?))
 - Multiple features to estimate video quality
 - It exploits ML techniques to get objective testing
- AI-based metrics: CNN based, trained using image subjective datasets (get very good estimations)

11.4.7 Reduced Reference


Practical for Large Scale systems. The input I and output $\hat{I}$ goes in a parallel way into:



We focus on a limited subset of features, which are preserved in the final image.

11.4.8 No Reference

It only used the $\hat{I}$ output:



Techniques: BRISQUE, NIQE, PIQE. Used to assess photos.

Mobile Smartphone Cameras are assessed this way, it tells what are the characteristics of the good images.

12 Adaptive Streaming

While streaming a content we need to take into account rate-quality (tradeoff). Video is the most difficult problem because we have to reduce uncompressed video (from the order of Gbps of rate, down to some Mbps).

Possible applications of multimedia streaming:

- Bulk Transfer (need data integrity)
- VOD (delay tolerant)
- Live streaming (scalability and low delay)


It is possible to control the encoders such that we are able to compress video with the same rate.

12.1 Video Content Distribution

12.1.1 Challenges

Each user has different links to the central server, and each user has different constraints (display, battery,...)

A possible solution is the Conversational Paradigm (1 source to N destinations):

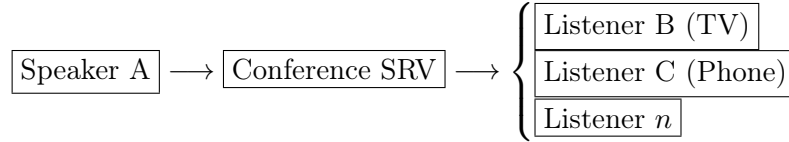

How to choose the coding rate of my video?

12.1.2 Coding Rate Bottleneck

We need:

$$R_c \leq C_k \quad (\text{capacity limit of user } k)$$

We need to keep the rate lower than the max capacity, to avoid buffering.

if $R_c = \min_k c_k$ we fix a low resolution also for high-capacity linked users.

Solution: use MANE, also deployed in CDNs and 5G Networks.

12.1.3 Paradigms

Push	Pull
• Goal: Minimize latency • Stack: WebRTC/RTCP/RTP/UDP • Server pushes, client listens (Real Time approach)	• Goal: Maximize QoE • Stack: [DASH,HLS]/HTTP3/QUIC/UDP/(CDNs) • Client asks for the content, server serves
UDP is quick and fast, RTP just adds additional infos like:	
• Packet Numbering • if Out-of-order packets → sort out	

RTCP also adds also a metrics exchange as control messages to let the server adapt the R_c .

There are also timestamps added to packets to handle sync and control jitter.

12.2 Scalable Video Coding (SVC)

Useful for a $1 \rightarrow N$ realtime video streaming. IDEA: just perform 1 encoding and then be able to extract several versions of the content. (JP2K like capabilities → progressive video coding)


12.2.1 Scalability Types

- **Time** Scalability: exploit temporal prediction
- **Quality** Scalability: use progressive coding, Base-Layer (BL) as prediction of ELs (Enhancement-Layers)
- **Space** Scalability: exploit Multiresolution Transforms, low-res base-layer + enhancement layers

Enhanced Layer is computed as $= I_{\text{input}} - \text{DEC}(\text{ENC}(I_{\text{input}}))$

12.2.2 Smart Layer Pruning

Assume we have the following architecture:



The speaker produces the Base-layer + 2 more enhancement layers, total of 3 Layers.

Confluence server decides how to send the layers to users, it's the **Selective Forward Unit**, usually a MANE.

12.2.3 Streaming via Legacy HTTP

Why don't we use the same solution for streaming? SFU needs memory proportional to the connected users, to keep the state of each. And the BL + EL solution has some overhead w.r.t. a single high res block of data. Solution: use HTTP because it is stateless and also largely implemented.

We can slice the video and have caching using the **CDNs**¹⁶ at the network edges.

The only drawback of Legacy HTTP is TCP, we increase latency and stop playout if a segment is lost (Head-of-line blocking). This implies ReTX and large delays. Solution: QUIC.

12.2.4 QUIC and HTTP/3

HTTP/3 is based on UDP:

- removes Head-of-line blocking
- it has short setup time (no handshakes)
- has connection migration, not bound to (ip,port) couple, just a connection ID

12.3 Adaptive Bitrate Streaming

12.3.1 Media Presentation Description (MPD) file

- **Period:** It is representing a certain content
- **AdaptationSet:** It represents a certain track (video, audio,...)
- **Representation:** It represents the different qualities (different codecs, resolutions, bitrates,...)
- **Segments:** They are the actual sliced media parts, by joining them together we get the actual content.

Further notes:

- Segments (.m4s) are Independently decodable, they only need an init signature part (.m4i)
- To encode a segment you have to wait the IDR block in a certain GOP.
Also in the decoding we'll start from a fresh new IDR block.
- If we know networks changes quickly: better short segments, otherwise viceversa.
- For Live streaming we have to use small chunks of about 200 – 500 ms, this is achieved with CMAF¹⁷
this leads to a glass-to-glass latency of about 1 → 3 seconds.

¹⁶Content Delivery Networks

¹⁷Common Media Application Format

12.3.2 Network Metrics: Throughput

Here we use continuous models to describe discrete things.

$$S(t) = \frac{d}{dt}D(t) \leq R_{\text{PHY}}$$

This inequality takes into account also for Overhead + Congestions + Other users on the link. Since S can be very sparky we want to use the average:

$$\bar{S} = \frac{1}{T} \int_0^T S(t)dt = \frac{D(T)}{T}$$

12.3.3 Network Metrics: E-2-E Nodal Delay

$$d_{e2e} = \sum_{k \in \text{links}} d_{\text{processing}}(k) + d_{\text{queue}}(k) + d_{\text{TX}}(k) + d_{\text{propagation}}(k)$$

- Processing: Error control, header reading
- Queuing: buffering
- Transmission: from the 1st bit to the last one, $\frac{\text{pkt size}}{\text{link rate}}$
- Propagation: usually distance over speed of light.

In modern networks an increase of R does affect only d_{TX} , the other delays keep the same size. The only thing we can change is the distance, we use CDNs to bring the content nearer to the users. Jitter is the most annoying phenomenon. Solution: use buffers to absorb the variability of the delay (Jitter).

12.4 Buffer Dynamics

12.4.1 Rebuffering event

Rebuffering: process of filling our buffers, it involves the download of some segments to play later

$$B(t) = L \cdot T_s \quad \text{where} \quad \begin{cases} L = \# \text{segments} \\ T_s = \text{duration of a segment} \end{cases}$$

If the network goes down, slowly buffer occupation decreases.

In a QoE maximization approach, for a user is better to have low quality video than an interruption.

12.4.2 Playout management

When I empty the buffer I wait for the playout to restart until I received M segments (Hysteresis):

$$B(t) = M \cdot T_s \quad \text{typically better for users if } L \geq M$$

We also set:

$$\frac{dB}{dt} = f_{IN} - f_{OUT}$$

Flows:

- f_{IN} Input Flow Rate, derived from network condition
 - Average $f_{IN} = \frac{D(T)}{T} = \frac{\bar{S}}{R_c}$
 - Instantaneous flow rate: $\frac{S(t)}{R_c} = \lim_{t \rightarrow 0} \frac{D(t)}{t}$

- f_{OUT} Output Flow Rate: speed of playout, considering 1x speed.

For a typical $f_{OUT} = 1$:

$$\frac{dB}{dt} = \begin{cases} \frac{S}{R_c} - 1 & \text{if playout going} \\ \frac{S}{R_c} & \text{if rebuffering, no playout} \end{cases}$$

The ideal condition is to have $S > R_c$ such that buffer is growing.

EXAM: Learn the Finite State Machine diagram and values $\rightarrow$ saw-tooth behavior.

12.4.3 Client Scoring-Policy Design

Assume $K(n)$ is the quality of segment n , then we want a function to assign each $K(n)$ a score: ideally MOS.

The QoE needs to take into account:

- Per-segment video quality
- Penalize High Buffering Times
- Penalize frequent quality switching

Let's take $Q(n) = K_n$ or $Q(n) = R(K_n)$, and define Δ_n = duration of rebuf. during playout at segment n .

We can define $J(n)$ as the score for playout of segment n , takes into account quality switches and rebuffering:

$$J(n) = \lambda_1 K_n - \lambda_2 |K_n - K_{n-1}| - \phi(\Delta_n) \quad \Rightarrow J(n) \propto K_n$$

To have a general score we define the final J by taking into account the first buffering event:

$$J = \sum_{n=1}^N J(n) - \lambda_3 T_{ST}$$

12.5 ABR Strategies

12.5.1 Throughput-based ABR

Goal: given an estimate of the current $S(t)$ let's check if segment arrives in time for playout.

Estimated Throughput:

$$S(n) = \frac{D(n)}{T_D(n)}$$

By using a smoothing filter (EMA):

$$\hat{S}(n) = \alpha S(n) + (1 - \alpha) \hat{S}(n-1)$$

Decision Rule:

$$R(n) \leq \eta \hat{S}(n) \quad \Rightarrow \text{typical value } \eta = 0.85$$

Problem: here we totally ignore buffer status (buffer blindness).

12.5.2 Buffer-based ABR

Strategy: select low quality if buffer is always empty, full quality if buffer is always full, linear behavior in the middle (2 thresholds to set). Problem: here we totally ignore network status.

12.5.3 Hybrid ABR strategy

Takes into account both strategies: it wants to maximize $J(n)$ as defined before. Pseudocode:

1. Set $J_{\min} = \infty$

2. $\forall l \in \{1 \dots k\}$:

Assuming constant $\hat{S}$ in the interval and $R = R(l)$, $\beta = \frac{\hat{S}}{R_c} - 1$, $B(t) = B_0 + \beta t$

- if $\beta \geq 0$ set $\Delta = 0$ (won't empty while downloading)
- if $\beta < 0$, compute $t_0 = \frac{B_0}{1 - \hat{S}R} = \frac{RB_0}{R - \hat{S}}$ emptying time, and check:
 - if $t_0 \geq T_s$ set $\Delta = 0$
 - if $t_0 < T_s$ set $\Delta = \frac{R}{\hat{S}}(T_s + MT_s)$

Server is totally unaware of what the client does, just serves what requested.

12.5.4 Learning-Based ABR

What works well: Reinforcement Learning techniques (State, Action, Reward)

12.5.5 Multiplayer Competition

Goal: guarantee the best possible average quality among all users.

What ABR Provides:

What are the Pathologies:

- | | |
|---|---|
| <ul style="list-style-type: none">• BW unfairness• Inefficiency (under-utilization)• Instability (synchro-flicker effect) | <ul style="list-style-type: none">• Fairness• Efficiency• Stability |
|---|---|

by using 'Implicit Coordination' mechanisms

12.5.6 Neural Video Coding

Uses Learned Transforms (instead of DCTs), Learned Motion Estimation (instead of Block Matching), Learned Entropy Modeling to reach a Joint R/D optimization. There is a unified loss function to be able to use many differential metrics, like MS-SSIM and VMAF (useful as an indicator of Human perception):

$$\mathcal{L} = D(x, \hat{x}) + \lambda R(\hat{y})$$