

Intro to the course

When contacting via **mail**, put [DGT-2025] in the subject and always use the institutional account.

Textbook: foundations of MIMO communication; should be available online for free in the library.

Password for the course: [Shannon48](#).

test ambush.

Professor recommends to check e-learning regularly: maybe he'll put there some notices etc etc; it's the way he has to communicate with us.

Exam: there will be a quiz part and then a questions part. The first part will have 5 *crocette* questions, 2 points each and they will have no penalty; then the second part will have a theoretical question (10 points; he might ask to repeat a demonstration and such) and an exercise (12 points; might be practical as well as theoretical)

The dates are:

1. 21/1
 2. 4/2
 3. 17/6
 4. 2/9
-

Professor will try and squeeze lessons so that they can end before Christmas.

In most of the course we'll handle wireless communications, as they're much more difficult than wired communications. In this course we'll stay at the physical layer.

We'll see:

1. **Channel models:** taking radio communications and making a mathematical model for them. We'll find an accurate model and then we'll apply a tradeoff to it, simplifying it so that it is manageable.
2. **OFDM:** Orthogonal Frequency Division Multiplexing.
3. **MIMO:** we have multiple antennas at the transmitter and multiple antennas at the receiver; we'd like to see how much this improves communications. The book he selected this year handles fundamentals of MIMO communications. MIMO is the *latest and greatest* achievement, he chose a book which goes from the basics. We might have single user MIMO or even multiple user MIMO: we're communicating to multiple phones through multiple antennas.

We can ask ourselves: what is the best that we can do? This is what our approach will be, so that we can know the boundaries.

We'll follow the slides from the author of the book, hopefully they'll be good.

We'll also have exercises with solutions: we can look at them from [cambridge.org](#), specifically from the page of the book.

In order to take this course, we need to master stuff from the Telecomunicazioni course D:. We need to know linear algebra and whatever's covered in the appendix of the book. **He recommends to study the appendices from A to G of the book.**

Primer

The first chapter is a primer in information theory and MSE estimation; we'll go fast as it **should** summarize stuff we know, as mutual information between two variables.

!!: the signals are always complex-valued and the constellations are always normalized to have unit power.

∞ -QAM: we increase the number of points making them denser inside a specific set.

Complex symmetric random variables, ∞ modulations

We'll start from chapter 1 of the book (:000); primer of information theory and MSE.

We should already know this stuff, but we'll cover it in order to have a common starting ground.

Prof's backstory moment -> in the end, he studies physical layer and that's it.

We ask ourselves: "what is information? When can we say that someone is giving us information?"

Professor begins ranting about information: information is related to probability! The more unlikely something is, the more informative it is!

Today we'll talk about mutual information between two random variables: the information a variable can supply to another variable.


We'll talk about channel capacity: the capacity at which a channel can convey information; it answers to "how much information can I send through this channel, reliably?" By reliably we mean that we can lower the probability of error as much as we want.

Binary coding and decoding are near optimum, but there can be other ways, which could be better: we'll show that binary is indeed optimum.

LMMSE is optimum when the signal and noise are Gaussian

Let's start from signals; in the book, signals are normally complex, unless we specifically say otherwise.

Normally complex random variables are complexly symmetric:

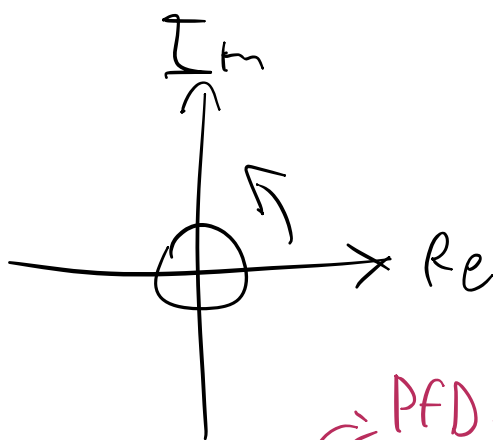


We can rotate the [variable] centered in the origin of the Im-Re plane without having it change!


About M-PSK and M-QAM; M is usually a power of 2

Let's see 16-QAM:




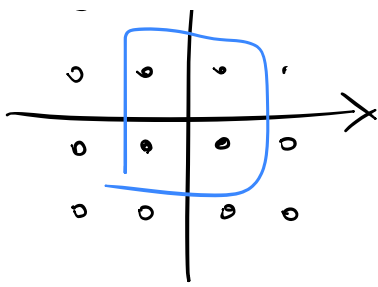

The power of the ones in blue is lower than the power of the other signals.
 In the book they always keep the same variance of the constellation; the book squeezes the values so that the power stays constant.

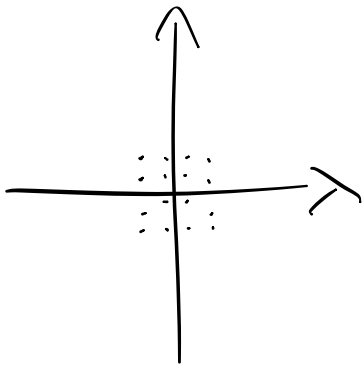

The book also has inf-PSK and inf-QAM: We take the normal constellation and we keep adding points

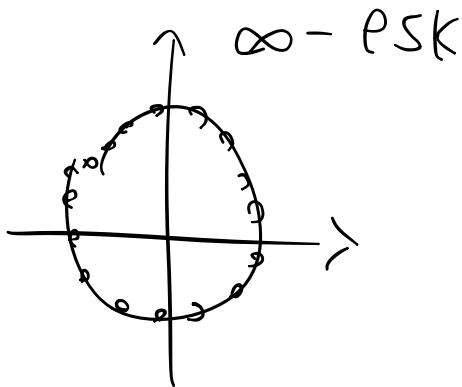

Here!

It's a useful way to see what happens in the asymptotic regime!

Also, the PDF of a complex Gaussian variable exists (see notes).

If σ^2 is the variance, the Standard deviation is $\sqrt{\sigma^2} = \sigma$

↓
NOT $\pm \sigma^2$!

We'll try and be as precise as possible: there is no negative standard deviation!

As an example:

$f(x) = \sqrt{x} \in \mathbb{R}$ is def. only for $x \geq 0$

$x^2 = 16$ has two sol.

What about information? There have been many results, dating back to Shannon!
(See pag 7 of the slides btw)

Discrete entropy (basic, joint, conditional), proper signals (+example with the entropy of a Bernoulli random variable)

Entropy

Entropy of a discrete-time random variable

$$\mathcal{H}(x) = - \sum_x p_x(x) \log_2 p_x(x) \\ = -\mathbb{E}[\log_2 p_x(x)].$$

Nonnegative function that quantifies the amount of uncertainty in discrete valued RV x

Joint entropy

$$\mathcal{H}(x_0, x_1) = - \sum_{x_0} \sum_{x_1} p_{x_0 x_1}(x_0, x_1) \log_2 p_{x_0 x_1}(x_0, x_1) \\ = -\mathbb{E}[\log_2 p_{x_0 x_1}(x_0, x_1)].$$

Conditional entropy

$$\mathcal{H}(x|y) = - \sum_x \sum_y p_{xy}(x, y) \log_2 p_{x|y}(x|y).$$

Entropy connections

$$\mathcal{H}(x, y) = \mathcal{H}(x) + \mathcal{H}(y|x),$$

The entropy is used in statistical physics.

Joint entropy:

$$\mathcal{H}(x_0, x_1) = \sum_{x_0} \sum_{x_1} p_{x_0, x_1}(x_0, x_1) \log_{1/2} p_{x_0, x_1}(x_0, x_1)$$

⚠ Diff. inform. can be negative

Conditional entropy:

$$\mathcal{H}(x, y) = \sum_x \sum_y p_{x, y}(x, y) \log_2 (p_{x, y}(x|y))$$

From this, we can use the bayes theorem to derive:


$$\mathcal{H}(x, y) = \mathcal{H}(x|y) + \mathcal{H}(y) \\ = \mathcal{H}(y|x) + \mathcal{H}(x)$$

⚠ [E $\times$] We have a Bern. variable

$$X = \{0, 1\} \quad P = \{p, 1-p\}$$

$H(X)$ will be ≤ 1 , where the equality holds if $p = 1/2$

If we plot it, we get:

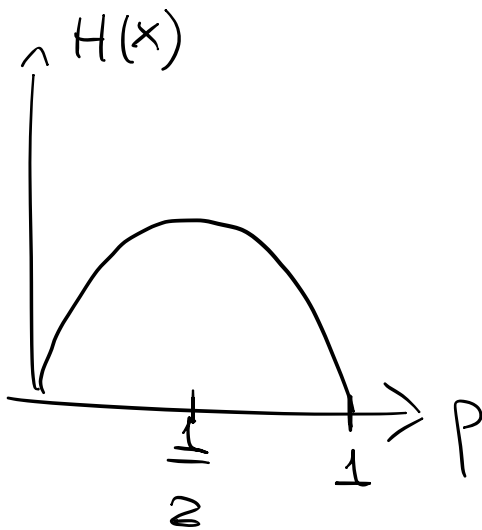


We get maximum information when we flip a *fair* coin!

If the coin always flips heads or tails, we get no information!

We could say that the messier the information, the more we get out of it.

Prof forgot stuff about signals: we're always talking about "proper" signals; the real and imaginary part of those numbers are uncorrelated!

Properness is preserved by affine transformations. An intuitive reason why we consider only proper complex numbers is that if we have real and imaginary parts of a random variable:

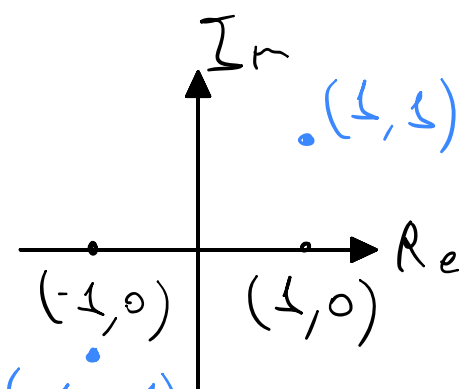

$$(-1, -1)$$

This is a fake complex variable; we want to avoid these cases.

→ Here the are

To elaborate further:

Proper complex

A random variable (or a random process/random vector) is said to be proper complex if it satisfies **Properness**:

Properness

A complex random variable is said to be **proper** if

$$E[x^2] = E[x]^2$$

holds.

Properness requires $\text{Re}[x], \text{Im}[x]$ to be **uncorrelated** and have the same variance.

A complex random vector is said to be **proper** if

$$E[\mathbf{x}\mathbf{x}^T] = E[\mathbf{x}]E[\mathbf{x}]^T$$

holds, which is equal to asking that $\text{Re}[\mathbf{x}], \text{Im}[\mathbf{x}]$ have identical **Covariance** matrices and cross-covariance equal to 0.

Properness is preserved in affine transformations!

L2

.

Entropy rate

Let's say we have a sequence of discrete random variables indexed by time, $x_0, \dots, x_{N-1}$. If they are **iid**, then the entropy of the whole process grows linearly with N at a rate $\mathcal{H}(x_0)$.

In general, a process grows according to the so-called *entropy rate*

$$\mathcal{H} = \lim_{N \rightarrow +\infty} \frac{1}{N} \mathcal{H}(x_0, \dots, x_{N-1}). \quad (1.32)$$

If the process is **stationary**, we can show that the entropy rate is equal to

$$\mathcal{H} = \lim_{N \rightarrow +\infty} \mathcal{H}(x_N | x_0, \dots, x_{N-1}). \quad (1.33)$$

All of this can be extended for continuous processes to differential entropy.

A process is said to be **nonregular** if its present value is perfectly predictable from noiseless observations of the entire past, while the process is **regular** (which happens if $\mathfrak{h} > -\infty$) if its present value cannot be perfectly predicted from noiseless observations of the entire past.

Differential entropy; differential entropy of a Complex Gaussian scalar and Complex Gaussian vector

Diff. entropy:

$$h(x) = \int f_x(x) \log_{1/2} f_x(x) dx$$
$$= E[\log_{1/2} f_x(x)]$$

For vectors:

$$h(\underline{x}) = E[\log_{1/2} f_{\underline{x}}(\underline{x})]$$

The differential entropy rate does not measure the information contained in a random variable.

If we only have a random variable, we only have a shot. In order to consider a rate, we consider a random process: in this case, we have a random variable every certain amount of time: we can say that we have a certain amount of information per second!

A binary random process with $p=0.5$ which gives a value every second, gives 1 bit/s.

So the rate does not measure the information contained in a random variable. We also need to keep in mind that the differential entropy can be negative.

It's easy to prove that a Gaussian distribution maximizes the differential entropy, for a fixed variance.

The differential entropy of a b bit quantization of a random variable x is $h(x)+b$ (what happens if we quantize more and more finally?)

$$h(x)+b$$

If we discretize a variable in b bits, then what we obtain is another random variable. What if we want to compute the differential entropy of that random variable?

Why do we use differential entropy even though we discretized? We just elongate it: