

Shen Zhen MTC Co., LTD

TEST REPORT

SCOPE OF WORK

RF TESTING—MHDV4080-T9503-S2, MHDV4080-T9503,
MHDV40****- T9503-##, MHDV40****- T9503, (*, # CAN
FROM 0 TO 9, A TO Z OR BLANK), 2T-C40HD2225EB, 2T-
C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-
C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2X25EB, 2T-
C40HD2X25KB, **-*40***** (* CAN FROM 0 TO 9,A TO Z
OR BLANK), PR40F2462VKB, F40AR5G, LT-40CR350,
L40RFE25

REPORT NUMBER

260508019SZN-002

ISSUE DATE

20 May 2026

[REVISED DATE]

[-----]

PAGES

23

DOCUMENT CONTROL NUMBER

DTV_RFa

© 2017 INTERTEK



RADIO PERFORMANCE VERIFICATION SUMMARY

Intertek Report No.: 260508019SZN-002

☒ DVB-T ☒ DVB-T2 ☒ DVB-S ☒ DVB-S2

Model: MHDV4080-T9503-S2 MHDV4080-T9503, MHDV40****-T9503-##, MHDV40****-T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225KB, 2T-C40HD3225EB, 2T-C40HD2x25KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40*****(* can from 0 to 9, A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25 Product Description: TV/LED TV		Applicant: Shen Zhen MTC Co., LTD MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan Street, Longgang district, Shenzhen, China Sample Receipt Date: 14 January 2025 Test Conducted Date: 14 January 2025 to 12 February 2025	
☒ 1 st TEST ☐ 2 nd TEST		ALL TESTS WERE CONDUCTED IN ACCORDANCE WITH: * ETSI EN 303 340 V1.2.1 (2020-09) * ETSI EN 303 372-2 V1.2.1 (2021-06)	
Test Site and Location:		Intertek Testing Services Shenzhen Ltd. No.101&201, Building B, No.308, Wuhe Avenue, Zhangkengjing, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China	
Test Result		Pass	Fail
* ETSI EN 303 340 V1.2.1 (2020-09)		☒	☐
* ETSI EN 303 372-2 V1.2.1 (2021-06)		☒	☐
When determining the test conclusion, the following Measurement Uncertainty of test has been considered at a level of confidence of 95%. Uncertainty in EN 62479 evaluation: ±30%			

Prepared and Checked By:

Approved By:

Signature

Bruce Zheng

Project Engineer

20 May 2026

Date

Signature

Rode Liu

Project Engineer

20 May 2026

Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd.

No.101&201, Building B, No.308, Wuhe Avenue, Zhangkengjing, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

RADIO PERFORMANCE RESULTS CONCLUSION
(with Justification)

RE: Radio Performance Testing Pursuant to Radio Equipment Directive (2014/53/EU) Article 3.1(a) & 3.2 Performed on the TV/LED TV,
Model: MHDV4080-T9503-S2

We tested the TV/LED TV, Model: MHDV4080-T9503-S2, to determine if it was in compliance with the relevant EN standards as marked on the Radio Performance Verification Summary. We found that the unit met the requirement of EN 62479, ETSI EN 303 340 standards when tested as received.

The Model: MHDV4080-T9503, MHDV40****-T9503-##, MHDV40****-T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40*****(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25 are the same as the Model: MHDV4080-T9503-S2 in hardware aspect. The difference in model number serves as marketing strategy.

This report bases on the previous report with report number 251219031SZN-002 Dated 09 January 2026 (original signature by Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

The production units are required to conform to the initial sample as received when the units are placed on the market.

LABORATORY MEASUREMENTS

Configuration Information


Equipment Under Test (EUT):	TV/LED TV
Model:	MHDV4080-T9503-S2
Brand Name(s):	AMTC, SHARP, Polariod, VITADO, JVC, Logik
Serial No.:	Not Labelled
Support Equipment:	DTV Multisignal Generator(EIDEN MSD5000A) Digital Signal Modulator(TELEVIEW TVB597A)
DVB-T/T2 Supported Broadcast Frequency Bands:	VHF(177.5-226.5MHz, Rx only) & UHF(474-858MHz Rx only)
If Broadcast Receiver With Optional Preamplifier:	No
DVB-S/S2 Input Frequency Band:	950 MHz-2150 MHz
Modulation for DVB-S/S2:	QPSK
Rated Voltage:	220-240V~, 50/60Hz, 70W or 90W

ETSI EN 303 340 ANNEX E APPLICABLE TESTS FOR DIFFERENT RECEIVER VARIANTS

Applicable tests				
Wanted signal configuration supported by receiver	Sensitivity tests EN 303 340 clause 4.2.3 (see note 2)	Adjacent channel selectivity tests EN 303 340 clause 4.2.4 (see note 1 and note 3)	Blocking tests EN 303 340 clause 4.2.5 (see note 4)	Overloading tests EN 303 340 clause 4.2.6 (see note 5)
DVB-T only or DVB-T & T2, VHF & UHF	Test-1 (DVB-T) Test-2 (DVB-T)	Test-1 (DVB-T) & (DVB-T2) Test-2 (DVB-T) & (DVB-T2) Test-3 (DVB-T) & (DVB-T2) Test-4 (DVB-T) Test-5 (DVB-T)	Test-1 (DVB-T)	Test-1 (DVB-T) & Test-2 (DVB-T) (for broadcast receivers with optional preamplifier)
DVB-T only or DVB-T & T2, UHF only	Test-2 (DVB-T)			Or Test-3 DVB-T (for broadcast receivers without optional preamplifier)
DVB-T2 only, VHF & UHF	Test-1 (DVB-T2) Test-2 (DVB-T2)			Test-2 (DVB-T2)
DVB-T2 only, UHF only	Test-2 (DVB-T2)	Or Test-3 (DVB-T2) (for broadcast receivers without optional preamplifier)		
NOTE 1: For broadcast receivers that do not receive DVB-T/T2 signals above 698 MHz, Adjacent channel selectivity test 1 is not applicable. NOTE 2: Test-1 (DVB-T) (VHF) and Test-2 (DVB-T) (UHF) apply to broadcast receivers capable of either DVB-T only, or DVB-T&T2 reception because DVB-T and DVB-T2 sensitivities are correlated in a given VHF or UHF band. NOTE 3: Test-4 (DVB-T) and Test-5 (DVB-T) are UHF tests which apply to broadcast receivers capable of either DVB-T only, or DVB-T&T2 reception in UHF/VHF because DVB-T and DVB-T2 adjacent channel selectivities are correlated and also UHF/VHF selectivities are correlated. NOTE 4: Test-1 (DVB-T) is a UHF test which applies to broadcast receivers capable of either DVB-T only, or DVB-T&T2 reception in UHF/VHF because DVB-T and DVB-T2 blocking levels are correlated and UHF/VHF blocking levels are correlated. Test-2 (DVB-T2) is a UHF DVB-T2 test which applies to broadcast receivers only capable of DVB-T2 reception in UHF/VHF because UHF/VHF blocking levels are correlated. NOTE 5: Test-1 (DVB-T), Test-2 (DVB-T) and Test-3 (DVB-T) are UHF tests which apply to broadcast receivers capable of either DVB-T only, or DVB-T&T2 reception in UHF/VHF because DVB-T and DVB-T2 overload levels are correlated and UHF/VHF overload levels are correlated. Test-1 (DVB-T2), Test-2 (DVB-T2), and Test-3 (DVB-T2) are UHF tests which apply to broadcast receivers only capable of DVB-T2 reception in UHF/VHF because UHF/VHF overload levels are correlated.				

ETSI EN 303 340 RECEIVER SENSITIVITY

Test Arrangement Description

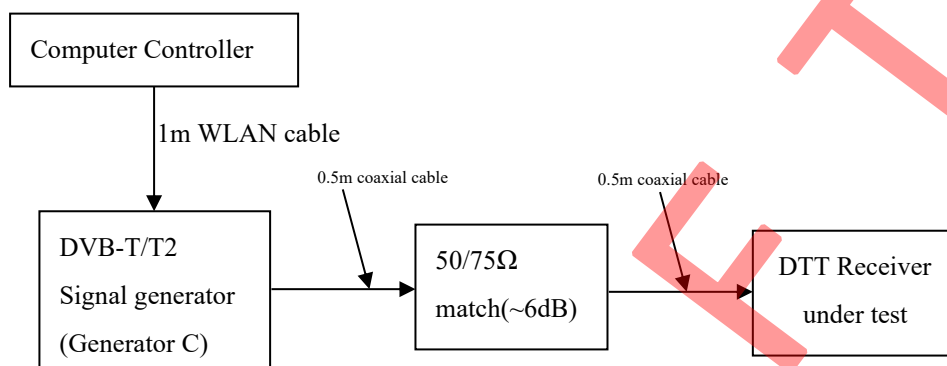

Test Procedure

- The wanted signal, provided by signal generator-C, shall be set to the wanted signal frequency as shown in table 4 and configured with the appropriate DTT mode parameters.
- Determine the attenuation of the cables, splitters, 50/75 ohm matching pad.
- Set the level of the wanted signal C at the broadcast receiver tuner port to -50 dBm and note the value of the "attenuator C" (= AC1).
- Tune the DTT receiver to the wanted channel.
- Increase the "attenuator C" sufficiently to cause complete picture failure.
- Adjust "attenuator C" gradually until the onset of picture degradation occurs. Force the receiver under test to re-acquire and re-adjust "attenuator C" until the onset of picture degradation occurs. Note the attenuator setting (= AC2).
- The receiver sensitivity shall be recorded in the measurement record as:

$$-50 - (AC2 - AC1) \text{ dBm}$$
- Repeat step a) to g) for the remaining frequencies in EN 303 340 table 4.

Limits

Test number	Test description	C wanted signal centre frequency (MHz)	Required sensitivity limit (dBm)	
			DVB-T	DVB-T2
1	Sensitivity VHF	198,5	-77	-75
2	Sensitivity UHF	666	-77	-75

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ070-16	Combiner	Mini-Circuits	ZFSC-2-2500-S+	2024-09-30	2025-09-30
SZ180-12	DTV Multi Signal Generator	Eiden	MSD5000A	2024-03-16	2025-03-16

Note: Uncertainty: $\pm 2.8\text{dB}$ at a level of confidence of 95%.

Test Data


Test Temperature: 25.1°C Test Humidity: 50.3%

DVB-T

Test	C frequency [MHz]	Crms [dBm]	Crms Limit [dBm]	Margin [dB]	Verdict
1	198.5	-81	-77	4.0	PASS
2	666.0	-82	-77	5.0	PASS

ETSI EN 303 340 ADJACENT CHANNEL SELECTIVITY

Test arrangement description

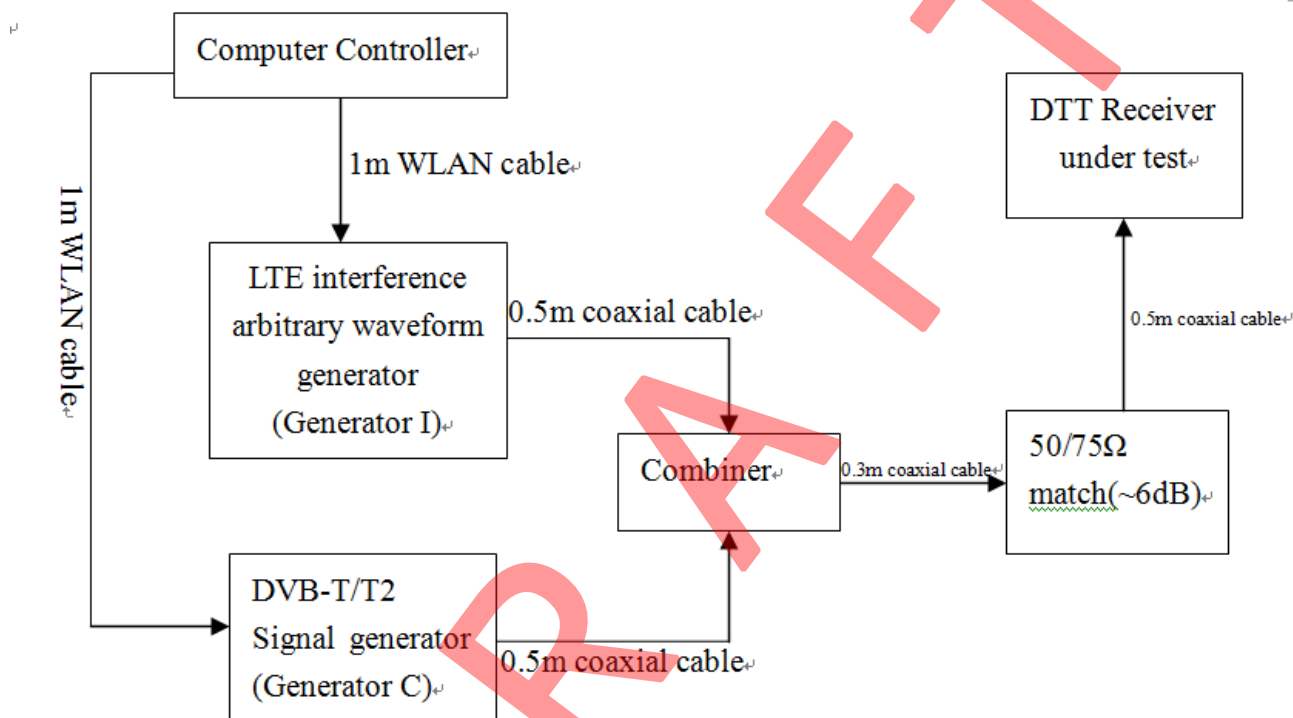

Limits

Test	Interferer (I) type	Interference test signal waveform name	C wanted signal centre frequency (MHz)	I interferer centre frequency (MHz)	I _{lic} (licensed) (dBm)	I _{rms} (rms) (dBm)	I LAPR (dB)	Minimum required I/C limit (where I = I _{lic}) (dB)		Equivalent wanted level Crms (dBm)	
								DVB-T	DVB-T2	DVB-T	DVB-T2
1 (see notes 1 and 2)	10 MHz LTE 800 BS light load (near idle)	LTE_BS-idle_V3_synth	786	796	-15	-23.3	8.3	35	36	-50	-51
2 (see notes 2)	10 MHz LTE 700 BS light load (near idle)	LTE_BS-idle_V3_synth	690	763 (see note 3)	-15	-23.3	8.3	43	43	-58	-58
3 (see notes 2)	10 MHz LTE 700 UE Video-Stream	Short_UE-Video-Stream_V2	690	708	-25	-42.7	17.7	33	38	-58	-63
4 (see notes 2)	N-1 UHF	8 MHz DVB-T	482	474	-30	-30	0	25	25	-55	-55
5 (see notes 2)	N+1 UHF	8 MHz DVB-T	482	490	-30	-30	0	25	25	-55	-55

NOTE 1: For broadcast receivers that do not receive DVB-T/T2 signals above 698 MHz, test 1 is not applicable.

NOTE 2: For applicability of tests see annex E.

NOTE 3: It is acceptable to use an alternative lower interference frequency such as 761 MHz. This may be necessary due to test equipment limitations.

Test Procedure

- a) Two signal generators, I and C, shall be connected to the receiver via a combining network.
- b) Determine the attenuation of the cables, combiner, splitter and 50/75 ohm matching pad.
- c) The wanted signal, provided by signal generator C, shall be set to the wanted signal frequency C as shown in EN 303 340 table 5 and configured with the appropriate DTT mode parameters. Turn this generator off (or to at least 30 dBc below the interferer signal) maintaining output impedance.
- d) The unwanted signal I, provided by signal generator I, shall be configured with the required interferer waveform and interferer signal frequency as shown in EN 303 340 table 5.
- e) The unwanted signal power at the broadcast receiver tuner port shall be set to the rms interferer power I_{rms} in EN 303 340 table 5. This power shall be verified with the power meter or spectrum analyser. Recommended instrument settings are described in EN 303 340 clause D.2.
- f) Turn on signal generator C and adjust "attenuator C" so that the rms powers of the interferer I and wanted signal C are equal. Note this attenuator setting (= AC1).
- g) Tune the DTT receiver to the wanted channel.
- h) Increase "attenuator C" in 1 dB steps or less until the onset of picture degradation occurs. Force the receiver under test to re-acquire and re-adjust "attenuator C" until the onset of picture degradation occurs. Note the attenuator setting (= AC2).
- i) The adjacent channel selectivity (I/C) shall be recorded in the measurement record as $AC2 - AC1 + LAPR$ dB, where LAPR is the licensed to average power ratio shown in EN 303 340 table 5.
Alternatively the measured wanted signal power C shall be recorded in the measurement record as $I_{rms} - (AC2 - AC1)$ dBm.
- j) Repeat step b) to i) for the remaining tests in EN 303 340 table 5.

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ065-06	Wideband Radio Communication Tester	R & S	CMW500	2024-09-29	2025-09-29
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ070-16	Combiner	Mini-Circuits	ZFSC-2-2500-S+	2024-09-30	2025-09-30
SZ180-12	DTV Multi Signal Generator	Eiden	MSD5000A	2024-03-16	2025-03-16
SZ180-14	Vector Signal Generator	R & S	SMU200A	2024-11-27	2025-11-27

Note: Uncertainty: $\pm 2.8\text{dB}$ at a level of confidence of 95%.

DRAFT

TEST REPORT

Model: MHDV4080-T9503-S2

Intertek Report No.: 260508019SZN-002

Test Data

Test Temperature: 25.1°C Test Humidity: 50.3%

DVB-T


Test	C frequency [MHz]	I frequency [MHz]	Irms [dBm]	Crms [dBm]	Crms Limit [dBm]	Margin [dB]	Verdict
1	786.0	796.0	-23.3	-54.3	-50.0	4.3	PASS
2	690.0	763.0	-23.3	-62.3	-58.0	4.3	PASS
3	690.0	708.0	-42.7	-61.7	-58.0	3.7	PASS
4	482.0	474.0	-30	-59	-55.0	4.0	PASS
5	482.0	490.0	-30	-59	-55.0	4.0	PASS

DVB-T2

Test	C frequency [MHz]	I frequency [MHz]	Irms [dBm]	Crms [dBm]	Crms Limit [dBm]	Margin [dB]	Verdict
1	786.0	796.0	-23.3	-55.3	-51.0	4.3	PASS
2	690.0	763.0	-23.3	-62.3	-58.0	4.3	PASS
3	690.0	708.0	-42.7	-67.7	-63.0	4.7	PASS

ETSI EN 303 340 BLOCKING

Test arrangement description

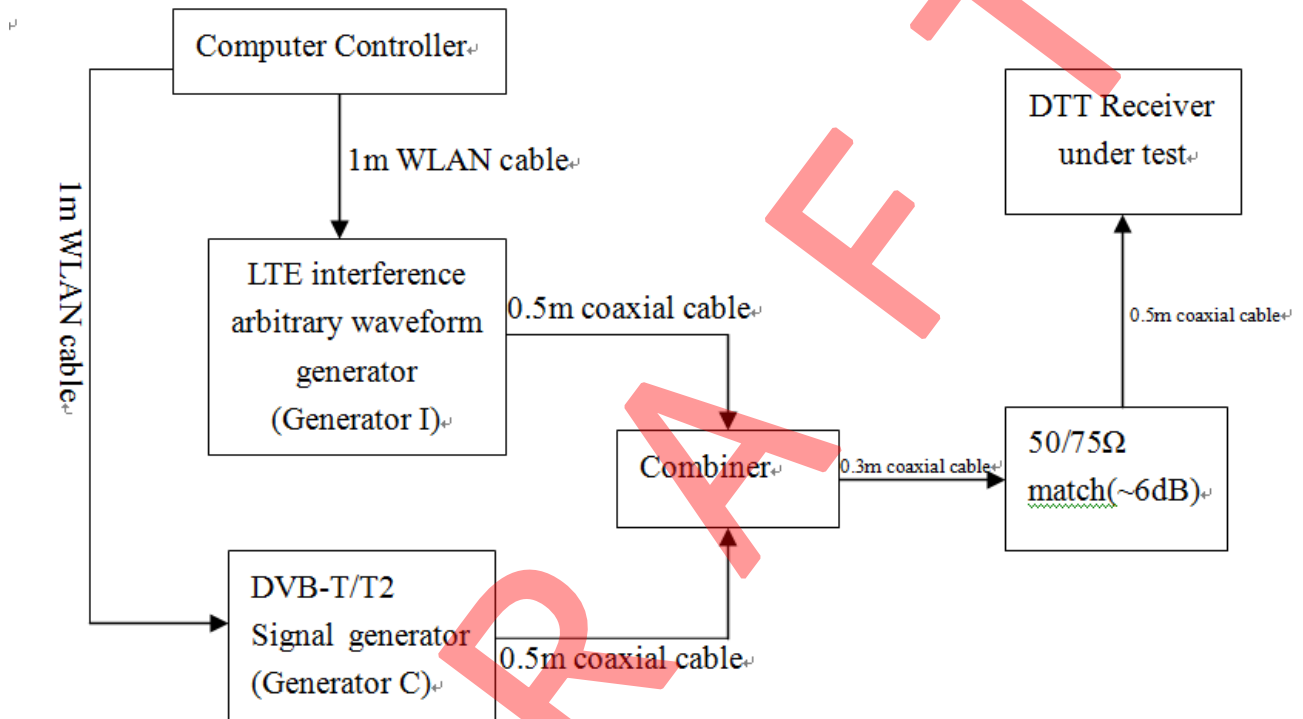

Limits

Test	Interferer (I) type	I interference test signal waveform name	C wanted signal centre frequency (MHz)	I centre frequency (MHz)	C _{rms} (rms) (dBm)	Required blocking level I _{rms} (dBm)	
						DVB-T	DVB-T2
1	10 MHz LTE 700 BS fully loaded	LTE_BS-100PC_synth	690	763	-71	-25	
2	10 MHz LTE 700 BS fully loaded	LTE_BS-100PC_synth	690	763	-69		-25

Test Procedure

- a) Two signal generators, I and C, shall be connected to the receiver via a combining network.
- b) Determine the attenuation of the cables, combiner, splitter and 50/75 ohm matching pad.
- c) The wanted signal, provided by signal generator C, shall be set to the wanted signal frequency as shown in EN 303 340 table 6 and configured with the appropriate DTT mode parameters.
- d) The unwanted signal I, provided by signal generator I, shall be configured with the required interferer waveform, interferer signal frequency as shown in EN 303 340 table 6.
- e) Adjust "attenuator C" to set the wanted level to -40 dBm at the broadcast receiver tuner port. This power shall be verified with the power meter or spectrum analyser. Then reduce the wanted signal power to the value of C_{rms} in EN 303 340 table 6 by increasing "attenuator C" by 31 dB for test 1 or by 29 dB for test 2.
- f) Adjust "attenuator I" to set the interferer level to -40 dBm at the broadcast receiver tuner port. This power shall be verified with the power meter or spectrum analyser. Then reduce the interferer signal power to that of the wanted signal (C_{rms} in EN 303 340 table 6) by increasing "attenuator I" by 31 dB for test 1 or by 29 dB for test 2. Note the value of "attenuator I" (= AI1).
- g) Tune the DTT receiver to the wanted channel.
- h) Reduce "attenuator I" until the onset of picture degradation occurs. Force the receiver under test to re-acquire and re-adjust "attenuator I" until the onset of picture degradation occurs. Note the attenuator setting (= AI2).
- i) The blocking level shall be recorded in the measurement record as $C_{rms} + AI1 - AI2$ dBm where C_{rms} is the value given in EN 303 340 table 6.

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ065-06	Wideband Radio Communication Tester	R & S	CMW500	2024-09-29	2025-09-29
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ070-16	Combiner	Mini-Circuits	ZFSC-2-2500-S+	2024-09-30	2025-09-30
SZ180-12	DTV Multi Signal Generator	Eiden	MSD5000A	2024-03-16	2025-03-16
SZ180-14	Vector Signal Generator	R & S	SMU200A	2024-11-27	2025-11-27

Note: Uncertainty: $\pm 2.8\text{dB}$ at a level of confidence of 95%.

Test Data


Test Temperature: 25.1°C Test Humidity: 50.3%

DVB-T

Test	C frequency [MHz]	I frequency [MHz]	Crms [dBm]	Irms [dBm]	Irms Limit [dBm]	Margin [dB]	Verdict
1	690.0	763.0	-71.0	-21.0	-25.0	4.0	PASS

ETSI EN 303 340 OVERLOADING

Test arrangement description

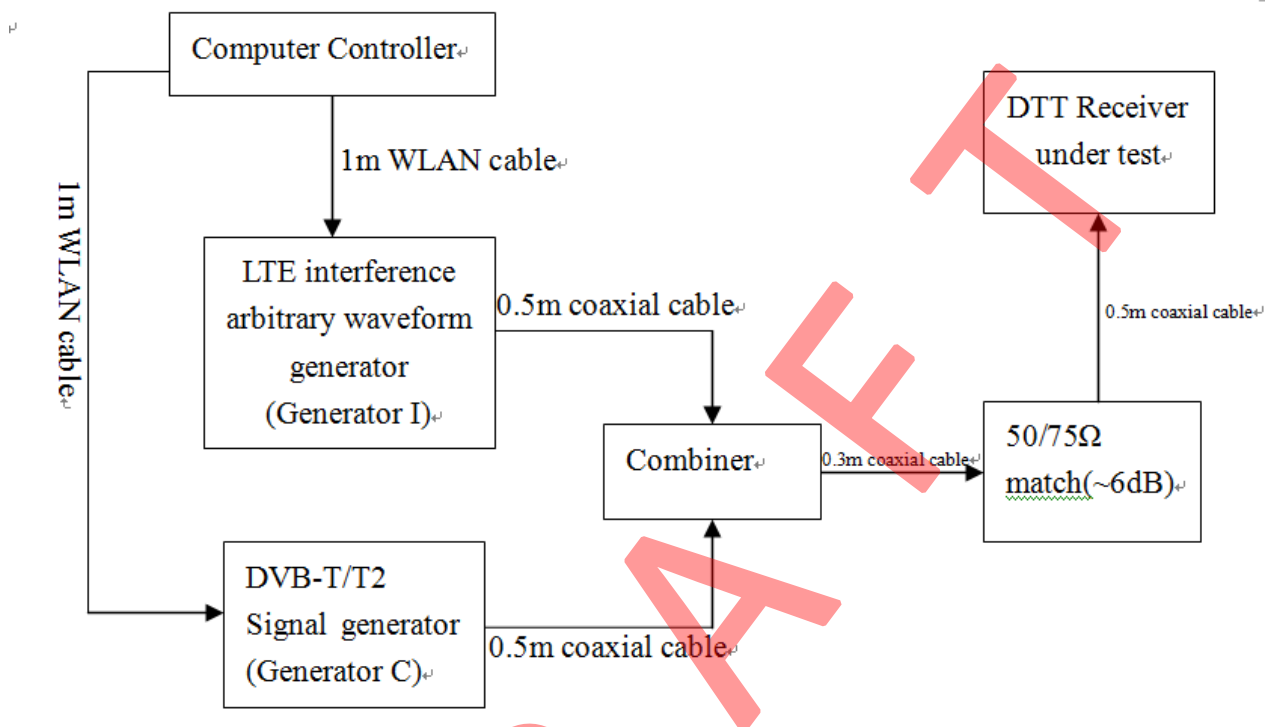

Limits

Test	Interferer (I) type	I interference test signal waveform name	C wanted signal centre frequency (MHz)	I centre frequency (MHz)	C _{rms} (rms) (dBm)	Required overload level I _{rms} for DTT configurations in tables 2 and 3 (dBm)	
						DVB-T	DVB-T2
1 Broadcast receivers with optional preamplifier (see notes 1, 2 and 4)	10 MHz LTE 700 BS fully loaded	LTE_BS-100PC_synth	690	763 (see note 1)	-35	-12	-12
2. Broadcast receivers with optional preamplifier switched off	10 MHz LTE 700 BS fully loaded	LTE_BS-100PC_synth	690	763	-35	-4	-4
3 Broadcast receivers without optional preamplifier (see notes 1, 2 and 4)	10 MHz LTE 700 BS fully loaded	LTE_BS-100PC_synth	690	763 (see note 1)	-35	-4	-4

NOTE 1: It is acceptable to test compliance at an alternative lower interference frequency (e.g. 761 MHz). This may be necessary due to test equipment limitations.

NOTE 2: For applicability of tests see annex E.

NOTE 3: Void.

NOTE 4: For the tests in the present table, "optional preamplifier" means an additional user controllable amplifier before the actual tuner IC device in the broadcast receiver, which may be available to the user and documented in the user documentation. The manufacturer shall declare the presence of an optional preamplifier in the declaration of conformity.

Test Procedure

- a) Two signal generators, I and C, shall be connected to the receiver via a combining network.
- b) Determine the attenuation of the cables, combiner, splitter and 50/75 ohm matching pad.
- c) The wanted signal, provided by signal generator C, shall be set to the wanted signal frequency as shown in EN 303 340 table 7 and configured with the appropriate DTT mode parameters
- d) The unwanted signal I, provided by signal generator I, shall be configured with the required interferer waveform, interferer signal frequency as shown in EN 303 340 table 7.
- e) Adjust "attenuator C" to set the wanted level to C_{rms} at the broadcast receiver tuner port.

This

power shall be verified with the power meter or spectrum analyser.

- f) Adjust "attenuator I" to set the interferer level to same level as C_{rms} at the broadcast receiver tuner port. This power shall be verified with the power meter or spectrum analyser. Note the value of "attenuator I" ($= A_{I1}$).
- g) Tune the DTT receiver to the wanted channel.
- h) Reduce "attenuator I" until the onset of picture degradation occurs. Force the receiver under test to re-acquire and re-adjust "attenuator I" until the onset of picture degradation occurs.

Note

the attenuator setting ($= A_{I2}$).

- i) The overload level shall be recorded in the measurement record as $C_{rms} + A_{I1} - A_{I2}$ dBm where C_{rms} is the value shown in EN 303 340 table 7.

TEST REPORT

Model: MHDV4080-T9503-S2

Intertek Report No.: 260508019SZN-002

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ065-06	Wideband Radio Communication Tester	R & S	CMW500	2024-09-29	2025-09-29
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ070-16	Combiner	Mini-Circuits	ZFSC-2-2500-S+	2024-09-30	2025-09-30
SZ180-12	DTV Multi Signal Generator	Eiden	MSD5000A	2024-03-16	2025-03-16
SZ180-14	Vector Signal Generator	R & S	SMU200A	2024-11-27	2025-11-27

Note: Uncertainty: $\pm 2.8\text{dB}$ at a level of confidence of 95%.

Test Data


Test Temperature: 25.1°C Test Humidity: 50.3%

DVB-T

Test	C frequency [MHz]	I frequency [MHz]	Crms [dBm]	Irms [dBm]	Irms Limit [dBm]	Margin [dB]	Verdict
3	690.0	763.0	-35.0	-1.0	-4.0	3.0	Pass

ETSI EN 303 372-2 Adjacent signal selectivity

Test arrangement description

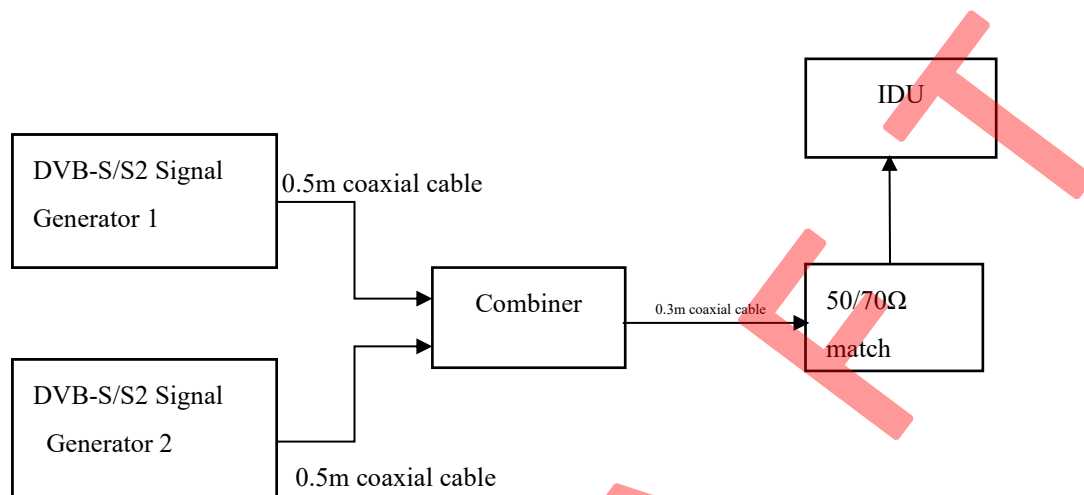

Test Specification:

Adjacent signal selectivity is specified through an increase of the required signal to noise ratio caused by the adjacent signal.

The adjacent signal shall apply the same modulation as the wanted signal. Frequency offset and power level offset of the adjacent signal with regard to the wanted signal shall take the values given in table 1. F is the ideal signal occupied bandwidth.

Table 1: Adjacent signal frequency and level

Frequency offset from wanted signal	Power level offset from wanted signal
$-F - 4 \text{ MHz}$	10 dB
$-F - 2 \text{ MHz}$	4 dB
$-F$	0 dB
F	0 dB
$F + 2 \text{ MHz}$	4 dB
$F + 4 \text{ MHz}$	10 dB

The required Noise level or signal to noise ratio in presence of an adjacent signal shall be less than 0,4 dB higher than in absence of adjacent signals.

Test Procedure:

- a) Two test signal generators shall be used. Each signal generator shall generate a modulated signal in the IDU input frequency range and thermal noise.
- b) The signal generators shall be connected to the IDU input through a splitter combiner.
- c) The symbol rate shall be set to the low end of the IDU's range.
- d) The test signal generators shall be set to the frequencies and levels according to EN 303 372-2 table 1. For each row of the table:
 - a) The IDU shall be set to receiving the signal of the first test signal generator.
 - b) The second test signal generator shall be set to output signal off.
 - c) The noise level (or signal to noise ratio) of the first test signal generator shall be varied in order to determine the threshold for quasi error free reception.
 - d) The second signal generator shall be set to output signal on.
 - e) The noise level (or signal to noise ratio) of the first test signal generator shall be varied in order to determine the threshold for quasi error free reception.
 - f) The degradation is equal to the noise level (or signal to noise ratio) determined in step e minus that determined in step c.
- e) Repeat from d) with symbol rate set to the high end of the IDU's range.
- f) The result is the highest degradation found.

TEST REPORT

Model: MHDV4080-T9503-S2

Intertek Report No.: 260508019SZN-002

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ067-03	Power Splitter	R & S	RVZ	2024-12-05	2025-12-05
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ180-12	DTV Multi Signal Generator	Eiden	MSD5000A	2024-03-16	2025-03-16

Notes: Uncertainty: $\pm 3.6\text{dB}$ at a level of confidence of 95%.

Test Data


Test Temperature: 25.1°C Test Humidity: 50.3%

Result for waste case

Signal symbol rate	Wanted signal		Adjacent signal compare with Wanted signal		Δ Noise level in presence of adjacent signal minus in absence of adjacent signal (dB)	Δ Limit	Verdict
	Frequence (MHz)	Level dB(μV)	Frequency offset(MHz)	Powel level offset(dB)			
Low end: 5M	1295	75	-F - 4 MHz	10 dB	0	≤ 0.4 dB	Pass
			-F - 2 MHz	4 dB	0		
			-F	0 dB	0.2		
			F	0 dB	0.1		
			F + 2 MHz	4 dB	0.1		
			F + 4 MHz	10 dB	0		
High end: 45M	1295	75	-F - 4 MHz	10 dB	0		
			-F - 2 MHz	4 dB	0.1		
			-F	0 dB	0.1		
			F	0 dB	0		
			F + 2 MHz	4 dB	0		
			F + 4 MHz	10 dB	0		

ETSI EN 303 372-2 Dynamic range

Test arrangement description

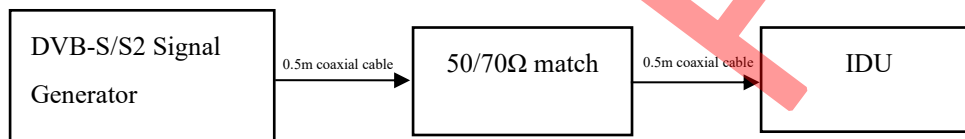

Test Procedure:

- a) A test signal generator that generates a modulated signal in the IDU input frequency range shall be used.
- b) The test signal generator shall be connected to the IDU input.
- c) The test signal generator frequency shall be set to the lowest, centre and highest frequency of the IDU input frequency band:
 - a) Set test signal generator level shall be set to lowest, centre and highest level:

It shall be verified that the IDU demodulates the test modulator signal properly.

Test Limit:

The IDU shall be able to process without degradation input signals at any level in a range of at least 40 dB.

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ180-12	DTV Multi Signal Generator	Eiden	MSD5000A	2024-03-16	2025-03-16

Test Data


Test Temperature: 25.1°C Test Humidity: 50.3%

Result for waste case

IDU input frequency (MHz)	Input signal level				Δ Limit	Verdict
	Lowest dB(m)	Centre dB(uV)	Highest dB(uV)	Δ level Lowest VS Highest		
Lowest: 950	30	55	80	50	≥40 dB	Pass
Centre: 1550	30	55	80	50	≥40 dB	Pass
Highest: 2010	30	55	80	50	≥40 dB	Pass

PHOTOS OF TEST SET-UP

Receiver Sensitivity & Adjacent Channel Selectivity & Blocking & Overloading & Dynamic range

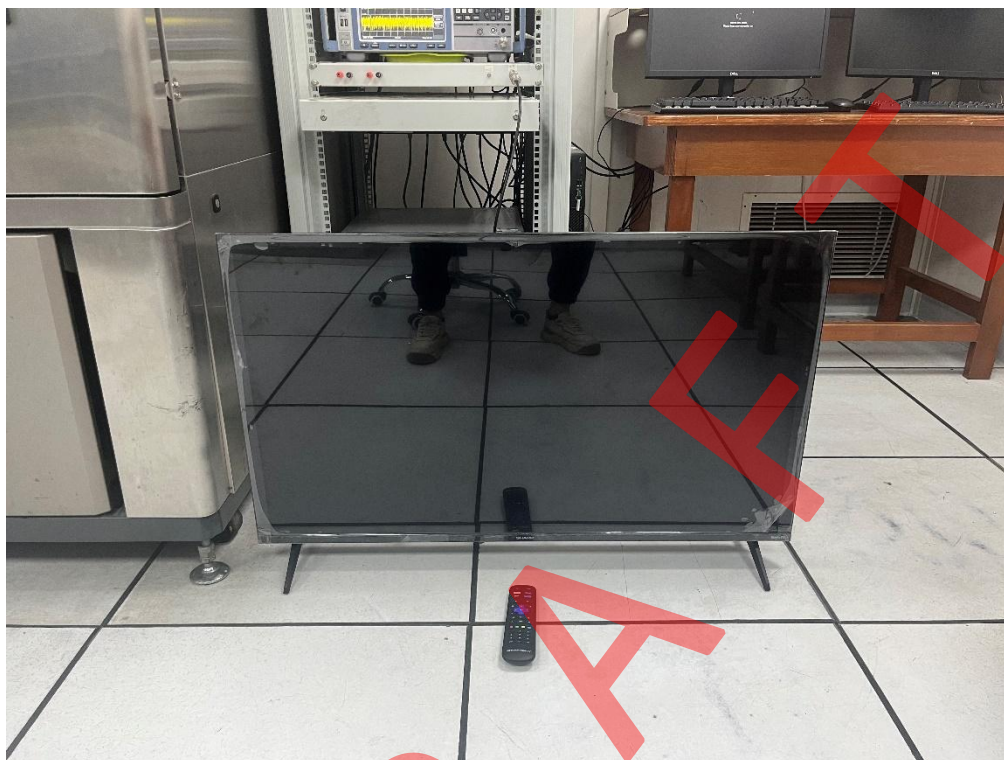

PHOTOS OF EUT

Please refer to Annex of EUT Photos_260508019SZN.

***** End of Report*****

DRAFT