
117 KEYS / 8x16 ROW2COL / ORIGINAL MATRIX



TOP MODULE / PROTECTED HEADER POWER / BOTTOM SMD SUPPORT

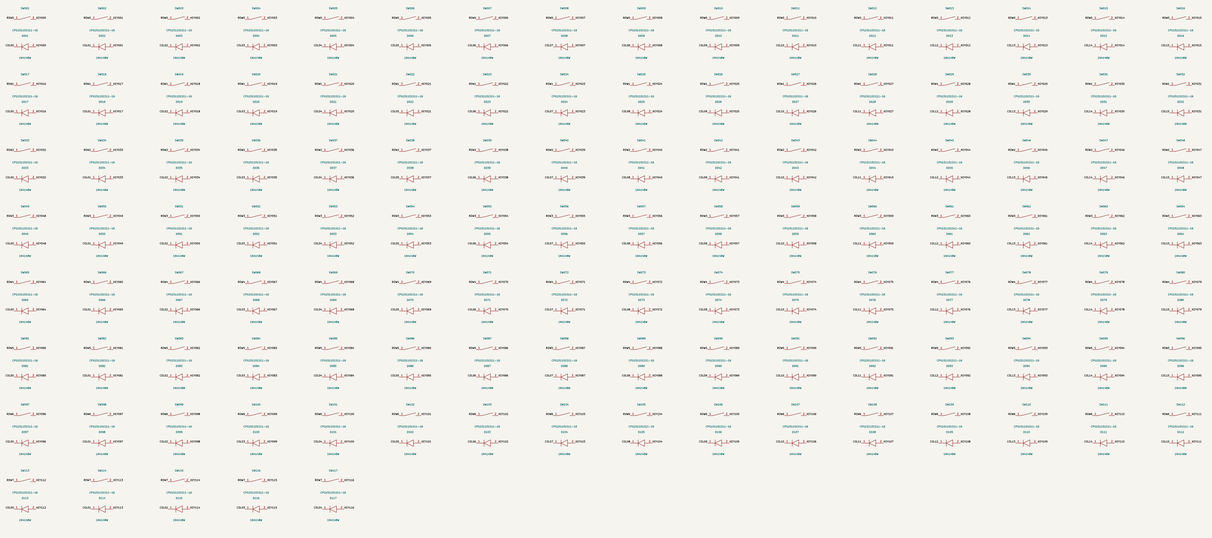

U1:A0 Vout -> F1 -> U3 -> 117 resistor/LED branches -> Q1 -> GND. NO external power input. VIN / 3V3 unused.

U3 S_IN -> IN: datasheet 55/75/100mA min/typ/max. GP28 EN default off. GP27 PWM -> 330R -> AO3400A gate, 100k pull-down.

Module BAT54C is shared by controller and LEDs: see POWER.md. USB configuration enables backlight suspend disables it.

117 REVERSE-MOUNT WHITE LEDs / ONE 3.9k RESISTOR PER LED



Sheet: /
File: Cleaver-White.kicad_sch

Title: Cleaver-White / top YD-RP2040 / bottom SMT

Size: User | Date: 2025-11-10 | Rev: white-0.1
KiCad 9.0.6 | 1 / 1