


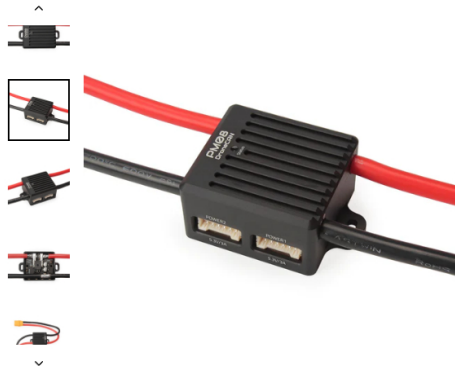

Home /

PM08-CAN Power Module 14S, 200A

SKU:15030

\$85.00

Shipping calculated at checkout.

CONNECTOR TYPE

☐ XT90 Connectors

☐ Tinned Wires

☒ XT90 & Ring Terminal


QUANTITY

- 1 +

ADD TO CART


PM08-CAN Power Module

- » Supports 2-14S & 200A
- » DroneCAN Protocol
- » Compact Design
- » 2x Independent 5V Out

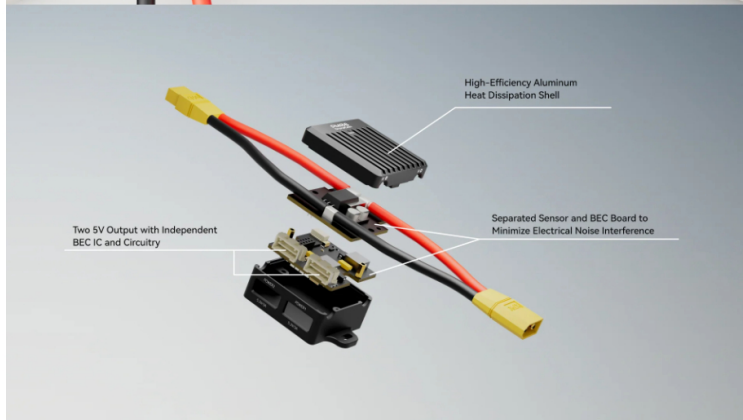

Galvanically Isolated Current Sensor

High accuracy, hall-effect-based, automotive AEC-Q100 Grade 1 qualified

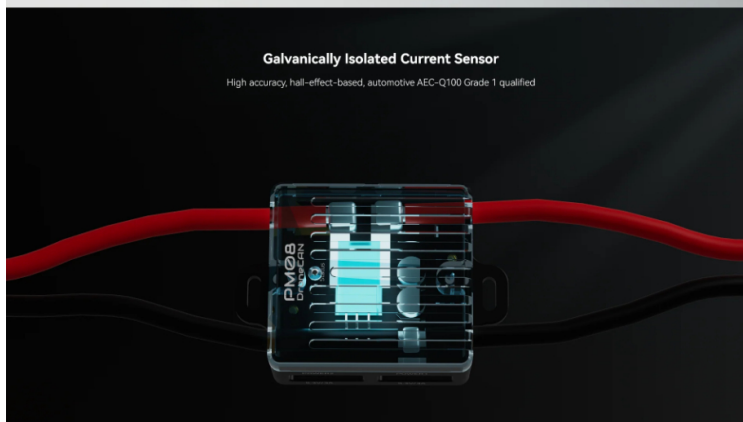

Feature

- Supports 2-14S & 200A Cont, 400A Burst
DroneCAN Communication Protocol

- DroneCAN Communication Protocol
- Small & Compact Design
- Two 5V Outputs with Independent BEC IC and Circuitry
- Separated Sensor and BEC Board to Minimize Electrical Noise Interference
- Galvanically Isolated Current Sensor IC (AEC-Q100 Grade 1 qualified)
- High Accuracy Temperature Sensor for Temperature Monitor
- High-Efficiency Aluminum Heat Dissipation Shell
- Software toggle for CAN termination resistance

Specifications

- Processor: STM32F405RG 168MHz 1024KB Flash 196KB RAM
- Voltage input: 7-60.9V (2S-14S)
- Continuous current:200A
- Burst current
 - 400A @ 25°C 1 sec
 - 1000A @ 25°C < 1 sec
- Max current sensing: 376A
- Voltage accuracy: $\pm 0.1V$
- Current accuracy: $\pm 5\%$
- Temperature accuracy: $\pm 1^{\circ}C$
- Wire gauge: 8 AWG (high-strand silicon-insulated)
- Power port output: 5.3V/3A each port
- Protocol: DroneCAN
- Operating temperature: -25°C~85°C
- Software-Controlled CAN Termination
- Firmware upgrade: Support
- Calibration: Support

Pinout



Interface Type

- Power & CAN Port: Molex CLIK-Mate 2mm 6Pin
- Battery IN/OUT Options:
 - XT90 Connectors
 - Tinned Wires
 - XT90 & Ring Terminals

Status LED

- Flashing quickly continuously: MCU is in the bootloader stage, waiting for the firmware to be flashed
- Flashing quickly for 3 seconds, and then on for 1 second: Waiting for CAN connection
- Flashing slowly (one-second intervals): CAN is successfully connected

Mechanical Spec

- Size: 45mm×41mm×26mm (Not Include Cable)
- Weight: 185g (Include Cable)

Reference Links

- [PX4 & Flight Controller Setup Instruction](#)
- [PM08CAN 3D CAD File Download](#)
- [Power Module Dimension](#)

You may also like



Power Distribution Board (PDB) 300A - Top Entry
from \$5.99



High Precision DroneCAN Airspeed Sensor - DLVR
from \$7.99



UBEC 12A (3-14S)
\$36.59



DroneCAN M9N GPS
\$77.99



CAN Hub
\$27.59



Holybro

Build Your Drone From Here

Recently viewed



Pixhawk 6C Mini



Power Distribution Board (PDB) 300A
- Side Entry



Power Distribution Board (PDB) 300A
- Top Entry



Standard Precision Digital Airspeed
Sensors



ELRS Receivers Series

[POLICY](#)

[PRODUCTS](#)

[EXPLORE](#)

[SUBSCRIBE](#)