

## Contents

<b>1</b>	<b>GITHUB COMMANDS</b>	<b>1</b>
1.1	Fix the Personal Access Token . . . . .	1
<b>2</b>	<b>LINEAR ALGEBRA - GILBERT STRANG</b>	<b>1</b>
2.1	Video 1 - 4 . . . . .	1
2.2	Video 5 (Nov 2, 2021) . . . . .	2
2.3	Video 6 (Nov 2, 2021) . . . . .	2
2.4	Video 7 (Nov 3, 2021) . . . . .	2
2.5	Video 8 (Nov 11, 2021) . . . . .	4
2.6	Video 9 (Nov 16, 2021) . . . . .	4
2.7	Video 10 (Nov 16, 2021) . . . . .	4
<b>3</b>	<b>EMBEDDED LINUX - for me</b>	<b>4</b>
3.1	Vid 0 - Build the image for Beaglebone Black . . . . .	4
3.2	Vid 1 - Lam quen voi Linux . . . . .	4
3.3	Vid 2 - Gioi thieu ve file, directory, multithread, user, etc. (Nov 11, 2021) . . . . .	5
3.4	Vid 3 - Signal (Nov 13, 2021) . . . . .	5
3.5	Vid 4 - Interrupt (Nov 15, 2021) . . . . .	7
3.6	Vid 9 - Interrupt (Nov 13, 2021) . . . . .	7
3.7	Vid 13 - Watchdog (Dec 04, 2021) . . . . .	7
3.8	Vid 14 - Uboot (Dec 11, 2021) . . . . .	8
<b>4</b>	<b>Control Bootcamp - Steve Bruton</b>	<b>8</b>
4.1	Vid 01 - Overview . . . . .	8
4.2	Vid 02 - Linear System . . . . .	9
4.2.1	Linear System $\dot{X} = A.X$ , with $X \in \mathbb{R}^n$ . . . . .	9
4.2.2	Eignevalue and Eigenvector . . . . .	10
4.2.3	Eigenvector Relationship . . . . .	11
4.2.4	Next step . . . . .	11
4.3	Vid 03 - Stability and Eigenvalues . . . . .	11
4.3.1	Stability of $\dot{X} = A.X$ . . . . .	12
4.3.2	Discrete time model, tstamp 09:14 . . . . .	12
4.4	Vid 04 - Linearizing System around fixed point $\dot{X} = f(x) \rightarrow \dot{X} = AX$ , with $X \in \mathbb{R}^n$ . . . . .	14
4.5	Vid 5 - Controllability . . . . .	16
4.5.1	Controllability . . . . .	16
4.6	Vid 6 - Controllability, Reachability, and Eigenvalue Placement	16
4.7	Vid 7 - Controllability, and the Discrete time Impulse Response	17
4.8	Vid 8 - Degrees of Controllability and Gramians . . . . .	17
4.9	Vid 9 - Controllability and the Popov-Belevitch-Hautus (PBH) test	17
4.9.1	remind . . . . .	17
4.9.2	The PBH Test . . . . .	17

4.9.3	The PBH Test - Important Conclusions . . . . .	17
4.10	Vid 10 - Cayley-Hamilton Theorem . . . . .	19
4.11	Vid 12 - Inverted Pendulum on a Cart . . . . .	19
4.12	Vid 13 - Pole Placement for the Inverted Pendulum on a Cart . . . . .	19
4.13	Vid 13 - Linear Quadratic Regulator (LQR) Control for the In- verted Pendulum on a Cart . . . . .	19
<b>5</b>	<b>STM32</b>	<b>19</b>
5.1	Nov 04, 2021 . . . . .	19
5.2	Nov 05, 2021 . . . . .	20
5.3	Nov 29, 2021 . . . . .	20
<b>6</b>	<b>C - PROGRAMMING</b>	<b>20</b>
<b>7</b>	<b>MATLAB SIMULINK</b>	<b>21</b>
7.1	Dec 10, 21 . . . . .	21
<b>8</b>	<b>Quan su ca map</b>	<b>21</b>
8.1	Vid 1: Lam sao de han che chot loi som - Dec 14, 21 . . . . .	21
<b>9</b>	<b>WHAT'S NEXT</b>	<b>22</b>
9.1	Dec 10, 21 . . . . .	22
9.2	Dec 06, 21 . . . . .	22
9.3	Nov 25, 21 . . . . .	22
<b>10</b>	<b>Conclusion</b>	<b>23</b>

## 1 GITHUB COMMANDS

shows all the configurations of github `gitconfig --list`

link for Endnote and Latex <https://www.rhizobia.co.nz/latex/convert>

### 1.1 Fix the Personal Access Token

From August 13, 2021, GitHub is no longer accepting account passwords when authenticating Git operations. You need to add a PAT (Personal Access Token) instead, and you can follow the below method to add a PAT on your system.

Ref:

<https://stackoverflow.com/questions/68775869/support-for-password-authentication-was-removed-please-use-a-personal-access-token>

Create Personal Access Token on GitHub:

- From your GitHub account, go to Settings.
- Developer Settings
- Personal Access Token
- Generate New Token (Give your password)
- Fillup the form => click Generate token
- Copy the generated Token, it will be something like `ghpsFhFsSHhTzMDreGRLjmks4Tzuzgthdvfsrta`

Now follow below method based on your machine:

- For Windows OS:  
Go to Credential Manager from Control Panel => Windows Credentials  
=> find `git:https://github.com` => Edit => On Password replace with  
with your GitHub Personal Access Token => You are Done If you dont  
find `git:https://github.com` => Click on Add a generic credential =>  
Internet address will be `git:https://github.com` and you need to type in  
your username and password will be your GitHub Personal Access Token  
=> Click Ok and you are done

## 2 LINEAR ALGEBRA - GILBERT STRANG

### 2.1 Video 1 - 4

operation matrix on the left is for row, on the right is for column [1]

$A = LU = LDU$ , with LDU, the diagonal in the L,U is ones.

$A = LU$  helps the reduce the computational efforts a lot.

## 2.2 Video 5 (Nov 2, 2021)

Symmetric matrix  $A' = A$

$R' \times R$  is always a symmetric matrix. Prove:  $(R'.R)' = R'.R'' = R'.R$

Chapter 3: Vector spaces

Every vector spaces has a vector zeros,  $R2 = [2 \ 3]$ ,  $[pi \ e]$ ,  $R3 = [2 \ 3 \ 4]$ ,  $[3 \ 2 \ 0]$  8 rules in the book. Every subspace must have the zero vector because we must be allowed to do the math operation with zero. subspace of  $R2$ : whole  $r2$ ,  $2 >$  any lines go through the origin,  $3 >$  zero vector  $[0 \ 0]$ . how to find the subspace: matrix  $A \rightarrow$  take columns of  $A$ , find all the combinations of the column then you have the column subspaces of the matrix  $A$

## 2.3 Video 6 (Nov 2, 2021)

Read chapter 3 of the book.

Vector spaces and subspaces

Column space of  $A$ : solving  $Ax = b$

Nullspace of  $A$ : solving  $Ax = 0$

Vector space requirements:  $v + w$  and  $cv$  are in the space, all the combinations  $cv + dw$  are in the space.

We can solve the  $A.x = b$  exactly if  $b$  is in the column space of  $A$ , noted as  $C(A)$ . Because in the same subspace, any linear combination of the columns in the  $A$  with  $x$  is  $B$ , and  $B$  will belongs to that subspace.

Pivot column, the column that is independent (27m)

NULL space of  $A$ , noted as  $N(A)$ , is all the combination of  $x$  that make  $A.x = 0$ , another ways is that with  $b = 0$ , solve  $A.x = b$ .

Check that the solution of  $A.x = 0$  always give a subspace. What do we have to check? If  $Av = 0$  and  $Aw = 0$ , how about  $A(v + w)$  must be  $= 0$

$Ax = b$ , do the solutions form the subspace  $\rightarrow$  NO, check if the zero-vector is not a solution or not. Although there are many solutions but there is no zero-vector solution (origin). So the solution is the line and the plan which does not go through the origin.

## 2.4 Video 7 (Nov 3, 2021)

Solving  $Ax = 0$ , break  $A \rightarrow U \rightarrow R$ , matlab function is `rref` (reduced row echelon form).

If the matrix has  $m$  (let's say  $m = 3$ ) columns, and the rank (aka number of pivots point of that matrix)  $= 2$ , then the matrix has  $3 - 2 = 1$  free columns.

$x = c*[-F \ , \ I]$ ,  $[-F \ , \ I]$  is the nullspace matrix, called  $N$ . Nullspace is the matrix, whose column is the special solution

Null space  $N = [-Free, I]$ , nullspace stores all the solution.

$$A = \begin{pmatrix} 1 & 2 & 3 \\ 2 & 4 & 6 \\ 2 & 6 & 8 \\ 2 & 8 & 10 \end{pmatrix} = \begin{pmatrix} 1 & 2 & 3 \\ 0 & 0 & 0 \\ 0 & 2 & 2 \\ 0 & 4 & 4 \end{pmatrix} = \begin{pmatrix} 1 & 2 & 3 \\ 0 & 2 & 2 \\ 0 & 0 & 0 \\ 0 & 4 & 4 \end{pmatrix} = \begin{pmatrix} 1 & 2 & 3 \\ 0 & 2 & 2 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} = U \quad (1)$$

Rank of the matrix is 2 because there are 2 pivots point, number 1 in the first row, and the first number 2 in the second row.

There are 2 pivot columns:

$$Pivot\_columns = \begin{pmatrix} 1 & 2 \\ 0 & 2 \\ 0 & 0 \\ 0 & 0 \end{pmatrix} \quad (2)$$

There are 1 free column:

$$Free\_column = \begin{pmatrix} 3 \\ 2 \\ 0 \\ 0 \end{pmatrix} \quad (3)$$

From U to R

$$U = \begin{pmatrix} 1 & 2 & 3 \\ 0 & 2 & 2 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} = \begin{pmatrix} 1 & 0 & 1 \\ 0 & 1 & 1 \\ 0 & 2 & 2 \\ 0 & 4 & 4 \end{pmatrix} = R = \quad (4)$$

There are 2 main matrices we need to focus on, one is the Identity matrix at the top left corner of the matrix R, the other is the free (F) part next to the Identity matrix at the top right corner of the matrix R. Identity matrix is:

$$I = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \quad (5)$$

Free matrix is

$$F = \begin{pmatrix} 1 \\ 1 \end{pmatrix} \quad (6)$$

The nullspace, also known as the solution, called N, is the matrix:

$$x = N = c * \begin{pmatrix} -F \\ I \end{pmatrix} \quad (7)$$

## 2.5 Video 8 (Nov 11, 2021)

Summarize the lecture so far at the end of the videos.

The rank of the matrix tell you about the number of solution for the equation  $Ax = b$

There are full ROW rank, full COL rank.

The solvability of the equation  $Ax = b$ .

The form of the solution of  $Ax = b$  is  $X = X_{\text{particular}} + X_{\text{nullspace}}$ .

$X$ -nullspace always for  $Ax = 0$ .

## 2.6 Video 9 (Nov 16, 2021)

Independence, Basis and dimension

Definition of independence vectors.

18m: Vector span a space

24m: basics

nho viet lai theo dang item cho cai note nay

35m: given a space, every basis for the space has the same number of vectors, that number of vectors is called dimension, this is the definition of the dimension of the spaces

rank of matrix  $A$  = number of pivot columns = dimension of space of  $A$ , written as  $C(A)$

## 2.7 Video 10 (Nov 16, 2021)

Four fundamental subspace is the matrix

Fix the error in the video 9, the error is the 2 rows is the same so the rank in row is only 2, so it is not invertible, because of the transposition  $A'$ .

4m: the 4 subspaces

10m: the picture of 4 spaces

# 3 EMBEDDED LINUX - for me

## 3.1 Vid 0 - Build the image for Beaglebone Black

## 3.2 Vid 1 - Lam quen voi Linux

warning level cua compiler should be set at the highest level, try to fix the warning.

co 2 cach de tim kiem 1 text trong linux, su dung grep hoac la su dung cscope, cscope thi thich hop voi nhung du an lon

co the setup visual studio code voi gdb va kernel de su dung cho thuan tien

### 3.3 Vid 2 - Gioi thieu ve file, directory, multithread, user, etc. (Nov 11, 2021)

02m: gioi thieu ve file, directory, multithread, user, etc.

04m:

ps - aux | grep hello - list all the process running in the pc, with the name hello

ls /proc/2821 - list all the files used in the process that has the id = 2821

ls -l /proc/2821/exe - show the directory of the execute file of the process id 2821, which is c02-hello

cat /proc/2821/maps - list all the libraries used in this process

cat /proc/2821/cmdline - list the command line used to call the execute file, which is "./c02-hello"

11m: the antivirus software detects the keylogger by checking the checksum of the binary files, so if you write your own keylogger cannot detect it until the checksum is updated into the antivirus software database.

16m: check all the files in the /proc/id-num to know more information about the process, ex.: could read how much ram, size of that process

20m: lap trinh voi file de doc ghi du lieu co ban

21m: 3 steps, step 1 > open file, step 2 > edit file, step 3: close the file. same as malloc.

good practise: write close file function right after open file function and then enter and write the code in the middle.

cach search: open() linux, them keyword linux vao trong phan search, va doc tu cac trang web cua hang viet ra linux, ex.: man7.org

31m: echo "hi everyone, minh la Hoang Ham Hoc" > data : write the content " hi everyone, minh la Hoang Ham Hoc " to the file named "data"

1h15m: checkpath and fix the homework - writing name into existed file

1h17m: fix loi DOS line ending, checkpath khac gi response tu gcc? -> follow linux kernel coding style (convention): kernel dot org coding style.

checkpath co the check phan code ban them vao va ignore phan code cu ko co thay doi. (ex: check patch cua firmware, co the coi video tu 1h17 de lam theo) fix loi ten xuong dong, lam sao de doc errno?

2h00m: cach debug ve struct khi open / close file.

### 3.4 Vid 3 - Signal (Nov 13, 2021)

use command "ps -aux | grep c03\_signal" to list the process id of the task name "c03\_signal"

use command "kill" to send signal, not kill the process, ex: kill -SIGUSR1 17748, then in the terminal will call the func. my\_handler, print out the value of the sig\_num

printf thuong se ghi du lieu vao stdout, doi khi printf se luu vao buffer, nhung phai co them 'sur n' thi no moi day ra ngoai man hinh

trong che do console mode, ko co dau x de dong app, nen khi minh nhan Ctrl + C thi se terminate 1 cai app trong che do console mode.

Control + C se gui 1 cai signal toi cho app, gia tri cua signal do la SIGINT

P1990, interrupt from keyboard, xem o man7.org.

1h10m: vi du ve dung to hop phim de gui 1 signal di, Ctrl + C interrupt from keyboard, Ctrl + Z quit the app. Cac signal nay chi gui den foreground cua Linux kernel, chu ko gui den background.

Signal co the gui kem du lieu (data) vao trong signal

Hoan thanh vi du, nhan "Ctrl + C" de inlog du lieu

- Change the code of the signal from SIGUSR1 to SIGINT (interrupt from keyboard), search with keywords: signal linux
- then add the printf You have pressed Ctrl C in the my\_handler function.
- run the compiled code and press "Ctrl + C"

```
alex@ubuntu:~/Desktop/embedded_linux/emLinux_examples/class_03$ ./c03_signal_ctrl_C
Register success
^Csig_num = 2
U have just pressed Ctrl and C on the keyboard
```

Figure 1: The result of the example

1h20m: phan quyen de chay process, moi cau lenh deu phai xem cai quyen cua minh o dau, day co the gay loi cho chuong trinh cua ban

1h27m: phai check sau moi cau lenh, de xem init co thanh cong hay ko, vd char \*a = malloc, thi phai check if(NULL != a), neu ko co loi thi moi chay func cua minh

ngoai ra thi phai check errno (error number).

IMPORTANT: errno only stores the value of the latest process.

1h41m: co nhieu process qua thi dung kill -9 process\_id.

chu y vao trang thai cua process, T, R+, T means terminated

```
root@ubuntu:/home/kienpt99/Khoa_hoc_Linux/Buoi_3# ps aux | grep -i hello
root      4397  60.2  0.0   2496    576 pts/0    T   20:44   0:09 ./hello
root      4400  95.7  0.0   2496    580 pts/0    R+  20:44   0:03 ./hello
root      4402   0.0  0.0   17672    724 pts/1    S+  20:45   0:00 grep --color=auto -i hello
root@ubuntu:/home/kienpt99/Khoa_hoc_Linux/Buoi_3#
```

Figure 2: Multiple processes but different status - stop T, running R

google keyword /proc/stat linux from man7.org for more information about the process

safe functions to run in the signal handler: slide 11 of 16 of signal ppt.

or the keywords: reentrant functions in linux

tat ca driver deu co process\_id = 0

search keyword 'passing arguments to signal handler' de tim hieu ve pass du lieu vao trong signal handler



```
phula@ubuntu:~$ ps -aux
USER      PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root         1   0.0  0.2 167888 11720 ?        Ss   19:31   0:02 /sbin/init auto noprompt text
root         2   0.0  0.0      0     0 ?        S    19:31   0:00 [kthreadd]
root         3   0.0  0.0      0     0 ?        I<   19:31   0:00 [rcu_gp]
root         4   0.0  0.0      0     0 ?        I<   19:31   0:00 [rcu_par_gp]
root         6   0.0  0.0      0     0 ?        I<   19:31   0:00 [kworker/0:0H-events_highpri]
root         9   0.0  0.0      0     0 ?        I<   19:31   0:00 [mm_percpu_wq]
root        10   0.0  0.0      0     0 ?        S    19:31   0:00 [rcu_tasks_rude_]
root        11   0.0  0.0      0     0 ?        S    19:31   0:00 [rcu_tasks_trace]
root        12   0.0  0.0      0     0 ?        S    19:31   0:00 [ksoftirqd/0]
root        13   0.0  0.0      0     0 ?        I    19:31   0:01 [rcu_sched]
root        14   0.0  0.0      0     0 ?        S    19:31   0:00 [migration/0]
```

Figure 3: Fields of ps-aux command

### 3.5 Vid 4 - Interrupt (Nov 15, 2021)

tao 1 thread de doc du lieu ngay nay qua thang no.  
 khi nao thi deadlock xay ra  
 gg thread\_create in man7.org  
 sau khi dung lenh pthread\_create thi phai dung lenh pthread\_join  
 1h09m: khi chay nhieu thread, co the bi loi race\_condition  
 1h29m: lenh atomic trong c++, atomic\_increas(a);  
 1h39m: mutex in operating system: khoa 1 chia, mutex\_lock  
 semaphore la khoa nhieu chia  
 1h55m: wrapper function  
 task in RTOS is as same as process in Linux  
 truyen tin giua cac task thi giong voi co che chuyen tin cua process  
 dung lenh time ./mutex thi se in ra tgian chay doan code do.  
 build ra file lib de lam gi.  
 2h26m: end of video

### 3.6 Vid 9 - Interrupt (Nov 13, 2021)

How to connect ssh using the internet

- cam day mang vao cong internet cua beaglebone
- sudo apt-get install openssh-server
- Ben board beaglebone thi dung lenh sudo ifconfig de xem dia chi ip cua day internet eth0
- Tai may windows thi dung mobaXterm, va go lenh ssh debian@192.168.0.43.
- sudo nano/etc/ssh/sshd\_config

### 3.7 Vid 13 - Watchdog (Dec 04, 2021)

Quy tac 5 buoc de viet driver

- Tim hieu hardware
- Tim hieu standard giao tiep giua OS va device file cua module do
- Tim hieu template driver
- Viet driver

scp my\_watchdog.ko debian@192.168.0.43: lenh de copy 1 file tu may ubuntu sang may BBB  
 dung lenh 'sudo su' de login o dang root, sau do  
 insmod my\_watchdog.ko sau moi lan reset  
 dung lenh ./main\_test de test watchdog  
 Dat log la dat nhu the nao

### 3.8 Vid 14 - Uboot (Dec 11, 2021)

Tai lieu tra cuu uboot - Uboot reference manual, link <https://hub.digi.com/dp/path=/support/asset/u-boot-reference-manual/>

File uEnv.txt la cho de config cho uboot  
 Homework: sua lai tgian boot cua uboot, de tgian doi ng dung tu 1s tro thanh 30s. Co nhieu cach de sua, build lai uboot va ghi vao the.

Tra trong reference manual, uboot, page 15, bootdelay  
 Node trong Embedded linux la sao?  
 Buildroot vs Yocto, framework de build la gi. Buildroot ra doi truoc nhung Yocto ra doi sau nhung tot hon, tuy theo tinh nang  
 OTA update linux - Mender, co the update app va framework OTA  
 Homework 2: type 'hello Phu', show 'xin chao Phu'

## 4 Control Bootcamp - Steve Bruton

### 4.1 Vid 01 - Overview

We could classify the control into these groups:

- Passive Control
- Active Control
  - Open-loop Control
  - Closed-loop Control

Why feedbacks?

- Uncertainty

- Intability
- Disturbances Rejection
- Efficient Control
  - You have to continuously move the inverted pendulum up and down to keep it stable (openloop)
  - But if you have a good fdbck controller, you barely have to control the cart, and the stick is still stable
  - You only need to control whenever you need it, not all the time

## 4.2 Vid 02 - Linear System

### 4.2.1 Linear System $\dot{X} = A.X$ , with $X \in \mathbb{R}^n$

The solution for the equation is

$$X(t) = e^{At}.X(0) \quad (8)$$

with  $X$  is a vector,  $A$  is a matrix.

Use Taylor series to expand  $e^{At}$

$$e^{At} = I + At + \frac{A^2t^2}{2!} + \frac{A^3t^3}{3!} + \dots + \frac{A^nt^n}{n!} \quad (9)$$

But if we have  $A$  is a  $5 \times 5$  matrix, calculating  $e^{At}$  is not practical to compute, so we will use eigenvalue and eigenvector of  $A$  to get a coordinate transformation from  $X$  coordinates to eigenvector's coordinates.

so that it is easier for us to understand the dynamics themselves  $\dot{X} = A.X$  and easier to write down  $e^{At}$

With

$$\dot{X} = A.X \quad (10)$$

Use MATLAB to find  $T$ ,  $D$  matrices

$$[T, D] = \text{eig}(A) \quad (11)$$

Matrix  $D$  is a diagonal matrix

$$D = \begin{bmatrix} \lambda_1 & & & \\ & \lambda_2 & & \\ & & \ddots & \\ & & & \lambda_n \end{bmatrix} \quad (12)$$

From  $D$  we calculate the  $e^{Dt}$

$$e^{Dt} = \begin{bmatrix} e^{\lambda_1 t} & & & \\ & e^{\lambda_2 t} & & \\ & & \ddots & \\ & & & e^{\lambda_n t} \end{bmatrix} \quad (13)$$

#### 4.2.2 Eignevalue and Eigenvector

with  $A = TDT^{-1}$

$$\begin{aligned}
e^{At} &= e^{TDT^{-1}t} \\
&= I + At + \frac{A^2t^2}{2!} + \frac{A^3t^3}{3!} + \dots + \frac{A^nt^n}{n!} \\
&= TIT^{-1} + TDT^{-1}t + \frac{TDT^{-1}.TDT^{-1}t^2}{2!} + \dots + \frac{(TDT^{-1})^nt^n}{n!} \\
&= T.[I + Dt + \frac{D^2t^2}{2!} + \frac{D^3t^3}{3!} + \dots + \frac{D^nt^n}{n!}].T^{-1} \\
&= T.e^{Dt}.T^{-1}
\end{aligned} \tag{14}$$

Try to write the system in this form  $AT = TD$  (8:19 timestamp)

$$\begin{aligned}
A.T &= T.D \\
T^{-1}.A.T &= T^{-1}.T.D \\
T^{-1}.A.T &= D
\end{aligned} \tag{15}$$

We have

$$\begin{aligned}
X &= TZ \\
\dot{X} &= T\dot{Z} = AX \\
T\dot{Z} &= AX \\
T\dot{Z} &= ATZ \\
T^{-1}T\dot{Z} &= T^{-1}ATZ \\
\dot{Z} &= T^{-1}ATZ
\end{aligned} \tag{16}$$

with  $T^{-1}.A.T = D$

$$\dot{Z} = DZ \tag{17}$$

Why do we really need  $D$  to be diagonol?

Because  $D$  now is a diagonol matrix so that all the component of  $Z$  is fully decoupled to each other. In another words,  $Z_1$  only effects  $\dot{Z}_1$ ,  $Z_2$  only effects  $\dot{Z}_2$

$$D = \begin{bmatrix} \lambda_1 & & & \\ & \lambda_2 & & \\ & & \ddots & \\ & & & \lambda_n \end{bmatrix} \tag{18}$$

$$\begin{bmatrix} \dot{Z}_1 \\ \dot{Z}_2 \\ \vdots \\ \dot{Z}_n \end{bmatrix} = \begin{bmatrix} \lambda_1 & & & \\ & \lambda_2 & & \\ & & \ddots & \\ & & & \lambda_n \end{bmatrix} \begin{bmatrix} Z_1 \\ Z_2 \\ \vdots \\ Z_n \end{bmatrix} \tag{19}$$

The solution for  $\dot{Z} = DZ$  is  $Z(t) = e^{Dt}.Z(0)$  (13:46 tstamp) We think immediately in our mind when we see the  $\dot{X} = AX$  is think about it in eigenvector  $X = TZ$  because it is simple for the solution  $Z(t)$

### 4.2.3 Eigenvector Relationship

Start with this Taylor series to expand  $e^{At}$

$$e^{At} = I + At + \frac{A^2 t^2}{2!} + \frac{A^3 t^3}{3!} + \dots + \frac{A^n t^n}{n!} \quad (20)$$

The transformation from  $e^{At} = Te^{Dt}T^{-1}$  (20:43 tstamp), we do this because it is very easy to compute the  $e^{Dt}$  due to the diagonal characteristic of matrix D

IMPORTANT: The main idea (concept) is  $X(t) = Te^{Dt}T^{-1}.X(0)$ , with  $X = TZ$

- $Z(0) = T^{-1}.X(0)$ : mapping the IC from x coordinates to eigenvector coordinates
- Then multiply with  $e^{Dt}$  to form  $Z(t) = e^{Dt}.T^{-1}.X(0)$ : it is intuitive because the dynamics is decoupled already
- Then multiply with  $T$  to map it back to  $X$  coordinates,  $X(t) = Te^{Dt}T^{-1}.X(0)$  which is required in the physical world - what we care is x, not z.

### 4.2.4 Next step

- Analyze the stability using eigenvectors of matrix A
- Build discrete model instead of using continuous model  $\dot{X} = A.X$  by discretize the system with  $\lambda T$
- Add the control Bu part to start controlling the dynamics  $\dot{X} = A.X + B.u$

## 4.3 Vid 03 - Stability and Eigenvalues

$$\dot{X} = A.X \quad (21)$$

Use MATLAB to find T, D matrices

$$[T, D] = \text{eig}(A) \quad (22)$$

Matrix D is a diagonal matrix

$$D = \begin{bmatrix} \lambda_1 & & & \\ & \lambda_2 & & \\ & & \ddots & \\ & & & \lambda_n \end{bmatrix} \quad (23)$$

$$e^{Dt} = \begin{bmatrix} e^{\lambda_1 t} & & & \\ & e^{\lambda_2 t} & & \\ & & \ddots & \\ & & & e^{\lambda_n t} \end{bmatrix} \quad (24)$$

#### 4.3.1 Stability of $\dot{X} = A.X$

With

$$X(t) = T e^{Dt} T^{-1} . X(0)$$

$$\lambda = a \pm bi$$

$$e^{\lambda t} = e^{at} [\cos(bt) \pm i \sin(bt)]$$

- if ALL of the REAL parts of all the eigenvalues has  $a < 0$  then the system is STABLE
- if any of the REAL parts of all the eigenvalues has  $a > 0$  then the system is unstable
- If any real parts of these lambdas are positive then the  $e^{Dt}$  blows up and the  $X(t) = T e^{Dt} T^{-1} . X(0)$  will blow up too.

#### 4.3.2 Discrete time model, tstamp 09:14

$$X_{k+1} = \tilde{A} . X_k$$

$$\tilde{A} = e^{A \Delta t}$$

We have  $X_0, \Delta t$ , and matrix  $A$

$$\begin{aligned} X_1 &= \tilde{A}^1 X_0, \lambda = 1 \\ X_2 &= \tilde{A}^2 X_0, \lambda = 2 \\ X_3 &= \tilde{A}^3 X_0, \lambda = 3 \\ &\dots \\ X_N &= \tilde{A}^N X_0, \lambda = N \end{aligned} \quad (25)$$

Using polar coordinate to describe the

$$\begin{aligned} \lambda &= R . e^{i\theta} \\ \lambda^N &= R^N e^{iN\theta} \end{aligned} \quad (26)$$

We see that  $\lambda^N$  has the same direction with  $\lambda$ , the radius  $R$  is powered by  $N$  (getting bigger or smaller), and the angle  $\theta$  is rotating around

So if the radius  $R$  of ALL the  $\lambda = R . e^{i\theta}$

- $R < 1$  the system is STABLE because  $R^N \rightarrow 0$  when  $t \rightarrow \infty$
- $R > 1$  the system is unstable because  $R^N \rightarrow \infty$  when  $t \rightarrow \infty$

### 18.3 9-pin JTAG/SWD connector

VTref	1 • • 2	SWDIO / TMS
GND	3 • • 4	SWCLK / TCK
GND	5 • • 6	SWO / TDO
---	7 • • 8	TDI
NC	9 • • 10	nRESET

Some target boards only provide a 9-pin JTAG/SWD connector for Cortex-M. or these devices SEGGER provides a 20-pin -> 9-pin Cortex-M adapter.

PIN	SIGNAL	TYPE	Description
1	VTref	Input	This is the target reference voltage. It is used to check if the target has power, to create the logic-level reference for the input comparators and to control the output logic levels to the target. It is normally fed from Vdd of the target board and must not have a series resistor.
2	SWDIO / TMS	I/O / output	SWDIO: (Single) bi-directional data pin. JTAG mode set input of target CPU. This pin should be pulled up on the target. Typically connected to TMS of the target CPU.
4	SWCLK / TCK	Output	SWCLK: Clock signal to target CPU. It is recommended that this pin is pulled to a defined state of the target board. Typically connected to TCK of target CPU. JTAG clock signal to target CPU.
6	SWO / TDO	Input	JTAG data output from target CPU. Typically connected to TDO of the target CPU. When using SWD, this pin is used as Serial Wire Output trace port. (Optional, not required for SWD communication)
---	---	---	This pin (normally pin 7) is not existent on the 19-pin JTAG/SWD and Trace connector.
8	TDI	Output	JTAG data input of target CPU.- It is recommended that this pin is pulled to a defined state on the target board. Typically connected to TDI of the target CPU. For CPUs which do not provide TDI (SWD-only devices), this pin is not used. J-Link will ignore the signal on this pin when using SWD.
9	NC (TRST)	NC	By default, TRST is not connected, but the Cortex-M Adapter comes with a solder bridge (NR1) which allows TRST to be connected to pin 9 of the Cortex-M adapter.

Figure 4: Pinout of the Jlink segger edu mini

So if all the lambda (also described as vectors) inside the unit circle, then the system is stable

From matrix  $\tilde{A}$  - discrete time, we calculate

$$[\tilde{T}, \tilde{D}] = eig(\tilde{A})$$

Always start with

$$\tilde{A}\tilde{T} = \tilde{T}\tilde{D}$$

$$\tilde{A}\tilde{T}\tilde{T}^{-1} = \tilde{T}\tilde{D}\tilde{T}^{-1}$$

$$\tilde{A} = \tilde{T}\tilde{D}\tilde{T}^{-1}$$

Plug  $\tilde{A} = \tilde{T}\tilde{D}\tilde{T}^{-1}$  into these equations:

$$X_1 = \tilde{A}^1 X_0, \lambda = 1, \tilde{D}^1$$

$$X_2 = \tilde{A}^2 X_0, \lambda = 2, \tilde{D}^2$$

$$X_3 = \tilde{A}^3 X_0, \lambda = 3, \tilde{D}^3$$

...

$$X_N = \tilde{A}^N X_0, \lambda = N, \tilde{D}^N$$

(27)

We see that the only thing could blow up the system is if the REAL part of

ANY lambda in the matrix D is  $> 0$

$$\tilde{D} = \begin{bmatrix} \tilde{\lambda}_1 & & & \\ & \tilde{\lambda}_2 & & \\ & & \ddots & \\ & & & \tilde{\lambda}_N \end{bmatrix} \quad (28)$$

The stability of the system is fully depend on the eigenvalues of the matrix A

- continuous time, real part must be negative, in the left half plane
- discrete time, the eigenvalues must be in the unit circle

#### 4.4 Vid 04 - Linearizing System around fixed point

$$\dot{X} = f(x) \rightarrow \dot{X} = AX, \text{ with } X \in \mathbb{R}^n$$

- Find the fixed point  $\bar{x}$  st  $\dot{x} = f(\bar{x}) = 0$ 
  - inverted pendulum,  $\bar{x}$  is the top point, without disturbances, the pendulum will stay there forever
  - pendulum,  $\bar{x}$  is the bottom point.
  - between the Earth and the Sun,  $\bar{x}$  the point where the gravitational force of the Sun and the Earth are the same.
- Linearize about the fixed point  $\bar{x}$ 
  - Take partial derivatives
  - Hartman–Grobman THEOREM,  
<https://en.wikipedia.org/wiki/Hartman>  
We could only linearize the system if the eigenvalues has NON-ZERO REAL PARTS,  
IF NOT, the linearization cannot show the dynamics of the system.

$$\frac{Df}{Dx}|_{\bar{x}} = \frac{\partial f_i}{\partial x_j} \quad (29)$$

- examples

$$\begin{aligned} \dot{X}_1 &= f_1(x_1, x_2) = x_1 x_2 \\ \dot{X}_2 &= f_2(x_1, x_2) = x_1^2 + x_2^2 \end{aligned} \quad (30)$$

$$\frac{Df}{Dx} = \begin{bmatrix} \frac{\partial f_1}{\partial x_1} & \frac{\partial f_1}{\partial x_2} \\ \frac{\partial f_2}{\partial x_1} & \frac{\partial f_2}{\partial x_2} \end{bmatrix} = \begin{bmatrix} x_2 & x_1 \\ 2x_1 & 2x_2 \end{bmatrix}$$

Examples: The pendulum.

- The Equation of Motion

$$\ddot{\theta} = -\frac{g}{L} \cdot \sin(\theta) - \delta \dot{\theta} \quad (31)$$



- Find the fixed point
  - Define the state of the system.

$$\begin{aligned} X &= \begin{bmatrix} X_1 \\ X_2 \end{bmatrix} = \begin{bmatrix} \theta \\ \dot{\theta} \end{bmatrix} \\ \dot{X} &= \begin{bmatrix} \dot{X}_1 \\ \dot{X}_2 \end{bmatrix} = \begin{bmatrix} \dot{\theta} \\ \ddot{\theta} \end{bmatrix} = \begin{bmatrix} \dot{\theta} \\ -\sin(\theta) - \delta\dot{\theta} \end{bmatrix} = \begin{bmatrix} X_2 \\ -\sin(X_1) - \delta X_2 \end{bmatrix} \end{aligned} \quad (32)$$

- Fixed point  $\bar{X}$  so that  $\dot{X} = f(\bar{X}) = 0$

$$\dot{X} = \begin{bmatrix} X_2 \\ -\sin(X_1) - \delta X_2 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (33)$$

$$\begin{bmatrix} X_2 \\ -\sin(X_1) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (34)$$

$$\begin{bmatrix} X_2 \\ X_1 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 + k\pi \end{bmatrix} \quad (35)$$

In the physical world, there are 2 roots, which are the up position and down position of the pendulum.

There are 2 fixed points:

$$\bar{X}_{down} = \begin{bmatrix} X_2 \\ X_1 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \text{ and } \bar{X}_{up} = \begin{bmatrix} X_2 \\ X_1 \end{bmatrix} = \begin{bmatrix} 0 \\ \pi \end{bmatrix} \quad (36)$$

- Linearize the system around the fixed points

$$\dot{X} = \begin{bmatrix} f_1(X_1, X_2) \\ f_2(X_1, X_2) \end{bmatrix} = \begin{bmatrix} X_2 \\ -\sin(X_1) - \delta X_2 \end{bmatrix} \quad (37)$$

$$\frac{Df}{Dx} = \begin{bmatrix} \frac{\partial f_1}{\partial x_1} & \frac{\partial f_1}{\partial x_2} \\ \frac{\partial f_2}{\partial x_1} & \frac{\partial f_2}{\partial x_2} \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -\cos(x_1) & -\delta \end{bmatrix} \quad (38)$$

Substitute the value of 2 fixed point X into the Jacobian Matrix to find the matrix A for both cases

$$\bar{X}_{down} = \begin{bmatrix} X_2 \\ X_1 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}, \quad A_{down} = \begin{bmatrix} 0 & 1 \\ -1 & -\delta \end{bmatrix} \quad (39)$$

$$\bar{X}_{up} = \begin{bmatrix} X_2 \\ X_1 \end{bmatrix} = \begin{bmatrix} 0 \\ \pi \end{bmatrix}, \quad A_{up} = \begin{bmatrix} 0 & 1 \\ 1 & -\delta \end{bmatrix} \quad (40)$$

- Find the eigenvalues of the 2 matrices A\_up and A\_down, with  $\delta = 0.1$   
Using Matlab function eig(A)

$$A_{down} = \begin{bmatrix} 0 & 1 \\ -1 & -0.1 \end{bmatrix}, \text{eigenvalues} = \begin{bmatrix} -0.05 + 0.9987i \\ -0.05 - 0.9987i \end{bmatrix} \quad (41)$$

$$A_{up} = \begin{bmatrix} 0 & 1 \\ 1 & -0.1 \end{bmatrix}, \text{eigenvalues} = \begin{bmatrix} -1.0512 \\ 0.9512 \end{bmatrix} \quad (42)$$

- Conclusions

- Pendulum in down position is stable, because the real part of 2 eigenvalues are negative
- Pendulum in up position is unstable, because there are 1 eigenvalues is positive
- The result is as same as we predict before doing this examples

## 4.5 Vid 5 - Controllability

Insert the right notations,  $\dot{x}$ ,  $y$ ,  $u = -kx$ ,  $\dot{x} = (a-bk)x$

In real world, people give a matrix  $A$ ,  $B$ , you cannot change it, you could only design the control law to make the system perform better

Column Rank and Row Rank

Controllability function in Matlab  $C = \text{ctrb}(A,B)$  only tells you YES or NO, not tell how controllable. If the rank ( $C$ ) equals to the number of the states, then the system is controllable. So we need another way to know how well the system could be controlled

Fullstate feedback means you could measure all the elements in the state  $X$

IF THE SYSTEM IS CONTROLLABLE, then you could drive the system to any state that you want. and place the pole any where you want. Link this with the Linear Algebra in Gilbert Strang class of MIT courseware

SVD - Single Value Decomposition of a CONTROLLABILITY MATRIX -  $C$ , the first part will show you which states of the System in the order from the easiest to control to the hardest to control. In other words, which states is easy to reach, which states are not.

### 4.5.1 Controllability

Example of uncontrollable system - timestamp 13:14 How do I modify  $B$  to make uncontrollable system to controllable.

## 4.6 Vid 6 - Controllability, Reachability, and Eigenvalue Placement

System is controllable or not?

if yes, we could use Pole placement, with any arbitrary eigenvalues

Reachability, if the column is not depend, assume we 2 vectors in  $R^2$ , then it is independent, it could represent the whole plane, whole state of the systems, watch gilbert strang linear algebra.

But the limit in reality is the limit in  $u$  of physical world. and the linear system disadvantage is it cannot represent the non-linear factor in the real life.

And in linear system equation, we could apply infinity value of  $U$  to get the  $\dot{X}$  as big as we want.

#### 4.7 Vid 7 - Controllability, and the Discrete time Impulse Response

#### 4.8 Vid 8 - Degrees of Controllability and Gramians

#### 4.9 Vid 9 - Controllability and the Popov-Belevitch-Hautus (PBH) test

##### 4.9.1 remind

$\dot{x} = Ax + Bu$ , with  $x \in \mathbb{R}^n$   
 $C = [B \ AB \ A^2B \ \dots \ A^{n-1}B]$   
>>  $\text{rank}(\text{ctrb}(A, B))$

##### 4.9.2 The PBH Test

The PBH test is (A, B) is controllable if and only iff (iff)  $\text{rank}[(A - \lambda I) \ B] = n$  with every  $\lambda$  in the complex plane  $\mathbb{C}$

The PBH test

$$\text{rank}[(A - \lambda I) \ B] = n, \quad \forall \lambda \in \mathbb{C} \quad (43)$$

Good question: When will  $(A - \lambda I)$  has rank n?

More specifically, when will  $(A - \lambda I)$  NOT has rank n(2:43)?

$(A - \lambda I)$  is deficient, when the determinant of the  $(A - \lambda I)$  equals to 0. It is the determinant equation

$$|(A - \lambda I)| = 0 \quad (44)$$

This equation satisfied with at most  $\lambda$  is the eigenvalues of matrix A.

If  $\lambda$  is not the eigenvalues of matrix A, then the  $(A - \lambda I)$  alone has the rank n, and we DO NOT really need the matrix B in the  $[(A - \lambda I) \ B]$  to have  $\text{rank}[(A - \lambda I) \ B] = n$ .

##### 4.9.3 The PBH Test - Important Conclusions

- $\text{rank}(A - \lambda I) = n$  except for the eigenvalues  $\lambda$ .  
It means we only need to test at eigenvalues, because  $(A - \lambda I)$  has rank n if  $\lambda$  is not the eigenvalues of matrix A (3:50)  
So we reduce from testing for the whole complex plane  $\mathbb{C}$  down to only testing at the eigenvalues of matrix A.
- B needs to have some components in each eigenvector (of matrix A) direction.  
If we pick  $\lambda$  as a eigenvalues of matrix A and plug it into the  $(A - \lambda I)$ , we see that the  $(A - \lambda I)$  is rank deficient, and in which direction that

$(A - \lambda I)$  is rank deficient?

The answer is, we look at the Nullspace of  $(A - \lambda I)$ , which is the eigenvector of  $(A - \lambda I)$ . The  $(A - \lambda I)$  is rank deficient in EXACTLY the direction of the eigenvector. And the eigenvector is the reason that makes  $(A - \lambda I)$  equals to 0.

We see that in order to have  $\text{rank}(A - \lambda I) = n$ , when  $(A - \lambda I) = 0$  in some eigenvector directions of A, then the matrix B must complement for matrix A, or matrix B must at least has some component in all of the eigenvector directions to make  $\text{rank}[(A - \lambda I) \ B] = n$ .

- (ADVANCED) if B is a random vector, in another word, if  $B = \text{randn}(n,1)$ , then (A,B) will be controllable with high probability.

B cannot be aligned with ONLY ONE eigenvector of matrix A because  $\text{rank}[(A - \lambda I) \ B]$  will be  $n$  for that specific  $\lambda$ , and for the other  $\lambda$ , the matrix B will not make  $\text{rank}[(A - \lambda I) \ B] = n$ . So that B must at least has some component in EVERY EIGENVECTOR of matrix A in order to make  $\text{rank}[(A - \lambda I) \ B] = n$  with all the  $\lambda$  in the complex plane  $\mathbb{C}$  ( $\forall \lambda \in \mathbb{C}$ ).

A random vector  $B \in R^n$ , with HIGH PROBABILITY, it has a little bit in ALL of those eigenvector direction of MATRIX A. And it is VERY EXTREMELY UNLUCKY for B to be aligned with ONLY one, two or a few eigenvector direction. So that it is a high probability that a random B will make  $\text{rank}[(A - \lambda I) \ B] = n$  with all the  $\lambda$ .

Even for the very high dimension of matrix A (million by million dimensional system), if I pull out a random vector B from  $R^n$ , then with the HIGH PROBABILITY, it is going to be able to control all the states  $x$  of the system  $\dot{x} = Ax + Bu$ , with  $x \in R^n$ .

- The PBH test tell me that, with a GIVEN MATRIX A, what is the minimal number of columns B, minimum of control actuators that we need in order to make the system  $\dot{x} = Ax + Bu$  CONTROLLABLE.

If there are 2 eigenvector direction in the null space of this operator  $(A - \lambda I)$ , then we need matrix B has 2 columns in order to fill in the null space and have a rank  $n$ . That is also mean you need 2 CONTROL INPUTS for your system.

- WE USE THIS TEST TO THINK ABOUT HOW CONTROLLABLE IS THE SYSTEM?

In case the system in the gray area, What if you have 2 different eigenvalues that is really close, or 2 eigenvectors but it is nearly the same (parallel) but it is not.

The `rank(ctrb(A,B))` from MATLAB tell us the system is controllable (binary result), but in fact, the system is approximately DEGENERATED,

and be BARELY CONTROLLABLE.

SOLUTION: we want to have MULTIPLE COLUMNS of matrix B to boost the control authority of the system.

random vector la gi, nullspace, subspace

#### 4.10 Vid 10 - Cayley-Hamilton Theorem

$\dot{x} = Ax + Bu$ , with  $x \in R^n$

#### 4.11 Vid 12 - Inverted Pendulum on a Cart

We have 2 states but due to Newton 2nd law, we have 4 (double) coupled ODEs (2:15)

Because the rank of the Controllability matrix is 4, I can span all of my state space with this Controllability subspace and that means I can actually develop a controller to control the system.

Set up the problem, identify matrix A, B, and the initial condition. Find the fixed points of the system. Linearize the system at the fixed point. Analyze the stability of the system with  $\text{eig}(A)$  and the Controllability with  $\text{rank}(\text{ctrb}(A,B))$

#### 4.12 Vid 13 - Pole Placement for the Inverted Pendulum on a Cart

We cannot move the poles (eigenvalues) of the feedback system to the left half plane forever because

- the control power of the actuator u is limit, not unlimited to meet up with the control demand from the controller
- when the response is fast, the dynamics of the system is out of the range when we linearize the non linear system. So that the controller we built for the linearized system failed.

#### 4.13 Vid 13 - Linear Quadratic Regulator (LQR) Control for the Inverted Pendulum on a Cart

What is the math behind pole placement and the LQR?

## 5 STM32

### 5.1 Nov 04, 2021

CubeIDE vs CubeMX differences?

add path trong environments, edit file path, link to the folder store the make

(cygwin), git, etc. so we could use it in the terminal of the visual code.

## 5.2 Nov 05, 2021

Equivalences at tstamp 7:15

reference nhung noi de thay doi file makefile tuy theo loai chip trong video 02 - toanchung

## 5.3 Nov 29, 2021

Compare JTAG vs SWD The other good thing about SWD is you can use the serial wire viewer for your printf statements for debugging.

Filter stability in the analog and digital domain

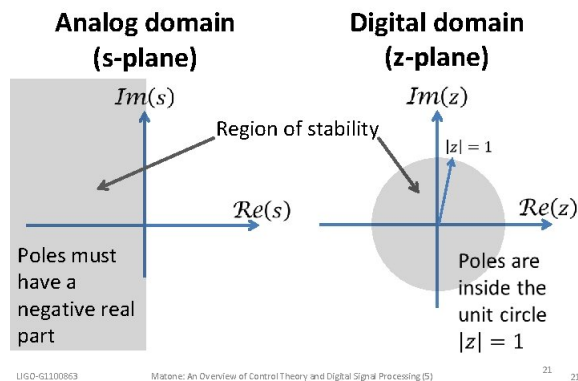


Figure 5: Mapping stable region between s-continuous and z-discrete domain

## 6 C - PROGRAMMING

Pointers

array[ ] different ? is it a 2 dimension, 3 dimensions array?

int \* const array, use array name, so it is 1 dimension (single subscripted array?)

what is the principle of least privilege? operands la gi?

Portability Tip 7.3

Most computers today have 2-byte or 4-byte integers. Some of the newer machines use 8- byte integers. Because the results of pointer arithmetic depend on the size of the objects a pointer points to, pointer arithmetic is machine dependent.

Pointers are valid operands in arithmetic expressions, assignment expressions and comparison expressions.

Arithmetic operations: cac phép tính toán học, basics: + - x /

how to know the system is 2, 4 or 8 byte systems?

Pointers can be compared using equality and relational operators, but such comparisons are meaningless unless the pointers point to elements of the same array  
Array element `b[3]` can alternatively be referenced with the pointer expression:  
`*( bPtr + 3 )`

The parentheses are necessary because the precedence of `*` is higher than the precedence of `+`.

string vs character array?

What is the end char of the string? null? `'\0'`? how to see it?

```
const int * xPtr
```

```
int * const xPtr
```

```
const char * const s2
```

#### DESIGN STEP

first think about the flow of the codes

which variable is fixed, should not be changed by mistakes, then use the qualifier `const`

should only pass the variable by value and return ONLY ONE value in each function for the principle of least of privilege

should not change the value of the variable inside the function if you don't really need to do that

## 7 MATLAB SIMULINK

### 7.1 Dec 10, 21

We could make different color for the time legend, according to the video in the link: <https://www.youtube.com/watch?v=8jBOD7CD5Z8>

How to make cascaded simulation in simulink?

How to use git for simulink, matlab?

## 8 Quan su ca map

### 8.1 Vid 1: Lam sao de han che chot loi som - Dec 14, 21

FA - Fundamental Analysis

TA - Technical Analysis

FA is more important than TA.

De hieu FA thi phai co 1 view tot ve business. Can phai tim hieu ve thi truong MOI NGAY. Kien thuc ve TA giup ta lua chon diem vao va diem ra chung khoan. Co 1 diem can phai het suc luu y: cac chart se bi CHI PHOI boi doi lai. TA co the tham khao, nhung co the ve duoc cac chart, dua tren luong tien doi

đầu tư các quỹ đầu tư.

Để tránh bán sớm cổ phiếu, thì chúng ta phải ước lượng được được giá bán trước khi mua. Và các bạn chỉ bán cổ phiếu khi giá cổ phiếu lớn hơn rất nhiều so với giá trị nội tại của công ty

Sử dụng các chỉ số PE PP, để đánh giá cổ phiếu, là cách cơ bản nhất. Hoặc là các chỉ số Dividen Yield, chỉ số trả cổ tức.  $PE < 10$  thì nên mua, trong trường hợp OCB. PE có thể tham khảo của trang web Vietstock, vietstock.vn Trang web giới thiệu cổ phiếu tốt: fabg (28:25)??, mirrage asset - hạn quốc (29:00) building on principles, cty ck Bán Việt, Doan Ta.

Cuốn sách Phương Pháp Đầu tư - warren buffet. (ebook)

Chart có thể bị vẽ bởi đôi mắt. Con số liệu trên báo cáo tài chính thì chỉ có doanh nghiệp mới vẽ được

## 9 WHAT'S NEXT

### 9.1 Dec 10, 21

- Watch 47 videos control Bootcamp - Bruton
- Answer Questions
- Fix GG Calendar - Done
- Watch ( 8-12 / 47 ) videos control Bootcamp - Bruton

### 9.2 Dec 06, 21

- Change ticket time - Done
- Sign Offer - Done
- Confirm the info of Gusto - Done
- Watch ( 1-8 / 47 ) videos control Bootcamp - Bruton

### 9.3 Nov 25, 21

- xem hết video của Embedded Linux, 1 ngày 2 videos, 5,6
- xem video Linear Algebra 2 videos 1 ngày, 8 9 10
- Github for simulink và matlab code
- setup cho stm32 toàn chung



## 10 Conclusion

## References

- [1] G. Strang. *Introduction to Linear Algebra*. Wellesley-Cambridge Press, 2021. ISBN: 9781733146654. URL: <https://books.google.com/books?id=c-1kzgEACAAJ>.