
Flip sheet instructions -F15



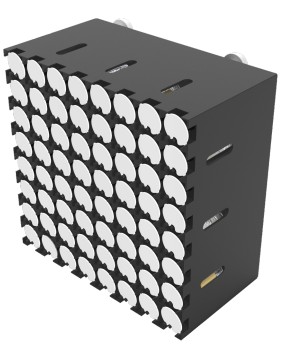

Module: FLIP DOT Module
ITEM: 15FLIPDOT-5V
Blade Size: Ø15mm
VOL: DC5V
WATT: 55W
Size: 122*122*80mm
Weight: 0.6 KG
Certifications: CE /ROHS

Security wizard

1. Please save the manual for future reference.
2. Before use, please open the packaging and carefully check whether the module has been damaged during transportation.
3. Before use, please ensure that the voltage and current used are consistent with the required voltage and current of the lamp.
4. Please ground the power cord to prevent static electricity.
5. Please stay away from flammable items during operation to avoid fire hazards.
6. When wiring or connecting plugs, please use safety products.
7. When the product malfunctions, please immediately stop using it and contact the nearest authorized technical center; Do not repair on your own. Non professional technicians may cause damage to the machine or malfunction.
8. Please do not touch the wires and lighting fixtures during operation to avoid accidents.
9. The rated voltage of this product is DC5V, and AC220V cannot be connected, otherwise it may cause fatal injury to the product!

Function Description

1. The flip chip module can be freely spliced into various shapes and is widely used for displaying patterns and logos on stage and in high-end luxury stores.
2. The product uses a combination of machinery and magnetic force to control the precise movement of the blades through MCU, making the movements of the blades neat, uniform, and full of texture.
3. Adopting the standard DMX512 protocol, it has good compatibility and stable performance.

Technical parameter

1	Operating voltage	DC5V	+/-5%
2	Product power	55W	Maximum power
3	Protection level	IP24	
4	Flip blade diameter	¢15mm	+/-0.3mm
5	Cell module pixel point	8*8	
6	Cell module size	122*122*80mm	
7	Flip frame rate	30 frames/second	Maximum speed
8	Flip life	More than 200 million times	
9	Visual distance	1-40 m (reference)	
10	Viewing Angle	120 degrees	
11	Ambient temperature	-25°C~45°C	
12	Control protocol	DMX512/SPI	Manual switching

Light control

1. Setting the address of the DMX module:

   (1) The address will be set and numbered before shipment;

   (2) Configure a dedicated address writer, and after connecting all flip flops, one click address can be set.
2. Each microcontroller occupies 64 channels of the DMA, with each channel corresponding to a chip.
3. The maximum number of signal series connections is 8PCS;


Lamp Control - Automatic Mode

Used for standalone demonstration and testing purposes, it can display letters and numbers as well as perform simple scanning of self-propelled programs.


Lamp Control - SPI Protocol

1. SPI is a serial communication protocol for lighting control (compatible with ucs1903/ws2811), without the need to write an address;
2. The maximum number of signal series connections is 16pcs;
3. The signals between the modules are connected by Ethernet cables, and the crystal heads of 568B are pressed at both ends;
4. The lamp power supply is equipped with a set of 2P power cables, and attention should be paid to the positive and negative polarity when connecting;


DIP switch setting method



Automatic mode:
DIP switch 1 ON/2 OFF/3 OFF



DMX512 mode:
DIP switch 1 OFF/2 ON/3 OFF



SPI mode:
DIP switch 1 OFF/2 OFF/3 ON


Note: Only one signal source can be selected at a time

Network port (568B)line sequence

Orange:	DMX512 signal A
Orange White:	DMX512 signal B
Blue:	DMX512 address
Blue and white:	GND
Green:	SPI signal
Green and white:	GND
Brown:	GND
Brown and white:	GND


Signal direction and layout instructions

1. Hold the flipping blade in hand, with the blade facing towards oneself, and the rear wire inlet end on the left. The upper right corner is the signal input end:
2. Z-shaped wiring method, as shown in the following figure.

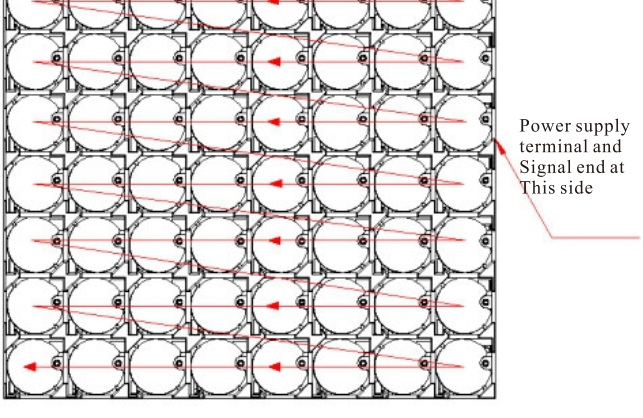


Product size

Installation reference instructions

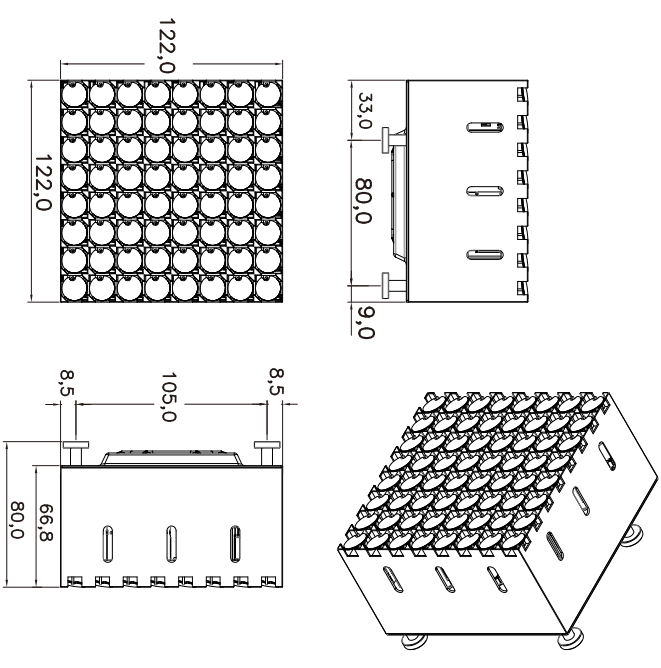

Installation reference suggestions

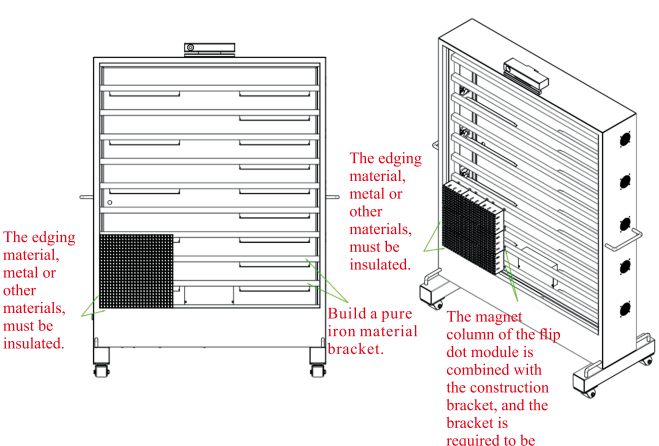

REMARKS

a. When using this machine, pay attention to the installation distance to avoid interference.

1. This product is installed using a magnetic suction column and requires a matching structure made of iron material. During installation, a single module is magnetically attached to the structure according to design requirements, making installation and maintenance convenient!
2. The installed height of the matched magnetic screw is 9.5mm. If you need to adjust the installation height, please contact our company's relevant technical personnel for confirmation!Packaging instructions

Packaging instructions

The product package contains the following accessories:

1. Magnetic screw rod 4PCS
2. One manual
3. Connect one signal wire between modules
4. One power cord for the module's power supply

Product Display

