


03 Firmware Flashing Method

In this lesson, we will learn how to flash firmware onto the WonderEcho Pro.

1. Flashing the Firmware

- 1) Begin by connecting the WonderEcho Pro to your computer using a Type-C data cable.

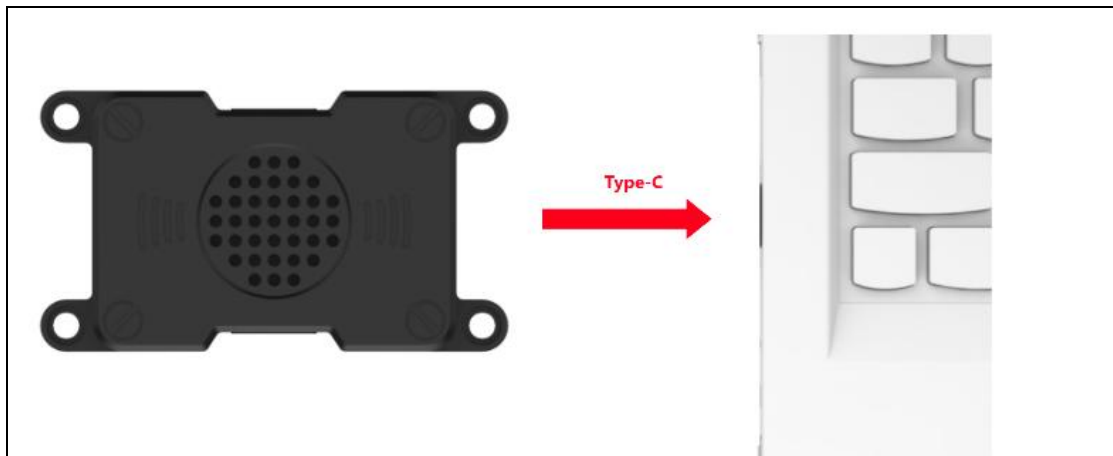


- 2) Open the file "PACK_UPDATE_TOOL.exe" located in "20.1 Voice Module Overview and Installation\ 05 Appendix\Firmware Flashing Tool". Select the "CI1302" chip and click "Firmware Upgrade."




For this example, we will use the “hello hiwonder firmware” (Wake word: “hello hiwonder”).

- 3) Select the firmware by locating the “hello hiwonder firmware (Wake word: hello hiwonder).bin” file under the “10.1.5 Appendix” path.

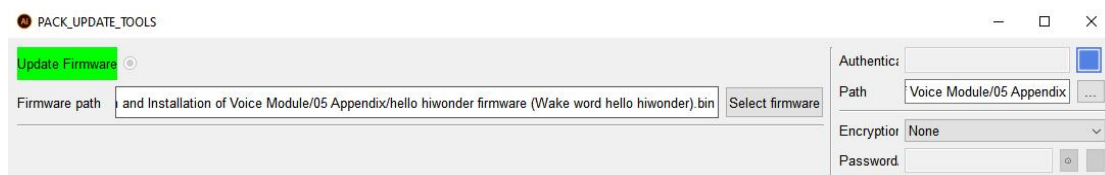

- 4) Identify the correct COM port and select it.

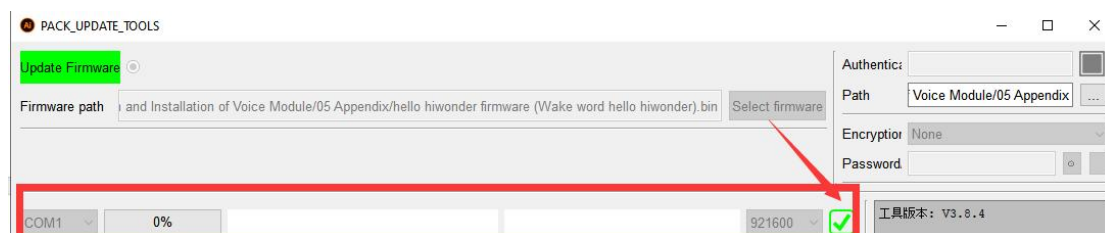


- 5) Press the RST button on the WonderEcho Pro to initiate the flashing process. Wait for the process to complete successfully.




2. Testing the Wake Word

After flashing the firmware, follow the steps in “10.1.5 Appendix\ Serial Port Debugging Tool” to install the serial port debugging tool. Then, follow the steps below to test whether the firmware is functioning correctly.

- 1) Connect the WonderEcho Pro to your computer’s USB port using a Type-C to USB adapter.

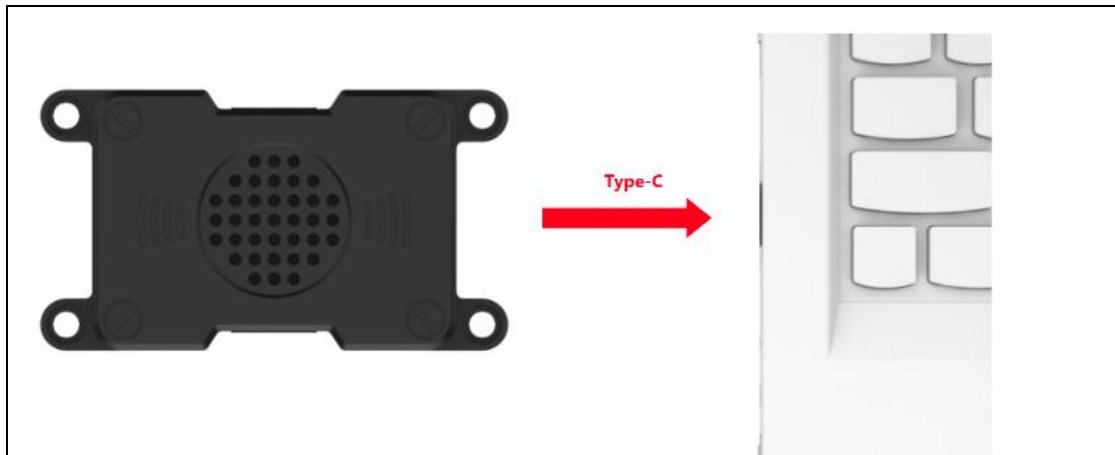

- 2) Open the Serial Port Utility, select the connected COM port (including CH340), and set the baud rate to 115200, as shown in the image below.

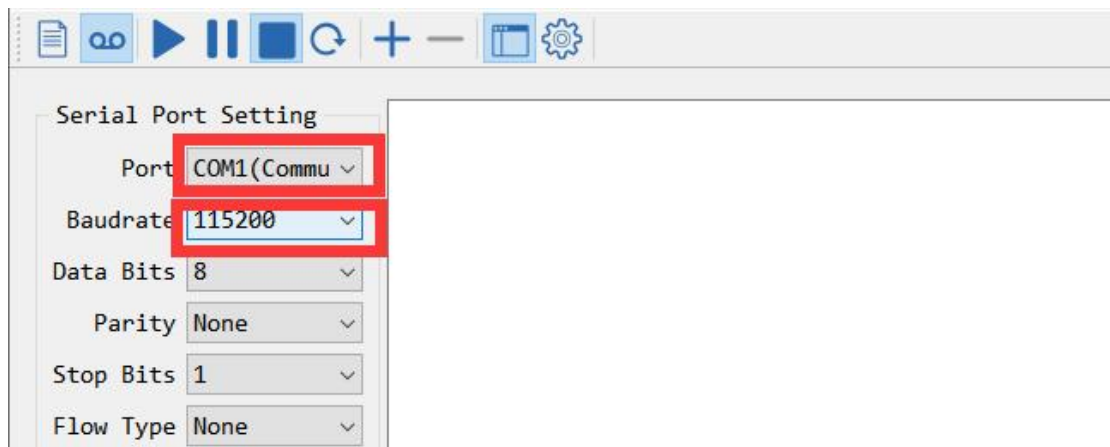

- 3) Say the wake word "hello hiwonder" as configured in the firmware settings. The corresponding flag information will appear on the right side (in hexadecimal format), confirming that the wake word was successfully recognized.

📄 🔊 ▶ ⏸ ⏹ ↺ + - 📊 ⚙

Serial Port Setting

Port COM1 (Commu

Baudrate 115200

Data Bits 8

Parity None

Stop Bits 1

Flow Type None

	A	B	C	D	E	F	G	H	I
1	语义标签	命令词	功能类型	播报语句	播报模式	发送协议	接收协议		
2	1	GREETING	欢迎语	Welcome	被	AA 55 01 00 FB	AA 55 01 00 FB		控制性
3	2	SLEEP	休息语	I'm going to take a break	被	AA 55 02 00 FB	AA 55 02 00 FB		
4	3	HELLO-HIWONDER	唤醒词	I'm here	被	AA 55 03 00 FB	AA 55 03 00 FB		
5									