Signals and Systems

Assignment 3

Fall 2020

MohammadKhalaji76@gmail.com - JaliliA370@gmail.com
Telegram Channel: @signals_systems_99

Question 1

Determine the Fourier Series coefficients a_k for the following periodic signals:

(a) $x(t) = 2sin(\frac{2\pi t}{6} + \frac{\pi}{6}) + 5cos(\frac{2\pi t}{12})$

(b) $x(t) = 2cos(\frac{2\pi t}{3} + \frac{\pi}{6})$

(c) .

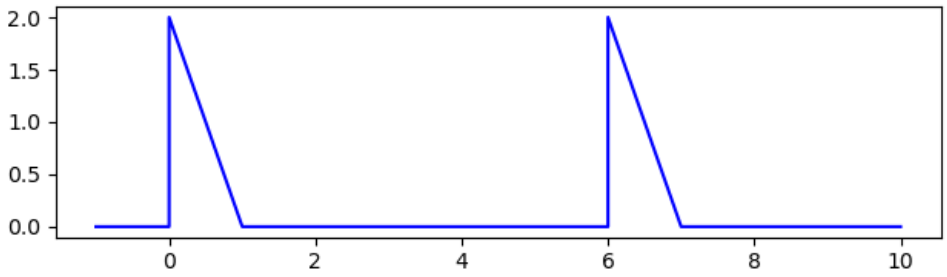

Question 2

Determine the Fourier Series coefficients a_k for $x(t)$:

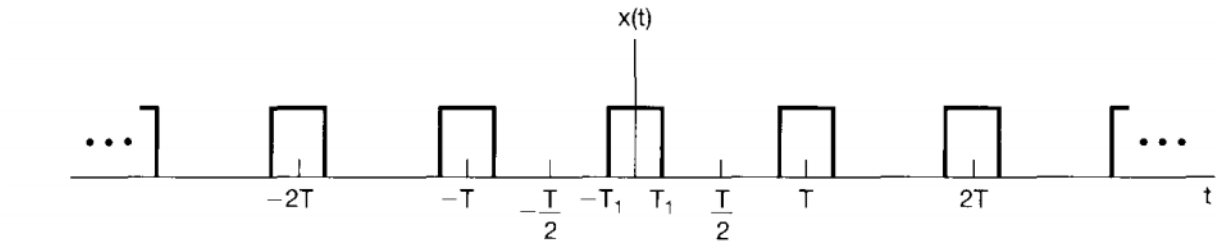

(a) .

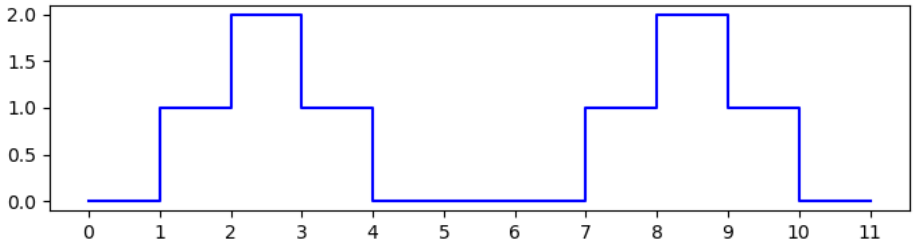

(b) .

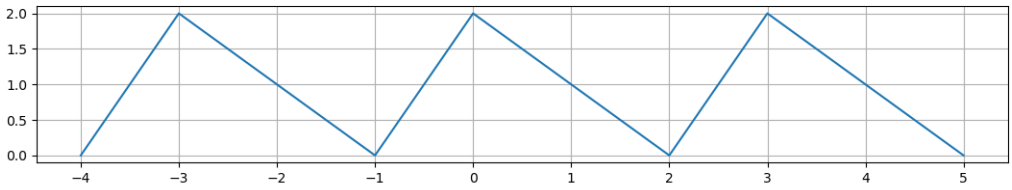

Question 3

(Textbook Section 3.8 - Fourier Series and LTI Systems)

Consider a signal $x(t)$ with Fourier Series representation like this:

$$a_{-2} = a_2 = \frac{1}{8}$$

$$a_{-1} = a_1 = \frac{1}{4}$$

$$a_0 = 1$$

And otherwise $a_k = 0$. Keep in mind that $T = 4$. Consider an LTI System with frequency response $H(j\omega)$ as plotted below.

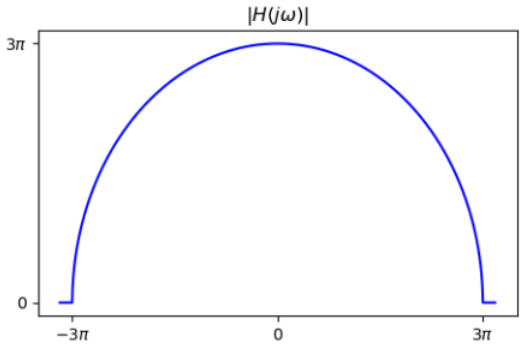

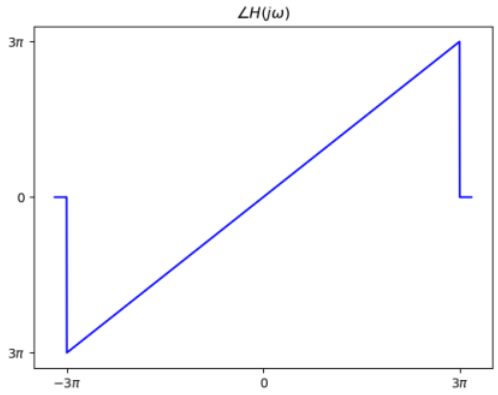

(a) Determine the output $y(t)$, and its Fourier Series coefficients b_k, if we apply $x(t)$ as input.

(b) Using Parseval's relation, determine the average power of $y(t)$.