


HIGH-TENSILE GALVANISED Z-PURLINS

High-Tensile Galvanised Z-Purlins are roll formed from high tensile Zinc coated steel with base steel Thickness of 1.60 mm, 2.00 mm and 2.50 mm.

They are suitable for roofing and wall cladding supports and for structural frames of buildings. Due to the light weight and high strength of the steel and the Zinc-coated surface, High-Tensile Galvanised Z-Purlins are versatile and economical and require minimal maintenance throughout the life span of the building.

MATERIAL SPECIFICATION

Base Steel Thickness	:	1.60 mm, 2.00 mm and 2.50 mm
Steel Grade	:	ASTM A446 Grade E Modified [AS 1397-G450]
Yield Stress	:	450 Mpa (minimum)
Zinc Coating	:	275g/m ² minimum coating mass
Mechanical Property	:	Y/P Min. 450 Mpa T/S Min. 510 Mpa E/LMin. 10%
Tolerances	:	Depth : 1 mm Flange width : 2 mm Length : 3 mm Hole Centres : 1.5mm

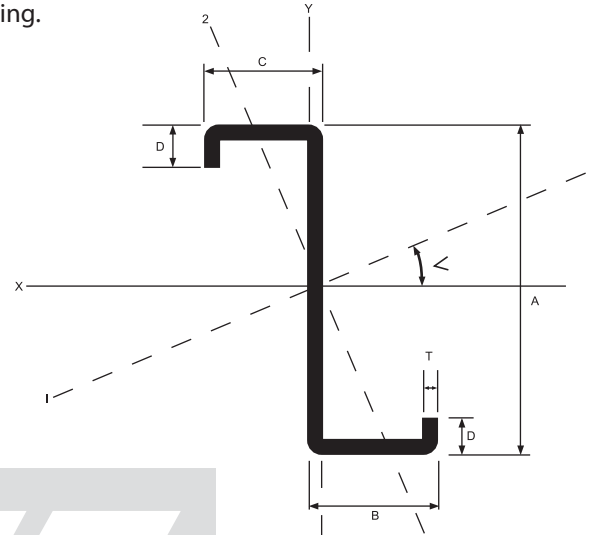

Dimensions											
Section Identification	Section Dimensions					Section Identification	Section Dimensions				
	A	B	C	D	t		A	B	C	D	t
	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm
BSZ 1610	102	57	51	16	1.6	BSZ 1615	153	74	67.5	16	1.6
BSZ 2010	102	57	51	16	2.0	BSZ 2015	153	74	67.5	16	2.0
BSZ 2510	102	57	51	16	2.5	BSZ 2515	153	74	67.5	16	2.5
BSZ 1612	127	57	51	16	1.6	BSZ 1620	203	74	67.5	16	1.6
BSZ 2012	127	57	51	16	2.0	BSZ 2020	203	74	67.5	16	2.0
BSZ 2512	127	57	51	16	2.5	BSZ 2520	203	74	67.5	16	2.5

Properties

Section Identification	Mass	Area	XX-AXIS			YY-AXIS			11 -AXIS	22-AXIS	ANGLE
			IX	ZX	RX	IY	ZY	RY	I1	I2	
	kg/m	mm ²	10 ⁶ mm ⁴	10 ³ mm ³	mm	10 ⁶ mm ⁴	10 ³ mm ³	mm	10 ⁶ mm ⁴	10 ⁶ mm ⁴	
BSZ 1610	3.05	373	0.62	12.16	40.6	0.250	4.94	25.8	0.70	0.160	24.5
BSZ 2010	3.72	442	0.77	15.14	41.8	0.310	6.22	26.5	0.98	0.190	24.4
BSZ 2510	4.60	534	0.96	18.84	42.4	0.380	7.60	26.6	1.11	0.230	24.3
BSZ 1612	3.20	408	1.03	16.18	50.1	0.261	5.20	25.3	1.04	0.243	22.9
BSZ 2012	3.94	510	1.28	20.16	51.1	0.380	7.60	27.3	1.30	0.351	22.7
BSZ 2512	4.89	638	1.60	25.20	52.2	0.470	9.45	27.5	1.63	0.434	22.6
BSZ 1615	4.01	512	2.01	26.30	62.7	0.646	9.69	35.5	2.32	0.335	23.3
BSZ 2015	4.92	598	2.50	32.70	65.4	0.811	12.2	37.2	2.86	0.451	22.7
BSZ 2515	6.01	731	3.12	40.70	66.2	1.031	15.6	38.1	3.53	0.619	22.1
BSZ 1620	4.70	572	3.86	38.10	82.6	0.635	9.52	33.5	4.15	0.350	15.9
BSZ 2020	5.74	698	4.85	47.80	84.1	0.811	12.2	34.4	5.16	0.501	15.0
BSZ 2520	7.03	855	6.05	59.60	85.1	1.021	15.4	34.9	6.40	0.675	14.2