


Z-PURLINS

HIGH-TENSILE GALVANISED Z-PURLINS (OTHER AVAILABLE SIZES)

Section Identification	Section Dimensions					Area mm ²	Mass Per Unit length kg/m
	A	B	C	D	t		
	mm	mm	mm	mm	mm		
SZ 100-16	102	53	49	14	1.6	344	2.78
SZ 100-20	102	53	48	14	2.0	430	3.45
SZ 150-16	152	65	61	16	1.6	472	3.84
SZ 150-20	152	65	61	16	2.0	590	4.77
SZ 150-25	152	66	60	16	2.5	738	5.93
SZ 200-16	203	79	74	20	1.6	592	4.82
SZ 200-20	203	79	74	20	2.0	750	6.00
SZ 200-25	203	79	73	20	2.5	938	7.46
SZ 250-20	250	78	72	20	2.0	840	6.76
SZ 250-25	250	78	72	20	2.5	1050	8.24

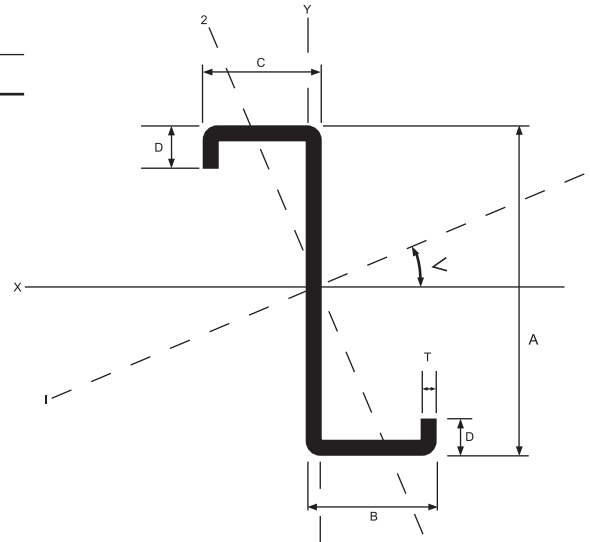

Section Identification	Section Dimensions					Area mm ²	Mass/ unit length kg/m	Second Moment of Area		Section Modulus		Radius of Gyration		Form Factor Q
	A	B	C	D	t			IX	IY	ZX	ZY	RX	RY	
	mm	mm	mm	mm	mm			10 ⁶ mm ⁴	10 ⁶ mm ⁴	10 ³ mm ³	10 ³ mm ³	mm	mm	
SZ 100-16	102	53	49	14	1.6	344	2.78	0.570	0.210	11.18	4.02	40.7	24.7	0.840
SZ 100-20	102	53	48	14	2.0	430	3.45	0.702	0.262	13.76	5.03	40.4	24.7	0.891
SZ 150-16	152	65	61	16	1.6	472	3.84	1.701	0.409	22.39	6.37	60.0	29.4	0.703
SZ 150-20	152	65	61	16	2.0	590	4.77	2.111	0.513	27.77	8.02	59.8	29.5	0.771
SZ 150-25	152	66	60	16	2.5	738	5.93	2.608	0.648	34.31	10.00	59.5	29.6	0.823
SZ 200-16	203	79	74	20	1.6	592	4.82	3.756	0.663	37.00	8.47	79.7	33.5	0.578
SZ 200-20	203	79	74	20	2.0	750	6.00	4.742	0.888	46.72	11.38	79.5	34.4	0.667
SZ 200-25	203	79	73	20	2.5	938	7.46	5.872	1.114	57.85	14.33	79.1	34.5	0.737
SZ 250-20	250	78	72	20	2.0	840	6.76	7.665	0.852	61.32	11.07	95.5	31.9	0.599
SZ 250-25	250	78	72	20	2.5	1050	8.24	9.522	1.075	76.18	14.01	95.2	32.0	0.658