


HIGH-TENSILE GALVANISED C-PURLINS

High-Tensile Galvanised C-Purlins (Sections) are roll formed from high-tensile Zinc coated steel with base steel Thickness of 1.60 mm, 2.00 mm and 2.50 mm.

They are suitable for roofing and wall cladding supports and for structural frames of buildings. Due to the light weight and high strength of the steel and the Zinc-coated surface. High-Tensile Galvanised C-Purlins are versatile and economical and require minimal maintenance throughout the life span of the building.

MATERIAL SPECIFICATION

Base Steel Thickness	:	1.60 mm, 2.00 mm and 2.50 mm
Steel Grade	:	ASTM A446 Grade E Modified [AS 1397-G450]
Yield Stress	:	450 Mpa (minimum)
Zinc Coating	:	275g/m ² minimum coating mass
Mechanical Property	:	Y/P Min. 450 Mpa T/S Min. 510 Mpa E/L Min. 10%
Tolerances	:	Depth : ± 1 mm Flange width : ± 2 mm Length : ± 3 mm Hole Centres : ± 1.5mm

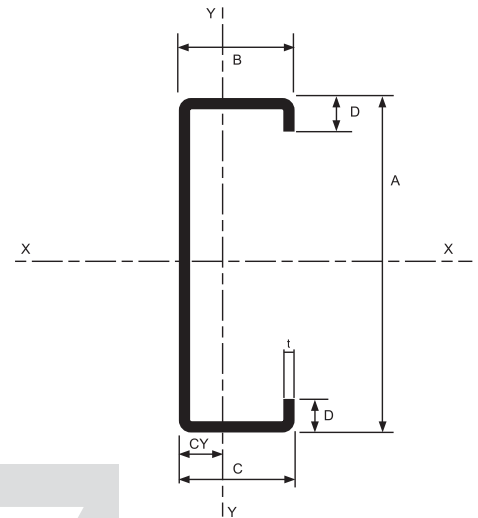

Dimensions											
Section Identification	Section Dimensions					Section Identification	Section Dimensions				
	A	B	C	D	t		A	B	C	D	t
	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm
BSC 1610	102	51	51	16	1.6	BSC 1615	153	71	71	16	1.6
BSC 2010	102	51	51	16	2.0	BSC 2015	153	71	71	16	2.0
BSC 2510	102	51	51	16	2.5	BSC 2515	153	71	71	16	2.5
BSC 1612	127	51	51	16	1.6	BSC 1620	203	71	71	16	1.6
BSC 2012	127	51	51	16	2.0	BSC 2020	203	71	71	16	2.0
BSC 2512	127	51	51	16	2.5	BSC 2520	203	71	71	16	2.5

Properties

Section Identification	Mass	Area	XX-AXIS			YY-AXIS			CY
			IX	ZX	RX	IY	ZY	RY	
	kg/m	mm ²	10 ⁶ mm ⁴	10 ³ mm ³	mm	10 ⁶ mm ⁴	10 ³ mm ³	mm	
BSC 1610	3.05	373	0.60	11.77	40.6	0.14	4.11	19.5	18.24
BSC 2010	3.72	442	0.76	14.84	41.9	0.18	5.46	20.3	18.60
BSC 2510	4.60	534	0.95	18.56	42.7	0.22	7.01	20.9	19.05
BSC 1612	3.20	408	1.00	15.72	50.0	0.15	4.29	19.4	11.08
BSC 2012	3.94	510	1.25	19.67	50.1	0.19	5.49	19.5	16.42
BSC 2512	4.89	638	1.56	24.56	50.1	0.24	7.13	19.6	17.35
BSC 1615	4.01	512	1.99	26.30	62.3	0.34	6.90	25.8	21.69
BSC 2015	4.92	598	2.48	32.42	64.4	0.41	8.61	26.2	23.36
BSC 2515	6.01	731	3.11	40.65	65.2	0.50	10.24	26.3	24.11
BSC 1620	4.70	572	3.80	37.44	80.8	0.37	7.09	25.1	19.18
BSC 2020	5.74	698	4.75	46.80	82.5	0.45	9.39	25.4	20.16
BSC 2520	7.03	855	5.94	58.52	83.4	0.61	12.23	26.8	20.80