
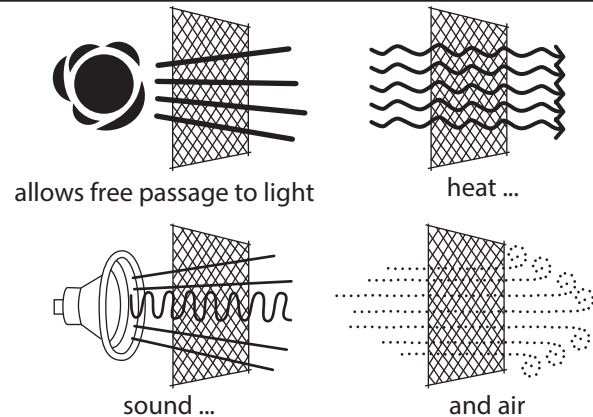


EXPANDED METAL

PROPERTIES

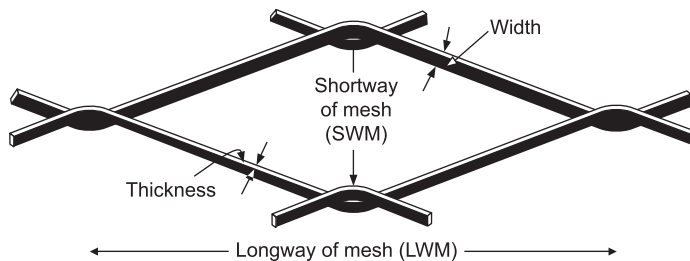


The main feature of Expanded Metal is that the mesh is formed from a single piece of metal. A metal sheet, plate or foil is passed through an expanding machine having a serrated knife which shears and stretches the metal into strands but leaves them joined at the knuckles.


This high strength-to-weight ratio material is technically functional in many protective and structural applications. The jointless expanded metal ensures that every strand will perform as a structural member, distributing the load over a wide area.

Advantages


1. No separate parts. Nothing to work loose, no fretting strands. Stays together under stress, even when cut into irregular shapes.
2. The strands are angled to the plane of the complete sheet of mesh in a truss-like formation which ensures excellent load bearing properties.
3. Protection. The range includes meshes small enough to exclude even the smallest fingers where moving parts are within finger length of the guards.
4. Screening effect - especially in anti-dazzle fences.
5. Reinforcement. The meshes anchor immovably and the angle strand formation further strengthens the reinforced material.
6. Provides anti-slip surface e.g. catwalk, stairtreads and ramps.

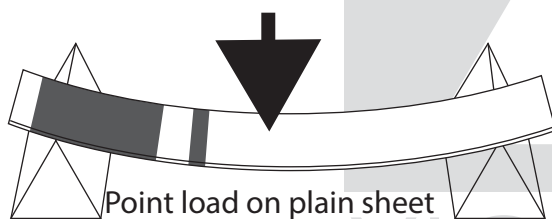


Point load on plain sheet

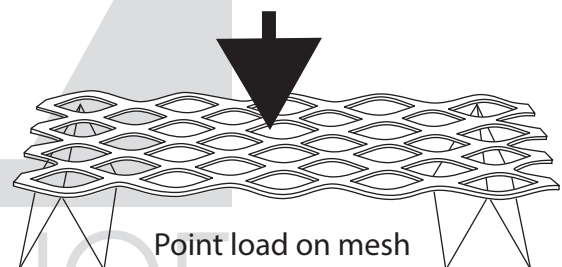




Point load on mesh

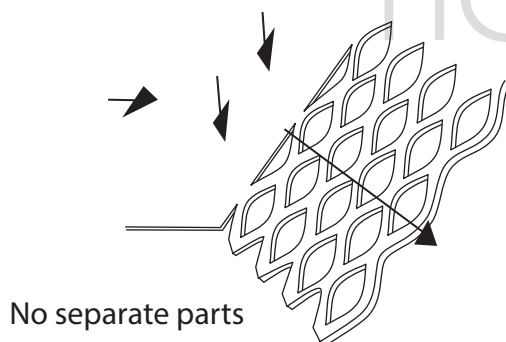

No separate parts

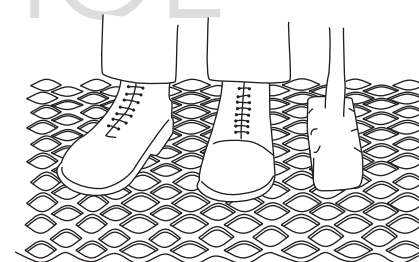

Anti-slip

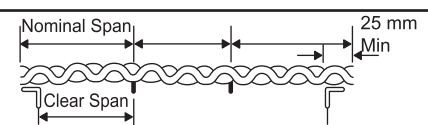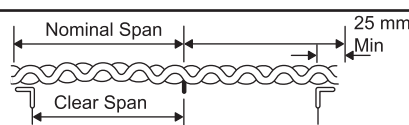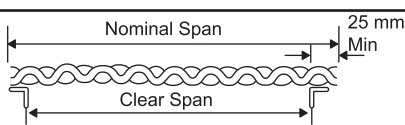

QUICK SELECTION TABLE FOR WALKWAYS

LOAD	NOMINAL SPAN OF MESH - SIMPLY SUPPORTED		
	600 mm	750 mm	900 mm
Distributed - 2.5 kPa	1000 - G1201 - 1502	1000 - G 1201	1000 (3.8) - 1501
Distributed - 5.0 kPa	1000 - G 1201 - 1502	1000 (3.8)	-
Concentrated - 1.1 kN @ 1.2 m CTRS	1000, 1502, 1000 (3.8)	1000 - G 1201 - 1501	1000 (3.8) - 1501

* These meshes whilst safe for the spans shown, may be springy, underfoot.