


WROUGHT STEEL BUTT-WELDING FITTINGS

Standard Sizes of Butt-Welding Fittings (Metric Unit: mm)

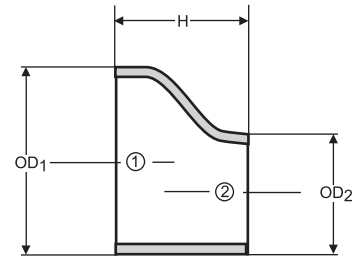

REDUCERS

ANSI B 16.9

Nominal Pipe Size ①x ②	Large End	Small End	Length	Approx. Weight kg	
	OD ₁	OD ₂	H	STD	XS
5 x 4	141.3	114.3	127.0	2.50	3.55
5 x 3½		101.6		2.39	3.38
5 x 3		88.9		2.28	3.21
5 x 2½		73.0		2.14	3.02
5 x 2		60.3		2.03	2.86
6 x 5	168.3	141.3	139.7	3.64	5.46
6 x 4		114.3		3.35	5.02
6 x 3½		101.6		3.22	4.82
6 x 3		88.3		3.09	4.62
6 x 2½		73.0		2.94	4.38
8 x 6	219.1	168.3	152.4	5.78	8.75
8 x 5		141.3		5.45	8.24
8 x 4		114.3		5.15	7.77
8 x 3½		101.6		5.01	7.55
10 x 8		219.1		9.74	13.1
10 x 6	273.1	168.3	177.8	8.96	12.1
10 x 5		141.3		8.58	11.3
10 x 4		114.3		8.21	11.0
12 x 10		273.1		13.9	18.3
12 x 8	323.9	219.1	203.2	12.9	17.0
12 x 6		168.3		12.1	15.9
12 x 5		141.3		11.6	15.3
14 x 12		323.9		25.5	33.8
14 x 10	355.6	273.1	330.2	23.7	31.4
14 x 8		219.1		21.9	27.7
16 x 14		355.6		31.0	41.1
16 x 12	406.4	323.9	355.6	29.8	39.5
16 x 10		273.1		28.0	37.0
18 x 16		406.4		37.7	50.1
18 x 14	457.2	355.6	381.0	35.7	47.4
18 x 12		323.9		34.5	45.7

Note: (1) Wall thickness and inside diameter conform to ANSI B 36.10.

(2) Shows available sizes of eccentric reducer.