


STAINLESS STEEL FITTINGS

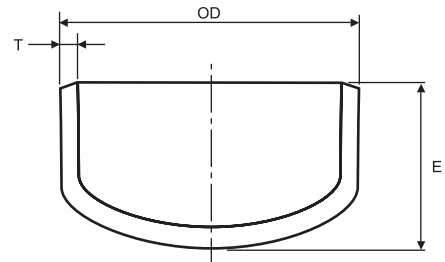

CAPS (24" and Smaller)

Dimensions						Unit: inch	Weights				Unit: kg
Nominal Pipe Size	Outside Dia. (OD)	Wall Thickness (T)				Length E	Nominal Pipe Size	Sch.5S	Sch.10S	Sch.40S	Sch.80S
		Sch.5S	Sch.10S	Sch.40S	Sch.80S						
1/2	0.840	0.065	0.083	0.109	0.147	1.00	1/2	0.036	0.040	0.046	0.045
3/4	1.050	0.065	0.083	0.113	0.154	1.00	3/4	0.049	0.052	0.059	0.086
1	1.315	0.065	0.109	0.133	0.179	1.50	1	0.053	0.090	0.109	0.109
1 1/4	1.660	0.065	0.109	0.140	0.191	1.50	1 1/4	0.066	0.113	0.145	0.159
1 1/2	1.900	0.065	0.109	0.145	0.200	1.50	1 1/2	0.076	0.130	0.171	0.222
2	2.375	0.065	0.109	0.154	0.218	1.50	2	0.099	0.168	0.234	0.344
2 1/2	2.875	0.083	0.120	0.203	0.276	2.00	2 1/2	0.169	0.242	0.420	0.512
3	3.500	0.083	0.120	0.216	0.300	2.50	3	0.253	0.362	0.664	0.888
4	4.500	0.083	0.120	0.237	0.337	3.00	4	0.409	0.585	1.17	1.51
5	5.563	0.109	0.134	0.258	0.375	3.50	5	0.805	0.978	1.90	2.89
6	6.625	0.109	0.134	0.280	0.432	4.00	6	1.11	1.35	2.83	4.24
8	8.625	0.109	0.148	0.322	0.500	5.00	8	1.74	2.49	5.11	7.76
10	10.750	0.134	0.165	0.375	0.500	6.00	10	3.26	3.84	8.92	13.11
12	12.750	0.156	0.180	0.375	0.500	7.00	12	5.47	6.15	14.10	17.94
14	14.000	0.156	0.188	0.375*	0.500**	7.50	14	7.19	7.85	16.35	21.11
16	16.000	0.165	0.188	0.375*	0.500**	8.00	16	10.99	9.56	18.60	25.73
18	18.000	0.165	0.188	0.375*	0.500**	9.00	18	13.92	12.10	23.54	32.57
20	20.000	0.188	0.218	0.375*	0.500**	10.00	20	17.19	17.90	29.06	40.21
24	24.000	0.218	0.250	0.375*	0.500**	12.00	24	27.43	30.15	41.85	57.86

*Std **XS

For fittings made from seamless and welded pipes ASTM A312 shall be applied as follows.

Grade	Carbon max, per cent	Mang- anese, max, percent	Phos- phorus per cent	Sulfur, max, per cent	Silicon, max, per cent	Chromium, percent	Nickel, percent	Other Elements	T.S Min ksi	Y.S Min ksi
TP 304	0.08	2.00	0.040	0.030	0.75	18.0~20.0	8.00~11.0		75	30
TP 304L	0.035	2.00	0.040	0.030	0.75	18.0~20.0	8.00~13.0		70	25
TP 316	0.08	2.00	0.040	0.030	0.75	16.0~18.0	11.00~14.0	Mo 2.0~3.0	75	30
TP 316L	0.035	2.00	0.040	0.030	0.75	16.0~18.0	10.00~15.0	Mo 2.0~3.0	70	25
TP 321	0.08	2.00	0.040	0.030	0.75	17.0~20.0	9.00~13.0	Ti min. CX5 max. 0.60	75	30
TP 347	0.08	2.00	0.040	0.030	0.75	17.0~20.0	9.00~13.0	Cb+Ta min. CX10 max. 1.00	75	30