

5 V INPUT / PROTECTION

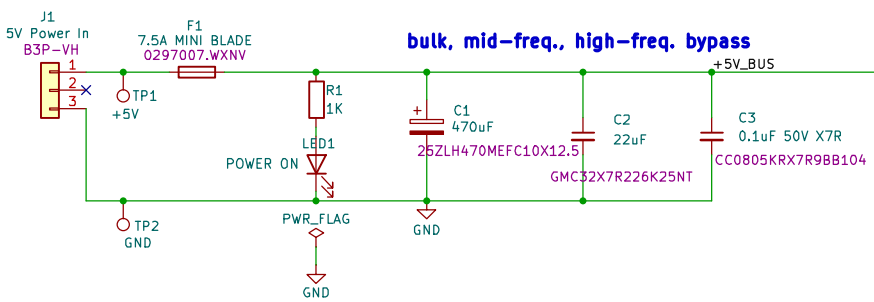

SIX FUSED 5 V OUTPUTS

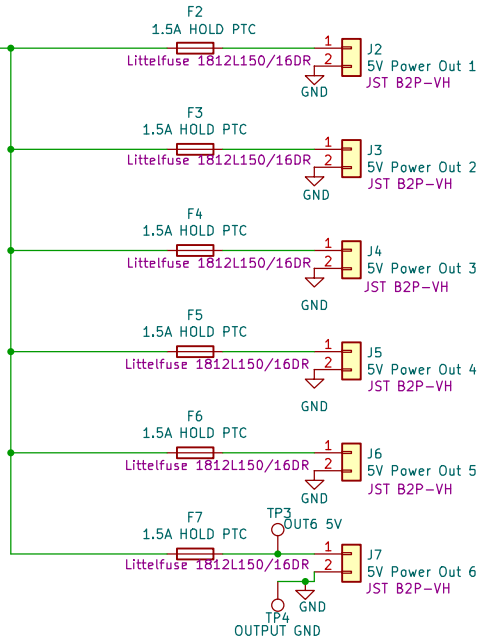

All output connector pin 1 = +5V; pin 2 = GND.

DESIGN NOTES:
1. Board distributes regulated 5 V power for one panel column (six branches of 56 LEDs).
2. F1 is a 7.5 A replaceable input fuse; F2–F7 are 1.5 A hold resettable branch protectors.
3. C1/C2/C3 provide complementary bulk, mid-frequency, and high-frequency bypassing.
4. Each YYZ_PIXEL chain also provides local bulk and IC decoupling at its load.
5. Use 2 oz copper, broad +5V/GND pours, short high-current paths, and 2.0 mm FR-4.
6. Verify every connector polarity against the actual harness before assembly.
7. Board outline is 140 mm x 50 mm; confirm hinge and cable clearance before fabrication.
8. LED1 indicates that fused 5 V power is present; it is not a safe-to-service interlock.

PCB outline: 140 mm x 50 mm; verify hinge and cable clearance
Direct 5V input; six individually fused 5V outputs
Allan M Schwartz
Sheet: /
File: yahrzeit_power_dist.kicad_sch

Title: Yahrzeit Wall Power Distribution

Size: A4	Date: 2026-09-10	Rev: A-DRAFT
KiCad E.D.A. 10.0.0		Id: 1/1