


Sheet

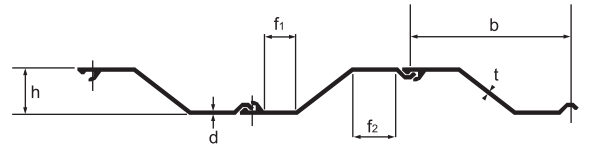

Frodingham Steel Sheet Piling - Dimensions and Properties

Section	b mm (nom.)	h mm (nom.)	d mm	t mm (nom.)	f ₁ mm (nom.)	f ₂ mm (nom.)	Section area sq. cm per metre of wall	Unit weight kg per linear metre		Moment of inertia cm ⁴ per metre	Modulus of section cm ³ per metre
1BXN	476	143	12.7	12.7	78	123	166.5	62.1	130.4	4,919	688
1N	483	170	9.0	9.0	105	137	126.0	47.8	99.1	6,048	713
2N	483	235	9.7	8.4	97	149	143.0	54.2	112.3	13,513	1,150
3N	483	283	11.7	8.9	89	145	175.0	66.2	137.1	23,885	1,688
3NA	483	305	9.7	9.5	96	146	165.0	62.6	129.8	25,687	1,690
4N	483	330	14.0	10.4	77	127	218.0	82.4	170.8	39,831	2,414
5	425	311	17.0	11.9	89	118	302.0	100.8	236.9	49,262	3,168

Rolling margin is within 4 per cent over and 2.5 per cent under theoretical mass; 75 mm over and 50 mm under on length.

*Please check on availability before specifying.

Special Sections

Sections may be "rolled up" (thickened) or "rolled down" (thinned) by special arrangement to increase or decrease the thickness of both webs and flanges by a maximum of 0.8 mm.

INTERLOCKING SECTIONS

Section (Tongue)	Interlocks with (Groove)	Section (Groove)	Interlocks with (Tongue)
1N	2N, 3NA	1N	NONE
1BXN	3N, 4N	1BXN	2N, 3NA
2N	1BXN, 3N, 3NA	2N	1N, 3NA
3N	4N	3N	1BXN, 2N, 3NA
3NA	3N, 1BXN, 2N	3NA	1N, 2N
4N	5	4N	1BXN, 3N
5	NONE	5	4N

RECOMMENDED MAXIMUM LENGTHS FOR DRIVING

The maximum length for each piling section depends upon the type of strata encountered, penetration required, and the type of construction for which the piling is designed. The following table is provided as a guide only.

In hard driving conditions it may be necessary to move up a section size to achieve the required penetration. Alternatively Grade 50A may be used.

Section	Approx. max. length (metres)	Section	Approx. max. length (metres)	Section	Approx. max. length (metres)
6W	9	32W	26	2N	14
9W	14	3	18	3N	18
12W	17	4A	23	3NA	18
16W	20	6	30	4N	23
20W	23	1N	11	5	24
25W	23	1BXN	14		