



STEEL PILES

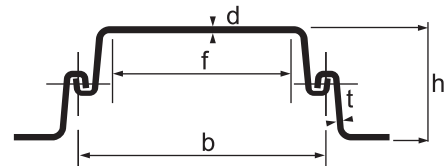

LARSEN STEEL SHEET PILING - Dimensions and Properties

Section	b mm (nom.)	h mm (nom.)	d mm	t mm (nom.)	f Flat of pan mm	Section area sq. cm per metre of wall	Unit weight		Combined moment of inertia cm ⁴ per metre	Modulus of section cm ³ per metre
							kg per linear metre	kg per sq. metre of wall		
6W	525	212	7.8	6.4	331	108	44.7	85.1	6,371	601
9W	525	260	8.9	6.4	343	124	51.0	97.1	11,726	902
12W	525	306	9.0	8.5	343	147	60.4	115.1	18,345	1,199
16W	525	348	10.5	8.9	341	166	68.3	130.1	27,857	1,601
20W	525	400	11.3	9.4	333	188	77.3	147.2	40,180	2,009
25W	525	454	12.1	10.5	317	213	87.9	167.4	56,727	2,499
32W	525	454	17.0	10.5	317	252	103.6	197.4	73,003	3,216
3	400	250	14.1	8.5	248	198	62.2	155.5	16,980	1,360
4A	400	381	15.7	9.6	219	236	74.0	185.1	44,916	2,360
6	420	440	22.0	14.0	248	370	122.0	290.5	92,452	4,200
6	420	440	25.4	14.0	251	397	131.0	311.8	102,861	4,675
6	420	440	28.6	14.0	251	421	138.7	330.2	111,450	5,066
GSP3	400	250	13.0	8.6	271	191	60.0	150.0	16,800	1,340

Rolling margin is within 4 per cent over and 2.5 per cent under theoretical mass; 75mm over and 50 mm under on length.

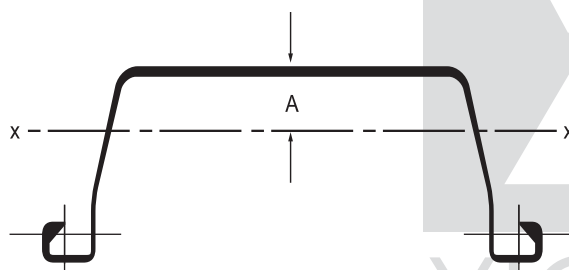

Section	Area cm ²	Dimension A mm	Moment of inertia about axis XX cm ⁴	Section modulus about axis XX cm ³
6W	57	45	1,247	155
9W	65	50	2,031	204
12W	77	62	3,240	288
16W	87	66	4,495	347
20W	98	79	6,737	467
25W	112	93	9,605	607
32W	132	82	10,580	626
3	79	49	2,227	227
4A	94	76	5,650	412
6 (22.0)	155	90	12,437	770
6 (25.4)	167	85	12,882	777
6 (28.6)	177	82	13,185	780
GSP3	76.4	--	2,220	223

INTERLOCKING SECTIONS

Section	Interlocks with	Section	Interlocks with
6W	9W, 12W, 16W, 4A	25W	12W, 16W, 20W, 32W, 3, 4A, 6
9W	6W, 12W, 16W, 4A	32W	12W, 16W, 20W, 25W, 3, 4A, 6
12W	6W, 9W, 16W, 20W, 25W, 32W, 4A	3	20W, 25W, 32W, 4A
16W	6W, 9W, 12W, 20W, 25W, 32W, 4A	4A	6W, 9W, 12W, 16W, 20W, 25W, 32W, 3
20W	12W, 16W, 25W, 32W, 3, 4A, 6	6	20W, 25W, 32W