SD batch Downloading


Purpose: Use SD card for batch downloading as production. Convenient.

Run the software “Download Assistant”.


1. Connect the terminal with the computer by USBmini port.

2. Plug the power supply by DB9 cable. (The voltage range is from 4.5V to 20V, suggesting working voltage is 12V.)

3. Click “Download Assistant” to run it.

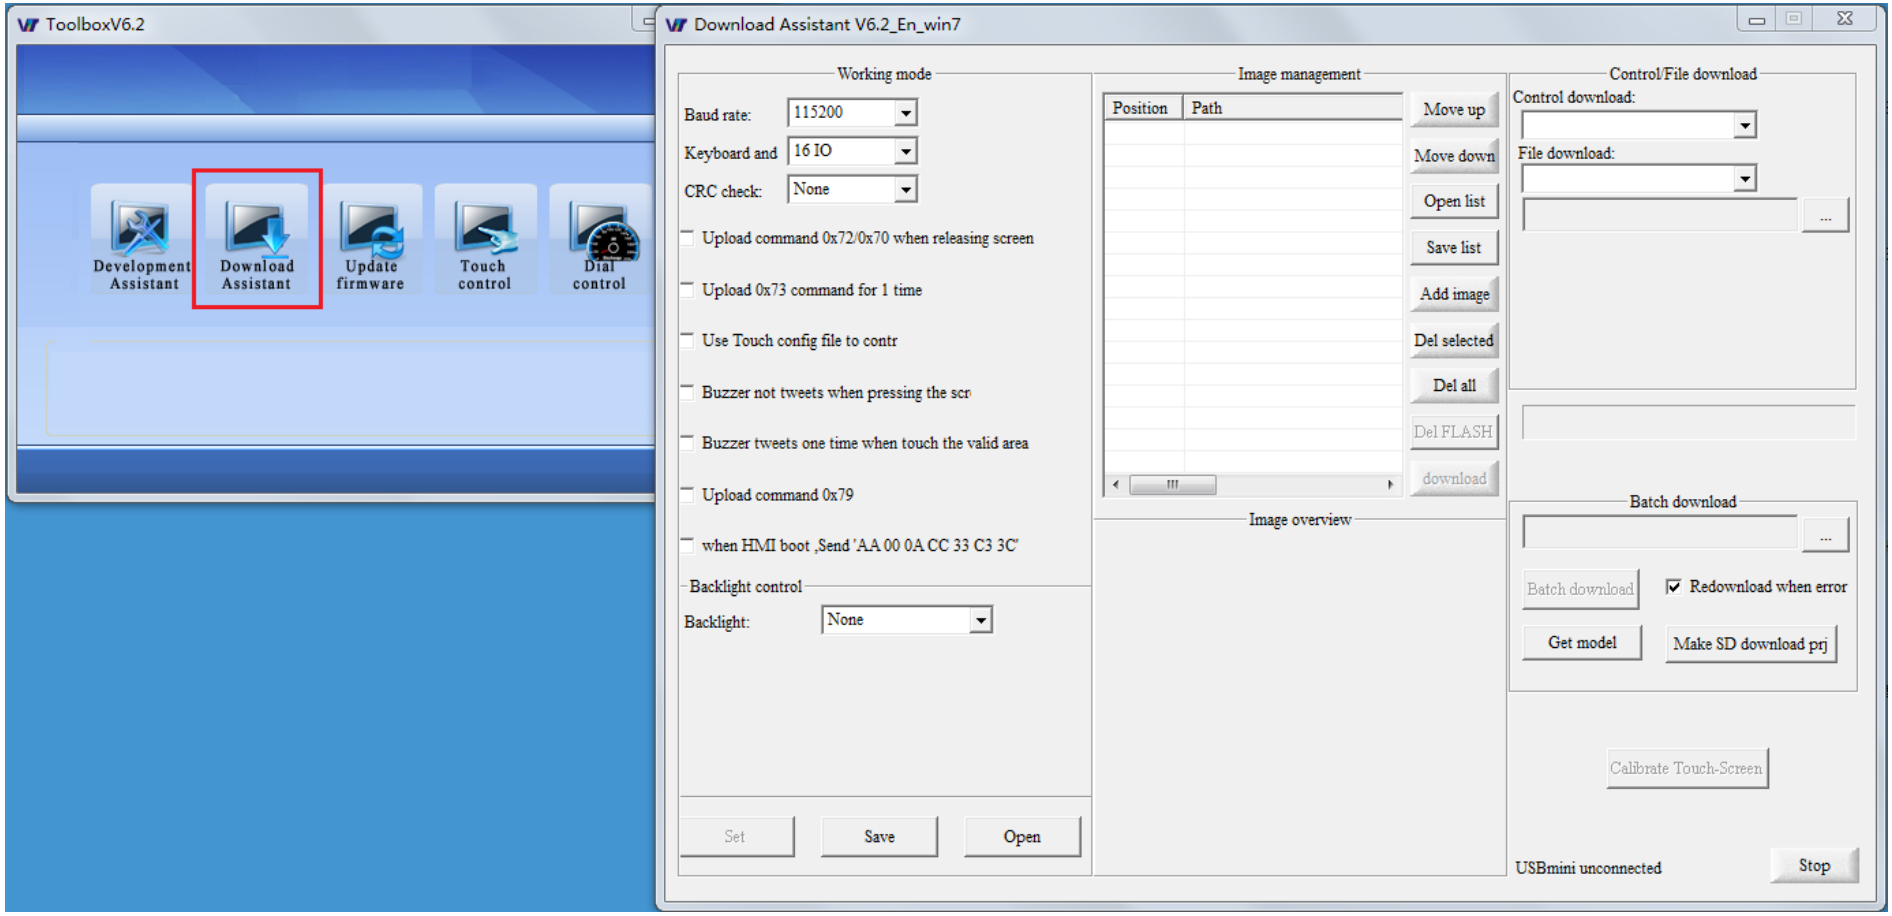

4. Batch downloading area in PART 4: Download files by SD card.

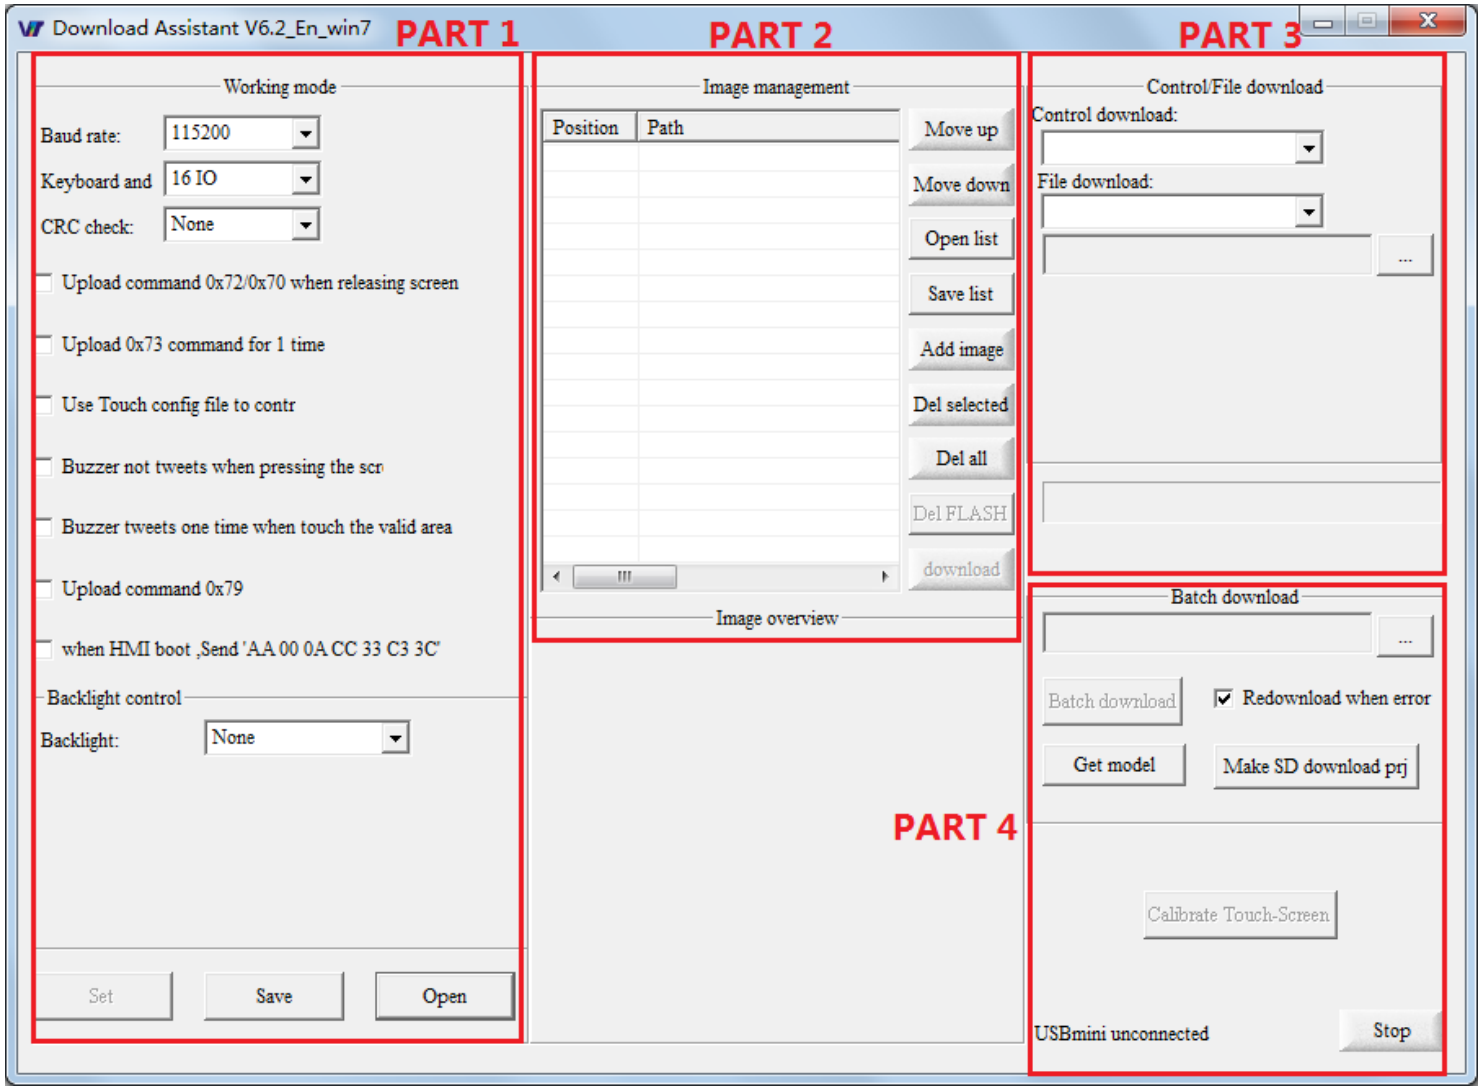

5. SD card Downloading

Note: a. The Batch downloading are suitable for batch production.
b. The example file in the folder of Batch Downloading Project should be deleted before you copy your application files into the folders.
c. All of folder name and file name in Batch Downloading Project can't be changed.
d. The SD card should be less than or equal to 2GB.

Process


(1) Copy all files into different folder of the Batch Downloading Project according to their categories

Such as: 1. Images and List File are saved into "Image File" folder.
Note: The image should be ".bmp" format file, and its resolutions should be same with the screen's.
The List File created by touch-control software must be necessary.
2. Touch file is saved into "Touch Control Configuration File" folder
3. Icon file is saved into "Icon Configuration File" folder
4. Font file is saved into "Custom Font Library" folder
Note: The storage position of font file can be set in the file name.
For example: **00-**Arial_12_24.dzk
5. Working mode 0xE0 command is defined in Custom Instruction file.


(2) Open Download Software and Create the SD batch downloading file.

1. Choose the "Batch download" Button. **(See 01 in the Picture-09)**
2. Select the "Batch download project" folder where you save the files. **(See 02 in the Picture-09)**
3. Click "YES" button. **(See 03 in the Picture-09)**
4. Click "Make SD project" button. **(See 04 in the Picture-09)**
5. Testing. If clicking "Batch Download" button, all of files in "Batch download project" can be downloaded into memory through the mini USB directly, So it can test whether the batch downloading file works well. **(See 05 in the Picture-09)**

Picture-09

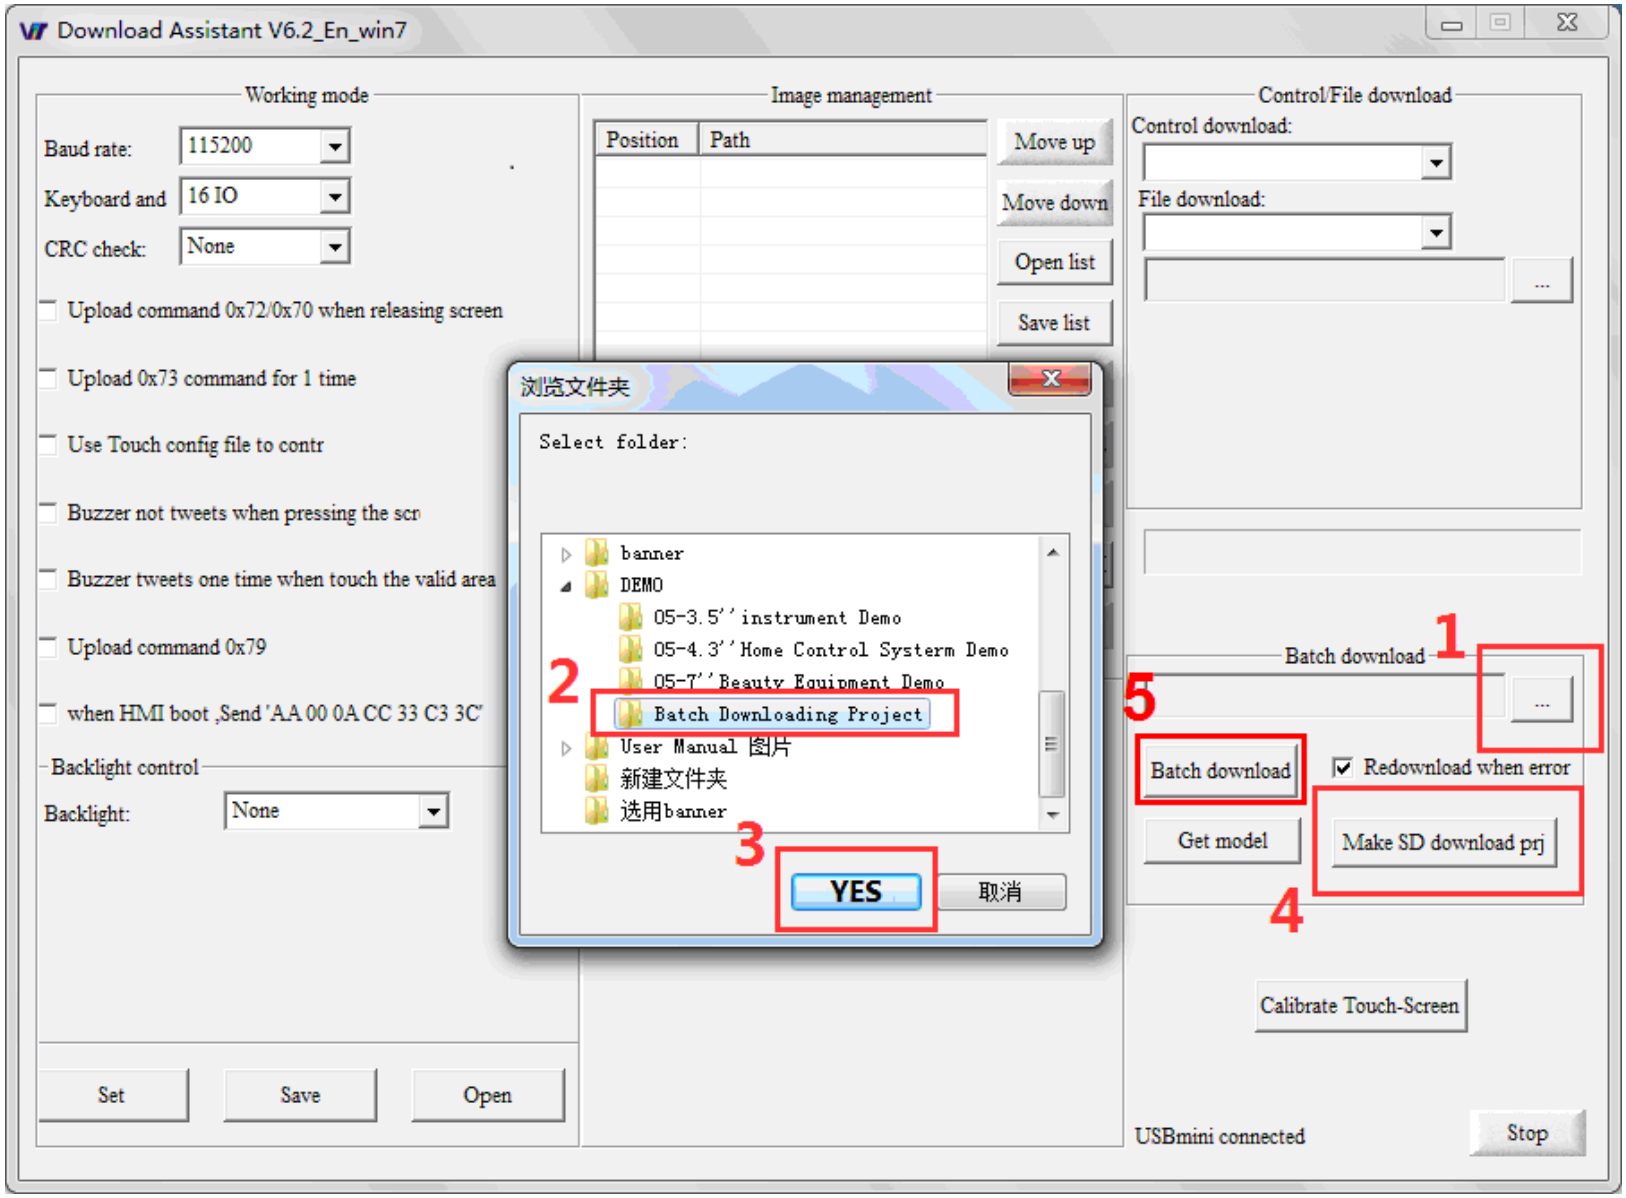
Download Assistant V6.2_En_win7
Working mode
Baud rate: 115200
Keyboard and 16 IO
CRC check: None
Upload command 0x72/0x70 when releasing screen
Upload 0x73 command for 1 time
Use Touch config file to contr
Buzzer not tweets when pressing the scr
Buzzer tweets one time when touch the valid area
Upload command 0x79
when HMI boot ,Send 'AA 00 0A CC 33 C3 3C'
Backlight control
Backlight: None
Set
Save
Open
Image management
Position
Path
Move up
Move down
Open list
Save list
浏览文件夹
Select folder:
banner
DEMO
05-3.5''instrument Demo
05-4.3''Home Control Systerm Demo
05-7''Beauty Equipment Demo
Batch Downloading Project
User Manual 图片
新建文件夹
选用banner
YES
取消
2
3
Control/File download
Control download:
File download:
Batch download
1
5
Batch download
Redownload when error
Get model
Make SD download prj
4
Calibrate Touch-Screen
USBmini connected
Stop

(3) Then the software will create a “VIEWTECH” folder in “Batch Downloading Project”, Please find it.
(4) Only Copy the “VIEWTECH” folder into TF card.
(5) Plug the SD card on PCB and don’t plug the power. Like the picture below.
(6) Plug the power supply, then all files will be stored automatically into the memory one by one.
After finishing, the screen will show the first image.

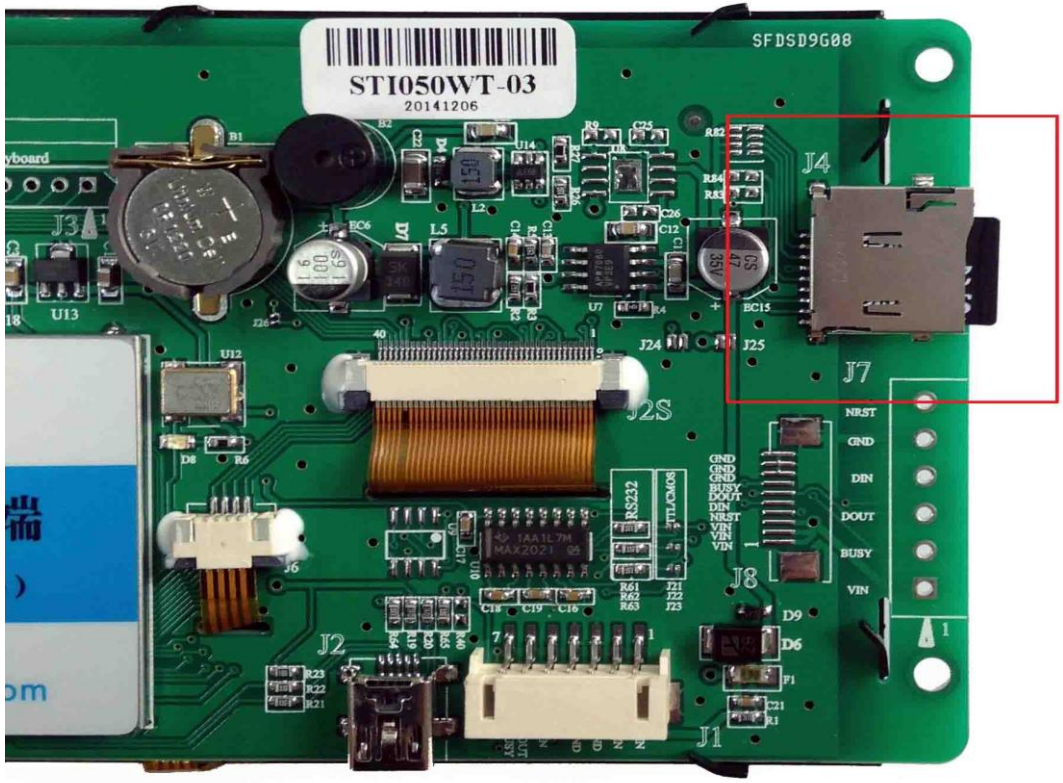

Should you have any technical questions, please feel free to contact us.