

Study guide: Introduction to Finite Element Methods

Hans Petter Langtangen^{1,2}

¹Center for Biomedical Computing, Simula Research Laboratory

²Department of Informatics, University of Oslo

Sep 9, 2014

Contents

1	Why finite elements?	1
1.1	Domain for flow around a dolphin	3
1.2	The flow	3
1.3	Solving PDEs by the finite element method	3
1.4	We start with function approximation, then we treat PDEs	4
2	Approximation in vector spaces	5
2.1	Approximation set-up	5
2.2	How to determine the coefficients?	5
2.3	Approximation of planar vectors; problem	6
2.4	Approximation of planar vectors; vector space terminology	6
2.5	The least squares method; principle	6
2.6	The least squares method; calculations	7
2.7	The projection (or Galerkin) method	7
2.8	Approximation of general vectors	7
2.9	The least squares method	8
2.10	The projection (or Galerkin) method	8
3	Approximation of functions	8
3.1	The least squares method; extend the basic ideas to functions	9
3.2	The least squares method; details	9
3.3	The projection (or Galerkin) method	9
3.4	Example: linear approximation; problem	10
3.5	Example: linear approximation; solution	10
3.6	Example: linear approximation; plot	11
3.7	Implementation of the least squares method; ideas	11
3.8	Implementation of the least squares method; symbolic code	11
3.9	Alternative: numerical code	12
3.10	Numerical code continued	12
3.11	Implementation of the least squares method; plotting	13

3.12	Implementation of the least squares method; application	13
3.13	Perfect approximation; parabola approximating parabola	14
3.14	Perfect approximation; the general result	14
3.15	Perfect approximation; proof of the general result	14
3.16	Finite-precision/numerical computations; question	14
3.17	Finite-precision/numerical computations; results	15
3.18	Ill-conditioning; observation in this special case	15
3.19	Ill-conditioning; general conclusions	16
3.20	Fourier series approximation; problem and code	16
3.21	Fourier series approximation; plot	16
3.22	Fourier series approximation; improvements	17
3.23	Fourier series approximation; final results	17
3.24	Orthogonal basis functions	17
3.25	The collocation or interpolation method; ideas and math	18
3.26	The collocation or interpolation method; implementation	18
3.27	The collocation or interpolation method; approximating a parabola by linear functions	18
3.28	Lagrange polynomials; motivation and ideas	19
3.29	Lagrange polynomials; formula and code	19
3.30	Lagrange polynomials; successful example	20
3.31	Lagrange polynomials; a less successful example	20
3.32	Lagrange polynomials; oscillatory behavior	20
3.33	Lagrange polynomials; remedy for strong oscillations	21
3.34	Lagrange polynomials; recalculation with Chebyshev nodes	22
3.35	Lagrange polynomials; less oscillations with Chebyshev nodes	22
4	Finite element basis functions	23
4.1	The basis functions have so far been global: $\psi_i(x) \neq 0$ almost everywhere	23
4.2	In the finite element method we use basis functions with local support	23
4.3	The linear combination of hat functions is a piecewise linear function	24
4.4	Elements and nodes	24
4.5	Example on elements with two nodes (P1 elements)	25
4.6	Illustration of two basis functions on the mesh	26
4.7	Example on elements with three nodes (P2 elements)	26
4.8	Some corresponding basis functions (P2 elements)	27
4.9	Examples on elements with four nodes (P3 elements)	27
4.10	Some corresponding basis functions (P3 elements)	28
4.11	The numbering does not need to be regular from left to right	28
4.12	Interpretation of the coefficients c_i	28
4.13	Properties of the basis functions	29
4.14	How to construct quadratic φ_i (P2 elements)	29
4.15	Example on linear φ_i (P1 elements)	30
4.16	Example on cubic φ_i (P3 elements)	31
5	Calculating the linear system for c_i	31
5.1	Computing a specific matrix entry (1)	31
5.2	Computing a specific matrix entry (2)	32
5.3	Calculating a general row in the matrix; figure	32
5.4	Calculating a general row in the matrix; details	32
5.5	Calculation of the right-hand side	33

5.6	Specific example with two elements; linear system and solution	33
5.7	Specific example with two elements; plot	33
5.8	Specific example: what about four elements?	35
6	Assembly of elementwise computations	35
6.1	Split the integrals into elementwise integrals	35
6.2	The element matrix	35
6.3	Illustration of the matrix assembly: regularly numbered P1 elements	36
6.4	Illustration of the matrix assembly: regularly numbered P3 elements	37
6.5	Illustration of the matrix assembly: irregularly numbered P1 elements	38
6.6	Assembly of the right-hand side	38
7	Mapping to a reference element	38
7.1	Affine mapping	39
7.2	Integral transformation	39
7.3	Advantages of the reference element	39
7.4	Standardized basis functions for P1 elements	39
7.5	Standardized basis functions for P2 elements	39
7.6	Integration over a reference element; element matrix	40
7.7	Integration over a reference element; element vector	40
7.8	Tedious calculations! Let's use symbolic software	40
8	Implementation	41
8.1	Compute finite element basis functions in the reference element	41
8.2	Compute the element matrix	41
8.3	Example on symbolic vs numeric element matrix	42
8.4	Compute the element vector	42
8.5	Fallback on numerical integration if symbolic integration fails	42
8.6	Linear system assembly and solution	43
8.7	Linear system solution	43
8.8	Example on computing symbolic approximations	43
8.9	Example on computing numerical approximations	43
8.10	The structure of the coefficient matrix	44
8.11	General result: the coefficient matrix is sparse	44
8.12	Exemplifying the sparsity for P2 elements	45
8.13	Matrix sparsity pattern for regular/random numbering of P1 elements	45
8.14	Matrix sparsity pattern for regular/random numbering of P3 elements	45
8.15	Sparse matrix storage and solution	46
8.16	Approximate $f \sim x^9$ by various elements; code	46
8.17	Approximate $f \sim x^9$ by various elements; plot	47
9	Comparison of finite element and finite difference approximation	47
9.1	Interpolation/collocation with finite elements	47
9.2	Galerkin/project and least squares vs collocation/interpolation or finite differences	48
9.3	Expressing the left-hand side in finite difference operator notation	48
9.4	Treating the right-hand side; Trapezoidal rule	48
9.5	Treating the right-hand side; Simpson's rule	49
9.6	Finite element approximation vs finite differences	49
9.7	Making finite elements behave as finite differences	50

10	Limitations of the nodes and element concepts	50
11	A generalized element concept	50
11.1	The concept of a finite element	51
11.2	Implementation; basic data structures	51
11.3	Implementation; example with P2 elements	51
11.4	Implementation; example with P0 elements	52
11.5	Example on doing the algorithmic steps	52
11.6	Approximating a parabola by P0 elements	52
11.7	Computing the error of the approximation; principles	53
11.8	Computing the error of the approximation; details	53
11.9	How does the error depend on h and d ?	53
11.10	Cubic Hermite polynomials; definition	54
11.11	Cubic Hermite polynomials; derivation	54
11.12	Cubic Hermite polynomials; result	54
12	Numerical integration	55
12.1	The Midpoint rule	55
12.2	Newton-Cotes rules	55
12.3	Gauss-Legendre rules with optimized points	56
13	Approximation of functions in 2D	56
13.1	2D basis functions as tensor products of 1D functions	56
13.2	Tensor products	57
13.3	Double or single index?	57
13.4	Example on 2D (bilinear) basis functions; formulas	57
13.5	Example on 2D (bilinear) basis functions; plot	58
13.6	Implementation; principal changes to the 1D code	58
13.7	Implementation; 2D integration	58
13.8	Implementation; 2D basis functions	58
13.9	Implementation; application	59
13.10	Implementation; trying a perfect expansion	59
13.11	Generalization to 3D	59
14	Finite elements in 2D and 3D	59
14.1	Examples on cell types	60
14.2	Rectangular domain with 2D P1 elements	62
14.3	Deformed geometry with 2D P1 elements	62
14.4	Rectangular domain with 2D Q1 elements	62
14.5	Basis functions over triangles in the physical domain	62
14.6	Basic features of 2D P1 elements	63
14.7	Linear mapping of reference element onto general triangular cell	64
14.8	φ_i : pyramid shape, composed of planes	64
14.9	Element matrices and vectors	65
14.10	Basis functions over triangles in the reference cell	65
14.11	2D P1, P2, P3, P4, P5, and P6 elements	66
14.12	P1 elements in 1D, 2D, and 3D	66
14.13	P2 elements in 1D, 2D, and 3D	66
14.14	Affine mapping of the reference cell; formula	66
14.15	Affine mapping of the reference cell; figure	67

14.16	Isoparametric mapping of the reference cell	67
14.17	Computing integrals	67
14.18	Remark on going from 1D to 2D/3D	68
15	Differential equation models	68
15.1	Abstract differential equation	68
15.2	Abstract boundary conditions	69
15.3	Reminder about notation	69
15.4	New topics	69
15.5	Residual-minimizing principles	70
15.6	The least squares method	70
15.7	The Galerkin method	70
15.8	The Method of Weighted Residuals	70
15.9	Terminology: test and trial Functions	71
15.10	The collocation method	71
16	Examples on using the principles	71
16.1	The first model problem	71
16.2	Boundary conditions	72
16.3	The least squares method; principle	72
16.4	The least squares method; equation system	72
16.5	Orthogonality of the basis functions gives diagonal matrix	73
16.6	Least squares method; solution	73
16.7	The Galerkin method; principle	73
16.8	The Galerkin method; solution	74
16.9	The collocation method	74
16.10	Comparison of the methods	74
17	Useful techniques	74
17.1	Integration by parts	74
17.2	Boundary function; principles	75
17.3	Boundary function; example (1)	75
17.4	Boundary function; example (2)	76
17.5	Impact of the boundary function on the space where we seek the solution	76
17.6	Abstract notation for variational formulations	76
17.7	Example on abstract notation	76
17.8	Bilinear and linear forms	77
17.9	The linear system associated with abstract form	77
17.10	Equivalence with minimization problem	77
18	Examples on variational formulations	78
18.1	Variable coefficient; problem	78
18.2	Variable coefficient; variational formulation (1)	78
18.3	Variable coefficient; variational formulation (2)	79
18.4	Variable coefficient; linear system (the easy way)	79
18.5	Variable coefficient; linear system (full derivation)	79
18.6	First-order derivative in the equation and boundary condition; problem	80
18.7	First-order derivative in the equation and boundary condition; details	80
18.8	First-order derivative in the equation and boundary condition; observations	80
18.9	First-order derivative in the equation and boundary condition; abstract notation	81


18.10	First-order derivative in the equation and boundary condition; linear system	81
18.11	Terminology: natural and essential boundary conditions	81
18.12	Nonlinear coefficient; problem	81
18.13	Nonlinear coefficient; variational formulation	82
18.14	Nonlinear coefficient; where does the nonlinearity cause challenges?	82
18.15	Computing with Dirichlet and Neumann conditions; problem	82
18.16	Computing with Dirichlet and Neumann conditions; details	83
18.17	When the numerical method is exact	83
19	Computing with finite elements	83
19.1	Variational formulation, finite element mesh, and basis	83
19.2	Computation in the global physical domain; formulas	84
19.3	Computation in the global physical domain; details	84
19.4	Computation in the global physical domain; linear system	85
19.5	Comparison with a finite difference discretization	85
19.6	Cellwise computations; formulas	85
19.7	Cellwise computations; details	86
19.8	Cellwise computations; details of boundary cells	86
19.9	Cellwise computations; assembly	86
19.10	General construction of a boundary function	87
19.11	Example with two Dirichlet values; variational formulation	87
19.12	Example with two Dirichlet values; boundary function	87
19.13	Example with two Dirichlet values; details	87
19.14	Example with two Dirichlet values; cellwise computations	88
19.15	Modification of the linear system; ideas	88
19.16	Modification of the linear system; original system	89
19.17	Modification of the linear system; row replacement	89
19.18	Modification of the linear system; element matrix/vector	89
19.19	Symmetric modification of the linear system; algorithm	90
19.20	Symmetric modification of the linear system; example	90
19.21	Symmetric modification of the linear system; element level	90
19.22	Boundary conditions: specified derivative	90
19.23	The variational formulation	91
19.24	Method 1: Boundary function and exclusion of Dirichlet degrees of freedom	91
19.25	Method 2: Use all φ_i and insert the Dirichlet condition in the linear system	91
19.26	How the Neumann condition impacts the element matrix and vector	92
20	The finite element algorithm	92
20.1	Python pseudo code; the element matrix and vector	92
20.2	Python pseudo code; boundary conditions and assembly	93
21	Variational formulations in 2D and 3D	93
21.1	Integration by parts	93
21.2	Example on integration by parts; problem	94
21.3	Example on integration by parts; details (1)	94
21.4	Example on integration by parts; details (2)	94
21.5	Example on integration by parts; linear system	95
21.6	Transformation to a reference cell in 2D/3D (1)	95
21.7	Transformation to a reference cell in 2D/3D (2)	95

21.8 Numerical integration	96
22 Time-dependent problems	96
22.1 Example: diffusion problem	96
22.2 A Forward Euler scheme; ideas	96
22.3 A Forward Euler scheme; stages in the discretization	97
22.4 A Forward Euler scheme; weighted residual (or Galerkin) principle	97
22.5 A Forward Euler scheme; integration by parts	97
22.6 New notation for the solution at the most recent time levels	98
22.7 Deriving the linear systems	98
22.8 Structure of the linear systems	98
22.9 Computational algorithm	99
22.10 Comparing P1 elements with the finite difference method; ideas	99
22.11 Comparing P1 elements with the finite difference method; results	99
22.12 Discretization in time by a Backward Euler scheme	100
22.13 The variational form of the time-discrete problem	100
22.14 Calculations with P1 elements in 1D	100
23 Dirichlet boundary conditions	100
23.1 Boundary function	101
23.2 Finite element basis functions	101
23.3 Modification of the linear system; the raw system	101
23.4 Modification of the linear system; setting Dirichlet conditions	102
23.5 Modification of the linear system; Backward Euler example	102
24 Analysis of the discrete equations	102
24.1 Handy formulas	102
24.2 Amplification factor for the Forward Euler method; results	103
24.3 Amplification factor for the Backward Euler method; results	103
24.4 Amplification factors for smaller time steps; Forward Euler	104
24.5 Amplification factors for smaller time steps; Backward Euler	104


1 Why finite elements?

- Can with ease solve PDEs in domains with *complex geometry*
- Can with ease provide higher-order approximations
- Has (in simpler stationary problems) a rigorous mathematical analysis framework (not much considered here)

1.1 Domain for flow around a dolphin

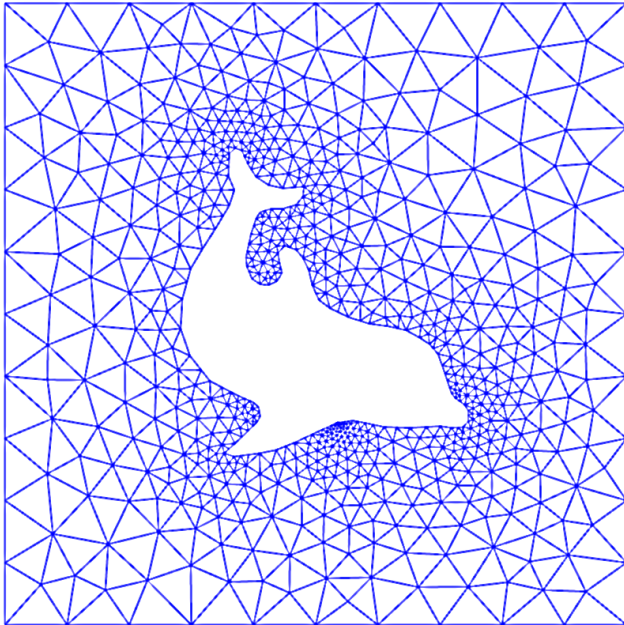

1.2 The flow

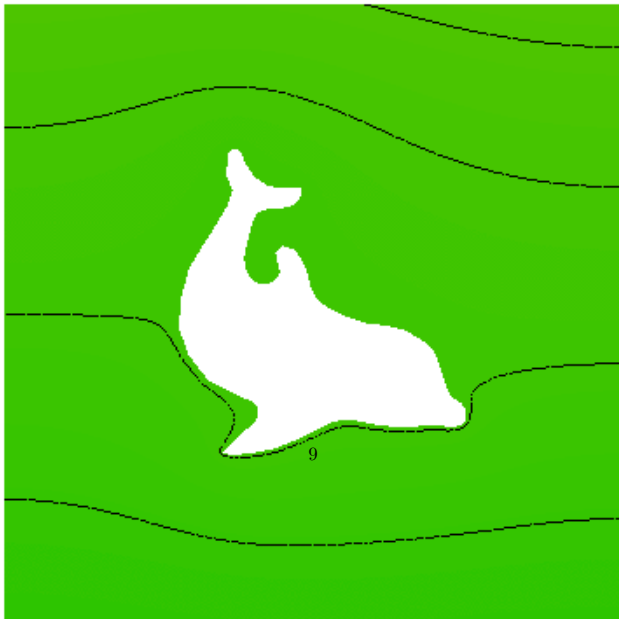

1.3 Solving PDEs by the finite element method

Stationary PDEs:

- Transform the PDE problem to a *variational form*
- Define function approximation over *finite elements*
- Use a machinery to derive *linear systems*
- Solve linear systems

Time-dependent PDEs:

- Finite elements *in space*
- Finite difference (or ODE solver) in time

1.4 We start with function approximation, then we treat PDEs


Learning strategy.

- Start with approximation of functions, not PDEs
- Introduce finite element *approximations*
- See later how this machinery is applied to PDEs

Reason:

The finite element method has many concepts and a jungle of details. This learning strategy minimizes the mixing of ideas, concepts, and technical details.

2 Approximation in vector spaces

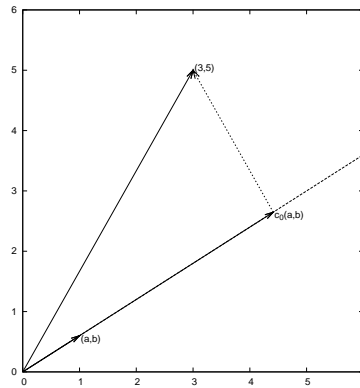

2.1 Approximation set-up

General idea of finding an approximation $u(x)$ to some given $f(x)$:

$$u(x) = \sum_{i=0}^N c_i \psi_i(x)$$

where

- $\psi_i(x)$ are prescribed functions
- c_i , $i = 0, \dots, N$ are unknown coefficients to be determined

2.2 How to determine the coefficients?

We shall address three approaches:

- The least squares method
- The projection (or Galerkin) method
- The interpolation (or collocation) method


Underlying motivation for our notation.

Our mathematical framework for doing this is phrased in a way such that it becomes easy to understand and use the FEniCS^a software package for finite element computing.

^a<http://fenicsproject.org>

2.3 Approximation of planar vectors; problem

Given a vector $\mathbf{f} = (3, 5)$, find an approximation to \mathbf{f} directed along a given line.

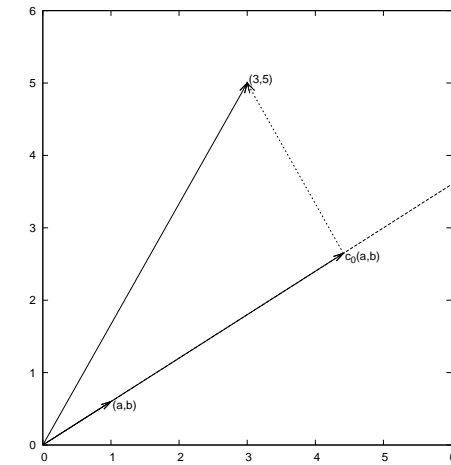

2.4 Approximation of planar vectors; vector space terminology

$$V = \text{span} \{ \psi_0 \}$$

- ψ_0 is a basis vector in the space V
- Seek $\mathbf{u} = c_0 \psi_0 \in V$
- Determine c_0 such that \mathbf{u} is the "best" approximation to \mathbf{f}
- Visually, "best" is obvious

Define

- the error $\mathbf{e} = \mathbf{f} - \mathbf{u}$
- the (Euclidian) scalar product of two vectors: (\mathbf{u}, \mathbf{v})
- the norm of \mathbf{e} : $\|\mathbf{e}\| = \sqrt{(\mathbf{e}, \mathbf{e})}$

2.5 The least squares method; principle

- Idea: find c_0 such that $\|\mathbf{e}\|$ is minimized
- Mathematical convenience: minimize $E = \|\mathbf{e}\|^2$

$$\frac{\partial E}{\partial c_0} = 0$$

2.6 The least squares method; calculations

$$\begin{aligned} E(c_0) &= (e, e) = (\mathbf{f} - \mathbf{u}, \mathbf{f} - \mathbf{u}) = (\mathbf{f} - c_0\psi_0, \mathbf{f} - c_0\psi_0) \\ &= (\mathbf{f}, \mathbf{f}) - 2c_0(\mathbf{f}, \psi_0) + c_0^2(\psi_0, \psi_0) \end{aligned}$$

$$\frac{\partial E}{\partial c_0} = -2(\mathbf{f}, \psi_0) + 2c_0(\psi_0, \psi_0) = 0 \quad (1)$$

$$c_0 = \frac{(\mathbf{f}, \psi_0)}{(\psi_0, \psi_0)} = \frac{3a + 5b}{a^2 + b^2}$$

Observation to be used later: the vanishing derivative (1) can be alternatively written as

$$(e, \psi_0) = 0$$

2.7 The projection (or Galerkin) method

- Last slide: $\min E$ is equivalent with $(e, \psi_0) = 0$
- $(e, \psi_0) = 0$ implies $(e, \mathbf{v}) = 0$ for *any* $\mathbf{v} \in V$
- That is: instead of using the least-squares principle, we can require that e is orthogonal to *any* $\mathbf{v} \in V$ (visually clear, but can easily be computed too)
- Precise math: find c_0 such that $(e, \mathbf{v}) = 0, \quad \forall \mathbf{v} \in V$
- Equivalent (see notes): find c_0 such that $(e, \psi_0) = 0$
- Insert $e = \mathbf{f} - c_0\psi_0$ and solve for c_0
- Same equation for c_0 and hence same solution as in the least squares method

2.8 Approximation of general vectors

Given a vector \mathbf{f} , find an approximation $\mathbf{u} \in V$:

$$V = \text{span}\{\psi_0, \dots, \psi_N\}$$

We have a set of linearly independent basis vectors ψ_0, \dots, ψ_N . Any $\mathbf{u} \in V$ can then be written as

$$\mathbf{u} = \sum_{j=0}^N c_j \psi_j$$

2.9 The least squares method

Idea: find c_0, \dots, c_N such that $E = \|e\|^2$ is minimized, $e = \mathbf{f} - \mathbf{u}$.

$$\begin{aligned} E(c_0, \dots, c_N) &= (e, e) = (\mathbf{f} - \sum_j c_j \psi_j, \mathbf{f} - \sum_j c_j \psi_j) \\ &= (\mathbf{f}, \mathbf{f}) - 2 \sum_{j=0}^N c_j (\mathbf{f}, \psi_j) + \sum_{p=0}^N \sum_{q=0}^N c_p c_q (\psi_p, \psi_q) \end{aligned}$$

$$\frac{\partial E}{\partial c_i} = 0, \quad i = 0, \dots, N$$

After some work we end up with a *linear system*

$$\sum_{j=0}^N A_{i,j} c_j = b_i, \quad i = 0, \dots, N \quad (2)$$

$$A_{i,j} = (\psi_i, \psi_j) \quad (3)$$

$$b_i = (\psi_i, \mathbf{f}) \quad (4)$$

2.10 The projection (or Galerkin) method

Can be shown that minimizing $\|e\|$ implies that e is orthogonal to all $\mathbf{v} \in V$:

$$(e, \mathbf{v}) = 0, \quad \forall \mathbf{v} \in V$$

which implies that e must be orthogonal to each basis vector:

$$(e, \psi_i) = 0, \quad i = 0, \dots, N$$

This orthogonality condition is the principle of the projection (or Galerkin) method. Leads to the same linear system as in the least squares method.

3 Approximation of functions

Let V be a *function space* spanned by a set of *basis functions* ψ_0, \dots, ψ_N ,

$$V = \text{span}\{\psi_0, \dots, \psi_N\}$$

Find $u \in V$ as a linear combination of the basis functions:

$$u = \sum_{j \in \mathcal{I}_s} c_j \psi_j, \quad \mathcal{I}_s = \{0, 1, \dots, N\}$$

3.1 The least squares method; extend the basic ideas to functions

Extend the ideas from the vector case: minimize the (square) norm of the error, E , with respect to the coefficients c_j , $j \in \mathcal{I}_s$:

$$E = (e, e) = (f - u, f - u) = (f(x) - \sum_{j \in \mathcal{I}_s} c_j \psi_j(x), f(x) - \sum_{j \in \mathcal{I}_s} c_j \psi_j(x))$$

$$\frac{\partial E}{\partial c_i} = 0, \quad i \in \mathcal{I}_s$$

What scalar product?

$$(f, g) = \int_{\Omega} f(x)g(x) dx$$

(natural extension from Euclidian product $(\mathbf{u}, \mathbf{v}) = \sum_j u_j v_j$)

3.2 The least squares method; details

$$\begin{aligned} E(c_0, \dots, c_N) &= (e, e) = (f - u, f - u) \\ &= (f, f) - 2 \sum_{j \in \mathcal{I}_s} c_j (f, \psi_j) + \sum_{p \in \mathcal{I}_s} \sum_{q \in \mathcal{I}_s} c_p c_q (\psi_p, \psi_q) \end{aligned}$$

$$\frac{\partial E}{\partial c_i} = 0, \quad i \in \mathcal{I}_s$$

The computations are *identical to the vector case*, and consequently we get a linear system

$$\sum_{j \in \mathcal{I}_s} A_{i,j} c_j = b_i, \quad i \in \mathcal{I}_s, \quad A_{i,j} = (\psi_i, \psi_j), \quad b_i = (f, \psi_i)$$

3.3 The projection (or Galerkin) method

As before, minimizing (e, e) is equivalent to

$$(e, \psi_i) = 0, \quad i \in \mathcal{I}_s$$

which is equivalent to

$$(e, v) = 0, \quad \forall v \in V$$

which is the projection (or Galerkin) method.

The algebra is the same as in the multi-dimensional vector case, and we get the same linear system as arose from the least squares method.

3.4 Example: linear approximation; problem

Problem.

Approximate a parabola $f(x) = 10(x-1)^2 - 1$ by a straight line.

$$V = \text{span}\{1, x\}$$

That is, $\psi_0(x) = 1$, $\psi_1(x) = x$, and $N = 1$. We seek

$$u = c_0 \psi_0(x) + c_1 \psi_1(x) = c_0 + c_1 x$$

3.5 Example: linear approximation; solution

$$A_{0,0} = (\psi_0, \psi_0) = \int_1^2 1 \cdot 1 dx = 1$$

$$A_{0,1} = (\psi_0, \psi_1) = \int_1^2 1 \cdot x dx = 3/2$$

$$A_{1,0} = A_{0,1} = 3/2$$

$$A_{1,1} = (\psi_1, \psi_1) = \int_1^2 x \cdot x dx = 7/3$$


$$b_1 = (f, \psi_0) = \int_1^2 (10(x-1)^2 - 1) \cdot 1 dx = 7/3$$

$$b_2 = (f, \psi_1) = \int_1^2 (10(x-1)^2 - 1) \cdot x dx = 13/3$$

Solution of 2x2 linear system:

$$c_0 = -38/3, \quad c_1 = 10, \quad u(x) = 10x - \frac{38}{3}$$

3.6 Example: linear approximation; plot

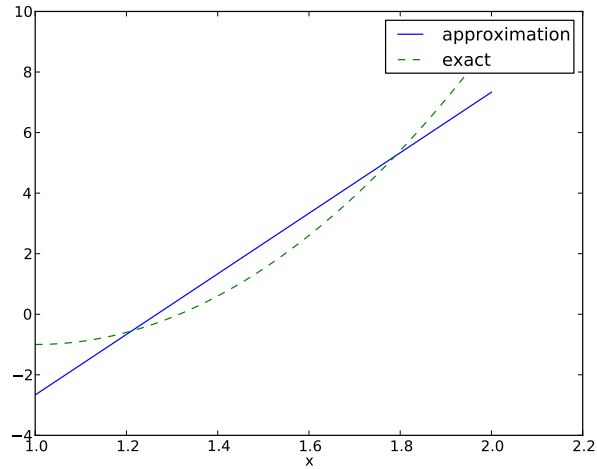

3.7 Implementation of the least squares method; ideas

Consider symbolic computation of the linear system, where

- $f(x)$ is given as a `sympy` expression `f` (involving the symbol `x`),
- `psi` is a list of $\{\psi_i\}_{i \in \mathcal{I}_n}$,
- `Omega` is a 2-tuple/list holding the domain Ω

Carry out the integrations, solve the linear system, and return $u(x) = \sum_j c_j \psi_j(x)$

3.8 Implementation of the least squares method; symbolic code

```
import sympy as sp

def least_squares(f, psi, Omega):
    N = len(psi) - 1
    A = sp.zeros((N+1, N+1))
    b = sp.zeros((N+1, 1))
    x = sp.Symbol('x')
    for i in range(N+1):
        for j in range(i, N+1):
            A[i,j] = sp.integrate(psi[i]*psi[j],
                                  (x, Omega[0], Omega[1]))
            A[j,i] = A[i,j]
        b[i,0] = sp.integrate(psi[i]*f, (x, Omega[0], Omega[1]))
    c = A.LUsolve(b)
    u = 0
```

```
for i in range(len(psi)):
    u += c[i,0]*psi[i]
return u, c
```

Observe: symmetric coefficient matrix so we can halve the integrations.

3.9 Alternative: numerical code

- Symbolic integration may be impossible and/or very slow
- Turn to pure numerical computations in those cases
- Supply Python functions `f(x)`, `psi(x,i)`, and a mesh `x`

```
def least_squares_numerical(f, psi, N, x,
                           integration_method='scipy',
                           orthogonal_basis=False):
    import scipy.integrate
    A = np.zeros((N+1, N+1))
    b = np.zeros(N+1)
    Omega = [x[0], x[-1]]
    dx = x[1] - x[0]

    for i in range(N+1):
        j_limit = i+1 if orthogonal_basis else N+1
        for j in range(i, j_limit):
            print '%d,%d' % (i, j)
            if integration_method == 'scipy':
                A_ij = scipy.integrate.quad(
                    lambda x: psi(x,i)*psi(x,j),
                    Omega[0], Omega[1], epsabs=1E-9, epsrel=1E-9)[0]
            elif ...
            A[i,j] = A[j,i] = A_ij
```

3.10 Numerical code continued

```
def least_squares_numerical(f, psi, N, x,
                           integration_method='scipy',
                           orthogonal_basis=False):
    ...
    for i in range(N+1):
        ...
        if integration_method == 'scipy':
            b_i = scipy.integrate.quad(
                lambda x: f(x)*psi(x,i), Omega[0], Omega[1],
                epsabs=1E-9, epsrel=1E-9)[0]
            elif ...
            b[i] = b_i

    c = b/np.diag(A) if orthogonal_basis else np.linalg.solve(A, b)
    u = sum(c[i]*psi(x, i) for i in range(N+1))
    return u, c
```

3.11 Implementation of the least squares method; plotting


Compare f and u visually:

```
def comparison_plot(f, u, Omega, filename='tmp.pdf'):
    x = sp.Symbol('x')
    # Turn f and u to ordinary Python functions
    f = sp.lambdify([x], f, modules="numpy")
    u = sp.lambdify([x], u, modules="numpy")
    resolution = 401 # no of points in plot
    xcoor = linspace(Omega[0], Omega[1], resolution)
    exact = f(xcoor)
    approx = u(xcoor)
    plot(xcoor, approx)
    hold('on')
    plot(xcoor, exact)
    legend(['approximation', 'exact'])
    savefig(filename)
```

All code in module approx1D.py¹

3.12 Implementation of the least squares method; application

```
>>> from approx1D import *
>>> x = sp.Symbol('x')
>>> f = 10*(x-1)**2-1
>>> u, c = least_squares(f=f, psi=[1, x], Omega=[1, 2])
>>> comparison_plot(f, u, Omega=[1, 2])
```

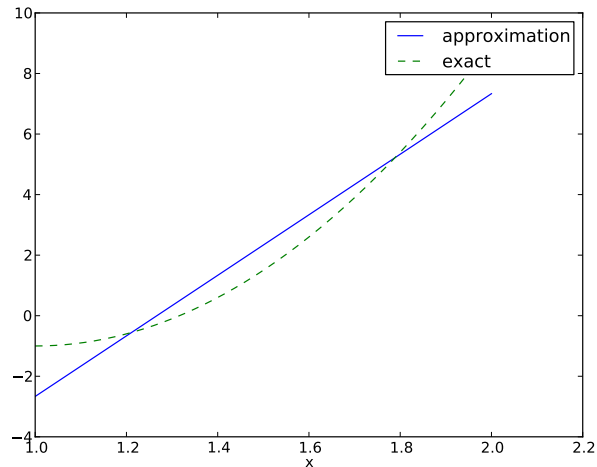

¹<http://tinyurl.com/jvzzcfm/fem/approx1D.py>

3.13 Perfect approximation; parabola approximating parabola

- What if we add $\psi_2 = x^2$ to the space V ?
- That is, approximating a parabola by any parabola?
- (Hopefully we get the exact parabola!)

```
>>> from approx1D import *
>>> x = sp.Symbol('x')
>>> f = 10*(x-1)**2-1
>>> u, c = least_squares(f=f, psi=[1, x, x**2], Omega=[1, 2])
>>> print u
10*x**2 - 20*x + 9
>>> print sp.expand(f)
10*x**2 - 20*x + 9
```

3.14 Perfect approximation; the general result

- What if we use $\psi_i(x) = x^i$ for $i = 0, \dots, N = 40$?
- The output from least_squares is $c_i = 0$ for $i > 2$

General result.

If $f \in V$, least squares and projection/Galerkin give $u = f$.

3.15 Perfect approximation; proof of the general result

If $f \in V$, $f = \sum_{j \in \mathcal{I}_s} d_j \psi_j$, for some $\{d_i\}_{i \in \mathcal{I}_s}$. Then

$$b_i = (f, \psi_i) = \sum_{j \in \mathcal{I}_s} d_j (\psi_j, \psi_i) = \sum_{j \in \mathcal{I}_s} d_j A_{i,j}$$

The linear system $\sum_j A_{i,j} c_j = b_i$, $i \in \mathcal{I}_s$, is then

$$\sum_{j \in \mathcal{I}_s} c_j A_{i,j} = \sum_{j \in \mathcal{I}_s} d_j A_{i,j}, \quad i \in \mathcal{I}_s$$

which implies that $c_i = d_i$ for $i \in \mathcal{I}_s$ and u is identical to f .

3.16 Finite-precision/numerical computations; question

The previous computations were symbolic. What if we solve the linear system numerically with standard arrays?

That is, f is parabola, but we approximate with

$$u(x) = c_0 + c_1 x + c_2 x^2 + c_3 x^3 + \dots + c_N x^N$$

We expect $c_2 = c_3 = \dots = c_N = 0$ since $f \in V$ implies $u = f$.

Will we get this result with finite precision computer arithmetic?

3.17 Finite-precision/numerical computations; results

exact	sympy	numpy32	numpy64
9	9.62	5.57	8.98
-20	-23.39	-7.65	-19.93
10	17.74	-4.50	9.96
0	-9.19	4.13	-0.26
0	5.25	2.99	0.72
0	0.18	-1.21	-0.93
0	-2.48	-0.41	0.73
0	1.81	-0.013	-0.36
0	-0.66	0.08	0.11
0	0.12	0.04	-0.02
0	-0.001	-0.02	0.002


- Column 2: `matrix` and `lu_solve` from `sympy.mpmath.fp`
- Column 3: `numpy` matrix with 4-byte floats
- Column 4: `numpy` matrix with 8-byte floats

3.18 Ill-conditioning: observation in this special case

Observations:

- Significant round-off errors in the numerical computations (!)
- But if we plot the approximations they look good (!)

The source of the problem is that the basis functions x^i become almost linearly dependent for large N .

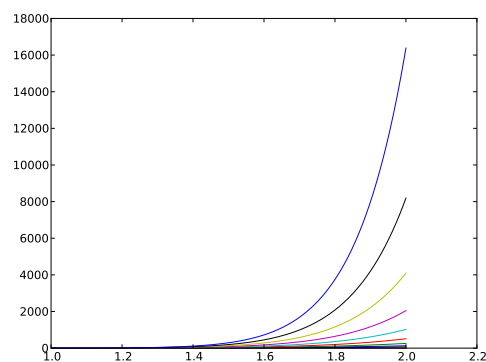

3.19 Ill-conditioning: general conclusions

- Almost linearly dependent basis functions give almost singular matrices
- Such matrices are said to be *ill conditioned*, and Gaussian elimination is severely affected by round-off errors
- The basis $1, x, x^2, x^3, x^4, \dots$ is a bad basis
- Polynomials are fine as basis, but the more orthogonal they are, $(\psi_i, \psi_j) \approx 0$, the better

3.20 Fourier series approximation; problem and code

Let's approximate f by a typical Fourier series expansion

$$u(x) = \sum_i a_i \sin i\pi x = \sum_{j=0}^N c_j \sin((j+1)\pi x)$$

which means that


$$V = \text{span} \{ \sin \pi x, \sin 2\pi x, \dots, \sin(N+1)\pi x \}$$

Computations using the `least_squares` function:

```
N = 3
from sympy import sin, pi
psi = [sin(pi*(i+1)*x) for i in range(N+1)]
f = 10*(x-1)**2 - 1
Omega = [0, 1]
u, c = least_squares(f, psi, Omega)
comparison_plot(f, u, Omega)
```

3.21 Fourier series approximation; plot

Left: $N = 3$, right: $N = 11$:

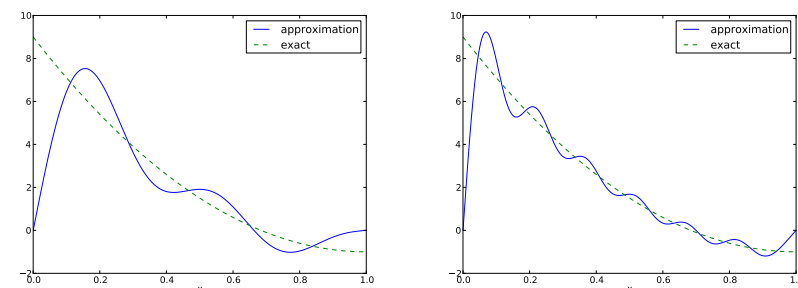

Problem:

All $\psi_i(0) = 0$ and hence $u(0) = 0 \neq f(0) = 9$. Similar problem at $x = 1$. The boundary values of u are always wrong!

3.22 Fourier series approximation; improvements


- Considerably improvement with $N = 11$, but still undesired discrepancy at $x = 0$ and $x = 1$
- Possible remedy: add a term that leads to correct boundary values

$$u(x) = \textcolor{red}{f(0)(1-x)} + \textcolor{red}{xf(1)} + \sum_{j \in \mathcal{I}_s} c_j \psi_j(x)$$

The extra terms ensure $u(0) = f(0)$ and $u(1) = f(1)$ and is a strikingly good help to get a good approximation!

3.23 Fourier series approximation; final results

$N = 3$ vs $N = 11$:

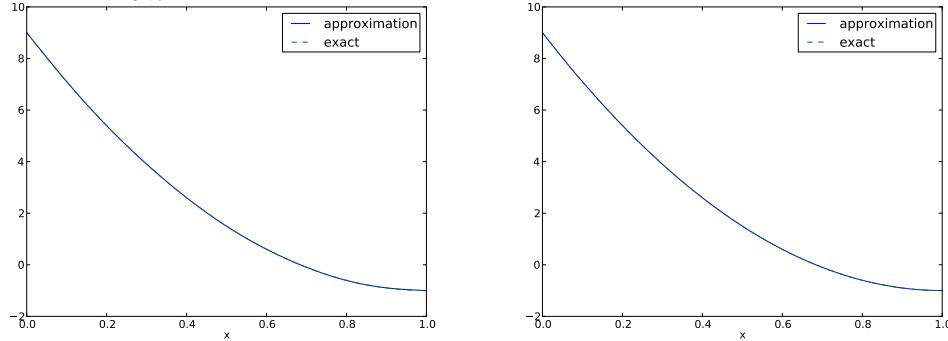**3.24 Orthogonal basis functions**

This choice of sine functions as basis functions is popular because

- the basis functions are orthogonal: $(\psi_i, \psi_j) = 0$
- implying that $A_{i,j}$ is a diagonal matrix
- implying that we can solve for $c_i = 2 \int_0^1 f(x) \sin((i+1)\pi x) dx$
- and what we get is the standard Fourier sine series of f

In general, for an orthogonal basis, $A_{i,j}$ is diagonal and we can easily solve for c_i :

$$c_i = \frac{b_i}{A_{i,i}} = \frac{(f, \psi_i)}{(\psi_i, \psi_i)}$$

3.25 The collocation or interpolation method; ideas and math

Here is another idea for approximating $f(x)$ by $u(x) = \sum_j c_j \psi_j$:

- Force $u(x_i) = f(x_i)$ at some selected *collocation* points $\{x_i\}_{i \in \mathcal{I}_s}$
- Then u is said to *interpolate* f
- The method is known as *interpolation* or *collocation*

$$u(x_i) = \sum_{j \in \mathcal{I}_s} c_j \psi_j(x_i) = f(x_i) \quad i \in \mathcal{I}_s, N$$

This is a linear system with no need for integration:

$$\sum_{j \in \mathcal{I}_s} A_{i,j} c_j = b_i, \quad i \in \mathcal{I}_s \quad (5)$$

$$A_{i,j} = \psi_j(x_i) \quad (6)$$

$$b_i = f(x_i) \quad (7)$$

No symmetric matrix: $\psi_j(x_i) \neq \psi_i(x_j)$ in general

3.26 The collocation or interpolation method; implementation



points holds the interpolation/collocation points

```
def interpolation(f, psi, points):
    N = len(psi) - 1
    A = sp.zeros((N+1, N+1))
    b = sp.zeros((N+1, 1))
    x = sp.Symbol('x')
    # Turn psi and f into Python functions
    psi = [sp.lambdify([x], psi[i]) for i in range(N+1)]
    f = sp.lambdify([x], f)
    for i in range(N+1):
        for j in range(N+1):
            A[i,j] = psi[j](points[i])
        b[i,0] = f(points[i])
    c = A.LUsolve(b)
    u = 0
    for i in range(len(psi)):
        u += c[i,0]*psi[i](x)
    return u
```

3.27 The collocation or interpolation method; approximating a parabola by linear functions

- Potential difficulty: how to choose x_i ?
- The results are sensitive to the points!

$(4/3, 5/3)$ vs $(1, 2)$:

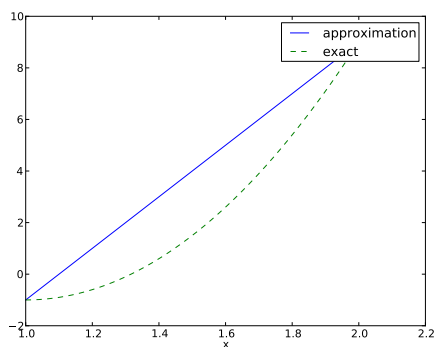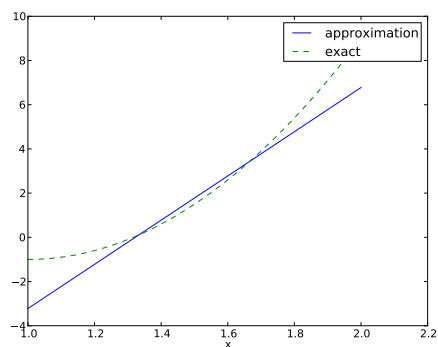

3.28 Lagrange polynomials; motivation and ideas

Motivation:

- The interpolation/collocation method avoids integration
- With a diagonal matrix $A_{i,j} = \psi_j(x_i)$ we can solve the linear system by hand

The *Lagrange interpolating polynomials* ψ_j have the property that

$$\psi_i(x_j) = \delta_{ij}, \quad \delta_{ij} = \begin{cases} 1, & i = j \\ 0, & i \neq j \end{cases}$$

Hence, $c_i = f(x_i)$ and

$$u(x) = \sum_{j \in \mathcal{I}_s} f(x_j) \psi_j(x)$$

- Lagrange polynomials and interpolation/collocation look convenient
- Lagrange polynomials are very much used in the finite element method


3.29 Lagrange polynomials; formula and code

$$\psi_i(x) = \prod_{j=0, j \neq i}^N \frac{x - x_j}{x_i - x_j} = \frac{x - x_0}{x_i - x_0} \cdots \frac{x - x_{i-1}}{x_i - x_{i-1}} \frac{x - x_{i+1}}{x_i - x_{i+1}} \cdots \frac{x - x_N}{x_i - x_N}$$


```
def Lagrange_polynomial(x, i, points):
    p = 1
    for k in range(len(points)):
        if k != i:
            p *= (x - points[k]) / (points[i] - points[k])
    return p
```

3.30 Lagrange polynomials; successful example

Least squares approximation by Lagrange polynomials of degree 3

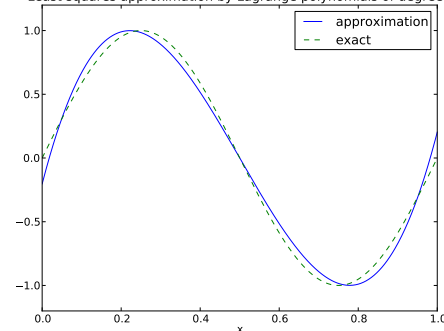


Interpolation by Lagrange polynomials of degree 3

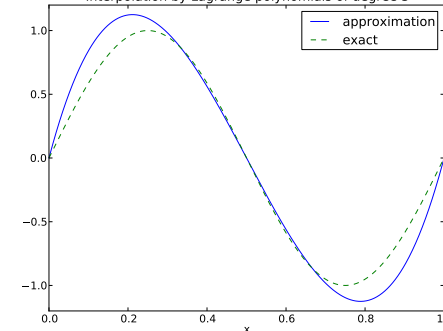


3.31 Lagrange polynomials; a less successful example

Interpolation by Lagrange polynomials of degree 7

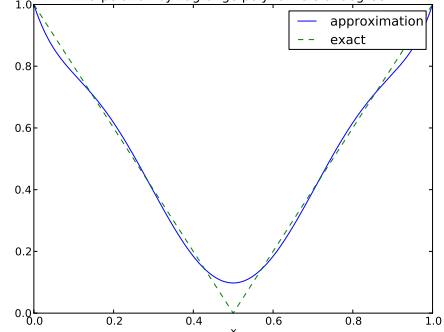


Interpolation by Lagrange polynomials of degree 14

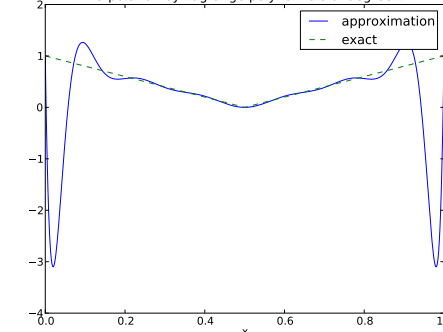

3.32 Lagrange polynomials; oscillatory behavior

12 points, degree 11, plot of two of the Lagrange polynomials - note that they are zero at all points except one.

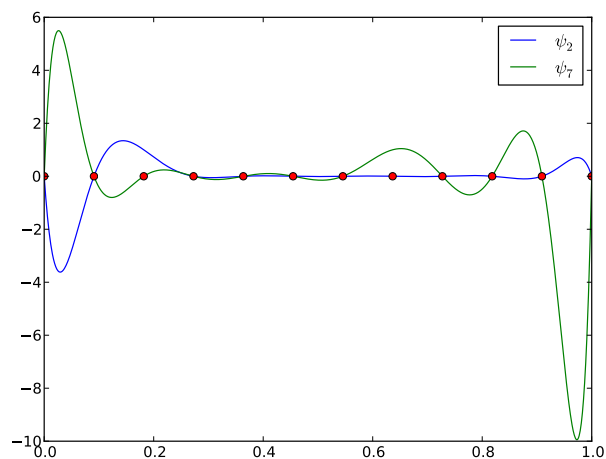

Problem: strong oscillations near the boundaries for larger N values.


3.33 Lagrange polynomials; remedy for strong oscillations

The oscillations can be reduced by a more clever choice of interpolation points, called the *Chebyshev nodes*:

$$x_i = \frac{1}{2}(a+b) + \frac{1}{2}(b-a) \cos\left(\frac{2i+1}{2(N+1)}\pi\right), \quad i = 0, \dots, N$$


on an interval $[a, b]$.

3.34 Lagrange polynomials; recalculation with Chebyshev nodes

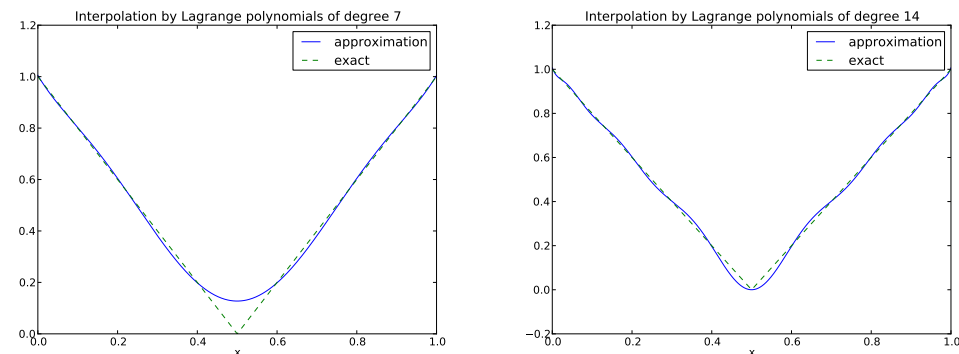


3.35 Lagrange polynomials; less oscillations with Chebyshev nodes

12 points, degree 11, plot of two of the Lagrange polynomials - note that they are zero at all points except one.

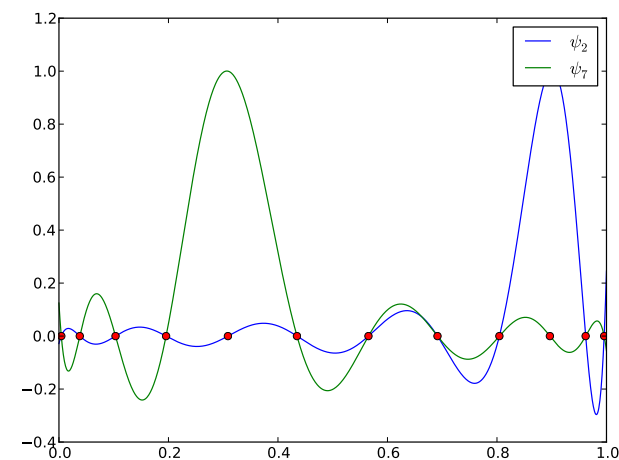


4 Finite element basis functions

4.1 The basis functions have so far been global: $\psi_i(x) \neq 0$ almost everywhere

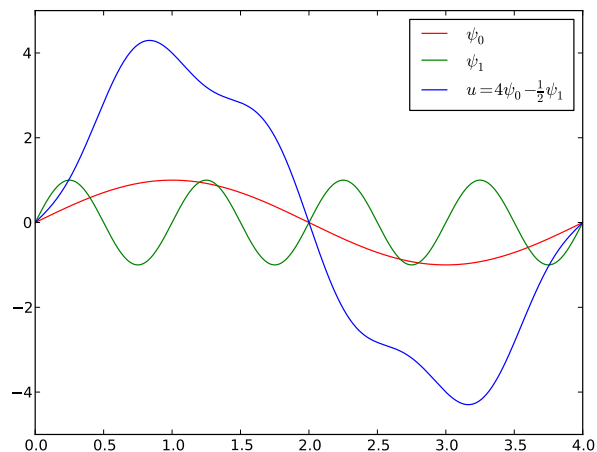


4.2 In the finite element method we use basis functions with local support

- *Local support*: $\psi_i(x) \neq 0$ for x in a small subdomain of Ω
- Typically hat-shaped
- $u(x)$ based on these ψ_i is a piecewise polynomial defined over many (small) subdomains
- We introduce φ_i as the name of these finite element hat functions (and for now choose $\psi_i = \varphi_i$)



4.3 The linear combination of hat functions is a piecewise linear function

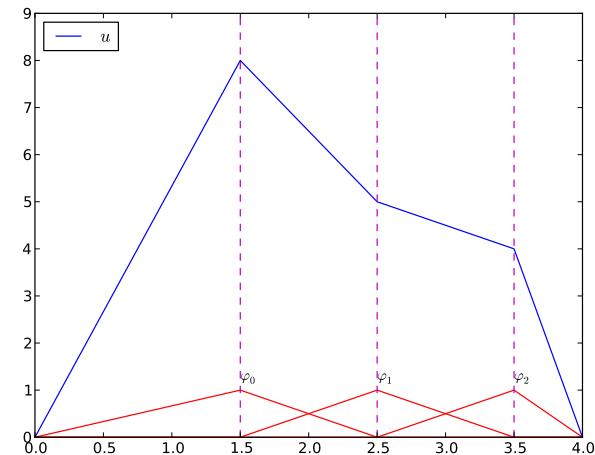

4.4 Elements and nodes


Split Ω into non-overlapping subdomains called *elements*:

$$\Omega = \Omega^{(0)} \cup \dots \cup \Omega^{(N_e)}$$

On each element, introduce points called *nodes*: x_0, \dots, x_{N_n}

- The finite element basis functions are named $\varphi_i(x)$
- $\varphi_i = 1$ at node i and 0 at all other nodes
- φ_i is a Lagrange polynomial on each element
- For nodes at the boundary between two elements, φ_i is made up of a Lagrange polynomial over each element


4.5 Example on elements with two nodes (P1 elements)

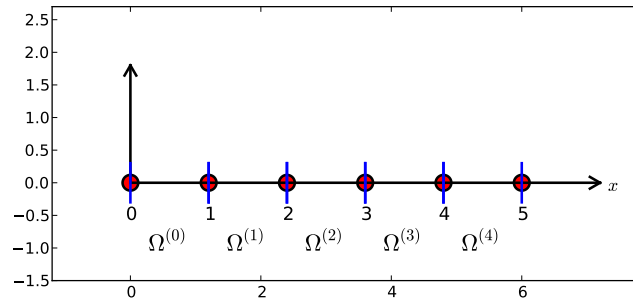


Data structure: `nodes` holds coordinates or nodes, `elements` holds the node numbers in each element

```
nodes = [0, 1.2, 2.4, 3.6, 4.8, 5]
elements = [[0, 1], [1, 2], [2, 3], [3, 4], [4, 5]]
```

4.6 Illustration of two basis functions on the mesh

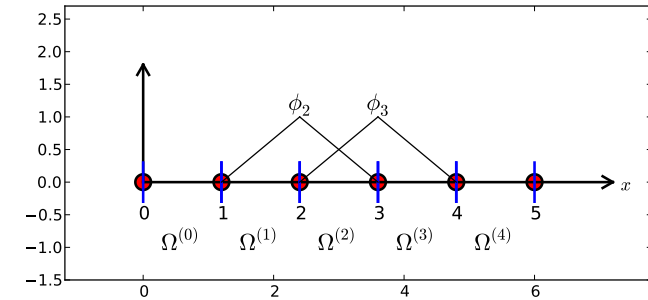


4.7 Example on elements with three nodes (P2 elements)

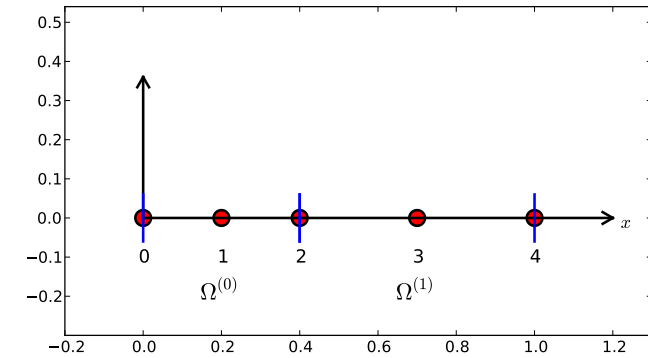


```
nodes = [0, 0.125, 0.25, 0.375, 0.5, 0.625, 0.75, 0.875, 1.0]
elements = [[0, 1, 2], [2, 3, 4], [4, 5, 6], [6, 7, 8]]
```


4.8 Some corresponding basis functions (P2 elements)

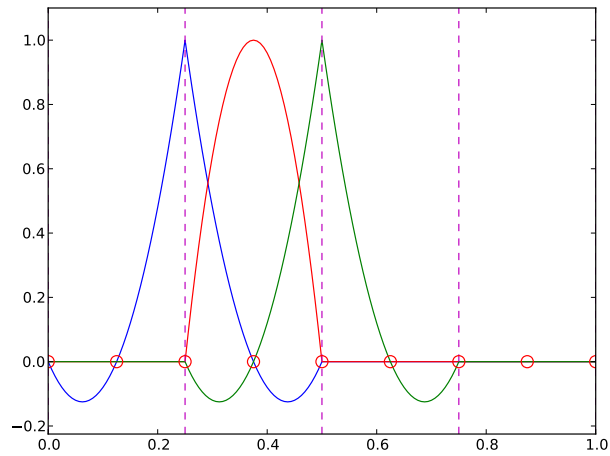


4.9 Examples on elements with four nodes (P3 elements)

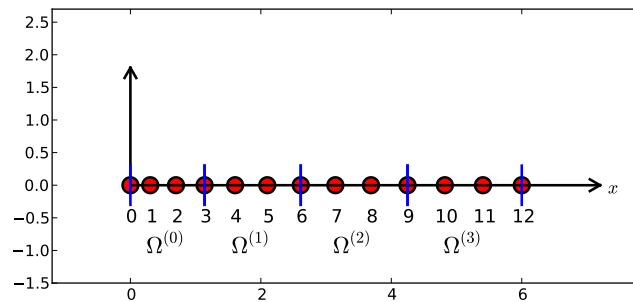


```
d = 3 # d+1 nodes per element
num_elements = 4
num_nodes = num_elements*d + 1
nodes = [i*0.5 for i in range(num_nodes)]
elements = [[i*d+j for j in range(d+1)] for i in range(num_elements)]
```

4.10 Some corresponding basis functions (P3 elements)

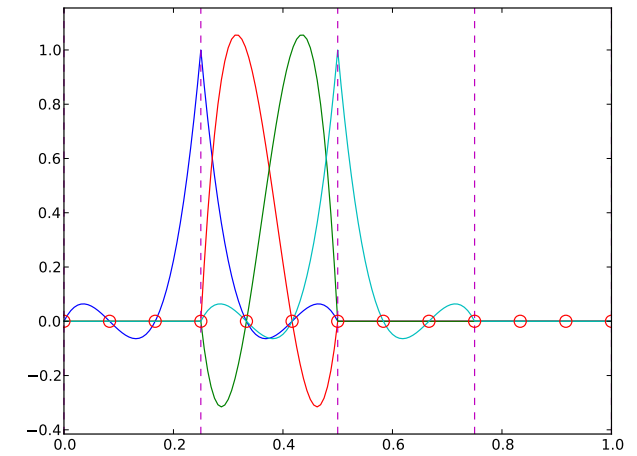

4.11 The numbering does not need to be regular from left to right

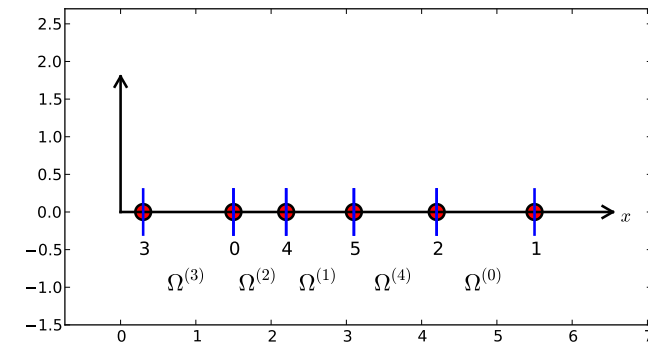

```
nodes = [1.5, 5.5, 4.2, 0.3, 2.2, 3.1]
elements = [[2, 1], [4, 5], [0, 4], [3, 0], [5, 2]]
```

4.12 Interpretation of the coefficients c_i

Important property: c_i is the value of u at node i , x_i :


$$u(x_i) = \sum_{j \in \mathcal{I}_s} c_j \varphi_j(x_i) = c_i \varphi_i(x_i) = c_i$$

because $\varphi_j(x_i) = 0$ if $i \neq j$


4.13 Properties of the basis functions

- $\varphi_i(x) \neq 0$ only on those elements that contain global node i
- $\varphi_i(x)\varphi_j(x) \neq 0$ if and only if i and j are global node numbers in the same element

Since $A_{i,j} = \int \varphi_i \varphi_j \, dx$, most of the elements in the coefficient matrix will be zero




4.14 How to construct quadratic φ_i (P2 elements)




1. Associate Lagrange polynomials with the nodes in an element
2. When the polynomial is 1 on the element boundary, combine it with the polynomial in the neighboring element

4.15 Example on linear φ_i (P1 elements)

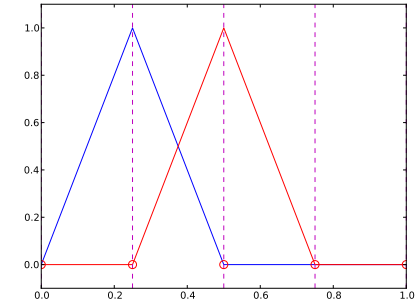


$$\varphi_i(x) = \begin{cases} 0, & x < x_{i-1} \\ (x - x_{i-1})/h, & x_{i-1} \leq x < x_i \\ 1 - (x - x_i)/h, & x_i \leq x < x_{i+1} \\ 0, & x \geq x_{i+1} \end{cases}$$

4.16 Example on cubic φ_i (P3 elements)



5 Calculating the linear system for c_i

5.1 Computing a specific matrix entry (1)




$A_{2,3} = \int_{\Omega} \varphi_2 \varphi_3 dx$: $\varphi_2 \varphi_3 \neq 0$ only over element 2. There,


$$\varphi_3(x) = (x - x_2)/h, \quad \varphi_2(x) = 1 - (x - x_2)/h$$

$$A_{2,3} = \int_{\Omega} \varphi_2 \varphi_3 dx = \int_{x_2}^{x_3} \left(1 - \frac{x - x_2}{h}\right) \frac{x - x_2}{h} dx = \frac{h}{6}$$

5.2 Computing a specific matrix entry (2)

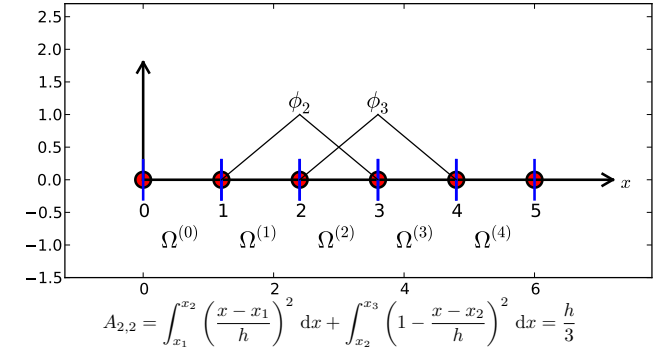

5.3 Calculating a general row in the matrix; figure

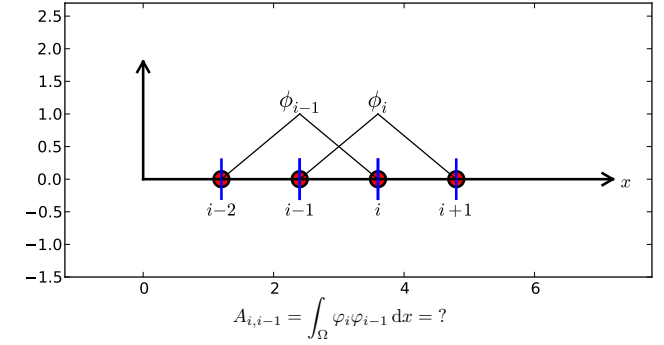


5.4 Calculating a general row in the matrix; details

$$\begin{aligned} A_{i,i-1} &= \int_{\Omega} \varphi_i \varphi_{i-1} dx \\ &= \underbrace{\int_{x_{i-2}}^{x_{i-1}} \varphi_i \varphi_{i-1} dx}_{\varphi_i=0} + \int_{x_{i-1}}^{x_i} \varphi_i \varphi_{i-1} dx + \underbrace{\int_{x_i}^{x_{i+1}} \varphi_i \varphi_{i-1} dx}_{\varphi_{i-1}=0} \\ &= \int_{x_{i-1}}^{x_i} \underbrace{\left(\frac{x - x_i}{h}\right)}_{\varphi_i(x)} \underbrace{\left(1 - \frac{x - x_{i-1}}{h}\right)}_{\varphi_{i-1}(x)} dx = \frac{h}{6} \end{aligned}$$

- $A_{i,i+1} = A_{i,i-1}$ due to symmetry

- $A_{i,i} = h/3$ (same calculation as for $A_{2,2}$)
- $A_{0,0} = A_{N,N} = h/3$ (only one element)

5.5 Calculation of the right-hand side

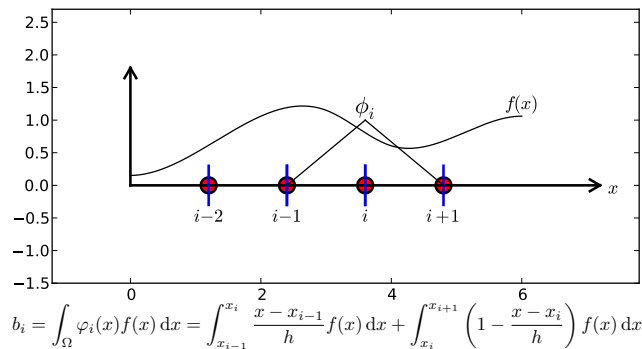

Need a specific $f(x)$ to do more...

5.6 Specific example with two elements; linear system and solution


- $f(x) = x(1 - x)$ on $\Omega = [0, 1]$
- Two equal-sized elements $[0, 0.5]$ and $[0.5, 1]$

$$A = \frac{h}{6} \begin{pmatrix} 2 & 1 & 0 \\ 1 & 4 & 1 \\ 0 & 1 & 2 \end{pmatrix}, \quad b = \frac{h^2}{12} \begin{pmatrix} 2 - 3h \\ 12 - 14h \\ 10 - 17h \end{pmatrix}$$


$$c_0 = \frac{h^2}{6}, \quad c_1 = h - \frac{5}{6}h^2, \quad c_2 = 2h - \frac{23}{6}h^2$$

5.7 Specific example with two elements; plot


$$u(x) = c_0 \varphi_0(x) + c_1 \varphi_1(x) + c_2 \varphi_2(x)$$

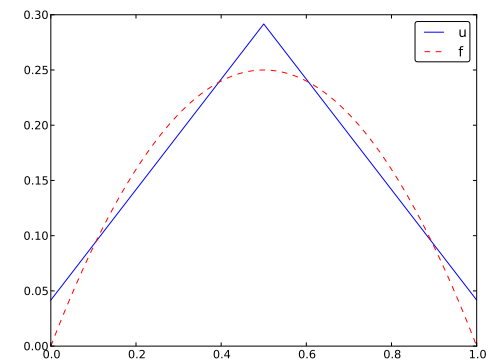

5.8 Specific example: what about four elements?

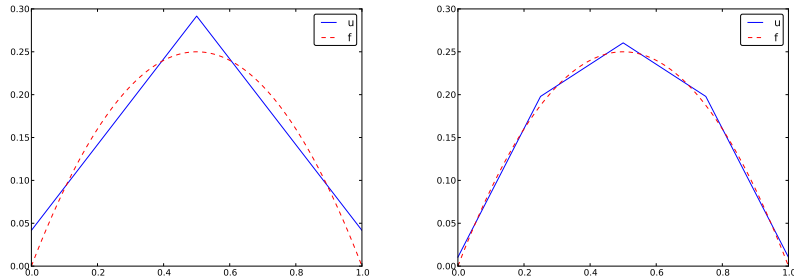

6 Assembly of elementwise computations

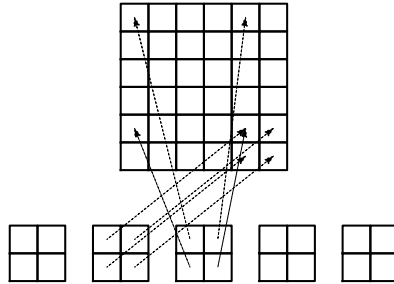

6.1 Split the integrals into elementwise integrals

$$A_{i,j} = \int_{\Omega} \varphi_i \varphi_j dx = \sum_e \int_{\Omega(e)} \varphi_i \varphi_j dx, \quad A_{i,j}^{(e)} = \int_{\Omega(e)} \varphi_i \varphi_j dx$$

Important:

- $A_{i,j}^{(e)} \neq 0$ if and only if i and j are nodes in element e (otherwise no overlap between the basis functions)
- all the nonzero elements in $A_{i,j}^{(e)}$ are collected in an *element matrix*

6.2 The element matrix


$$\tilde{A}^{(e)} = \{\tilde{A}_{r,s}^{(e)}\}, \quad \tilde{A}_{r,s}^{(e)} = \int_{\Omega(e)} \varphi_{q(e,r)} \varphi_{q(e,s)} dx, \quad r, s \in I_d = \{0, \dots, d\}$$

- r, s run over *local node numbers* in an element; i, j run over *global node numbers*
- $i = q(e, r)$: mapping of local node number r in element e to the global node number i (math equivalent to `i=elements[e][r]`)

- Add $\tilde{A}_{r,s}^{(e)}$ into the global $A_{i,j}$ (*assembly*)

$$A_{q(e,r),q(e,s)} := A_{q(e,r),q(e,s)} + \tilde{A}_{r,s}^{(e)}, \quad r, s \in I_d$$


6.3 Illustration of the matrix assembly: regularly numbered P1 elements

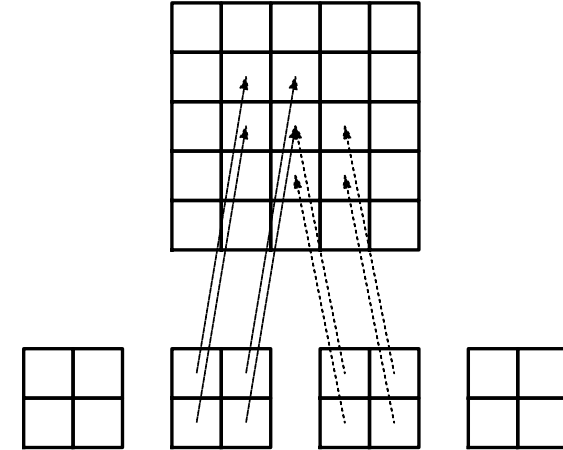

Animation²

²http://tinyurl.com/k3sdbuv/pub/mov-fem/fe_assembly.html


6.4 Illustration of the matrix assembly: regularly numbered P3 elements

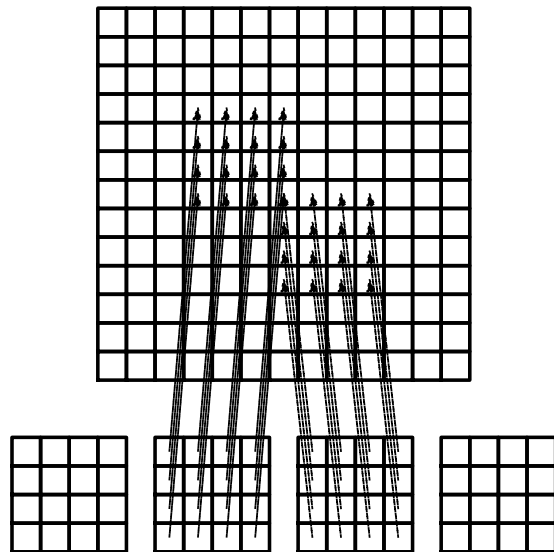

Animation³

³http://tinyurl.com/k3sdbuv/pub/mov-fem/fe_assembly.html

6.5 Illustration of the matrix assembly: irregularly numbered P1 elements

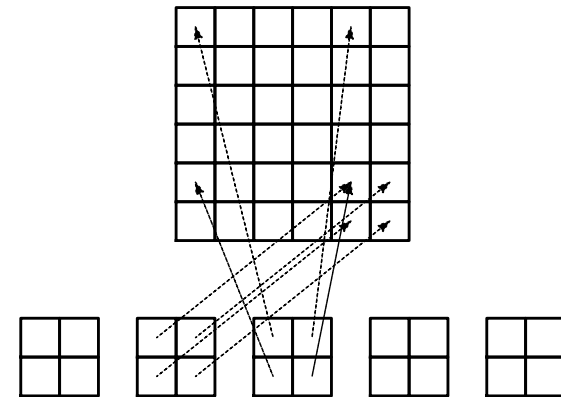

Animation⁴

6.6 Assembly of the right-hand side

$$b_i = \int_{\Omega} f(x) \varphi_i(x) dx = \sum_e \int_{\Omega^{(e)}} f(x) \varphi_i(x) dx, \quad b_i^{(e)} = \int_{\Omega^{(e)}} f(x) \varphi_i(x) dx$$

Important:

- $b_i^{(e)} \neq 0$ if and only if global node i is a node in element e (otherwise $\varphi_i = 0$)
- The $d + 1$ nonzero $b_i^{(e)}$ can be collected in an *element vector* $\tilde{b}_r^{(e)} = \{\tilde{b}_r^{(e)}\}$, $r \in I_d$

Assembly:

$$b_{q(e,r)} := b_{q(e,r)} + \tilde{b}_r^{(e)}, \quad r, s \in I_d$$

7 Mapping to a reference element

Instead of computing

$$\tilde{A}_{r,s}^{(e)} = \int_{\Omega^{(e)}} \varphi_{q(e,r)}(x) \varphi_{q(e,s)}(x) dx = \int_{x_L}^{x_R} \varphi_{q(e,r)}(x) \varphi_{q(e,s)}(x) dx$$

we now map $[x_L, x_R]$ to a standardized reference element domain $[-1, 1]$ with local coordinate X

⁴http://tinyurl.com/k3sdbuv/pub/mov-fem/fe_assembly.html

7.1 Affine mapping

$$x = \frac{1}{2}(x_L + x_R) + \frac{1}{2}(x_R - x_L)X$$

or rewritten as

$$x = x_m + \frac{1}{2}hX, \quad x_m = (x_L + x_R)/2$$

7.2 Integral transformation

Reference element integration: just change integration variable from x to X . Introduce local basis function

$$\tilde{\varphi}_r(X) = \varphi_{q(e,r)}(x(X))$$

$$\tilde{A}_{r,s}^{(e)} = \int_{\Omega^{(e)}} \varphi_{q(e,r)}(x) \varphi_{q(e,s)}(x) dx = \int_{-1}^1 \tilde{\varphi}_r(X) \tilde{\varphi}_s(X) \underbrace{\frac{dx}{dX}}_{\det J = h/2} dX = \int_{-1}^1 \tilde{\varphi}_r(X) \tilde{\varphi}_s(X) \det J dX$$

$$\tilde{b}_r^{(e)} = \int_{\Omega^{(e)}} f(x) \varphi_{q(e,r)}(x) dx = \int_{-1}^1 f(x(X)) \tilde{\varphi}_r(X) \det J dX$$

7.3 Advantages of the reference element

- Always the same domain for integration: $[-1, 1]$
- We only need formulas for $\tilde{\varphi}_r(X)$ over one element (no piecewise polynomial definition)
- $\tilde{\varphi}_r(X)$ is the same for all elements: no dependence on element length and location, which is "factored out" in the mapping and $\det J$

7.4 Standardized basis functions for P1 elements

$$\tilde{\varphi}_0(X) = \frac{1}{2}(1 - X) \quad (8)$$

$$\tilde{\varphi}_1(X) = \frac{1}{2}(1 + X) \quad (9)$$

7.5 Standardized basis functions for P2 elements

P2 elements:

$$\tilde{\varphi}_0(X) = \frac{1}{2}(X - 1)X \quad (10)$$

$$\tilde{\varphi}_1(X) = 1 - X^2 \quad (11)$$

$$\tilde{\varphi}_2(X) = \frac{1}{2}(X + 1)X \quad (12)$$

Easy to generalize to arbitrary order!

7.6 Integration over a reference element; element matrix

P1 elements and $f(x) = x(1 - x)$.

$$\begin{aligned} \tilde{A}_{0,0}^{(e)} &= \int_{-1}^1 \tilde{\varphi}_0(X) \tilde{\varphi}_0(X) \frac{h}{2} dX \\ &= \int_{-1}^1 \frac{1}{2}(1 - X) \frac{1}{2}(1 - X) \frac{h}{2} dX = \frac{h}{8} \int_{-1}^1 (1 - X)^2 dX = \frac{h}{3} \end{aligned} \quad (13)$$

$$\begin{aligned} \tilde{A}_{1,0}^{(e)} &= \int_{-1}^1 \tilde{\varphi}_1(X) \tilde{\varphi}_0(X) \frac{h}{2} dX \\ &= \int_{-1}^1 \frac{1}{2}(1 + X) \frac{1}{2}(1 - X) \frac{h}{2} dX = \frac{h}{8} \int_{-1}^1 (1 - X^2) dX = \frac{h}{6} \end{aligned} \quad (14)$$

$$\tilde{A}_{0,1}^{(e)} = \tilde{A}_{1,0}^{(e)} \quad (15)$$

$$\begin{aligned} \tilde{A}_{1,1}^{(e)} &= \int_{-1}^1 \tilde{\varphi}_1(X) \tilde{\varphi}_1(X) \frac{h}{2} dX \\ &= \int_{-1}^1 \frac{1}{2}(1 + X) \frac{1}{2}(1 + X) \frac{h}{2} dX = \frac{h}{8} \int_{-1}^1 (1 + X)^2 dX = \frac{h}{3} \end{aligned} \quad (16)$$

7.7 Integration over a reference element; element vector

$$\begin{aligned} \tilde{b}_0^{(e)} &= \int_{-1}^1 f(x(X)) \tilde{\varphi}_0(X) \frac{h}{2} dX \\ &= \int_{-1}^1 (x_m + \frac{1}{2}hX)(1 - (x_m + \frac{1}{2}hX)) \frac{1}{2}(1 - X) \frac{h}{2} dX \\ &= -\frac{1}{24}h^3 + \frac{1}{6}h^2x_m - \frac{1}{12}h^2 - \frac{1}{2}hx_m^2 + \frac{1}{2}hx_m \end{aligned} \quad (17)$$

$$\begin{aligned} \tilde{b}_1^{(e)} &= \int_{-1}^1 f(x(X)) \tilde{\varphi}_1(X) \frac{h}{2} dX \\ &= \int_{-1}^1 (x_m + \frac{1}{2}hX)(1 - (x_m + \frac{1}{2}hX)) \frac{1}{2}(1 + X) \frac{h}{2} dX \\ &= -\frac{1}{24}h^3 - \frac{1}{6}h^2x_m + \frac{1}{12}h^2 - \frac{1}{2}hx_m^2 + \frac{1}{2}hx_m \end{aligned} \quad (18)$$

x_m : element midpoint.

7.8 Tedious calculations! Let's use symbolic software

```
>>> import sympy as sp
>>> x, x_m, h, X = sp.symbols('x x_m h X')
>>> sp.integrate(h/8*(1-X)**2, (X, -1, 1))
h/3
>>> sp.integrate(h/8*(1+X)*(1-X), (X, -1, 1))
h/6
>>> x = x_m + h/2*X
>>> b_0 = sp.integrate(h/4*x*(1-x)*(1-X), (X, -1, 1))
>>> print b_0
-h**3/24 + h**2*x_m/6 - h**2/12 - h*x_m**2/2 + h*x_m/2
```

Can printe out in L^AT_EX too (convenient for copying into reports):

```
>>> print sp.latex(b_0, mode='plain')
- \frac{1}{24} h^3 + \frac{1}{6} h^2 x_m
- \frac{1}{12} h^2 - \frac{1}{2} h x_m^2
+ \frac{1}{2} h x_m
```

8 Implementation

- Coming functions appear in `fe_approx1D.py`⁵
- Functions can operate in symbolic or numeric mode
- The code documents all steps in finite element calculations!

8.1 Compute finite element basis functions in the reference element

Let $\tilde{\varphi}_r(X)$ be a Lagrange polynomial of degree d :

```
import sympy as sp
import numpy as np

def phi_r(r, X, d):
    if isinstance(X, sp.Symbol):
        h = sp.Rational(1, d) # node spacing
        nodes = [2*i*h - 1 for i in range(d+1)]
    else:
        # assume X is numeric: use floats for nodes
        nodes = np.linspace(-1, 1, d+1)
    return Lagrange_polynomial(X, r, nodes)

def Lagrange_polynomial(x, i, points):
    p = 1
    for k in range(len(points)):
        if k != i:
            p *= (x - points[k]) / (points[i] - points[k])
    return p

def basis(d=1):
    """Return the complete basis."""
    X = sp.Symbol('X')
    phi = [phi_r(r, X, d) for r in range(d+1)]
    return phi
```

8.2 Compute the element matrix

```
def element_matrix(phi, Omega_e, symbolic=True):
    n = len(phi)
    A_e = sp.zeros((n, n))
    X = sp.Symbol('X')
    if symbolic:
        h = sp.Symbol('h')
    else:
```

⁵http://tinyurl.com/jvzzcfn/fem/fe_approx1D.py

```
        h = Omega_e[1] - Omega_e[0]
        detJ = h/2 # dx/dX
        for r in range(n):
            for s in range(r, n):
                A_e[r,s] = sp.integrate(phi[r]*phi[s]*detJ, (X, -1, 1))
                A_e[s,r] = A_e[r,s]
    return A_e
```

8.3 Example on symbolic vs numeric element matrix

```
>>> from fe_approx1D import *
>>> phi = basis(d=1)
>>> phi
[1/2 - X/2, 1/2 + X/2]
>>> element_matrix(phi, Omega_e=[0.1, 0.2], symbolic=True)
[h/3, h/6]
[h/6, h/3]
>>> element_matrix(phi, Omega_e=[0.1, 0.2], symbolic=False)
[0.0333333333333333, 0.0166666666666667]
[0.0166666666666667, 0.0333333333333333]
```

8.4 Compute the element vector

```
def element_vector(f, phi, Omega_e, symbolic=True):
    n = len(phi)
    b_e = sp.zeros((n, 1))
    # Make f a function of X
    X = sp.Symbol('X')
    if symbolic:
        h = sp.Symbol('h')
    else:
        h = Omega_e[1] - Omega_e[0]
    x = (Omega_e[0] + Omega_e[1])/2 + h/2*X # mapping
    f = f.subs('x', x) # substitute mapping formula for x
    detJ = h/2 # dx/dX
    for r in range(n):
        b_e[r] = sp.integrate(f*phi[r]*detJ, (X, -1, 1))
    return b_e
```

Note `f.subs('x', x)`: replace x by $x(X)$ such that f contains X

8.5 Fallback on numerical integration if symbolic integration fails

- Element matrix: only polynomials and `sympy` always succeeds
- Element vector: $\int f\tilde{\varphi} dx$ can fail (`sympy` then returns an `Integral` object instead of a number)

```
def element_vector(f, phi, Omega_e, symbolic=True):
    ...
    I = sp.integrate(f*phi[r]*detJ, (X, -1, 1)) # try...
    if isinstance(I, sp.Integral):
        h = Omega_e[1] - Omega_e[0] # Ensure h is numerical
        detJ = h/2
        integrand = sp.lambdify([X], f*phi[r]*detJ)
```



```
I = sp.mpmath.quad(integrand, [-1, 1])
b_e[r] = I
...
```

8.6 Linear system assembly and solution

```
def assemble(nodes, elements, phi, f, symbolic=True):
    N_n, N_e = len(nodes), len(elements)
    zeros = sp.zeros if symbolic else np.zeros
    A = zeros((N_n, N_n))
    b = zeros((N_n, 1))
    for e in range(N_e):
        Omega_e = [nodes[elements[e][0]], nodes[elements[e][-1]]]

        A_e = element_matrix(phi, Omega_e, symbolic)
        b_e = element_vector(f, phi, Omega_e, symbolic)

        for r in range(len(elements[e])):
            for s in range(len(elements[e])):
                A[elements[e][r], elements[e][s]] += A_e[r, s]
            b[elements[e][r]] += b_e[r]
    return A, b
```

8.7 Linear system solution

```
if symbolic:
    c = A.LUsolve(b)          # sympy arrays, symbolic Gaussian elim.
else:
    c = np.linalg.solve(A, b) # numpy arrays, numerical solve
```

Note: the symbolic computation of A and b and the symbolic solution can be very tedious.

8.8 Example on computing symbolic approximations

```
>>> h, x = sp.symbols('h x')
>>> nodes = [0, h, 2*h]
>>> elements = [[0, 1], [1, 2]]
>>> phi = basis(d=1)
>>> f = x*(1-x)
>>> A, b = assemble(nodes, elements, phi, f, symbolic=True)
>>> A
[h/3, h/6, 0]
[h/6, 2*h/3, h/6]
[ 0, h/6, h/3]
>>> b
[ h**2/6 - h**3/12]
[ h**2 - 7*h**3/6]
[5*h**2/6 - 17*h**3/12]
>>> c = A.LUsolve(b)
>>> c
[ h**2/6]
[12*(7*h**2/12 - 35*h**3/72)/(7*h)]
[ 7*(4*h**2/7 - 23*h**3/21)/(2*h)]
```

8.9 Example on computing numerical approximations

```
>>> nodes = [0, 0.5, 1]
>>> elements = [[0, 1], [1, 2]]
>>> phi = basis(d=1)
>>> x = sp.Symbol('x')
>>> f = x*(1-x)
>>> A, b = assemble(nodes, elements, phi, f, symbolic=False)
>>> A
[ 0.166666666666667, 0.0833333333333333, 0]
[0.0833333333333333, 0.333333333333333, 0.0833333333333333]
[ 0, 0.0833333333333333, 0.166666666666667]
>>> b
[ 0.03125]
[0.104166666666667]
[ 0.03125]
>>> c = A.LUsolve(b)
>>> c
[0.0416666666666667]
[ 0.291666666666667]
[0.0416666666666667]
```

8.10 The structure of the coefficient matrix

```
>>> d=1; N_e=8; Omega=[0,1] # 8 linear elements on [0,1]
>>> phi = basis(d)
>>> f = x*(1-x)
>>> nodes, elements = mesh_symbolic(N_e, d, Omega)
>>> A, b = assemble(nodes, elements, phi, f, symbolic=True)
>>> A
[h/3, h/6, 0, 0, 0, 0, 0, 0]
[h/6, 2*h/3, h/6, 0, 0, 0, 0, 0]
[ 0, h/6, 2*h/3, h/6, 0, 0, 0, 0]
[ 0, 0, h/6, 2*h/3, h/6, 0, 0, 0]
[ 0, 0, 0, h/6, 2*h/3, h/6, 0, 0]
[ 0, 0, 0, 0, h/6, 2*h/3, h/6, 0]
[ 0, 0, 0, 0, 0, h/6, 2*h/3, h/6]
[ 0, 0, 0, 0, 0, 0, h/6, h/3]
```

Note: do this by hand to understand what is going on!

8.11 General result: the coefficient matrix is sparse

- Sparse = most of the entries are zeros
- Below: P1 elements



$$A = \frac{h}{6} \begin{pmatrix} 2 & 1 & 0 & \dots & \dots & \dots & 0 \\ 1 & 4 & 1 & \ddots & & & \\ 0 & 1 & 4 & 1 & \ddots & & \\ \vdots & \ddots & \ddots & \ddots & \ddots & 0 & \\ \vdots & & \ddots & \ddots & \ddots & \ddots & \\ \vdots & & & 0 & 1 & 4 & 1 \\ \vdots & & & & \ddots & \ddots & \ddots & 0 \\ \vdots & & & & & \ddots & 1 & 4 & 1 \\ 0 & \dots & \dots & \dots & \dots & 0 & 1 & 2 \end{pmatrix}$$

8.12 Exemplifying the sparsity for P2 elements

$$A = \frac{h}{30} \begin{pmatrix} 4 & 2 & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 2 & 16 & 2 & 0 & 0 & 0 & 0 & 0 & 0 \\ -1 & 2 & 8 & 2 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 2 & 16 & 2 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 2 & 8 & 2 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 2 & 16 & 2 & 0 & 0 \\ 0 & 0 & 0 & 0 & -1 & 2 & 8 & 2 & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 2 & 16 & 2 \\ 0 & 0 & 0 & 0 & 0 & 0 & -1 & 2 & 4 \end{pmatrix}$$



8.13 Matrix sparsity pattern for regular/random numbering of P1 elements

- Left: number nodes and elements from left to right
- Right: number nodes and elements arbitrarily



8.14 Matrix sparsity pattern for regular/random numbering of P3 elements

- Left: number nodes and elements from left to right
- Right: number nodes and elements arbitrarily



8.15 Sparse matrix storage and solution

The minimum storage requirements for the coefficient matrix $A_{i,j}$:

- P1 elements: only 3 nonzero entries per row
- P2 elements: only 5 nonzero entries per row
- P3 elements: only 7 nonzero entries per row
- It is important to utilize sparse storage and sparse solvers
- In Python: `scipy.sparse` package


8.16 Approximate $f \sim x^9$ by various elements; code

Compute a mesh with N_e elements, basis functions of degree d , and approximate a given symbolic expression $f(x)$ by a finite element expansion $u(x) = \sum_j c_j \varphi_j(x)$:

```
import sympy as sp
from fe_approx1D import approximate
x = sp.Symbol('x')

approximate(f=x*(1-x)**8, symbolic=False, d=1, N_e=4)
approximate(f=x*(1-x)**8, symbolic=False, d=2, N_e=2)
approximate(f=x*(1-x)**8, symbolic=False, d=1, N_e=8)
approximate(f=x*(1-x)**8, symbolic=False, d=2, N_e=4)
```

8.17 Approximate $f \sim x^9$ by various elements; plot

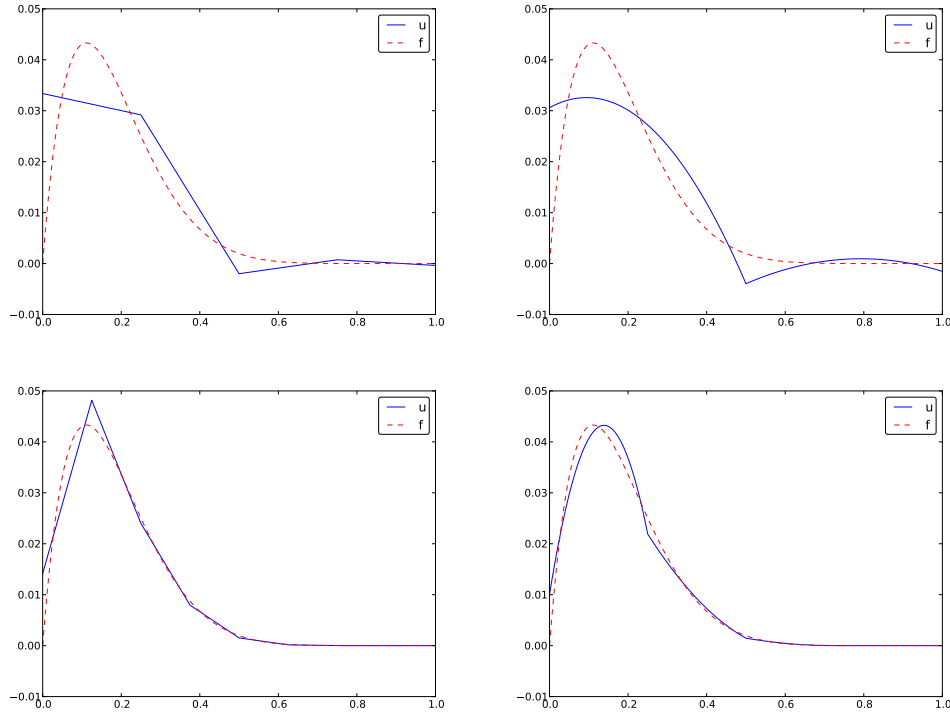

9 Comparison of finite element and finite difference approximation

- Finite difference approximation of a function $f(x)$: simply choose $u_i = f(x_i)$ (interpolation)
- Galerkin/project and least squares method: must derive and solve a linear system
- What is *really* the difference in u ?

9.1 Interpolation/collocation with finite elements

Let $\{x_i\}_{i \in \mathcal{I}_s}$ be the nodes in the mesh. Collocation means

$$u(x_i) = f(x_i), \quad i \in \mathcal{I}_s,$$

which translates to

$$\sum_{j \in \mathcal{I}_s} c_j \varphi_j(x_i) = f(x_i),$$

but $\varphi_j(x_i) = 0$ if $i \neq j$ so the sum collapses to one term $c_i \varphi_i(x_i) = c_i$, and we have the result

$$c_i = f(x_i)$$

Same result as the standard finite difference approach, but finite elements define u also *between* the x_i points

9.2 Galerkin/project and least squares vs collocation/interpolation or finite differences

- Scope: work with P1 elements
- Use projection/Galerkin or least squares (equivalent)
- Interpret the resulting linear system as finite difference equations

The P1 finite element machinery results in a linear system where equation no i is

$$\frac{h}{6}(u_{i-1} + 4u_i + u_{i+1}) = (f, \varphi_i)$$

Note:

- We have used u_i for c_i to make notation similar to finite differences
- The finite difference counterpart is just $u_i = f_i$

9.3 Expressing the left-hand side in finite difference operator notation

Rewrite the left-hand side of finite element equation no i :

$$h(u_i + \frac{1}{6}(u_{i-1} - 2u_i + u_{i+1})) = [h(u + \frac{h^2}{6}D_x D_x u)]_i$$

This is the standard finite difference approximation of

$$h(u + \frac{h^2}{6}u'')$$

9.4 Treating the right-hand side; Trapezoidal rule

$$(f, \varphi_i) = \int_{x_{i-1}}^{x_i} f(x) \frac{1}{h}(x - x_{i-1})dx + \int_{x_i}^{x_{i+1}} f(x) \frac{1}{h}(1 - (x - x_i))dx$$

Cannot do much unless we specialize f or use *numerical integration*.

Trapezoidal rule using the nodes:

$$(f, \varphi_i) = \int_{\Omega} f \varphi_i dx \approx h \frac{1}{2}(f(x_0) \varphi_i(x_0) + f(x_N) \varphi_i(x_N)) + h \sum_{j=1}^{N-1} f(x_j) \varphi_i(x_j)$$

$\varphi_i(x_j) = \delta_{ij}$, so this formula collapses to one term:

$$(f, \varphi_i) \approx hf(x_i), \quad i = 1, \dots, N-1.$$

Same result as in collocation (interpolation) and the finite difference method!

9.5 Treating the right-hand side; Simpson's rule

$$\int_{\Omega} g(x) dx \approx \frac{h}{6} \left(g(x_0) + 2 \sum_{j=1}^{N-1} g(x_j) + 4 \sum_{j=0}^{N-1} g(x_{j+\frac{1}{2}}) + f(x_{2N}) \right),$$

Our case: $g = f\varphi_i$. The sums collapse because $\varphi_i = 0$ at most of the points.

$$(f, \varphi_i) \approx \frac{h}{3} (f_{i-\frac{1}{2}} + f_i + f_{i+\frac{1}{2}})$$

Conclusions:

- While the finite difference method just samples f at x_i , the finite element method applies an average (smoothing) of f around x_i
- On the left-hand side we have a term $\sim hu''$, and u'' also contribute to smoothing
- There is some inherent smoothing in the finite element method

9.6 Finite element approximation vs finite differences

With Trapezoidal integration of (f, φ_i) , the finite element method essentially solve

$$u + \frac{h^2}{6} u'' = f, \quad u'(0) = u'(L) = 0,$$

by the finite difference method

$$[u + \frac{h^2}{6} D_x D_x u = f]_i$$

With Simpson integration of (f, φ_i) we essentially solve

$$[u + \frac{h^2}{6} D_x D_x u = \bar{f}]_i,$$

where

$$\bar{f}_i = \frac{1}{3} (f_{i-1/2} + f_i + f_{i+1/2})$$

Note: as $h \rightarrow 0$, $hu'' \rightarrow 0$ and $\bar{f}_i \rightarrow f_i$.

9.7 Making finite elements behave as finite differences

- Can we adjust the finite element method so that we do not get the extra hu'' smoothing term and averaging of f ?
- This is sometimes important in time-dependent problems to incorporate good properties of finite differences into finite elements

Result:

- Compute all integrals by the Trapezoidal method and P1 elements
- Specifically, the coefficient matrix becomes diagonal ("lumped") - no linear system (!)
- Loss of accuracy? The Trapezoidal rule has error $\mathcal{O}(h^2)$, the same as the approximation error in P1 elements

10 Limitations of the nodes and element concepts

So far,

- *Nodes*: points for defining φ_i and computing u values
- *Elements*: subdomain (containing a few nodes)
- This is a common notion of nodes and elements

One problem:

- Our algorithms need nodes at the element boundaries
- This is often not desirable, so we need to throw the `nodes` and `elements` arrays away and find a more generalized element concept

11 A generalized element concept

- We introduce *cell* for the subdomain that we up to now called element
- A cell has *vertices* (interval end points)
- *Nodes* are, almost as before, points where we want to compute unknown functions
- *Degrees of freedom* is what the c_j represent (usually function values at nodes)

11.1 The concept of a finite element

1. a *reference cell* in a local reference coordinate system
2. a set of *basis functions* $\tilde{\varphi}_r$ defined on the cell
3. a set of *degrees of freedom* (e.g., function values) that uniquely determine the basis functions such that $\tilde{\varphi}_r = 1$ for degree of freedom number r and $\tilde{\varphi}_r = 0$ for all other degrees of freedom
4. a mapping between local and global degree of freedom numbers (*dof map*)
5. a geometric *mapping* of the reference cell onto to cell in the physical domain: $[-1, 1] \Rightarrow [x_L, x_R]$


11.2 Implementation; basic data structures

- Cell vertex coordinates: **vertices** (equals **nodes** for P1 elements)
- Element vertices: **cell[e][r]** holds global vertex number of local vertex no **r** in element **e** (same as **elements** for P1 elements)
- **dof_map[e,r]** maps local dof **r** in element **e** to global dof number (same as **elements** for Pd elements)

The assembly process now applies **dof_map**:

```
A[dof_map[e][r], dof_map[e][s]] += A_e[x,s]
b[dof_map[e][r]] += b_e[r]
```

11.3 Implementation; example with P2 elements

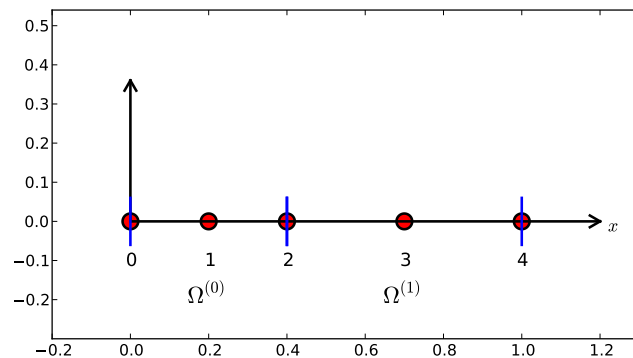

```
vertices = [0, 0.4, 1]
cells = [[0, 1], [1, 2]]
dof_map = [[0, 1, 2], [2, 3, 4]]
```

11.4 Implementation; example with P0 elements

Example: Same mesh, but u is piecewise constant in each cell (P0 element). Same **vertices** and **cells**, but

```
dof_map = [[0], [1]]
```

May think of one node in the middle of each element.

We will hereafter work with **cells**, **vertices**, and **dof_map**.

11.5 Example on doing the algorithmic steps

```
# Use modified fe_approx1D module
from fe_approx1D_numint import *

x = sp.Symbol('x')
f = x*(1 - x)


N_e = 10
# Create mesh with P3 (cubic) elements
vertices, cells, dof_map = mesh_uniform(N_e, d=3, Omega=[0,1])

# Create basis functions on the mesh
phi = [basis(len(dof_map[e])-1) for e in range(N_e)]

# Create linear system and solve it
A, b = assemble(vertices, cells, dof_map, phi, f)
c = np.linalg.solve(A, b)

# Make very fine mesh and sample u(x) on this mesh for plotting
x_u, u = u_glob(c, vertices, cells, dof_map,
                resolution_per_element=51)
plot(x_u, u)
```

11.6 Approximating a parabola by P0 elements

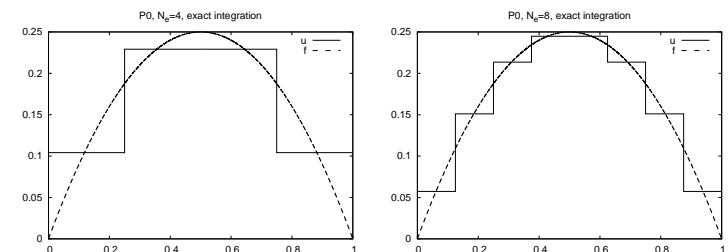

The **approximate** function automates the steps in the previous slide:

```

from fe_approx1D_numint import *
x=sp.Symbol("x")
for N_e in 4, 8:
    approximate(x*(1-x), d=0, N_e=N_e, Omega=[0,1])

```

11.7 Computing the error of the approximation; principles

$$L^2 \text{ error: } ||e||_{L^2} = \left(\int_{\Omega} e^2 dx \right)^{1/2}$$

Accurate approximation of the integral:

- Sample $u(x)$ at many points in each element (call `u_glob`, returns `x` and `u`)
- Use the Trapezoidal rule based on the samples
- It is important to integrate u accurately *over the elements*
- (In a finite difference method we would just sample the mesh point values)

11.8 Computing the error of the approximation; details

Note.

We need a version of the Trapezoidal rule valid for non-uniformly spaced points:

$$\int_{\Omega} g(x) dx \approx \sum_{j=0}^{n-1} \frac{1}{2} (g(x_j) + g(x_{j+1})) (x_{j+1} - x_j)$$

```

# Given c, compute x and u values on a very fine mesh
x, u = u_glob(c, vertices, cells, dof_map,
              resolution_per_element=101)
# Compute the error on the very fine mesh
e = f(x) - u
e2 = e**2
# Vectorized Trapezoidal rule
E = np.sqrt(0.5*np.sum((e2[:-1] + e2[1:])* (x[1:] - x[:-1])))

```

11.9 How does the error depend on h and d ?

Theory and experiments show that the least squares or projection/Galerkin method in combination with P_d elements of equal length h has an error

$$||e||_{L^2} = Ch^{d+1}$$

where C depends on f , but not on h or d .

11.10 Cubic Hermite polynomials; definition

- Can we construct $\varphi_i(x)$ with continuous derivatives? Yes!

Consider a reference cell $[-1, 1]$. We introduce two nodes, $X = -1$ and $X = 1$. The degrees of freedom are

- 0: value of function at $X = -1$
- 1: value of first derivative at $X = -1$
- 2: value of function at $X = 1$
- 3: value of first derivative at $X = 1$

Derivatives as unknowns ensure the same $\varphi'_i(x)$ value at nodes and thereby continuous derivatives.

11.11 Cubic Hermite polynomials; derivation

4 constraints on $\tilde{\varphi}_r$ (1 for dof r , 0 for all others):

- $\tilde{\varphi}_0(X_{(0)}) = 1, \tilde{\varphi}_0(X_{(1)}) = 0, \tilde{\varphi}'_0(X_{(0)}) = 0, \tilde{\varphi}'_0(X_{(1)}) = 0$
- $\tilde{\varphi}'_1(X_{(0)}) = 1, \tilde{\varphi}'_1(X_{(1)}) = 0, \tilde{\varphi}_1(X_{(0)}) = 0, \tilde{\varphi}_1(X_{(1)}) = 0$
- $\tilde{\varphi}_2(X_{(1)}) = 1, \tilde{\varphi}_2(X_{(0)}) = 0, \tilde{\varphi}'_2(X_{(0)}) = 0, \tilde{\varphi}'_2(X_{(1)}) = 0$
- $\tilde{\varphi}'_3(X_{(1)}) = 1, \tilde{\varphi}'_3(X_{(0)}) = 0, \tilde{\varphi}_3(X_{(0)}) = 0, \tilde{\varphi}_3(X_{(1)}) = 0$

This gives 4 linear, coupled equations *for each* $\tilde{\varphi}_r$ to determine the 4 coefficients in the cubic polynomial

11.12 Cubic Hermite polynomials; result

$$\tilde{\varphi}_0(X) = 1 - \frac{3}{4}(X+1)^2 + \frac{1}{4}(X+1)^3 \quad (19)$$

$$\tilde{\varphi}_1(X) = -(X+1)(1 - \frac{1}{2}(X+1))^2 \quad (20)$$

$$\tilde{\varphi}_2(X) = \frac{3}{4}(X+1)^2 - \frac{1}{2}(X+1)^3 \quad (21)$$

$$\tilde{\varphi}_3(X) = -\frac{1}{2}(X+1)(\frac{1}{2}(X+1)^2 - (X+1)) \quad (22)$$

$$(23)$$

12 Numerical integration

- $\int_{\Omega} f \varphi_i dx$ must in general be computed by numerical integration
- Numerical integration is often used for the matrix too

Common form of a numerical integration rule:

$$\int_{-1}^1 g(X) dX \approx \sum_{j=0}^M w_j g(\bar{X}_j),$$

where

- \bar{X}_j are *integration points*
- w_j are *integration weights*

Different rules correspond to different choices of points and weights

12.1 The Midpoint rule

Simplest possibility: the Midpoint rule,

$$\int_{-1}^1 g(X) dX \approx 2g(0), \quad \bar{X}_0 = 0, \quad w_0 = 2,$$

Exact for linear integrands

12.2 Newton-Cotes rules

- Idea: use a fixed, uniformly distributed set of points in $[-1, 1]$
- The points often coincides with nodes
- Very useful for making $\varphi_i \varphi_j = 0$ and get diagonal ("mass") matrices ("lumping")

The Trapezoidal rule:

$$\int_{-1}^1 g(X) dX \approx g(-1) + g(1), \quad \bar{X}_0 = -1, \quad \bar{X}_1 = 1, \quad w_0 = w_1 = 1,$$

Simpson's rule:

$$\int_{-1}^1 g(X) dX \approx \frac{1}{3} (g(-1) + 4g(0) + g(1)),$$

where

$$\bar{X}_0 = -1, \quad \bar{X}_1 = 0, \quad \bar{X}_2 = 1, \quad w_0 = w_2 = \frac{1}{3}, \quad w_1 = \frac{4}{3}$$

12.3 Gauss-Legendre rules with optimized points

- Optimize the location of points to get higher accuracy
- Gauss-Legendre rules (quadrature) adjust points and weights to integrate polynomials exactly

$$M = 1: \quad \bar{X}_0 = -\frac{1}{\sqrt{3}}, \quad \bar{X}_1 = \frac{1}{\sqrt{3}}, \quad w_0 = w_1 = 1 \quad (24)$$

$$M = 2: \quad \bar{X}_0 = -\sqrt{\frac{3}{5}}, \quad \bar{X}_1 = 0, \quad \bar{X}_2 = \sqrt{\frac{3}{5}}, \quad w_0 = w_2 = \frac{5}{9}, \quad w_1 = \frac{8}{9} \quad (25)$$

- $M = 1$: integrates 3rd degree polynomials exactly
- $M = 2$: integrates 5th degree polynomials exactly
- In general, M -point rule integrates a polynomial of degree $2M + 1$ exactly.

See `numint.py`⁶ for a large collection of Gauss-Legendre rules.

13 Approximation of functions in 2D

Extensibility of 1D ideas.

All the concepts and algorithms developed for approximation of 1D functions $f(x)$ can readily be extended to 2D functions $f(x, y)$ and 3D functions $f(x, y, z)$. Key formulas stay the same.

Inner product in 2D:

$$(f, g) = \int_{\Omega} f(x, y) g(x, y) dx dy$$

Least squares and project/Galerkin lead to a linear system

$$\sum_{j \in \mathcal{I}_s} A_{i,j} c_j = b_i, \quad i \in \mathcal{I}_s$$

$$A_{i,j} = (\psi_i, \psi_j)$$

$$b_i = (f, \psi_i)$$

Challenge: How to construct 2D basis functions $\psi_i(x, y)$?

13.1 2D basis functions as tensor products of 1D functions

Use a 1D basis for x variation and a similar for y variation:

$$V_x = \text{span}\{\hat{\psi}_0(x), \dots, \hat{\psi}_{N_x}(x)\} \quad (26)$$

$$V_y = \text{span}\{\hat{\psi}_0(y), \dots, \hat{\psi}_{N_y}(y)\} \quad (27)$$

⁶<http://tinyurl.com/jvzzcfn/fem/numint.py>

The 2D vector space can be defined as a *tensor product* $V = V_x \otimes V_y$ with basis functions

$$\psi_{p,q}(x,y) = \hat{\psi}_p(x)\hat{\psi}_q(y) \quad p \in \mathcal{I}_x, q \in \mathcal{I}_y.$$

13.2 Tensor products

Given two vectors $a = (a_0, \dots, a_M)$ and $b = (b_0, \dots, b_N)$ their *outer tensor product*, also called the *dyadic product*, is $p = a \otimes b$, defined through

$$p_{i,j} = a_i b_j, \quad i = 0, \dots, M, \quad j = 0, \dots, N.$$

Note: p has two indices (as a matrix or two-dimensional array)

Example: 2D basis as tensor product of 1D spaces,

$$\psi_{p,q}(x,y) = \hat{\psi}_p(x)\hat{\psi}_q(y), \quad p \in \mathcal{I}_x, q \in \mathcal{I}_y$$

13.3 Double or single index?

The 2D basis can employ a double index and double sum:

$$u = \sum_{p \in \mathcal{I}_x} \sum_{q \in \mathcal{I}_y} c_{p,q} \psi_{p,q}(x,y)$$

Or just a single index:

$$u = \sum_{j \in \mathcal{I}_s} c_j \psi_j(x,y)$$

with

$$\psi_i(x,y) = \hat{\psi}_p(x)\hat{\psi}_q(y), \quad i = pN_y + q \text{ or } i = qN_x + p$$

13.4 Example on 2D (bilinear) basis functions; formulas

In 1D we use the basis

$$\{1, x\}$$

2D tensor product (all combinations):

$$\psi_{0,0} = 1, \quad \psi_{1,0} = x, \quad \psi_{0,1} = y, \quad \psi_{1,1} = xy$$


or with a single index:

$$\psi_0 = 1, \quad \psi_1 = x, \quad \psi_2 = y, \quad \psi_3 = xy$$

See notes for details of a hand-calculation.

13.5 Example on 2D (bilinear) basis functions; plot

Quadratic $f(x,y) = (1+x^2)(1+2y^2)$ (left), bilinear u (right):

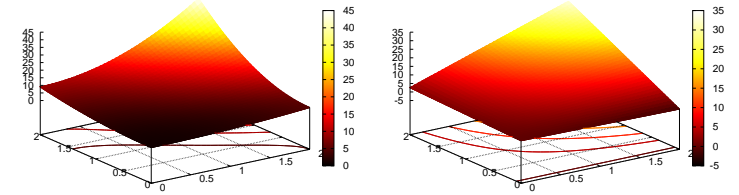

13.6 Implementation; principal changes to the 1D code

Very small modification of approx1D.py:

- $\Omega = [[0, L_x], [0, L_y]]$
- Symbolic integration in 2D
- Construction of 2D (tensor product) basis functions

13.7 Implementation; 2D integration

```
import sympy as sp

integrand = psi[i]*psi[j]
I = sp.integrate(integrand,
                  (x, Omega[0][0], Omega[0][1]),
                  (y, Omega[1][0], Omega[1][1]))

# Fall back on numerical integration if symbolic integration
# was unsuccessful
if isinstance(I, sp.Integral):
    integrand = sp.lambdify([x,y], integrand)
    I = sp.mpmath.quad(integrand,
                       [Omega[0][0], Omega[0][1]],
                       [Omega[1][0], Omega[1][1]])
```

13.8 Implementation; 2D basis functions

Tensor product of 1D "Taylor-style" polynomials x^i :

```
def taylor(x, y, Nx, Ny):
    return [x**i*y**j for i in range(Nx+1) for j in range(Ny+1)]
```

Tensor product of 1D sine functions $\sin((i+1)\pi x)$:

```
def sines(x, y, Nx, Ny):
    return [sp.sin(sp.pi*(i+1)*x)*sp.sin(sp.pi*(j+1)*y)
            for i in range(Nx+1) for j in range(Ny+1)]
```

Complete code in approx2D.py⁷

⁷http://tinyurl.com/jvzzcfn/fem/fe_approx2D.py

13.9 Implementation; application

$$f(x, y) = (1 + x^2)(1 + 2y^2)$$

```
>>> from approx2D import *
>>> f = (1+x**2)*(1+2*y**2)
>>> psi = taylor(x, y, 1, 1)
>>> Omega = [[0, 2], [0, 2]]
>>> u, c = least_squares(f, psi, Omega)
>>> print u
8*x*y - 2*x/3 + 4*y/3 - 1/9
>>> print sp.expand(f)
2*x**2*y**2 + x**2 + 2*y**2 + 1
```

13.10 Implementation; trying a perfect expansion

Add higher powers to the basis such that $f \in V$:

```
>>> psi = taylor(x, y, 2, 2)
>>> u, c = least_squares(f, psi, Omega)
>>> print u
2*x**2*y**2 + x**2 + 2*y**2 + 1
>>> print u-f
0
```

Expected: $u = f$ when $f \in V$

13.11 Generalization to 3D

Key idea:

$$V = V_x \otimes V_y \otimes V_z$$

Repeated outer tensor product of multiple vectors.

$$\begin{aligned} a^{(q)} &= (a_0^{(q)}, \dots, a_{N_q}^{(q)}), \quad q = 0, \dots, m \\ p &= a^{(0)} \otimes \dots \otimes a^{(m)} \\ p_{i_0, i_1, \dots, i_m} &= a_{i_1}^{(0)} a_{i_1}^{(1)} \dots a_{i_m}^{(m)} \end{aligned}$$

$$\begin{aligned} \psi_{p,q,r}(x, y, z) &= \hat{\psi}_p(x) \hat{\psi}_q(y) \hat{\psi}_r(z) \\ u(x, y, z) &= \sum_{p \in \mathcal{I}_x} \sum_{q \in \mathcal{I}_y} \sum_{r \in \mathcal{I}_z} c_{p,q,r} \psi_{p,q,r}(x, y, z) \end{aligned}$$

14 Finite elements in 2D and 3D

The two great advantages of the finite element method:

- Can handle complex-shaped domains in 2D and 3D

- Can easily provide higher-order polynomials in the approximation

Finite elements in 1D: mostly for learning, insight, debugging

14.1 Examples on cell types


2D:

- triangles
- quadrilaterals


3D:

- tetrahedra
- hexahedra


14.2 Rectangular domain with 2D P1 elements



14.3 Deformed geometry with 2D P1 elements

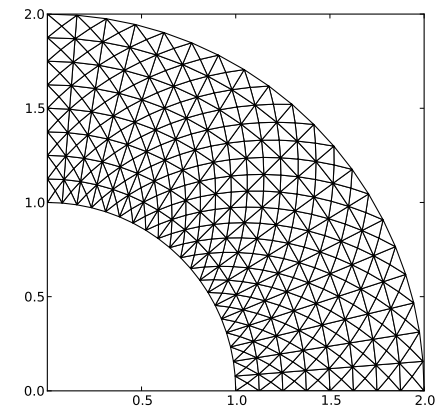


14.4 Rectangular domain with 2D Q1 elements

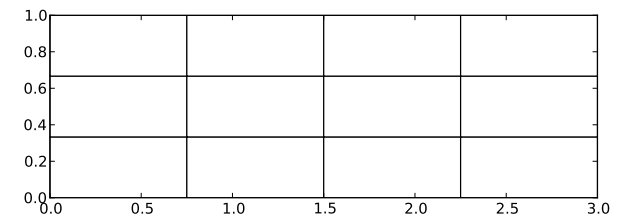

14.5 Basis functions over triangles in the physical domain


The P1 triangular 2D element: u is linear $ax + by + c$ over each triangular cell

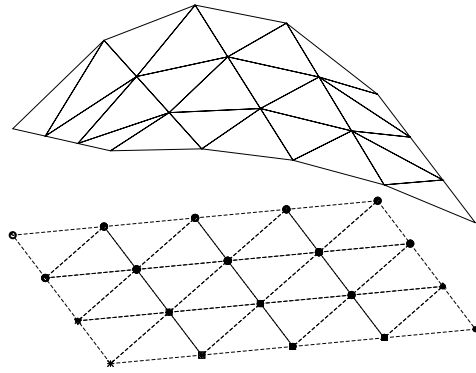

14.6 Basic features of 2D P1 elements


- $\varphi_r(X, Y)$ is a linear function over each element
- Cells = triangles
- Vertices = corners of the cells
- Nodes = vertices
- Degrees of freedom = function values at the nodes

14.7 Linear mapping of reference element onto general triangular cell

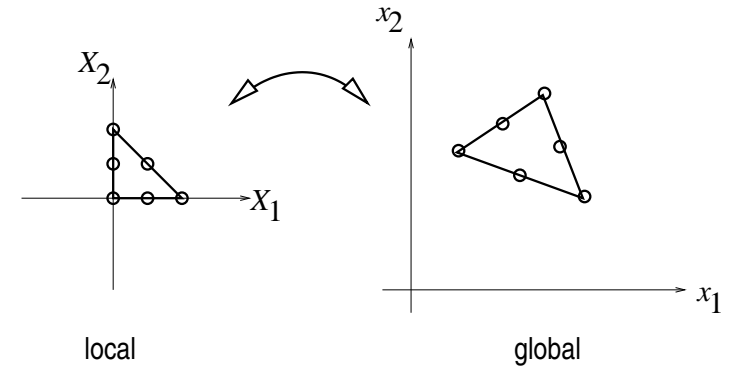

14.8 φ_i : pyramid shape, composed of planes


- $\varphi_i(X, Y)$ varies linearly over an element
- $\varphi_i = 1$ at vertex (node) i , 0 at all other vertices (nodes)

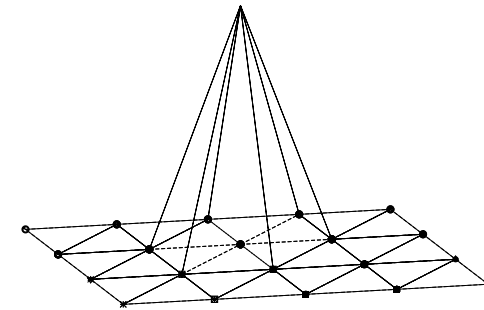

14.9 Element matrices and vectors

- As in 1D, the contribution from one cell to the matrix involves just a few numbers, collected in the element matrix and vector
- $\varphi_i \varphi_j \neq 0$ only if i and j are degrees of freedom (vertices/nodes) in the same element
- The 2D P1 has a 3×3 element matrix

14.10 Basis functions over triangles in the reference cell




$$\tilde{\varphi}_0(X, Y) = 1 - X - Y \quad (28)$$

$$\tilde{\varphi}_1(X, Y) = X \quad (29)$$


$$\tilde{\varphi}_2(X, Y) = Y \quad (30)$$

Higher-degree $\tilde{\varphi}_r$ introduce more nodes (dof = node values)


14.11 2D P1, P2, P3, P4, P5, and P6 elements

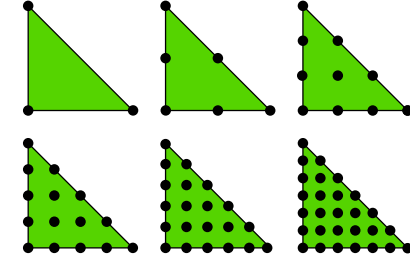

14.12 P1 elements in 1D, 2D, and 3D



14.13 P2 elements in 1D, 2D, and 3D



- Interval, triangle, tetrahedron: *simplex* element (plural quick-form: *simplices*)
- Side of the cell is called *face*
- Tetrahedron has also *edges*

14.14 Affine mapping of the reference cell; formula

Mapping of local $\mathbf{X} = (X, Y)$ coordinates in the reference cell to global, physical $\mathbf{x} = (x, y)$ coordinates:


$$\mathbf{x} = \sum_r \tilde{\varphi}_r^{(1)}(\mathbf{X}) \mathbf{x}_{q(e,r)} \quad (31)$$

where

- r runs over the local vertex numbers in the cell
- \mathbf{x}_i are the (x, y) coordinates of vertex i
- $\tilde{\varphi}_r^{(1)}$ are P1 basis functions

This mapping preserves the straight/planar faces and edges.

14.15 Affine mapping of the reference cell; figure

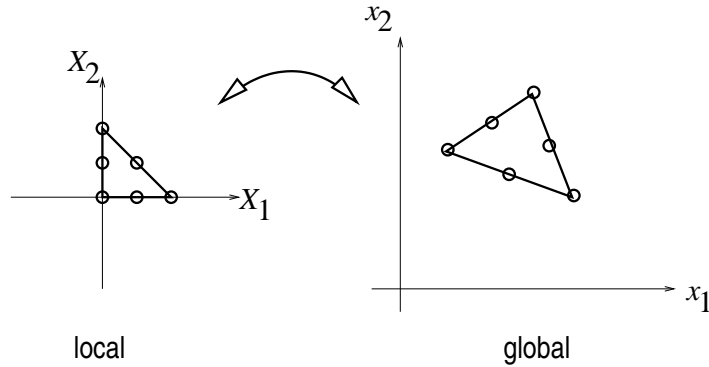


14.16 Isoparametric mapping of the reference cell

Idea: Use the basis functions of the element (not only the P1 functions) to map the element

$$\mathbf{x} = \sum_r \bar{\varphi}_r(\mathbf{X}) \mathbf{x}_{q(e,r)}$$

Advantage: higher-order polynomial basis functions now map the reference cell to a *curved* triangle or tetrahedron.

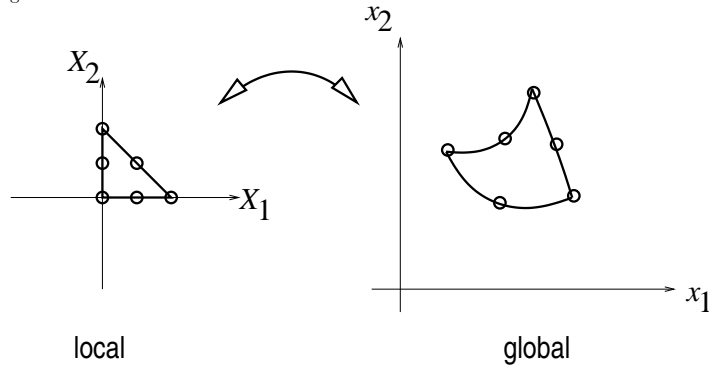

14.17 Computing integrals

Integrals must be transformed from $\Omega^{(e)}$ (physical cell) to $\bar{\Omega}^r$ (reference cell):

$$\int_{\Omega^{(e)}} \varphi_i(\mathbf{x}) \varphi_j(\mathbf{x}) d\mathbf{x} = \int_{\bar{\Omega}^r} \bar{\varphi}_i(\mathbf{X}) \bar{\varphi}_j(\mathbf{X}) \det J d\mathbf{X} \quad (32)$$

$$\int_{\Omega^{(e)}} \varphi_i(\mathbf{x}) f(\mathbf{x}) d\mathbf{x} = \int_{\bar{\Omega}^r} \bar{\varphi}_i(\mathbf{X}) f(\mathbf{x}(\mathbf{X})) \det J d\mathbf{X} \quad (33)$$

where $d\mathbf{x} = dx dy$ or $d\mathbf{x} = dx dy dz$ and $\det J$ is the determinant of the Jacobian of the mapping $\mathbf{x}(\mathbf{X})$.

$$J = \begin{bmatrix} \frac{\partial x}{\partial X} & \frac{\partial x}{\partial Y} \\ \frac{\partial y}{\partial X} & \frac{\partial y}{\partial Y} \end{bmatrix}, \quad \det J = \frac{\partial x}{\partial X} \frac{\partial y}{\partial Y} - \frac{\partial x}{\partial Y} \frac{\partial y}{\partial X}$$

Affine mapping (31): $\det J = 2\Delta$, Δ = cell volume

!slide

14.18 Remark on going from 1D to 2D/3D

Finite elements in 2D and 3D builds on the same *ideas* and *concepts* as in 1D, but there is simply much more to compute because the specific mathematical formulas in 2D and 3D are more complicated and the book keeping with dof maps also gets more complicated. The manual work is tedious, lengthy, and error-prone so automation by the computer is a must.

15 Differential equation models

Our aim is to extend the ideas for approximating f by u , or solving

$$u = f$$

to real differential equations like[[[

$$-u'' + bu = f, \quad u(0) = 1, \quad u'(L) = D$$

Three methods are addressed:

1. least squares
2. Galerkin/projection
3. collocation (interpolation)

Method 2 will be totally dominating!

15.1 Abstract differential equation

$$\mathcal{L}(u) = 0, \quad x \in \Omega \quad (34)$$

Examples (1D problems):

$$\mathcal{L}(u) = \frac{d^2 u}{dx^2} - f(x), \quad (35)$$

$$\mathcal{L}(u) = \frac{d}{dx} \left(\alpha(x) \frac{du}{dx} \right) + f(x), \quad (36)$$

$$\mathcal{L}(u) = \frac{d}{dx} \left(\alpha(u) \frac{du}{dx} \right) - au + f(x), \quad (37)$$

$$\mathcal{L}(u) = \frac{d}{dx} \left(\alpha(u) \frac{du}{dx} \right) + f(u, x) \quad (38)$$

15.2 Abstract boundary conditions

$$\mathcal{B}_0(u) = 0, \quad x = 0, \quad \mathcal{B}_1(u) = 0, \quad x = L \quad (39)$$

Examples:

$$\mathcal{B}_i(u) = u - g, \quad \text{Dirichlet condition} \quad (40)$$

$$\mathcal{B}_i(u) = -\alpha \frac{du}{dx} - g, \quad \text{Neumann condition} \quad (41)$$

$$\mathcal{B}_i(u) = -\alpha \frac{du}{dx} - h(u - g), \quad \text{Robin condition} \quad (42)$$

15.3 Reminder about notation

- $u_e(x)$ is the symbol for the *exact* solution of $\mathcal{L}(u_e) = 0$
- $u(x)$ denotes an *approximate* solution
- We seek $u \in V$
- $V = \text{span}\{\psi_0(x), \dots, \psi_N(x)\}$, V has basis $\{\psi_i\}_{i \in \mathcal{I}_s}$
- $\mathcal{I}_s = \{0, \dots, N\}$ is an index set
- $u(x) = \sum_{j \in \mathcal{I}_s} c_j \psi_j(x)$
- Inner product: $(u, v) = \int_{\Omega} uv \, dx$
- Norm: $\|u\| = \sqrt{(u, u)}$

15.4 New topics

Much is similar to approximating a function (solving $u = f$), but two new topics are needed:

- Variational formulation of the differential equation problem (including integration by parts)
- Handling of boundary conditions

15.5 Residual-minimizing principles

- When solving $u = f$ we knew the error $e = f - u$ and could use principles for minimizing the error
- When solving $\mathcal{L}(u_e) = 0$ we do not know u_e and cannot work with the error $e = u_e - u$
- We only have the *error in the equation*: the residual R

Inserting $u = \sum_j c_j \psi_j$ in $\mathcal{L} = 0$ gives a residual

$$R = \mathcal{L}(u) = \mathcal{L}\left(\sum_j c_j \psi_j\right) \neq 0 \quad (43)$$

Goal: minimize R wrt $\{c_i\}_{i \in \mathcal{I}_s}$ (and hope it makes a small e too)

$$R = R(c_0, \dots, c_N; x)$$

15.6 The least squares method

Idea: minimize

$$E = \|R\|^2 = (R, R) = \int_{\Omega} R^2 \, dx \quad (44)$$

Minimization wrt $\{c_i\}_{i \in \mathcal{I}_s}$ implies

$$\frac{\partial E}{\partial c_i} = \int_{\Omega} 2R \frac{\partial R}{\partial c_i} \, dx = 0 \quad \Leftrightarrow \quad (R, \frac{\partial R}{\partial c_i}) = 0, \quad i \in \mathcal{I}_s \quad (45)$$

$N + 1$ equations for $N + 1$ unknowns $\{c_i\}_{i \in \mathcal{I}_s}$

15.7 The Galerkin method

Idea: make R orthogonal to V ,

$$(R, v) = 0, \quad \forall v \in V \quad (46)$$

This implies

$$(R, \psi_i) = 0, \quad i \in \mathcal{I}_s \quad (47)$$

$N + 1$ equations for $N + 1$ unknowns $\{c_i\}_{i \in \mathcal{I}_s}$

15.8 The Method of Weighted Residuals

Generalization of the Galerkin method: demand R orthogonal to some space W , possibly $W \neq V$:

$$(R, v) = 0, \quad \forall v \in W \quad (48)$$

If $\{w_0, \dots, w_N\}$ is a basis for W :

$$(R, w_i) = 0, \quad i \in \mathcal{I}_s \quad (49)$$

- $N + 1$ equations for $N + 1$ unknowns $\{c_i\}_{i \in \mathcal{I}_s}$
- Weighted residual with $w_i = \partial R / \partial c_i$ gives least squares

15.9 Terminology: test and trial Functions

- ψ_j used in $\sum_j c_j \psi_j$ is called *trial function*
- ψ_i or w_i used as weight in Galerkin's method is called *test function*

15.10 The collocation method


Idea: demand $R = 0$ at $N + 1$ points

$$R(x_i; c_0, \dots, c_N) = 0, \quad i \in \mathcal{I}_s \quad (50)$$

Note: The collocation method is a weighted residual method with delta functions as weights

$$0 = \int_{\Omega} R(x; c_0, \dots, c_N) \delta(x - x_i) dx = R(x_i; c_0, \dots, c_N)$$

$$\text{property of } \delta(x) : \int_{\Omega} f(x) \delta(x - x_i) dx = f(x_i), \quad x_i \in \Omega \quad (51)$$



16 Examples on using the principles

Goal.

Exemplify the least squares, Galerkin, and collocation methods in a simple 1D problem with global basis functions.

16.1 The first model problem

$$-u''(x) = f(x), \quad x \in \Omega = [0, L], \quad u(0) = 0, \quad u(L) = 0 \quad (52)$$

Basis functions:

$$\psi_i(x) = \sin\left((i+1)\pi\frac{x}{L}\right), \quad i \in \mathcal{I}_s \quad (53)$$

The residual:

$$\begin{aligned} R(x; c_0, \dots, c_N) &= u''(x) + f(x), \\ &= \frac{d^2}{dx^2} \left(\sum_{j \in \mathcal{I}_s} c_j \psi_j(x) \right) + f(x), \\ &= - \sum_{j \in \mathcal{I}_s} c_j \psi_j''(x) + f(x) \end{aligned} \quad (54)$$

16.2 Boundary conditions

Since $u(0) = u(L) = 0$ we must ensure that all $\psi_i(0) = \psi_i(L) = 0$. Then

$$u(0) = \sum_j c_j \psi_j(0) = 0, \quad u(L) = \sum_j c_j \psi_j(L)$$

- u known: Dirichlet boundary condition
- u' known: Neumann boundary condition
- Must have $\psi_i = 0$ where Dirichlet conditions apply

16.3 The least squares method; principle

$$\left(R, \frac{\partial R}{\partial c_i}\right) = 0, \quad i \in \mathcal{I}_s$$

$$\frac{\partial R}{\partial c_i} = \frac{\partial}{\partial c_i} \left(\sum_{j \in \mathcal{I}_s} c_j \psi_j''(x) + f(x) \right) = \psi_i''(x) \quad (55)$$

Because:

$$\frac{\partial}{\partial c_i} (c_0 \psi_0'' + c_1 \psi_1'' + \dots + c_{i-1} \psi_{i-1}'' + c_i \psi_i'' + c_{i+1} \psi_{i+1}'' + \dots + c_N \psi_N'') = \psi_i''$$

16.4 The least squares method; equation system

$$\left(\sum_j c_j \psi_j'' + f, \psi_i'' \right) = 0, \quad i \in \mathcal{I}_s \quad (56)$$

Rearrangement:

$$\sum_{j \in \mathcal{I}_s} (\psi_i'', \psi_j'') c_j = -(f, \psi_i''), \quad i \in \mathcal{I}_s \quad (57)$$

This is a linear system

$$\sum_{j \in \mathcal{I}_s} A_{i,j} c_j = b_i, \quad i \in \mathcal{I}_s$$

with

$$\begin{aligned}
A_{i,j} &= (\psi_i'', \psi_j'') \\
&= \pi^4 (i+1)^2 (j+1)^2 L^{-4} \int_0^L \sin\left((i+1)\pi \frac{x}{L}\right) \sin\left((j+1)\pi \frac{x}{L}\right) dx \\
&= \begin{cases} \frac{1}{2} L^{-3} \pi^4 (i+1)^4 & i = j \\ 0, & i \neq j \end{cases} \quad (58)
\end{aligned}$$

$$b_i = -(f, \psi_i'') = (i+1)^2 \pi^2 L^{-2} \int_0^L f(x) \sin\left((i+1)\pi \frac{x}{L}\right) dx \quad (59)$$

16.5 Orthogonality of the basis functions gives diagonal matrix

Useful property:

$$\int_0^L \sin\left((i+1)\pi \frac{x}{L}\right) \sin\left((j+1)\pi \frac{x}{L}\right) dx = \delta_{ij}, \quad \delta_{ij} = \begin{cases} \frac{1}{2} L & i = j \\ 0, & i \neq j \end{cases} \quad (60)$$

$\Rightarrow (\psi_i'', \psi_j'') = \delta_{ij}$, i.e., diagonal $A_{i,j}$, and we can easily solve for c_i :

$$c_i = \frac{2L}{\pi^2 (i+1)^2} \int_0^L f(x) \sin\left((i+1)\pi \frac{x}{L}\right) dx \quad (61)$$

16.6 Least squares method; solution

Let's sympy do the work ($f(x) = 2$):

```
from sympy import *
import sys

i, j = symbols('i j', integer=True)
x, L = symbols('x L')
f = 2
a = 2*L/(pi**2*(i+1)**2)
c_i = a*integrate(f*sin((i+1)*pi*x/L), (x, 0, L))
c_i = simplify(c_i)
print c_i
```

$$c_i = 4 \frac{L^2 \left((-1)^i + 1\right)}{\pi^3 (i^3 + 3i^2 + 3i + 1)}, \quad u(x) = \sum_{k=0}^{N/2} \frac{8L^2}{\pi^3 (2k+1)^3} \sin\left((2k+1)\pi \frac{x}{L}\right). \quad (62)$$

Fast decay: $c_2 = c_0/27$, $c_4 = c_0/125$ - only one term might be good enough:

$$u(x) \approx \frac{8L^2}{\pi^3} \sin\left(\pi \frac{x}{L}\right).$$

16.7 The Galerkin method; principle

$R = u'' + f$:

$$(u'' + f, v) = 0, \quad \forall v \in V,$$

or

$$(u'', v) = -(f, v), \quad \forall v \in V \quad (63)$$

This is a *variational formulation* of the differential equation problem.
 $\forall v \in V$ means for all basis functions:

$$\left(\sum_{j \in \mathcal{I}_s} c_j \psi_j'', \psi_i\right) = -(f, \psi_i), \quad i \in \mathcal{I}_s \quad (64)$$

16.8 The Galerkin method; solution

Since $\psi_i'' \propto \psi_i$, Galerkin's method gives the same linear system and the same solution as the least squares method (in this particular example).

16.9 The collocation method

$R = 0$ (i.e., the differential equation) must be satisfied at $N+1$ points:

$$-\sum_{j \in \mathcal{I}_s} c_j \psi_j''(x_i) = f(x_i), \quad i \in \mathcal{I}_s \quad (65)$$

This is a linear system $\sum_j A_{i,j} = b_i$ with entries

$$A_{i,j} = -\psi_j''(x_i) = (j+1)^2 \pi^2 L^{-2} \sin\left((j+1)\pi \frac{x_i}{L}\right), \quad b_i = 2$$

Choose: $N = 0$, $x_0 = L/2$

$$c_0 = 2L^2/\pi^2$$

16.10 Comparison of the methods

- Exact solution: $u(x) = x(L-x)$
- Galerkin or least squares ($N = 0$): $u(x) = 8L^2 \pi^{-3} \sin(\pi x/L)$
- Collocation method ($N = 0$): $u(x) = 2L^2 \pi^{-2} \sin(\pi x/L)$.
- Max error in Galerkin/least sq.: $-0.008L^2$
- Max error in collocation: $0.047L^2$

17 Useful techniques

17.1 Integration by parts

Second-order derivatives will hereafter be integrated by parts

$$\begin{aligned}
\int_0^L u''(x)v(x)dx &= -\int_0^L u'(x)v'(x)dx + [vu']_0^L \\
&= -\int_0^L u'(x)v'(x)dx + u'(L)v(L) - u'(0)v(0)
\end{aligned} \tag{66}$$

Motivation:

- Lowers the order of derivatives
- Gives more symmetric forms (incl. matrices)
- Enables easy handling of Neumann boundary conditions
- Finite element basis functions φ_i have discontinuous derivatives (at cell boundaries) and are not suited for terms with φ_i''

17.2 Boundary function; principles

- What about nonzero Dirichlet conditions? Say $u(L) = D$
- We always require $\psi_i(L) = 0$ (i.e., $\psi_i = 0$ where Dirichlet conditions applies)
- Problem: $u(L) = \sum_j c_j \psi_j(L) = \sum_j c_j \cdot 0 = 0 \neq D$ - always
- Solution: $u(x) = B(x) + \sum_j c_j \psi_j(x)$
- $B(x)$: user-constructed boundary function that fulfills the Dirichlet conditions
- If $u(L) = D$, $B(L) = D$
- No restrictions of how $B(x)$ varies in the interior of Ω

17.3 Boundary function; example (1)

Dirichlet conditions: $u(0) = C$ and $u(L) = D$. Choose for example

$$\begin{aligned}
B(x) &= \frac{1}{L}(C(L-x) + Dx) : \quad B(0) = C, \quad B(L) = D \\
u(x) &= B(x) + \sum_{j \in \mathcal{I}_s} c_j \psi_j(x), \\
u(0) &= B(0) = C, \quad u(L) = B(L) = D
\end{aligned} \tag{67}$$

17.4 Boundary function; example (2)

Dirichlet condition: $u(L) = D$. Choose for example

$$\begin{aligned}
B(x) &= D : \quad B(L) = D \\
u(x) &= B(x) + \sum_{j \in \mathcal{I}_s} c_j \psi_j(x), \\
u(L) &= B(L) = D
\end{aligned} \tag{68}$$

17.5 Impact of the boundary function on the space where we seek the solution

- $\{\psi_i\}_{i \in \mathcal{I}_s}$ is a basis for V
- $\sum_{j \in \mathcal{I}_s} c_j \psi_j(x) \in V$
- But $u \notin V$!
- Reason: say $u(0) = C$ and $u \in V$ (any $v \in V$ has $v(0) = C$, then $2u \notin V$ because $2u(0) = 2C$)
- When $u(x) = B(x) + \sum_{j \in \mathcal{I}_s} c_j \psi_j(x)$, $B \neq 0$, $B \notin V$ (in general) and $u \notin V$, but $(u - B) \in V$ since $\sum_j c_j \psi_j \in V$

17.6 Abstract notation for variational formulations

The finite element literature (and much FEniCS documentation) applies an abstract notation for the variational formulation:

Find $(u - B) \in V$ such that

$$a(u, v) = L(v) \quad \forall v \in V$$

17.7 Example on abstract notation

$$-u'' = f, \quad u'(0) = C, \quad u(L) = D, \quad u = D + \sum_j c_j \psi_j$$

Variational formulation:

$$\int_{\Omega} u'v'dx = \int_{\Omega} fvdx \quad -v(0)C \text{ or } (u', v') = (f, v) - v(0)C \quad \forall v \in V$$

Abstract formulation: find $(u - B) \in V$ such that

$$a(u, v) = L(v) \quad \forall v \in V$$

We identify

$$a(u, v) = (u', v'), \quad L(v) = (f, v) - v(0)C$$

17.8 Bilinear and linear forms

- $a(u, v)$ is a *bilinear form*
- $L(v)$ is a *linear form*

Linear form means

$$L(\alpha_1 v_1 + \alpha_2 v_2) = \alpha_1 L(v_1) + \alpha_2 L(v_2),$$

Bilinear form means

$$\begin{aligned} a(\alpha_1 u_1 + \alpha_2 u_2, v) &= \alpha_1 a(u_1, v) + \alpha_2 a(u_2, v), \\ a(u, \alpha_1 v_1 + \alpha_2 v_2) &= \alpha_1 a(u, v_1) + \alpha_2 a(u, v_2) \end{aligned}$$

In nonlinear problems: Find $(u - B) \in V$ such that $F(u; v) = 0 \forall v \in V$

17.9 The linear system associated with abstract form

$$a(u, v) = L(v) \quad \forall v \in V \quad \Leftrightarrow \quad a(u, \psi_i) = L(\psi_i) \quad i \in \mathcal{I}_s$$

We can now derive the corresponding linear system once and for all:

$$a\left(\sum_{j \in \mathcal{I}_s} c_j \psi_j, \psi_i\right) c_j = L(\psi_i) \quad i \in \mathcal{I}_s$$

Because of linearity,

$$\sum_{j \in \mathcal{I}_s} \underbrace{a(\psi_j, \psi_i)}_{A_{i,j}} c_j = \underbrace{L(\psi_i)}_{b_i} \quad i \in \mathcal{I}_s$$

Given $a(u, v)$ and $L(v)$ in a problem, we can immediately generate the linear system:

$$A_{i,j} = a(\psi_j, \psi_i), \quad b_i = L(\psi_i)$$

17.10 Equivalence with minimization problem

If $a(u, v) = a(v, u)$,

$$a(u, v) = L(v) \quad \forall v \in V,$$

is equivalent to minimizing the functional

$$F(v) = \frac{1}{2} a(v, v) - L(v)$$

over all functions $v \in V$. That is,

$$F(u) \leq F(v) \quad \forall v \in V.$$

- Much used in the early days of finite elements

- Still much used in structural analysis and elasticity
- Not as general as Galerkin's method (since $a(u, v) = a(v, u)$)

18 Examples on variational formulations

Goal.

Derive variational formulations for many prototype differential equations in 1D that include

- variable coefficients
- mixed Dirichlet and Neumann conditions
- nonlinear coefficients

18.1 Variable coefficient; problem

$$-\frac{d}{dx} \left(\alpha(x) \frac{du}{dx} \right) = f(x), \quad x \in \Omega = [0, L], \quad u(0) = C, \quad u(L) = D \quad (69)$$

- Variable coefficient $\alpha(x)$
- *Nonzero* Dirichlet conditions at $x = 0$ and $x = L$
- Must have $\psi_i(0) = \psi_i(L) = 0$
- $V = \text{span}\{\psi_0, \dots, \psi_N\}$
- $v \in V$: $v(0) = v(L) = 0$

$$u(x) = B(x) + \sum_{j \in \mathcal{I}_s} c_j \psi_j(x)$$

$$B(x) = C + \frac{1}{L}(D - C)x$$

18.2 Variable coefficient; variational formulation (1)

$$R = -\frac{d}{dx} \left(\alpha \frac{du}{dx} \right) - f$$

Galerkin's method:

$$(R, v) = 0, \quad \forall v \in V,$$

or with integrals:

$$\int_{\Omega} \left(\frac{d}{dx} \left(\alpha \frac{du}{dx} \right) - f \right) v \, dx = 0, \quad \forall v \in V.$$

18.3 Variable coefficient; variational formulation (2)

Integration by parts:

$$-\int_{\Omega} \frac{d}{dx} \left(\alpha(x) \frac{du}{dx} \right) v \, dx = \int_{\Omega} \alpha(x) \frac{du}{dx} \frac{dv}{dx} \, dx - \left[\alpha \frac{du}{dx} v \right]_0^L.$$

Boundary terms vanish since $v(0) = v(L) = 0$

Variational formulation.

Find $(u - B) \in V$ such that

$$\int_{\Omega} \alpha(x) \frac{du}{dx} \frac{dv}{dx} \, dx = \int_{\Omega} f(x) v \, dx, \quad \forall v \in V,$$

Compact notation:

$$\underbrace{(\alpha u', v')}_{a(u, v)} = \underbrace{(f, v)}_{L(v)}, \quad \forall v \in V$$

18.4 Variable coefficient; linear system (the easy way)

With

$$a(u, v) = (\alpha u', v), \quad L(v) = (f, v)$$

we can just use the formula for the linear system:

$$A_{i,j} = a(\psi_j, \psi_i) = (\alpha \psi_j', \psi_i') = \int_{\Omega} \alpha \psi_j' \psi_i' \, dx = \int_{\Omega} \psi_i' \alpha \psi_j' \, dx = a(\psi_i, \psi_j) = A_{j,i}$$

$$b_i = (f, \psi_i) = \int_{\Omega} f \psi_i \, dx$$

18.5 Variable coefficient; linear system (full derivation)

$v = \psi_i$ and $u = B + \sum_j c_j \psi_j$:

$$(\alpha B' + \alpha \sum_{j \in \mathcal{I}_s} c_j \psi_j', \psi_i') = (f, \psi_i), \quad i \in \mathcal{I}_s.$$

Reorder to form linear system:

$$\sum_{j \in \mathcal{I}_s} (\alpha \psi_j', \psi_i') c_j = (f, \psi_i) + (a(D - C)L^{-1}, \psi_i'), \quad i \in \mathcal{I}_s.$$

This is $\sum_j A_{i,j} c_j = b_i$ with

$$A_{i,j} = (a \psi_j', \psi_i') = \int_{\Omega} \alpha(x) \psi_j'(x) \psi_i'(x) \, dx$$

$$b_i = (f, \psi_i) + (a(D - C)L^{-1}, \psi_i') = \int_{\Omega} \left(f(x) \psi_i(x) + \alpha(x) \frac{D - C}{L} \psi_i'(x) \right) \, dx$$

18.6 First-order derivative in the equation and boundary condition; problem

$$-u''(x) + bu'(x) = f(x), \quad x \in \Omega = [0, L], \quad u(0) = C, \quad u'(L) = E \quad (70)$$

New features:

- first-order derivative u' in the equation
- boundary condition with u' : $u'(L) = E$

Initial steps:

- Must force $\psi_i(0) = 0$ because of Dirichlet condition at $x = 0$
- Boundary function: $B(x) = C(L - x)$ or just $B(x) = C$
- No requirements on $\psi_i(L)$ (no Dirichlet condition at $x = L$)

18.7 First-order derivative in the equation and boundary condition; details

$$u = C + \sum_{j \in \mathcal{I}_s} c_j \psi_j(x)$$

Galerkin's method: multiply by v , integrate over Ω , integrate by parts.

$$(-u'' + bu' - f, v) = 0, \quad \forall v \in V$$

$$(u', v') + (bu', v) = (f, v) + [u'v]_0^L, \quad \forall v \in V$$

Now, $[u'v]_0^L = u'(L)v(L) = Ev(L)$ because $v(0) = 0$ and $u'(L) = E$:

$$(u'v') + (bu', v) = (f, v) + Ev(L), \quad \forall v \in V$$

18.8 First-order derivative in the equation and boundary condition; observations

$$(u'v') + (bu', v) = (f, v) + Ev(L), \quad \forall v \in V,$$

Important:

- The boundary term can be used to implement Neumann conditions
- Forgetting the boundary term implies the condition $u' = 0$ (!)
- Such conditions are called *natural boundary conditions*

18.9 First-order derivative in the equation and boundary condition; abstract notation

Abstract notation:

$$a(u, v) = L(v) \quad \forall v \in V$$

Here:

$$\begin{aligned} a(u, v) &= (u', v') + (bu', v) \\ L(v) &= (f, v) + Ev(L) \end{aligned}$$

18.10 First-order derivative in the equation and boundary condition; linear system

Insert $u = C + \sum_j c_j \psi_j$ and $v = \psi_i$:

$$\sum_{j \in \mathcal{I}_s} \underbrace{((\psi'_j, \psi'_i) + (b\psi'_j, \psi_i))}_{A_{i,j}} c_j = \underbrace{(f, \psi_i) + E\psi_i(L)}_{b_i}$$

Observation: $A_{i,j}$ is not symmetric because of the term

$$(b\psi'_j, \psi_i) = \int_{\Omega} b\psi'_j \psi_i dx \neq \int_{\Omega} b\psi'_i \psi_j dx = (\psi'_i, b\psi_j)$$

18.11 Terminology: natural and essential boundary conditions

$$(u', v') + (bu', v) = (f, v) + u'(L)v(L) - u'(0)v(0)$$

- Note: forgetting the boundary terms implies $u'(L) = u'(0) = 0$ (unless prescribe a Dirichlet condition)
- Conditions on u' are simply inserted in the variational form and called *natural conditions*
- Conditions on u at $x = 0$ requires modifying V (through $\psi_i(0) = 0$) and are known as *essential conditions*

Lesson learned.

It is easy to forget the boundary term when integrating by parts. That mistake may prescribe a condition on u !

18.12 Nonlinear coefficient; problem

Problem:

$$-(\alpha(u)u')' = f(u), \quad x \in [0, L], \quad u(0) = 0, \quad u'(L) = E \quad (71)$$

- V : basis $\{\psi_i\}_{i \in \mathcal{I}_s}$ with $\psi_i(0) = 0$ because of $u(0) = 0$

- How does the nonlinear coefficients $\alpha(u)$ and $f(u)$ impact the variational formulation?
- (Not much!)

18.13 Nonlinear coefficient; variational formulation

Galerkin: multiply by v , integrate, integrate by parts

$$\int_0^L \alpha(u) \frac{du}{dx} \frac{dv}{dx} dx = \int_0^L f(u) v dx + [\alpha(u) v u']_0^L \quad \forall v \in V$$

- $\alpha(u(0))v(0)u'(0) = 0$ since $v(0) = 0$
- $\alpha(u(L))v(L)u'(L) = \alpha(u(L))v(L)E$ since $u'(L) = E$

$$\int_0^L \alpha(u) \frac{du}{dx} \frac{dv}{dx} v dx = \int_0^L f(u) v dx + \alpha(u(L))v(L)E \quad \forall v \in V$$

or

$$(\alpha(u)u', v') = (f(u), v) + \alpha(u(L))v(L)E \quad \forall v \in V$$

18.14 Nonlinear coefficient; where does the nonlinearity cause challenges?

- Abstract notation: no $a(u, v)$ and $L(v)$ because a and L are nonlinear
- Instead: $F(u; v) = 0 \quad \forall v \in V$
- What about forming a linear system? We get a *nonlinear* system of algebraic equations
- Must use methods like Picard iteration or Newton's method to solve nonlinear algebraic equations
- But: the variational formulation was not much affected by nonlinearities

18.15 Computing with Dirichlet and Neumann conditions; problem

$$-u''(x) = f(x), \quad x \in \Omega = [0, 1], \quad u'(0) = C, \quad u(1) = D$$

- Use a *global* polynomial basis $\psi_i \sim x^i$ on $[0, 1]$
- Because of $u(1) = D$: $\psi_i(1) = 0$
- Basis: $\psi_i(x) = (1 - x)^{i+1}$, $i \in \mathcal{I}_s$
- $B(x) = Dx$

18.16 Computing with Dirichlet and Neumann conditions; details

$$A_{i,j} = (\psi'_j, \psi'_i) = \int_0^1 \psi'_i(x) \psi'_j(x) dx = \int_0^1 (i+1)(j+1)(1-x)^{i+j} dx,$$

Choose $f(x) = 2$:

$$\begin{aligned} b_i &= (2, \psi_i) - (D, \psi'_i) - C\psi_i(0) \\ &= \int_0^1 (2(1-x)^{i+1} - D(i+1)(1-x)^i) dx - C\psi_i(0) \end{aligned}$$

Can easily do the integrals with `sympy`. $N = 1$:

$$\begin{pmatrix} 1 & 1 \\ 1 & 4/3 \end{pmatrix} \begin{pmatrix} c_0 \\ c_1 \end{pmatrix} = \begin{pmatrix} -C + D + 1 \\ 2/3 - C + D \end{pmatrix}$$

$$c_0 = -C + D + 2, \quad c_1 = -1,$$

$$u(x) = 1 - x^2 + D + C(x - 1) \quad (\text{exact solution})$$

18.17 When the numerical method is exact

Assume that apart from boundary conditions, u_e lies in the same space V as where we seek u :

$$u = B + F, \quad F \in Va(B + F, v) = L(v) \quad \forall v \in V, u_e = B + E, \quad E \in Va(B + E, v) = L(v) \quad \forall v \in V$$

$$\text{Subtract: } a(F - E, v) = 0 \Rightarrow E = F \text{ and } u = u_e$$

19 Computing with finite elements

Tasks:

- Address the model problem $-u''(x) = 2$, $u(0) = u(L) = 0$
- Uniform finite element mesh with P1 elements
- Show all finite element computations in detail

19.1 Variational formulation, finite element mesh, and basis

$$-u''(x) = 2, \quad x \in (0, L), \quad u(0) = u(L) = 0,$$

Variational formulation:

$$(u', v') = (2, v) \quad \forall v \in V$$

Since $u(0) = 0$ and $u(L) = 0$, we must force

$$v(0) = v(L) = 0, \quad \psi_i(0) = \psi_i(L) = 0$$

Use finite element basis, but exclude φ_0 and φ_{N_n} since these are not 0 on the boundary:

$$\psi_i = \varphi_{i+1}, \quad i = 0, \dots, N = N_n - 2$$

Introduce index mapping $\nu(j)$: $\psi_i = \varphi_{\nu(i)}$

$$u = \sum_{j \in \mathcal{I}_s} c_j \varphi_{\nu(j)}, \quad i = 0, \dots, N, \quad \nu(j) = j + 1$$

Irregular numbering: more complicated $\nu(j)$ table


19.2 Computation in the global physical domain; formulas

$$A_{i,j} = \int_0^L \varphi'_{i+1}(x) \varphi'_{j+1}(x) dx, \quad b_i = \int_0^L 2\varphi_{i+1}(x) dx$$

Many will prefer to change indices to obtain a $\varphi'_i \varphi'_j$ product: $i + 1 \rightarrow i$, $j + 1 \rightarrow j$

$$A_{i-1,j-1} = \int_0^L \varphi'_i(x) \varphi'_j(x) dx, \quad b_{i-1} = \int_0^L 2\varphi_i(x) dx$$

19.3 Computation in the global physical domain; details

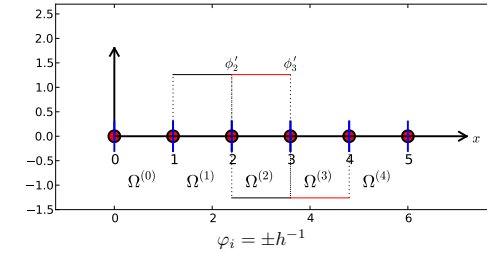

$$A_{i-1,i-1} = h^{-2}2h = 2h^{-1}, \quad A_{i-1,i-2} = h^{-1}(-h^{-1})h = -h^{-1}, \quad A_{i-1,i} = A_{i-1,i-2}$$

$$b_{i-1} = 2\left(\frac{1}{2}h + \frac{1}{2}h\right) = 2h$$

19.4 Computation in the global physical domain; linear system

$$\frac{1}{h} \begin{pmatrix} 2 & -1 & 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 \\ -1 & 2 & -1 & \ddots & & & & & \vdots \\ 0 & -1 & 2 & -1 & \ddots & & & & \vdots \\ \vdots & \ddots & & \ddots & \ddots & 0 & & & \vdots \\ \vdots & & & \ddots & \ddots & \ddots & \ddots & & \vdots \\ \vdots & & & & 0 & -1 & 2 & -1 & \ddots \\ \vdots & & & & & \ddots & \ddots & \ddots & 0 \\ \vdots & & & & & & \ddots & \ddots & -1 \\ 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 & -1 & 2 \end{pmatrix} \begin{pmatrix} c_0 \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ c_N \end{pmatrix} = \begin{pmatrix} 2h \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ 2h \end{pmatrix} \quad (72)$$

19.5 Comparison with a finite difference discretization

- Recall: $c_i = u(x_{i+1}) \equiv u_{i+1}$
- Write out a general equation at node $i - 1$, expressed by u_i

$$-\frac{1}{h}u_{i-1} + \frac{2}{h}u_i - \frac{1}{h}u_{i+1} = 2h \quad (73)$$

The standard finite difference method for $-u'' = 2$ is

$$-\frac{1}{h^2}u_{i-1} + \frac{2}{h^2}u_i - \frac{1}{h^2}u_{i+1} = 2$$

The finite element method and the finite difference method are identical *in this example*.

(Remains to study the equations involving boundary values)

19.6 Cellwise computations; formulas

- Repeat the previous example, but apply the cellwise algorithm
- Work with one cell at a time
- Transform physical cell to reference cell $X \in [-1, 1]$

$$A_{i-1,j-1}^{(e)} = \int_{\Omega^{(e)}} \varphi'_i(x) \varphi'_j(x) dx = \int_{-1}^1 \frac{d}{dx} \tilde{\varphi}_r(X) \frac{d}{dx} \tilde{\varphi}_s(X) \frac{h}{2} dX,$$

$$\tilde{\varphi}_0(X) = \frac{1}{2}(1 - X), \quad \tilde{\varphi}_1(X) = \frac{1}{2}(1 + X)$$

$$\frac{d\tilde{\varphi}_0}{dX} = -\frac{1}{2}, \quad \frac{d\tilde{\varphi}_1}{dX} = \frac{1}{2}$$

From the chain rule

$$\frac{d\tilde{\varphi}_r}{dx} = \frac{d\tilde{\varphi}_r}{dX} \frac{dX}{dx} = \frac{2}{h} \frac{d\tilde{\varphi}_r}{dX}$$

19.7 Cellwise computations; details

$$A_{i-1,j-1}^{(e)} = \int_{\Omega^{(e)}} \varphi'_i(x) \varphi'_j(x) dx = \int_{-1}^1 \frac{2}{h} \frac{d\tilde{\varphi}_r}{dX} \frac{2}{h} \frac{d\tilde{\varphi}_s}{dX} \frac{h}{2} dX = \tilde{A}_{r,s}^{(e)}$$

$$b_{i-1}^{(e)} = \int_{\Omega^{(e)}} 2\varphi_i(x) dx = \int_{-1}^1 2\tilde{\varphi}_r(X) \frac{h}{2} dX = \tilde{b}_r^{(e)}, \quad i = q(e, r), \quad r = 0, 1$$

Must run through all $r, s = 0, 1$ and $r = 0, 1$ and compute each entry in the element matrix and vector:

$$\tilde{A}^{(e)} = \frac{1}{h} \begin{pmatrix} 1 & -1 \\ -1 & 1 \end{pmatrix}, \quad \tilde{b}^{(e)} = h \begin{pmatrix} 1 \\ 1 \end{pmatrix}. \quad (74)$$

Example:

$$\tilde{A}_{0,1}^{(e)} = \int_{-1}^1 \frac{2}{h} \frac{d\tilde{\varphi}_0}{dX} \frac{2}{h} \frac{d\tilde{\varphi}_1}{dX} \frac{h}{2} dX = \frac{2}{h} \left(-\frac{1}{2}\right) \frac{2}{h} \frac{1}{2} \int_{-1}^1 dX = -\frac{1}{h}$$

19.8 Cellwise computations; details of boundary cells

- The boundary cells involve only one unknown
- $\Omega^{(0)}$: left node value known, only a contribution from right node
- $\Omega^{(N_e)}$: right node value known, only a contribution from left node

For $e = 0$ and N_e :

$$\tilde{A}^{(e)} = \frac{1}{h} \begin{pmatrix} 1 \\ 1 \end{pmatrix}, \quad \tilde{b}^{(e)} = h \begin{pmatrix} 1 \\ 1 \end{pmatrix}$$

Only one degree of freedom ("node") in these cells ($r = 0$ counts the only dof)

19.9 Cellwise computations; assembly

4 P1 elements:

```
vertices = [0, 0.5, 1, 1.5, 2]
cells = [[0, 1], [1, 2], [2, 3], [3, 4]]
dof_map = [[0], [0, 1], [1, 2], [2]] # only 1 dof in elm 0, 3
```

Python code for the assembly algorithm:

```
# Ae[e][r,s]: element matrix, be[e][r]: element vector
# A[i,j]: coefficient matrix, b[i]: right-hand side

for e in range(len(Ae)):
    for r in range(Ae[e].shape[0]):
        for s in range(Ae[e].shape[1]):
            A[dof_map[e,r],dof_map[e,s]] += Ae[e][r,s]
            b[dof_map[e,r]] += be[e][r]
```

Result: same linear system as arose from computations in the physical domain

19.10 General construction of a boundary function

- Now we address nonzero Dirichlet conditions
- $B(x)$ is not always easy to construct (extend to the interior of Ω), especially not in 2D and 3D
- With finite element φ_i , $B(x)$ can be constructed in a completely general way
- I_b : set of indices with nodes where u is known
- U_i : Dirichlet value of u at node i , $i \in I_b$

$$B(x) = \sum_{j \in I_b} U_j \varphi_j(x) \quad (75)$$

Suppose we have a Dirichlet condition $u(x_k) = U_k$, $k \in I_b$:

$$u(x_k) = \sum_{j \in I_b} U_j \underbrace{\varphi_j(x)}_{\neq 0 \text{ only for } j=k} + \sum_{j \in I_s} c_j \underbrace{\varphi_{\nu(j)}(x_k)}_{=0, k \notin I_s} = U_k$$

19.11 Example with two Dirichlet values; variational formulation

$$-u'' = 2, \quad u(0) = C, \quad u(L) = D$$

$$\int_0^L u'v' dx = \int_0^L 2v dx \quad \forall v \in V$$

$$(u', v') = (2, v) \quad \forall v \in V$$

19.12 Example with two Dirichlet values; boundary function

$$B(x) = \sum_{j \in I_b} U_j \varphi_j(x) \quad (76)$$

Here $I_b = \{0, N_n\}$, $U_0 = C$, $U_{N_n} = D$,

$$\psi_i = \varphi_{\nu(i)}, \quad \nu(i) = i + 1, \quad i \in I_s = \{0, \dots, N = N_n - 2\}$$

$$u(x) = C\varphi_0(x) + D\varphi_{N_n}(x) + \sum_{j \in I_s} c_j \varphi_{\nu(j)} \quad (77)$$

19.13 Example with two Dirichlet values; details

Insert $u = B + \sum_j c_j \psi_j$ in variational formulation:

$$(u', v') = (2, v) \quad \Rightarrow \quad \left(\sum_j c_j \psi_j', \psi_i' \right) = (2 - B', \psi_i) \quad \forall v \in V$$

$$\begin{aligned} u(x) &= \underbrace{C \cdot \varphi_0 + D\varphi_{N_n}}_{B(x)} + \sum_{j \in I_s} c_j \varphi_{j+1} \\ &= C \cdot \varphi_0 + D\varphi_{N_n} + c_0\varphi_1 + c_1\varphi_2 + \dots + c_{N_n}\varphi_{N_n-1} \end{aligned}$$

$$A_{i-1,j-1} = \int_0^L \varphi_i'(x) \varphi_j'(x) dx, \quad b_{i-1} = \int_0^L (f(x) - C\varphi_0'(x) - D\varphi_{N_n}'(x)) \varphi_i(x) dx$$

for $i, j = 1, \dots, N+1 = N_n - 1$.

New boundary terms from $-\int B'\varphi_i dx$: $C/2$ for $i = 1$ and $-D/2$ for $i = N_n - 1$

19.14 Example with two Dirichlet values; cellwise computations

- Element matrices as in the previous example (with $u = 0$ on the boundary)
- New element vector in the first and last cell

From the last cell:

$$\tilde{b}_0^{(N_e)} = \int_{-1}^1 \left(f - D \frac{2}{h} \frac{d\tilde{\varphi}_1}{dX} \right) \tilde{\varphi}_0 \frac{h}{2} dX = \left(\frac{h}{2} (2 - D \frac{2}{h} \frac{1}{2}) \right) \int_{-1}^1 \tilde{\varphi}_0 dX = h - D/2$$

From the first cell:

$$\tilde{b}_0^{(0)} = \int_{-1}^1 \left(f - C \frac{2}{h} \frac{d\tilde{\varphi}_0}{dX} \right) \tilde{\varphi}_1 \frac{h}{2} dX = \left(\frac{h}{2} (2 + C \frac{2}{h} \frac{1}{2}) \right) \int_{-1}^1 \tilde{\varphi}_1 dX = h + C/2.$$

19.15 Modification of the linear system; ideas

- Method 1: incorporate Dirichlet values through a $B(x)$ function and demand $\psi_i = 0$ where Dirichlet values apply
- Method 2: drop $B(x)$, drop demands to ψ_i , just assemble as if there were no Dirichlet conditions, and modify the linear system instead

Method 2: always $\psi_i = \varphi_i$ and

$$u(x) = \sum_{j \in I_s} c_j \varphi_j(x), \quad I_s = \{0, \dots, N = N_n\} \quad (78)$$

Attractive way of incorporating Dirichlet conditions.

u is treated as unknown at all boundaries when computing entires in the linear system

19.16 Modification of the linear system; original system

$$-u'' = 2, \quad u(0) = 0, \quad u(L) = D$$

Assemble as if there were no Dirichlet conditions:

$$\frac{1}{h} \begin{pmatrix} 1 & -1 & 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 \\ -1 & 2 & -1 & \ddots & & & & & \vdots \\ 0 & -1 & 2 & -1 & \ddots & & & & \vdots \\ \vdots & \ddots & & \ddots & \ddots & & & & \vdots \\ \vdots & & & \ddots & \ddots & \ddots & & 0 & \vdots \\ \vdots & & & & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & & & & & \ddots & \ddots & \ddots & \vdots \\ \vdots & & & & 0 & -1 & 2 & -1 & \ddots \\ \vdots & & & & & \ddots & \ddots & \ddots & 0 \\ \vdots & & & & & & \ddots & \ddots & \ddots \\ \vdots & & & & & & & \ddots & \ddots \\ 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 & -1 & 1 \end{pmatrix} \begin{pmatrix} c_0 \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ c_N \end{pmatrix} = \begin{pmatrix} h \\ 2h \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ 2h \\ h \end{pmatrix} \quad (79)$$

19.17 Modification of the linear system; row replacement

- Dirichlet condition $u(x_k) = U_k$ means $c_k = U_k$ (since $c_k = u(x_k)$)
- Replace first row by $c_0 = 0$
- Replace last row by $c_N = D$

$$\frac{1}{h} \begin{pmatrix} h & 0 & 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 \\ -1 & 2 & -1 & \ddots & & & & & \vdots \\ 0 & -1 & 2 & -1 & \ddots & & & & \vdots \\ \vdots & \ddots & & \ddots & \ddots & & & & \vdots \\ \vdots & & & \ddots & \ddots & \ddots & & 0 & \vdots \\ \vdots & & & & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & & & & & \ddots & \ddots & \ddots & \vdots \\ \vdots & & & & 0 & -1 & 2 & -1 & \ddots \\ \vdots & & & & & \ddots & \ddots & \ddots & 0 \\ \vdots & & & & & & \ddots & \ddots & \ddots \\ \vdots & & & & & & & \ddots & \ddots \\ 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 & 0 & h \end{pmatrix} \begin{pmatrix} c_0 \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ c_N \end{pmatrix} = \begin{pmatrix} 0 \\ 2h \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ 2h \\ D \end{pmatrix} \quad (80)$$

19.18 Modification of the linear system; element matrix/vector

In cell 0 we know u for local node (degree of freedom) $r = 0$. Replace the first cell equation by $\tilde{c}_0 = 0$:

$$\tilde{A}^{(0)} = A = \frac{1}{h} \begin{pmatrix} h & 0 \\ -1 & 1 \end{pmatrix}, \quad \tilde{b}^{(0)} = \begin{pmatrix} 0 \\ h \end{pmatrix} \quad (81)$$

In cell N_e we know u for local node $r = 1$. Replace the last equation in the cell system by $\tilde{c}_1 = D$:

$$\tilde{A}^{(N_e)} = A = \frac{1}{h} \begin{pmatrix} 1 & -1 \\ 0 & h \end{pmatrix}, \quad \tilde{b}^{(N_e)} = \begin{pmatrix} h \\ D \end{pmatrix} \quad (82)$$

19.19 Symmetric modification of the linear system; algorithm

- The modification above destroys symmetry of the matrix: e.g., $A_{0,1} \neq A_{1,0}$
- Symmetry is often important in 2D and 3D (faster computations)
- A more complex modification can preserve symmetry!

Algorithm for incorporating $c_i = U_i$ in a symmetric way:

1. Subtract column i times U_i from the right-hand side
2. Zero out column and row no i
3. Place 1 on the diagonal
4. Set $b_i = U_i$

19.20 Symmetric modification of the linear system; example

$$\frac{1}{h} \begin{pmatrix} 1 & 0 & 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 \\ 0 & 2 & -1 & \ddots & & & & & \vdots \\ 0 & -1 & 2 & -1 & \ddots & & & & \vdots \\ \vdots & \ddots & & \ddots & \ddots & & & & \vdots \\ \vdots & & & \ddots & \ddots & \ddots & & 0 & \vdots \\ \vdots & & & & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & & & & & \ddots & \ddots & \ddots & \vdots \\ \vdots & & & & 0 & -1 & 2 & -1 & \ddots \\ \vdots & & & & & \ddots & \ddots & \ddots & 0 \\ \vdots & & & & & & \ddots & \ddots & \ddots \\ 0 & \cdots & \cdots & \cdots & \cdots & \cdots & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} c_0 \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ c_N \end{pmatrix} = \begin{pmatrix} 0 \\ 2h \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ \vdots \\ 2h + D/h \\ D \end{pmatrix} \quad (83)$$

19.21 Symmetric modification of the linear system; element level

Symmetric modification applied to $\tilde{A}^{(N_e)}$:

$$\tilde{A}^{(N_e)} = A = \frac{1}{h} \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}, \quad \tilde{b}^{(N-1)} = \begin{pmatrix} h + D/h \\ D \end{pmatrix} \quad (84)$$

19.22 Boundary conditions: specified derivative

Neumann conditions.

How can we incorporate $u'(0) = C$ with finite elements?

$$-u'' = f, \quad u'(0) = C, \quad u(L) = D$$

- $\psi_i(L) = 0$ because of Dirichlet condition $u(L) = D$
- No demand to $\psi_i(0)$

19.23 The variational formulation

Galerkin's method:

$$\int_0^L (u''(x) + f(x))\psi_i(x)dx = 0, \quad i \in \mathcal{I}_s$$

Integration of $u''\psi_i$ by parts:

$$\int_0^L u'(x)\psi_i'(x)dx - (u'(L)\psi_i(L) - u'(0)\psi_i(0)) - \int_0^L f(x)\psi_i(x)dx = 0, \quad i \in \mathcal{I}_s$$

- $u'(L)\psi_i(L) = 0$ since $\psi_i(L) = 0$
- $u'(0)\psi_i(0) = C\psi_i(0)$ since $u'(0) = C$

19.24 Method 1: Boundary function and exclusion of Dirichlet degrees of freedom

- $\psi_i = \varphi_i, i \in \mathcal{I}_s = \{0, \dots, N = N_n - 1\}$
- $B(x) = D\varphi_{N_n}(x), u = B + \sum_{j=0}^N c_j \varphi_j$

$$\int_0^L u'(x)\varphi_i'(x)dx = \int_0^L f(x)\varphi_i(x)dx - C\varphi_i(0), \quad i \in \mathcal{I}_s$$

$$\sum_{j=0}^{N=N_n-1} \left(\int_0^L \varphi_i'(x)\varphi_j'(x)dx \right) c_j = \int_0^L (f(x)\varphi_i(x) - D\varphi_N'(x)\varphi_i(x))dx - C\varphi_i(0) \quad (85)$$

for $i = 0, \dots, N = N_n - 1$.

19.25 Method 2: Use all φ_i and insert the Dirichlet condition in the linear system

- Now $\psi_i = \varphi_i, i = 0, \dots, N = N_n$
- $\varphi_N(L) \neq 0$, so $u'(L)\varphi_N(L) \neq 0$
- However, the term $u'(L)\varphi_N(L)$ in b_N will be erased when we insert the Dirichlet value in $b_N = D$

We can forget about the term $u'(L)\varphi_i(L)!$

Result.

Boundary terms $u'\varphi_i$ at points x_i where Dirichlet values apply can always be forgotten.

$$u(x) = \sum_{j=0}^{N=N_n} c_j \varphi_j(x)$$

$$\sum_{j=0}^{N=N_n} \left(\int_0^L \varphi_i'(x)\varphi_j'(x)dx \right) c_j = \int_0^L f(x)\varphi_i(x)\varphi_i(x)dx - C\varphi_i(0) \quad (86)$$

Assemble entries for $i = 0, \dots, N = N_n$ and then modify the last equation to $c_N = D$

19.26 How the Neumann condition impacts the element matrix and vector

The extra term $C\varphi_0(0)$ affects only the element vector from the first cells since $\varphi_0 = 0$ on all other cells.

$$\bar{A}^{(0)} = A = \frac{1}{h} \begin{pmatrix} 1 & 1 \\ -1 & 1 \end{pmatrix}, \quad \bar{b}^{(0)} = \begin{pmatrix} h - C \\ h \end{pmatrix} \quad (87)$$

20 The finite element algorithm

The differential equation problem defines the integrals in the variational formulation.

Request these functions from the user:

```
integrand_lhs(phi, r, s, x)
boundary_lhs(phi, r, s, x)
integrand_rhs(phi, r, x)
boundary_rhs(phi, r, x)
```

Must also have a mesh with `vertices`, `cells`, and `dof_map`

20.1 Python pseudo code; the element matrix and vector

```
<Declare global matrix, global rhs: A, b>

# Loop over all cells
for e in range(len(cells)):

    # Compute element matrix and vector
    n = len(dof_map[e]) # no of dofs in this element
    h = vertices[cells[e][1]] - vertices[cells[e][0]]
    <Declare element matrix, element vector: A_e, b_e>

    # Integrate over the reference cell
    points, weights = <numerical integration rule>
    for X, w in zip(points, weights):
        phi = <basis functions + derivatives at X>
        detJ = h/2
        x = <affine mapping from X>
        for r in range(n):
            for s in range(n):
```

```

        A_e[r,s] += integrand_lhs(phi, r, s, x)*detJ*w
        b_e[r] += integrand_rhs(phi, r, x)*detJ*w

# Add boundary terms
for r in range(n):
    for s in range(n):
        A_e[r,s] += boundary_lhs(phi, r, s, x)*detJ*w
        b_e[r] += boundary_rhs(phi, r, x)*detJ*w

```

20.2 Python pseudo code; boundary conditions and assembly

```

for e in range(len(cells)):
    ...

    # Incorporate essential boundary conditions
    for r in range(n):
        global_dof = dof_map[e][r]
        if global_dof in essbc_dofs:
            # dof r is subject to an essential condition
            value = essbc_vals[global_dof]
            # Symmetric modification
            b_e -= value*A_e[:,r]
            A_e[r,:] = 0
            A_e[:,r] = 0
            A_e[r,r] = 1
            b_e[r] = value

    # Assemble
    for r in range(n):
        for s in range(n):
            A[dof_map[e][r], dof_map[e][s]] += A_e[r,s]
            b[dof_map[e][r]] += b_e[r]

<solve linear system>

```

21 Variational formulations in 2D and 3D

How to do integration by parts is the major difference when moving to 2D and 3D.

21.1 Integration by parts

Rule for multi-dimensional integration by parts.

$$-\int_{\Omega} \nabla \cdot (a(x) \nabla u) v \, dx = \int_{\Omega} a(x) \nabla u \cdot \nabla v \, dx - \int_{\partial\Omega} a \frac{\partial u}{\partial n} v \, ds \quad (88)$$

- $\int_{\Omega}() \, dx$: area (2D) or volume (3D) integral
- $\int_{\partial\Omega}() \, ds$: line(2D) or surface (3D) integral

- $\partial\Omega_N$: Neumann conditions $-a \frac{\partial u}{\partial n} = g$
- $\partial\Omega_D$: Dirichlet conditions $u = u_0$
- $v \in V$ must vanish on $\partial\Omega_D$ (in method 1)

21.2 Example on integration by parts; problem

$$\mathbf{v} \cdot \nabla u + \alpha u = \nabla \cdot (a \nabla u) + f, \quad \mathbf{x} \in \Omega \quad (89)$$

$$u = u_0, \quad \mathbf{x} \in \partial\Omega_D \quad (90)$$

$$-a \frac{\partial u}{\partial n} = g, \quad \mathbf{x} \in \partial\Omega_N \quad (91)$$

- Known: a, α, f, u_0 , and g .
- Second-order PDE: must have *exactly one boundary condition at each point of the boundary*

Method 1 with boundary function and $\psi_i = 0$ on $\partial\Omega_D$:

$$u(\mathbf{x}) = B(\mathbf{x}) + \sum_{j \in \mathcal{I}_s} c_j \psi_j(\mathbf{x}), \quad B(\mathbf{x}) = u_0(\mathbf{x})$$

21.3 Example on integration by parts; details (1)

Galerkin's method: multiply by $v \in V$ and integrate over Ω ,

$$\int_{\Omega} (\mathbf{v} \cdot \nabla u + \alpha u) v \, dx = \int_{\Omega} \nabla \cdot (a \nabla u) \, dx + \int_{\Omega} f v \, dx$$

Integrate second-order term by parts:

$$\int_{\Omega} \nabla \cdot (a \nabla u) v \, dx = - \int_{\Omega} a \nabla u \cdot \nabla v \, dx + \int_{\partial\Omega} a \frac{\partial u}{\partial n} v \, ds,$$

Resulting variational form:

$$\int_{\Omega} (\mathbf{v} \cdot \nabla u + \alpha u) v \, dx = - \int_{\Omega} a \nabla u \cdot \nabla v \, dx + \int_{\partial\Omega} a \frac{\partial u}{\partial n} v \, ds + \int_{\Omega} f v \, dx$$

21.4 Example on integration by parts; details (2)

Note: $v \neq 0$ only on $\partial\Omega_N$:

$$\int_{\partial\Omega} a \frac{\partial u}{\partial n} v \, ds = \int_{\partial\Omega_N} \underbrace{a \frac{\partial u}{\partial n}}_{-g} v \, ds = - \int_{\partial\Omega_N} g v \, ds$$

The final variational form:

$$\int_{\Omega} (\mathbf{v} \cdot \nabla u + \alpha u) v \, dx = - \int_{\Omega} a \nabla u \cdot \nabla v \, dx - \int_{\partial\Omega_N} g v \, ds + \int_{\Omega} f v \, dx$$

Or with inner product notation:

$$(\mathbf{v} \cdot \nabla u, v) + (\alpha u, v) = -(a \nabla u, \nabla v) - (g, v)_N + (f, v)$$

$(g, v)_N$: line or surface integral over $\partial\Omega_N$.

21.5 Example on integration by parts; linear system

$$u = B + \sum_{j \in \mathcal{I}_s} c_j \psi_j, \quad B = u_0$$

$$A_{i,j} = (\mathbf{v} \cdot \nabla \psi_j, \psi_i) + (\alpha \psi_j, \psi_i) + (a \nabla \psi_j, \nabla \psi_i)$$

$$b_i = (g, \psi_i)_N + (f, \psi_i) - (\mathbf{v} \cdot \nabla u_0, \psi_i) + (\alpha u_0, \psi_i) + (a \nabla u_0, \nabla \psi_i)$$

21.6 Transformation to a reference cell in 2D/3D (1)

We want to compute an integral in the physical domain by integrating over the reference cell.

$$\int_{\Omega^{(e)}} a(\mathbf{x}) \nabla \varphi_i \cdot \nabla \varphi_j \, dx \quad (92)$$

Mapping from reference to physical coordinates:

$$\mathbf{x}(\mathbf{X})$$

with Jacobian J ,

$$J_{i,j} = \frac{\partial x_j}{\partial X_i}$$

- $dx \rightarrow \det J \, dX$.
- Must express $\nabla \varphi_i$ by an expression with $\tilde{\varphi}_r$, $i = q(e, r)$: $\nabla \tilde{\varphi}_r(\mathbf{X})$
- We want $\nabla_{\mathbf{x}} \tilde{\varphi}_r(\mathbf{X})$ (derivatives wrt \mathbf{x})
- What we readily have is $\nabla_{\mathbf{X}} \tilde{\varphi}_r(\mathbf{X})$ (derivative wrt \mathbf{X})
- Need to transform $\nabla_{\mathbf{X}} \tilde{\varphi}_r(\mathbf{X})$ to $\nabla_{\mathbf{x}} \tilde{\varphi}_r(\mathbf{X})$

21.7 Transformation to a reference cell in 2D/3D (2)

Can derive

$$\begin{aligned} \nabla_{\mathbf{X}} \tilde{\varphi}_r &= J \cdot \nabla_{\mathbf{x}} \varphi_i \\ \nabla_{\mathbf{x}} \varphi_i &= \nabla_{\mathbf{x}} \tilde{\varphi}_r(\mathbf{X}) = J^{-1} \cdot \nabla_{\mathbf{X}} \tilde{\varphi}_r(\mathbf{X}) \end{aligned}$$

Integral transformation from physical to reference coordinates:

$$\int_{\Omega^{(e)}} a(\mathbf{x}) \nabla_{\mathbf{x}} \varphi_i \cdot \nabla_{\mathbf{x}} \varphi_j \, dx = \int_{\tilde{\Omega}^r} a(\mathbf{x}(\mathbf{X})) (J^{-1} \cdot \nabla_{\mathbf{X}} \tilde{\varphi}_r) \cdot (J^{-1} \cdot \nabla_{\mathbf{X}} \tilde{\varphi}_s) \det J \, dX \quad (93)$$

21.8 Numerical integration

Numerical integration over reference cell triangles and tetrahedra:

$$\int_{\tilde{\Omega}^r} g \, dX = \sum_{j=0}^{n-1} w_j g(\bar{\mathbf{X}}_j)$$

Module `numint.py`⁸ contains different rules:

```
>>> import numint
>>> x, w = numint.quadrature_for_triangles(num_points=3)
>>> x
[(0.16666666666666666, 0.16666666666666666),
 (0.66666666666666666, 0.16666666666666666),
 (0.16666666666666666, 0.66666666666666666)]
>>> w
[0.16666666666666666, 0.16666666666666666, 0.16666666666666666]
```

- Triangle: rules with $n = 1, 3, 4, 7$ integrate exactly polynomials of degree 1, 2, 3, 4, resp.
- Tetrahedron: rules with $n = 1, 4, 5, 11$ integrate exactly polynomials of degree 1, 2, 3, 4, resp.

22 Time-dependent problems

- So far: used the finite element framework for discretizing in space
- What about $u_t = u_{xx} + f$?
 1. Use finite differences in time to obtain a set of recursive spatial problems
 2. Solve the spatial problems by the finite element method

22.1 Example: diffusion problem

$$\frac{\partial u}{\partial t} = \alpha \nabla^2 u + f(\mathbf{x}, t), \quad \mathbf{x} \in \Omega, t \in (0, T] \quad (94)$$

$$u(\mathbf{x}, 0) = I(\mathbf{x}), \quad \mathbf{x} \in \Omega \quad (95)$$

$$\frac{\partial u}{\partial n} = 0, \quad \mathbf{x} \in \partial\Omega, t \in (0, T] \quad (96)$$

22.2 A Forward Euler scheme; ideas

$$[D_t^+ u = \alpha \nabla^2 u + f]^n, \quad n = 1, 2, \dots, N_t - 1 \quad (97)$$

Solving wrt u^{n+1} :

$$u^{n+1} = u^n + \Delta t (\alpha \nabla^2 u^n + f(\mathbf{x}, t_n)) \quad (98)$$

- $u^n = \sum_j c_j^n \psi_j \in V$, $u^{n+1} = \sum_j c_j^{n+1} \psi_j \in V$
- Compute u^0 from I
- Compute u^{n+1} from u^n by solving the PDE for u^{n+1} at each time level

⁸<http://tinyurl.com/jvzzcfn/fem/numint.py>

22.3 A Forward Euler scheme; stages in the discretization

- $u_e(\mathbf{x}, t)$: exact solution of the space-and time-continuous problem
- $u_e^n(\mathbf{x})$: exact solution of time-discrete problem (after applying a finite difference scheme in time)
- $u_e^n(\mathbf{x}) \approx u^n = \sum_{j \in \mathcal{I}_s} c_j^n \psi_j =$ solution of the time- and space-discrete problem (after applying a Galerkin method in space)

$$\frac{\partial u_e}{\partial t} = \alpha \nabla^2 u_e + f(\mathbf{x}, t) \quad (99)$$

$$u_e^{n+1} = u_e^n + \Delta t (\alpha \nabla^2 u_e^n + f(\mathbf{x}, t_n)) \quad (100)$$

$$u_e^n \approx u^n = \sum_{j=0}^N c_j^n \psi_j(\mathbf{x}), \quad u_e^{n+1} \approx u^{n+1} = \sum_{j=0}^N c_j^{n+1} \psi_j(\mathbf{x})$$

$$R = u^{n+1} - u^n - \Delta t (\alpha \nabla^2 u^n + f(\mathbf{x}, t_n))$$

22.4 A Forward Euler scheme; weighted residual (or Galerkin) principle

$$R = u^{n+1} - u^n - \Delta t (\alpha \nabla^2 u^n + f(\mathbf{x}, t_n))$$

The weighted residual principle:

$$\int_{\Omega} R w \, dx = 0, \quad \forall w \in W$$

results in

$$\int_{\Omega} [u^{n+1} - u^n - \Delta t (\alpha \nabla^2 u^n + f(\mathbf{x}, t_n))] w \, dx = 0, \quad \forall w \in W$$

Galerkin: $W = V$, $w = v$

22.5 A Forward Euler scheme; integration by parts

Isolating the unknown u^{n+1} on the left-hand side:

$$\int_{\Omega} u^{n+1} \psi_i \, dx = \int_{\Omega} [u^n - \Delta t (\alpha \nabla^2 u^n + f(\mathbf{x}, t_n))] v \, dx$$

Integration by parts of $\int \alpha(\nabla^2 u^n) v \, dx$:

$$\int_{\Omega} \alpha(\nabla^2 u^n) v \, dx = - \int_{\Omega} \alpha \nabla u^n \cdot \nabla v \, dx + \underbrace{\int_{\partial \Omega} \alpha \frac{\partial u^n}{\partial n} v \, dx}_{=0 \quad \leftarrow \quad \partial u^n / \partial n = 0}$$

Variational form:

$$\int_{\Omega} u^{n+1} v \, dx = \int_{\Omega} u^n v \, dx - \Delta t \int_{\Omega} \alpha \nabla u^n \cdot \nabla v \, dx + \Delta t \int_{\Omega} f^n v \, dx, \quad \forall v \in V \quad (101)$$

22.6 New notation for the solution at the most recent time levels

- u and \mathbf{u} : the spatial unknown function to be computed
- u_1 and \mathbf{u}_1 : the spatial function at the previous time level $t - \Delta t$
- u_2 and \mathbf{u}_2 : the spatial function at $t - 2\Delta t$
- This new notation gives close correspondence between code and math

$$\int_{\Omega} uv \, dx = \int_{\Omega} u_1 v \, dx - \Delta t \int_{\Omega} \alpha \nabla u_1 \cdot \nabla v \, dx + \Delta t \int_{\Omega} f^n v \, dx \quad (102)$$

or shorter

$$(u, \psi_i) = (u_1, v) - \Delta t (\alpha \nabla u_1, \nabla v) + (f^n, v) \quad (103)$$

22.7 Deriving the linear systems

- $u = \sum_{j=0}^N c_j \psi_j(\mathbf{x})$
- $u_1 = \sum_{j=0}^N c_{1,j} \psi_j(\mathbf{x})$
- $\forall v \in V$: for $v = \psi_i$, $i = 0, \dots, N$

Insert these in

$$(u, \psi_i) = (u_1, \psi_i) - \Delta t (\alpha \nabla u_1, \nabla \psi_i) + (f^n, \psi_i)$$

and order terms as matrix-vector products:

$$\sum_{j=0}^N \underbrace{(\psi_i, \psi_j)}_{M_{i,j}} c_j = \sum_{j=0}^N \underbrace{(\psi_i, \psi_j)}_{M_{1,i,j}} c_{1,j} - \Delta t \sum_{j=0}^N \underbrace{(\nabla \psi_i, \alpha \nabla \psi_j)}_{K_{i,j}} c_{1,j} + (f^n, \psi_i), \quad i = 0, \dots, N \quad (104)$$

22.8 Structure of the linear systems

$$Mc = Mc_1 - \Delta t K c_1 + f \quad (105)$$

$$\begin{aligned} M &= \{M_{i,j}\}, & M_{i,j} &= (\psi_i, \psi_j), & i, j &\in \mathcal{I}_s \\ K &= \{K_{i,j}\}, & K_{i,j} &= (\nabla \psi_i, \alpha \nabla \psi_j), & i, j &\in \mathcal{I}_s \\ f &= \{(f(\mathbf{x}, t_n), \psi_i)\}_{i \in \mathcal{I}_s} \\ c &= \{c_i\}_{i \in \mathcal{I}_s} \\ c_1 &= \{c_{1,i}\}_{i \in \mathcal{I}_s} \end{aligned}$$

22.9 Computational algorithm

1. Compute M and K .
2. Initialize u^0 by either interpolation or projection
3. For $n = 1, 2, \dots, N_t$:
 - (a) compute $b = Mc_1 - \Delta t K c_1 + f$
 - (b) solve $Mc = b$
 - (c) set $c_1 = c$

Initial condition:

- Either interpolation: $c_{1,j} = I(\mathbf{x}_j)$ (finite elements)
- Or projection: solve $\sum_j M_{i,j} c_{1,j} = (I, \psi_i)$, $i \in \mathcal{I}_s$

22.10 Comparing P1 elements with the finite difference method; ideas

- P1 elements in 1D
- Uniform mesh on $[0, L]$ with cell length h
- No Dirichlet conditions: $\psi_i = \varphi_i$, $i = 0, \dots, N = N_n$
- Have found formulas for M and K at the element level
- Have assembled the global matrices
- Have developed corresponding finite difference operator formulas
- M : $h[D_t^+(u + \frac{1}{6}h^2 D_x D_x u)]_i^n$
- K : $h[\alpha D_x D_x u]_i^n$

22.11 Comparing P1 elements with the finite difference method; results

Diffusion equation with finite elements is equivalent to

$$[D_t^+(u + \frac{1}{6}h^2 D_x D_x u) = \alpha D_x D_x u + f]_i^n \quad (106)$$

Can lump the mass matrix by Trapezoidal integration and get the standard finite difference scheme

$$[D_t^+ u = \alpha D_x D_x u + f]_i^n \quad (107)$$

22.12 Discretization in time by a Backward Euler scheme

Backward Euler scheme in time:

$$[D_t^- u = \alpha \nabla^2 u + f(\mathbf{x}, t)]^n.$$

$$u_e^n - \Delta t (\alpha \nabla^2 u_e^n + f(\mathbf{x}, t_n)) = u_e^{n-1} \quad (108)$$

$$u_e^n \approx u^n = \sum_{j=0}^N c_j^n \psi_j(\mathbf{x}), \quad u_e^{n+1} \approx u^{n+1} = \sum_{j=0}^N c_j^{n+1} \psi_j(\mathbf{x})$$

22.13 The variational form of the time-discrete problem

$$\int_{\Omega} (u^n v + \Delta t \alpha \nabla u^n \cdot \nabla v) \, dx = \int_{\Omega} u^{n-1} v \, dx - \Delta t \int_{\Omega} f^n v \, dx, \quad \forall v \in V \quad (109)$$

or

$$(u, v) + \Delta t (\alpha \nabla u, \nabla v) = (u_1, v) + \Delta t (f^n, \psi_i) \quad (110)$$

The linear system: insert $u = \sum_j c_j \psi_j$ and $u_1 = \sum_j c_{1,j} \psi_j$,

$$(M + \Delta t \alpha K) c = M c_1 + f \quad (111)$$

22.14 Calculations with P1 elements in 1D

Can interpret the resulting equation system as

$$[D_t^-(u + \frac{1}{6}h^2 D_x D_x u) = \alpha D_x D_x u + f]_i^n \quad (112)$$

Lumped mass matrix (by Trapezoidal integration) gives a standard finite difference method:

$$[D_t^- u = \alpha D_x D_x u + f]_i^n \quad (113)$$

23 Dirichlet boundary conditions

Dirichlet condition at $x = 0$ and Neumann condition at $x = L$:

$$u(\mathbf{x}, t) = u_0(\mathbf{x}, t), \quad \mathbf{x} \in \partial\Omega_D \quad (114)$$

$$-\alpha \frac{\partial}{\partial n} u(\mathbf{x}, t) = g(\mathbf{x}, t), \quad \mathbf{x} \in \partial\Omega_N \quad (115)$$

Forward Euler in time, Galerkin's method, and integration by parts:

$$\int_{\Omega} u^{n+1} v \, dx = \int_{\Omega} (u^n - \Delta t \alpha \nabla u^n \cdot \nabla v) \, dx - \Delta t \int_{\partial\Omega_N} g v \, ds, \quad \forall v \in V \quad (116)$$

Requirement: $v = 0$ on $\partial\Omega_D$

23.1 Boundary function

$$u^n(\mathbf{x}) = u_0(\mathbf{x}, t_n) + \sum_{j \in \mathcal{I}_s} c_j^n \psi_j(\mathbf{x})$$

$$\begin{aligned} \sum_{j \in \mathcal{I}_s} \left(\int_{\Omega} \psi_i \psi_j \, dx \right) c_j^{n+1} &= \sum_{j \in \mathcal{I}_s} \left(\int_{\Omega} (\psi_i \psi_j - \Delta t \alpha \nabla \psi_i \cdot \nabla \psi_j) \, dx \right) c_j^n - \\ &\int_{\Omega} (u_0(\mathbf{x}, t_{n+1}) - u_0(\mathbf{x}, t_n) + \Delta t \alpha \nabla u_0(\mathbf{x}, t_n) \cdot \nabla \psi_i) \, dx \\ &+ \Delta t \int_{\Omega} f \psi_i \, dx - \Delta t \int_{\partial \Omega_N} g \psi_i \, ds, \quad i \in \mathcal{I}_s \end{aligned}$$

23.2 Finite element basis functions

- $B(\mathbf{x}, t_n) = \sum_{j \in I_b} U_j^n \varphi_j$
- $\psi_i = \varphi_{\nu(j)}$, $j \in \mathcal{I}_s$
- $\nu(j)$, $j \in \mathcal{I}_s$, are the node numbers corresponding to all nodes without a Dirichlet condition

$$\begin{aligned} u^n &= \sum_{j \in I_b} U_j^n \varphi_j + \sum_{j \in \mathcal{I}_s} c_{1,j} \varphi_{\nu(j)}, \\ u^{n+1} &= \sum_{j \in I_b} U_j^{n+1} \varphi_j + \sum_{j \in \mathcal{I}_s} c_j \varphi_{\nu(j)} \end{aligned}$$

$$\begin{aligned} \sum_{j \in \mathcal{I}_s} \left(\int_{\Omega} \varphi_i \varphi_j \, dx \right) c_j &= \sum_{j \in \mathcal{I}_s} \left(\int_{\Omega} (\varphi_i \varphi_j - \Delta t \alpha \nabla \varphi_i \cdot \nabla \varphi_j) \, dx \right) c_{1,j} - \\ &\sum_{j \in I_b} \int_{\Omega} (\varphi_i \varphi_j (U_j^{n+1} - U_j^n) + \Delta t \alpha \nabla \varphi_i \cdot \nabla \varphi_j U_j^n) \, dx \\ &+ \Delta t \int_{\Omega} f \varphi_i \, dx - \Delta t \int_{\partial \Omega_N} g \varphi_i \, ds, \quad i \in \mathcal{I}_s \end{aligned}$$

23.3 Modification of the linear system; the raw system

- Drop boundary function
- Compute as if there are not Dirichlet conditions
- Modify the linear system to incorporate Dirichlet conditions
- \mathcal{I}_s holds the indices of all nodes $\{0, 1, \dots, N = N_n\}$

$$\begin{aligned} \sum_{j \in \mathcal{I}_s} \underbrace{\left(\int_{\Omega} \varphi_i \varphi_j \, dx \right)}_{M_{i,j}} c_j &= \sum_{j \in \mathcal{I}_s} \underbrace{\left(\int_{\Omega} \varphi_i \varphi_j \, dx \right)}_{M_{i,j}} - \Delta t \underbrace{\int_{\Omega} \alpha \nabla \varphi_i \cdot \nabla \varphi_j \, dx}_{K_{i,j}} c_{1,j} \\ &\underbrace{- \Delta t \int_{\Omega} f \varphi_i \, dx - \Delta t \int_{\partial \Omega_N} g \varphi_i \, ds}_{f_i}, \quad i \in \mathcal{I}_s \end{aligned}$$

23.4 Modification of the linear system; setting Dirichlet conditions

$$Mc = b, \quad b = Mc_1 - \Delta t K c_1 + \Delta t f \quad (117)$$

For each k where a Dirichlet condition applies, $u(x_k, t_{n+1}) = U_k^{n+1}$,

- set row k in M to zero and 1 on the diagonal: $M_{k,j} = 0$, $j \in \mathcal{I}_s$, $M_{k,k} = 1$
- $b_k = U_k^{n+1}$

Or apply the slightly more complicated modification which preserves symmetry of M

23.5 Modification of the linear system; Backward Euler example

Backward Euler discretization in time gives a more complicated coefficient matrix:

$$Ac = b, \quad A = M + \Delta t K, \quad b = Mc_1 + \Delta t f. \quad (118)$$

- Set row k to zero and 1 on the diagonal: $M_{k,j} = 0$, $j \in \mathcal{I}_s$, $M_{k,k} = 1$
- Set row k to zero: $K_{k,j} = 0$, $j \in \mathcal{I}_s$
- $b_k = U_k^{n+1}$

Observe: $A_{k,k} = M_{k,k} + \Delta t K_{k,k} = 1 + 0$, so $c_k = U_k^{n+1}$

24 Analysis of the discrete equations

The diffusion equation $u_t = \alpha u_{xx}$ allows a (Fourier) wave component

$$u = A_e^n e^{ikx}, \quad A_e = e^{-\alpha k^2 \Delta t} \quad (119)$$

Numerical schemes often allow the similar solution

$$u_q^n = A^n e^{ikx} \quad (120)$$

- A : amplification factor to be computed
- How good is this A compared to the exact one?

24.1 Handy formulas

$$\begin{aligned} [D_t^+ A^n e^{ikq\Delta x}]^n &= A^n e^{ikq\Delta x} \frac{A-1}{\Delta t}, \\ [D_t^- A^n e^{ikq\Delta x}]^n &= A^n e^{ikq\Delta x} \frac{1-A^{-1}}{\Delta t}, \\ [D_t A^n e^{ikq\Delta x}]^{n+\frac{1}{2}} &= A^{n+\frac{1}{2}} e^{ikq\Delta x} \frac{A^{\frac{1}{2}} - A^{-\frac{1}{2}}}{\Delta t} = A^n e^{ikq\Delta x} \frac{A-1}{\Delta t}, \\ [D_x D_x A^n e^{ikq\Delta x}]_q &= -A^n \frac{4}{\Delta x^2} \sin^2 \left(\frac{k\Delta x}{2} \right). \end{aligned}$$

24.2 Amplification factor for the Forward Euler method; results

Introduce $p = k\Delta x/2$ and $C = \alpha\Delta t/\Delta x^2$:

$$A = 1 - 4C \underbrace{\frac{\sin^2 p}{1 - \frac{2}{3}\sin^2 p}}_{\text{from } M}$$

(See notes for details)

Stability: $|A| \leq 1$:


$$C \leq \frac{1}{6} \Rightarrow \Delta t \leq \frac{\Delta x^2}{6\alpha} \quad (121)$$

Finite differences: $C \leq \frac{1}{2}$, so finite elements give a *stricter* stability criterion for this PDE!


24.3 Amplification factor for the Backward Euler method; results

Coarse meshes:


$$A = \left(1 + 4C \frac{\sin^2 p}{1 + \frac{2}{3}\sin^2 p}\right)^{-1} \quad (\text{unconditionally stable})$$

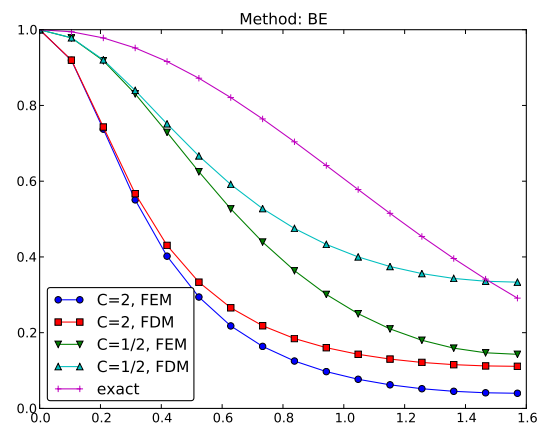

24.4 Amplification factors for smaller time steps; Forward Euler

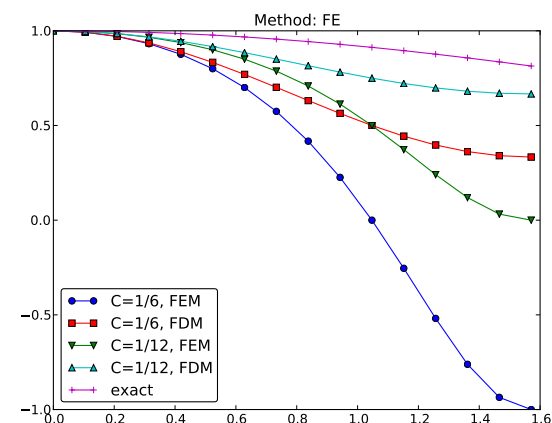

24.5 Amplification factors for smaller time steps; Backward Euler

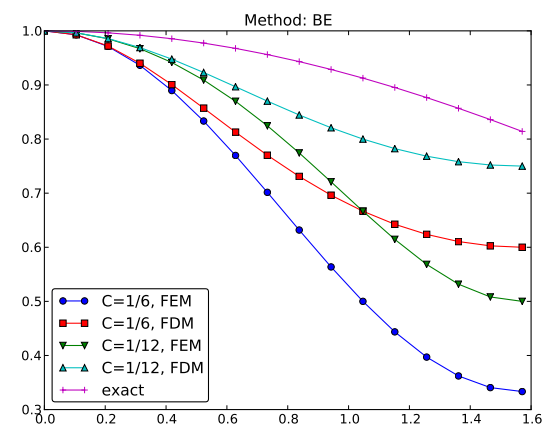

Index

- approximation
 - by sines, 16
 - collocation, 18
 - of functions, 8
 - of general vectors, 7
- `cells` list, 51
- collocation method (approximation), 18
- dof map, 51
- `dof_map` list, 51
- edges, 66
- faces, 66
- finite element, definition, 51
- Galerkin method, 8
- Gauss-Legendre quadrature, 56
- integration by parts, 74
- isoparametric mapping, 67
- Lagrange (interpolating) polynomial, 19
- lumped mass matrix, 50
- mapping of reference cells
 - isoparametric mapping, 67
- mass lumping, 50
- mass matrix, 50
- Midpoint rule, 55
- numerical integration
 - Midpoint rule, 55
 - Simpson's rule, 55
 - Trapezoidal rule, 55
- projection, 8
- simplex elements, 66
- simplices, 66
- Simpson's rule, 55
- sparse matrices, 46
- test function, 71
- test space, 71
- Trapezoidal rule, 55
- trial function, 71
- trial space, 71
- `vertices` list, 51