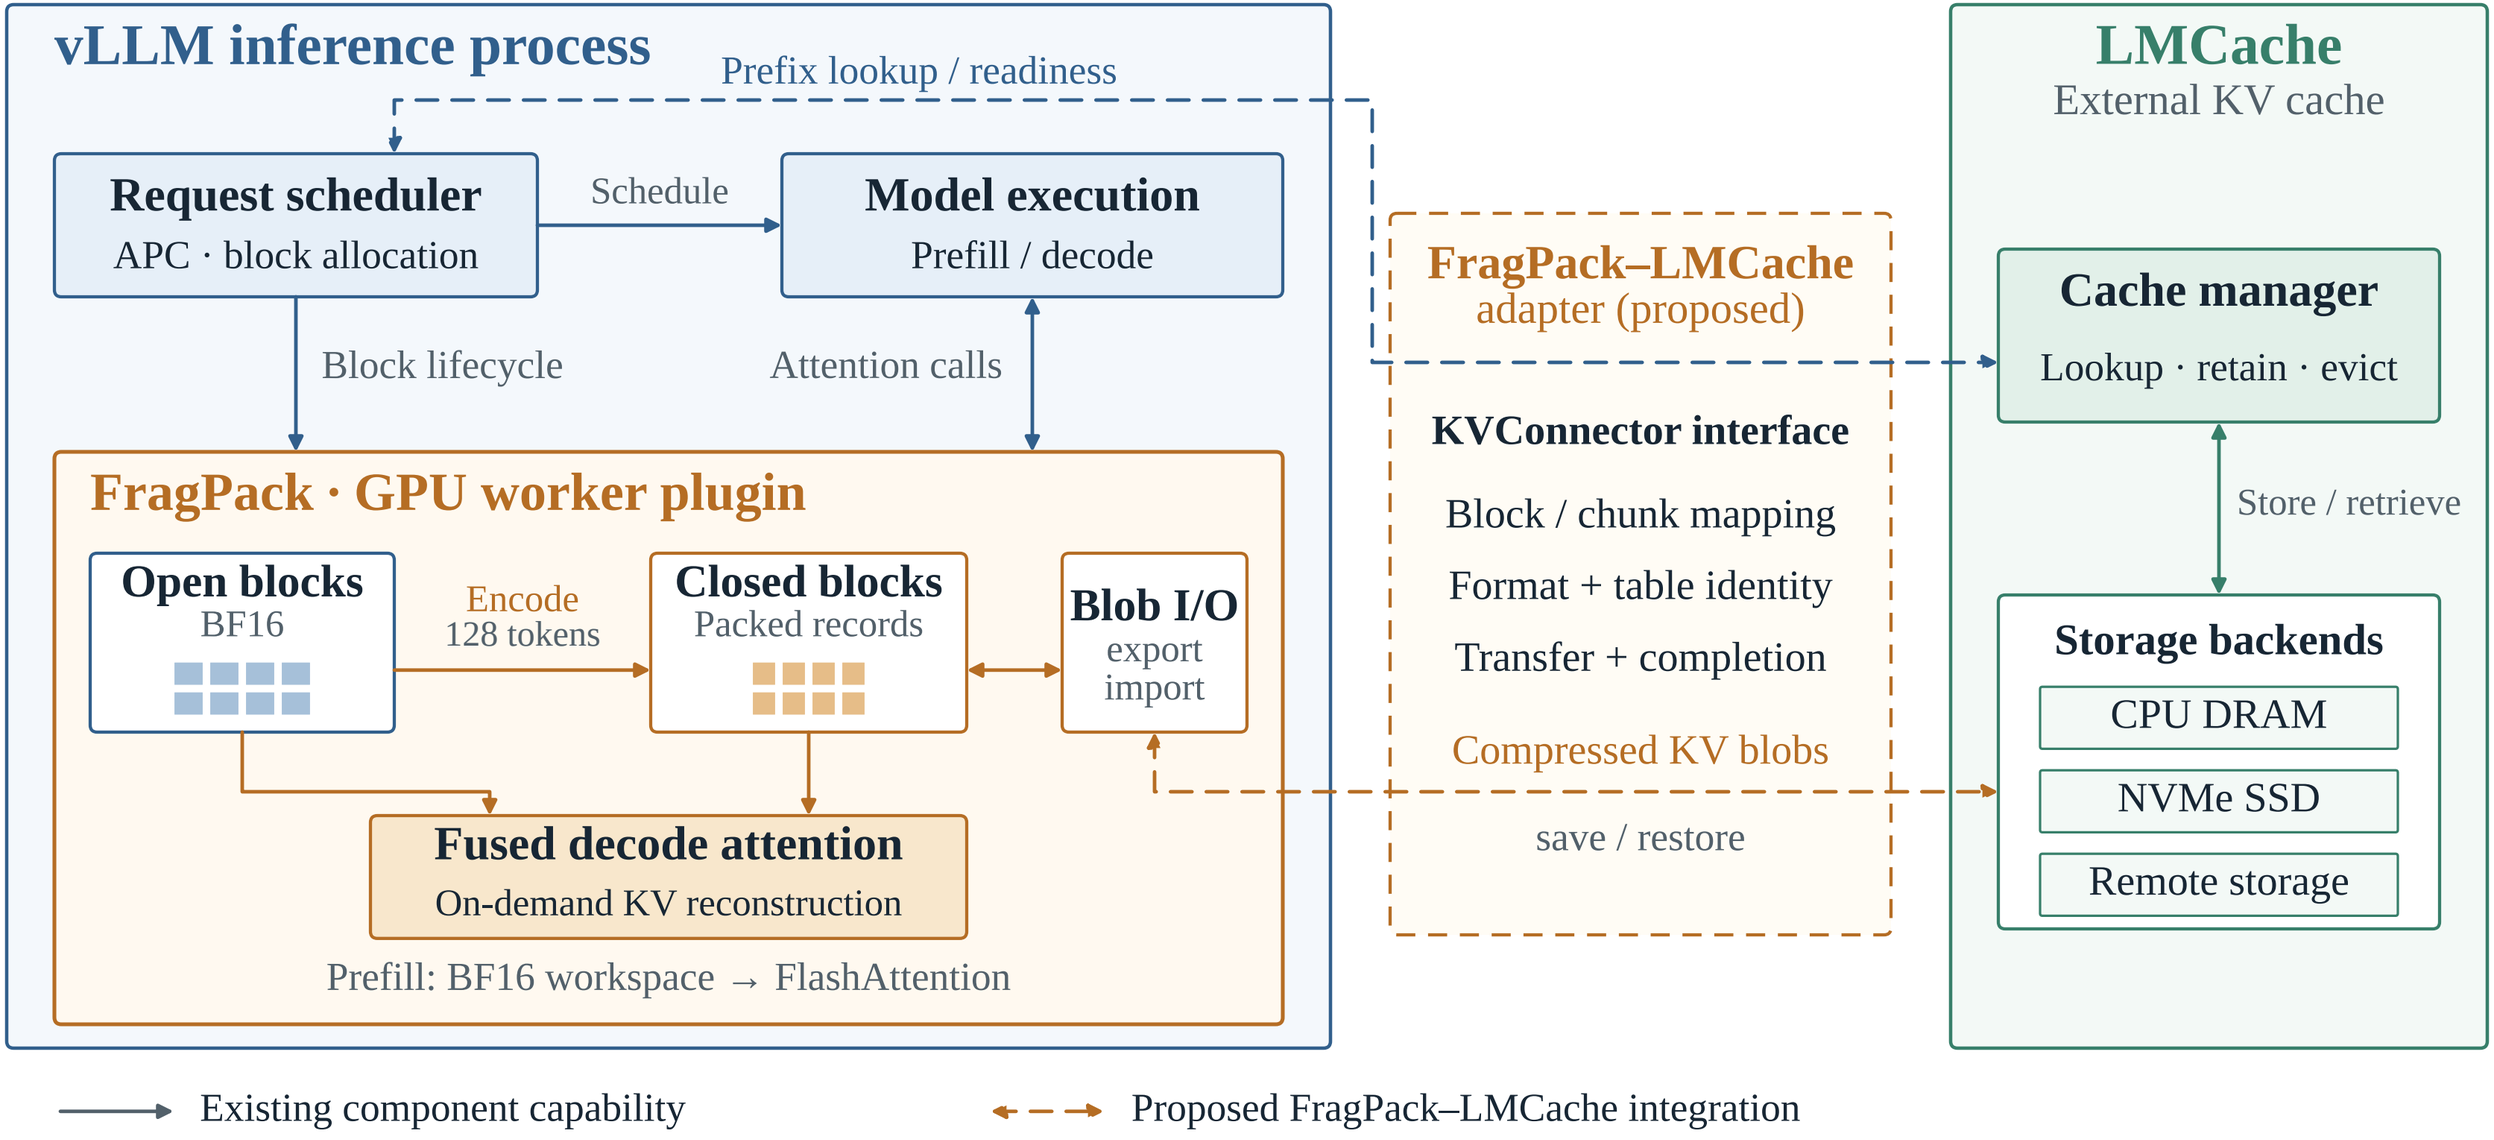

External KV becomes reusable only after transfer, successful import, and readiness confirmation.