


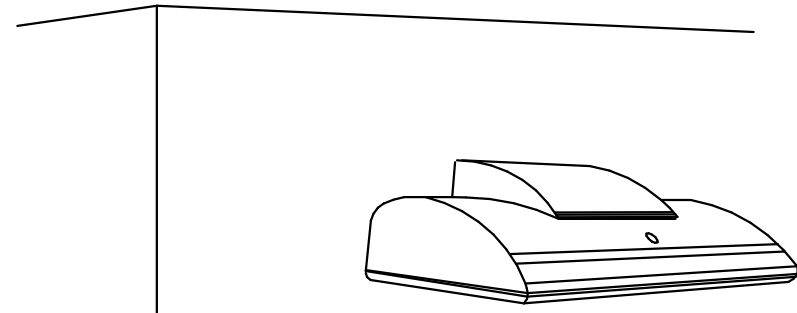

NOTE: THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.

LUMINAIRE REQUIREMENTS:


1. HOUSING - DIE-CAST OR EXTRUDED ALUMINUM WITH INTEGRAL PASSIVE COOLING MECHANISM. HEAT SINK INCORPORATED DIRECTLY INTO HOUSING OR DRIVER COMPARTMENT.
2. OPTICS - PRECISION MOLDED ACRYLIC LENS WITH TYPE II, III, OR IV DISTRIBUTIONS. BUG UPLIGHT RATING OF U0, WITH GLARE RATING AS DETERMINED BY LIGHTING ZONE INSTALLED.
3. LIGHT SOURCE - SOLID STATE LEDS, 3000K CCT UON, MINIMUM 70 CRI UON, AND MINIMUM EFFICACY OF 80 LUMENS/WATT UON. INITIAL LUMEN OUTPUT AS INDICATED IN LUMINAIRE SCHEDULE.
4. DRIVER - REPLACEABLE, INTEGRAL, HIGH-EFFICIENCY DIMMABLE DRIVER WITH MINIMUM 0.9 PF, OPERATING VOLTAGE OF 120-277V, THERMAL MANAGEMENT, AND < 20% THD. ON-OFF CONTROL AND FULLY DIMMABLE DOWN TO 10% MINIMUM OR AS INDICATED IN LUMINAIRE SCHEDULE.
5. CERTIFICATION - UL LISTED FOR WET LOCATION, ROHS COMPLIANT. COMPLIES WITH IES LM79, LM80 AND TM21 TESTING STANDARDS.
6. MOUNTING - SURFACE MOUNTED WITH STAINLESS STEEL MOUNTING HARDWARE.
7. OPTIONS - VARIOUS LIGHT DISTRIBUTIONS. INTEGRAL MOTION SENSOR, PHOTOCCELL, BATTERY BACK-UP.

REVISED:	NOVEMBER 2020	LIGHTING PLATE:	NI -24
----------	---------------	-----------------	---------------

REVISED:	NOVEMBER 2020	LIGHTING PLATE:	NI -24
----------	---------------	-----------------	---------------

REVISED:	NOVEMBER 2020	LIGHTING PLATE:	NI -28
----------	---------------	-----------------	---------------

REVISED:	NOVEMBER 2020	LIGHTING PLATE:	NI -28
----------	---------------	-----------------	---------------

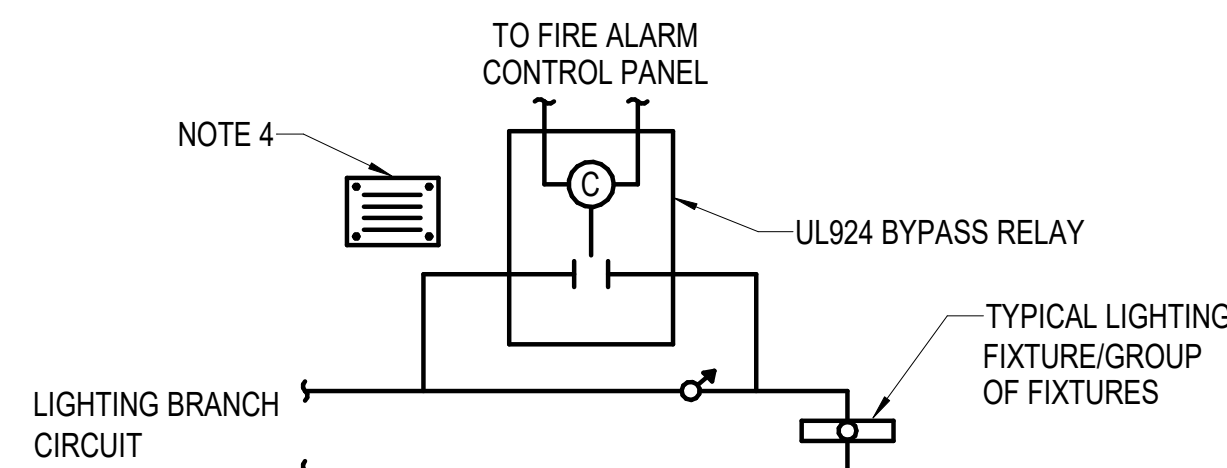

LIGHTING BYPASS CONTROL DIAGRAM NOTES:

1. PROVIDE 120V AC BYPASS RELAY WITH MINIMUM 20 AMP, 120V RATED NORMALLY OPEN AND NORMALLY CLOSED CONTACTS. NORMALLY CLOSED BYPASS RELAY CONTACTS MUST BE HELD OPEN BY 120 VOLT POWER. NORMALLY CLOSED CONTACT MUST CLOSE WHEN FIRE ALARM/MASS NOTIFICATION SYSTEM IS IN ALARM AND MUST BYPASS THE LIGHTING SWITCHES, CONTROLS AND OCCUPANCY/VACANCY SENSORS.
2. BYPASS RELAY MUST BE UL LISTED FOR EMERGENCY LIGHTING CONTROL USE.
3. PROVIDE ENGRAVED INFORMATIONAL SIGN TO LABEL BYPASS RELAY WITH CIRCUIT NUMBER, FIRE ALARM CONTROL MODULE ADDRESS AND LIGHTING AREA SERVED. INDICATE RELAY LOCATIONS ON RECORD DRAWINGS. INCLUDE A LISTING OF BYPASS RELAYS WITH FIRE ALARM INFORMATION, CONTROL CIRCUIT, AND AREA CONTROLLED IN TABLE FORMAT AND INCLUDE TABLE IN OPERATION AND MAINTENANCE MANUAL.
4. COORDINATE WORK, INCLUDING LOCATIONS OF LIGHTING BYPASS RELAYS, WITH FIRE ALARM INSTALLER.
5. INSTALL BYPASS RELAY ABOVE SUSPENDED/ACCESSIBLE CEILING IN AN ACCESSIBLE LOCATION WITHIN THE ROOM CONTROLLED. INDICATE RELAY LOCATIONS ON THE AS-BUILT DRAWINGS.
6. COORDINATE WITH FIRE ALARM INSTALLER. PROVIDE TESTING OF EACH RELAY. DOCUMENT TEST RESULTS ON RELAY SUMMARY TABLE.

LOCAL AREA CONTROLLER DIAGRAM NOTES

1. WIRING, COMPONENTS AND INSTALLATION REQUIREMENTS WILL VARY DEPENDING ON SYSTEM.
2. INSTALLATION OF SENSORS, SWITCHES, AND WIRING MUST BE PER MANUFACTURER'S RECOMMENDATIONS.
3. CONTROL WIRING MUST BE PER MANUFACTURER'S RECOMMENDATION AND MUST BE INSTALLED WITHIN CONDUIT.
4. PROVIDE ENGRAVED INFORMATIONAL SIGN AT CONTROL PANEL INDICATING LIGHTING BRANCH CIRCUITS AND AREAS SERVED.
5. LOSS OF POWER TO CONTROLLER MUST TURN RELAYS ON.
6. DIAGRAM INDICATES TYPICAL CONTROL DEVICES. REFER TO LIGHTING PLANS FOR BRANCH CIRCUITS.
7. PROVIDE MINIMUM QUANTITY OF SENSORS AS INDICATED ON LIGHTING PLANS. PROVIDE MANUFACTURER'S RECOMMENDED SENSOR QUANTITIES AND SPACING FOR FULL COVERAGE OF SPACE IF MANUFACTURER RECOMMENDS ADDITIONAL SENSORS DUE TO CLOSER SENSOR SPACING.
8. EACH LIGHTING CONTROL SWITCH STATION MUST BE ABLE TO TURN LIGHTING ON/OFF WITHIN THE CONTROLLED AREA AND RAISE/LOWER LIGHTING LEVELS. PROVIDE SWITCH STATIONS WITH ENGRAVED PUSHBUTTONS INDICATING CONTROL PROVIDED (ON, OFF, RAISE, LOWER). ADDITIONALLY, PROVIDE A MELAMINE SIGN, COORDINATE WIRING WITH THE CONTRACTING OFFICER.
9. NOT ALL PARTS ARE SHOWN IN DIAGRAM. PROVIDE COMPONENTS FOR A COMPLETE WORKING SYSTEM.
10. ACTIVATION OF THE FIRE ALARM SYSTEM MUST TURN LIGHTING ON FULLY.
11. MUST BE UL 924 LISTED.
12. PROPOSED SEQUENCE OF OPERATION, COORDINATE WITH THE CONTRACTING OFFICER: LIGHTING IS INITIATED AUTOMATIC ON TO 100% VIA HIGH BAY OCCUPANCY/VACANCY SENSORS. LIGHTING IS LOWERED TO 50% ILLUMINATION LEVEL VIA HIGH BAY OCCUPANCY/VACANCY SENSOR AFTER 20 MINUTES OF VACANCY. LIGHTING IS SCHEDULED TO FULL OFF AFTER HOURS. LOW VOLTAGE SWITCH MAY BE USED AFTER HOURS TO TURN LIGHTS ON MANUALLY. IF MANUAL ON AFTER HOURS IS INITIATED, HIGH BAY OCCUPANCY/VACANCY SENSORS WILL TURN LIGHTS OFF AFTER 20 MINUTES OF VACANCY. EACH LOCAL SWITCH MUST CONTROL THE FIXTURES WITHIN THE SAME AREA.

LOCAL AREA CONTROLLER DIAGRAM - SHOP

EL102, EL103, EL105

EL101, EL102, EL103, EL105

EL101, EL102