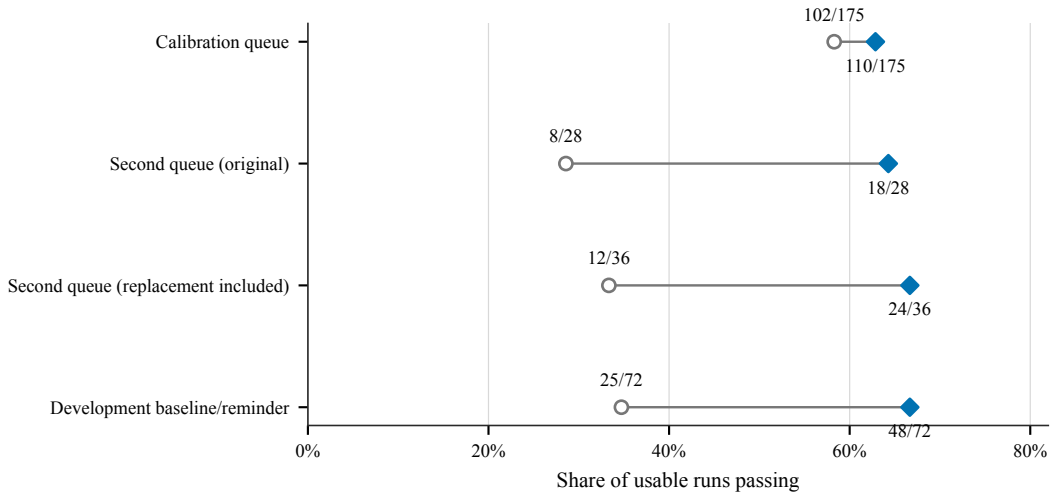
Calibration queue
102/175
110/175
Second queue (original)
8/28
18/28
Second queue (replacement included)
12/36
24/36
Development baseline/reminder
25/72
48/72
0%
20%
40%
60%
80%
Share of usable runs passing