

Connection guide for Raspberry Pi and Arduino

Trieu An Do

November 24, 2025

BETTER FINISH IT BEFORE CHRISTMAS

Contents

1	Motor	2
1.1	Material	2
1.2	Connection with Raspberry Pi	2
1.2.1	Connection scheme	2
1.2.2	Real connection image	2
1.2.3	Code example	3
1.2.4	Remark for connection with RBP	4
1.3	Connection with Arduino	4
1.3.1	Connection scheme	4
1.3.2	Real connection image	4
1.3.3	Code example	4
1.3.4	Remark for conection with Arduino	5
2	NFC Reader(PN532 V3)	5
3	Sensor	5
4	Compressor	5

1 Motor

1.1 Material

Motor: 9V, 24V, speed changing by PWM

Raspberry Pi: Pi 4 Model B, Pi 5/Arduino Uno Rev 3

GPIO cables

Motor driver L298N

L298N Pinout:

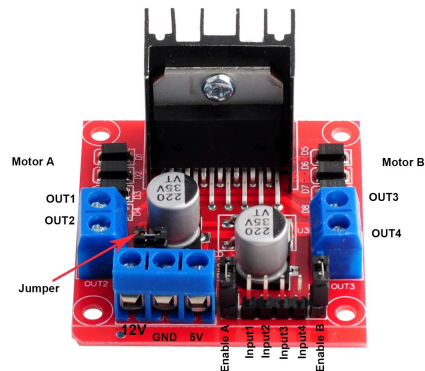


Figure 1: L298N Pin Layout

1 L298N can controll maximum 2 independent motors.

Input1 controls OUT1 and so on.

Control by H-bridge:

Low	Low	Stop
High	Low	Clockwise/Anti-Clockwise
High	Low	Clockwise/Anti-Clockwise
High	High	Brake

1.2 Connection with Raspberry Pi

1.2.1 Connection scheme

The connection scheme to connect motor to rbp using l298n

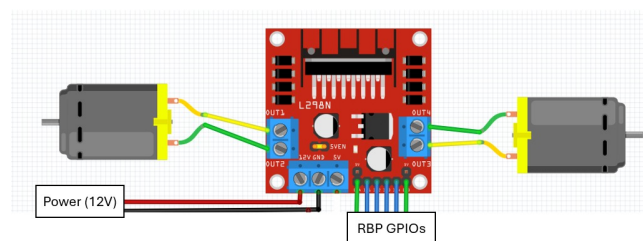


Figure 2: Connection scheme

1.2.2 Real connection image

The image of real connection

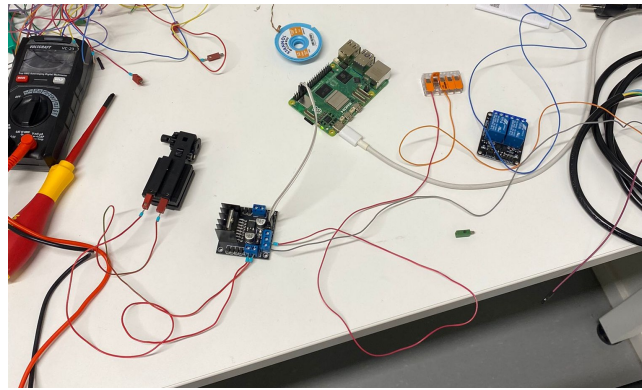


Figure 3: Real connection image

1.2.3 Code example

```
import RPi.GPIO as GPIO
import time

# Pin setup
IN1 = 17
IN2 = 27
ENA = 22 # PWM pin

GPIO.setmode(GPIO.BCM)
GPIO.setup(IN1, GPIO.OUT)
GPIO.setup(IN2, GPIO.OUT)
GPIO.setup(ENA, GPIO.OUT)

# Setup PWM at 1000 Hz
pwm = GPIO.PWM(ENA, 1000)
pwm.start(0) # start with speed 0

def motor_forward(speed):
    GPIO.output(IN1, GPIO.HIGH)
    GPIO.output(IN2, GPIO.LOW)
    pwm.ChangeDutyCycle(speed)

def motor_backward(speed):
    GPIO.output(IN1, GPIO.LOW)
    GPIO.output(IN2, GPIO.HIGH)
    pwm.ChangeDutyCycle(speed)

def motor_stop():
    GPIO.output(IN1, GPIO.LOW)
    GPIO.output(IN2, GPIO.LOW)
    pwm.ChangeDutyCycle(0)

try:
    print("Motor forward")
    motor_forward(60) # 60% speed
    time.sleep(2)

    print("Motor backward")
```

```

        motor_backward(60) # 60% speed
        time.sleep(2)

        print("Stop")
        motor_stop()
        time.sleep(1)

except KeyboardInterrupt:
    pass

finally:
    pwm.stop()
    GPIO.cleanup()

```

1.2.4 Remark for connection with RBP

- 1 L298N occupies at least 4 GPIOs on RBP (for 2 motors).
- L298N can be powered by RBP or external power source.

1.3 Connection with Arduino

1.3.1 Connection scheme

The connection scheme to connect motors to arduino uno rev 3 using l298n is the same as connection with RBP

1.3.2 Real connection image

The image of real connection

Figure 4: Real connection image

1.3.3 Code example

```

// Motor control pins
int IN1 = 7;
int IN2 = 8;
int ENA = 9;    // must be a PWM pin (~)

void setup() {
    pinMode(IN1, OUTPUT);
    pinMode(IN2, OUTPUT);
    pinMode(ENA, OUTPUT);

    // Start with motor stopped
    analogWrite(ENA, 0);
}

void motorForward(int speed) {
    digitalWrite(IN1, HIGH);
    digitalWrite(IN2, LOW);
    analogWrite(ENA, speed);    // 0-255
}

```

```

void motorBackward(int speed) {
digitalWrite(IN1, LOW);
digitalWrite(IN2, HIGH);
analogWrite(ENA, speed);    // 0-255
}

void motorStop() {
digitalWrite(IN1, LOW);
digitalWrite(IN2, LOW);
analogWrite(ENA, 0);
}

void loop() {
// Forward for 2 seconds
motorForward(150);    // about 60% speed
delay(2000);

// Backward for 2 seconds
motorBackward(150);
delay(2000);

// Stop for 1 second
motorStop();
delay(1000);
}

```

1.3.4 Remark for conection with Arduino

- 1 L298N occupies at least 4 GPIOs on Arduino (for 2 motors).
- Recommend connection: Motor -i L298N -i Arduino -i RBP

2 NFC Reader(PN532 V3)

3 Sensor

4 Compressor