Customer No.:

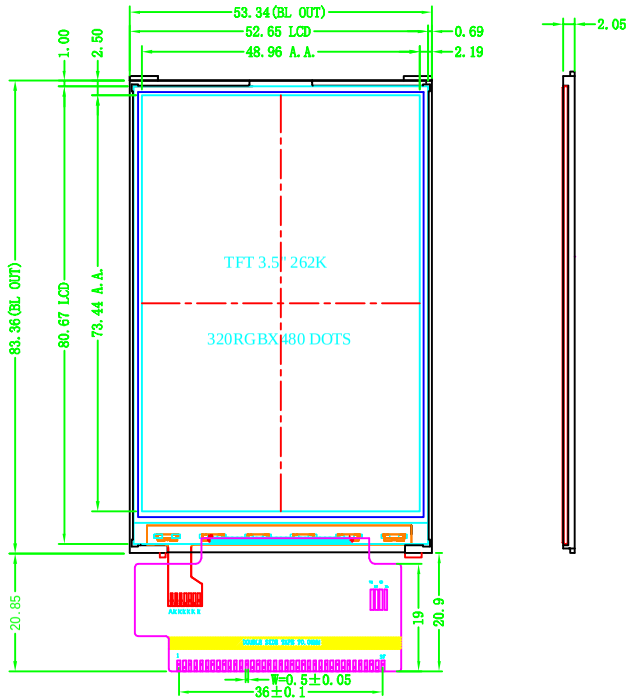

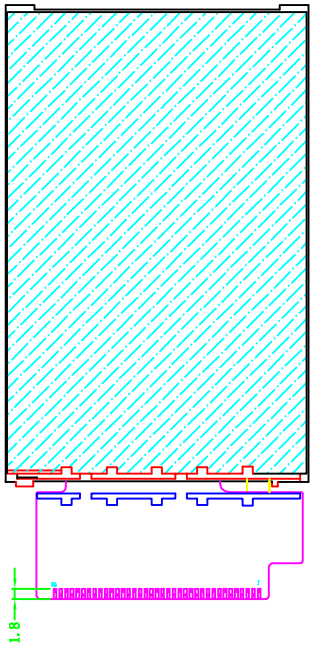

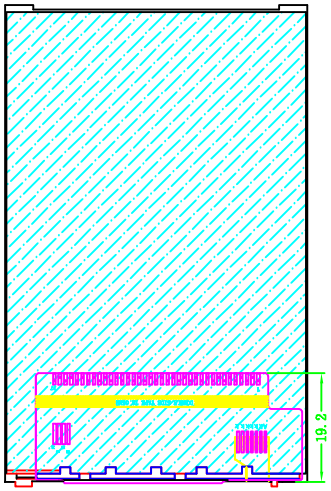

????0.40mmMAX
?????????
FPC?????
????

LED CIRCUIT DIAGRAM:

LED CIRCUIT DIAGRAM:



CONFORM TO ROHS STANDARD	
ITEM	
LCD TYPE	3.5" HVGA TFT
Viewing direction	FREE
Drive method	MCU I/F
Display mode	Transmissive
Operating TEMP.	-20° C~70° C
Storage TEMP.	-30° C~80° C
Drive IC	RM68040

ANGLE	±1.0°
60.01 -	±0.20
30.01 - 60.00	±0.15
6.01 - 30.00	±0.10
0.00 - 6.00	±0.05
FIELD	TOLERANCES
GENERAL TOLERANCES	

NO.	CONTENT	DATE
04		
03		
02		
01	Original	2011-4-6

AMEND

NAME

TOLERANCE: DECIMAL
.x ± .30
.xx ± .20
∠ ± 1/4°

深圳市韩彩光电有限公司
ShenZhen Hanncai optoelectronics CO.,LTD.

PRODUCT NO.	DRAW NO. ASSY	REV
HC-T350022	ASSY-HC-T350022	01

DWN	STEVEN.YIP	DSN	STEVEN.YIP
CHKD	STEVEN.YIP	APPD	STEVEN.YIP
NOT IN SCALE		UNIT: mm	SHEET: 1

PDF 文件使用 "pdfFactory Pro" 试用版本创建 www.fineprint.cn