


Pin A0 – L35
center pin.
Pin 3V – L35
right pin.
Pin GND – L35
left pin.
D1 and GND –
green LED.
D6 and GND –
red LED

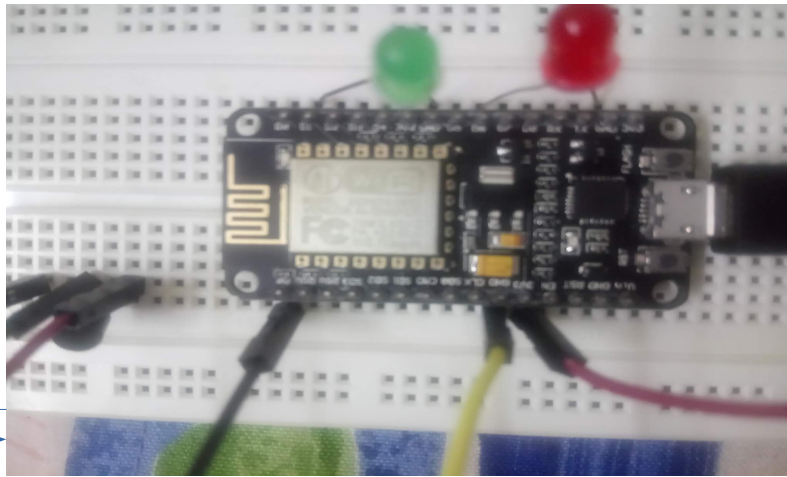

WiFi Router

Thinger server instance
running locally on a
computer on the network.
This will provide the rest
APIs called by Mycroft
skill

Mycroft AI core running locally on
local computer in the network. The
custom node-light-controller skill
will run locally on the this machine
and interact with NodeMCU through
REST APIs provided by Thinger
Server