


How to Check Printers?

- For Ricoh copiers, there're 4 things to check.
 - Octopus lights
 - should be steady green. Otherwise, as you can't fix it, please report to ITSC.




- Octopus screens and copier screens
 - should be no errors on the displays or touch panels. Otherwise, try to fix them by following the instructions on the displays or touch panels. For difficult problems which you can't fix, please report to ITSC.

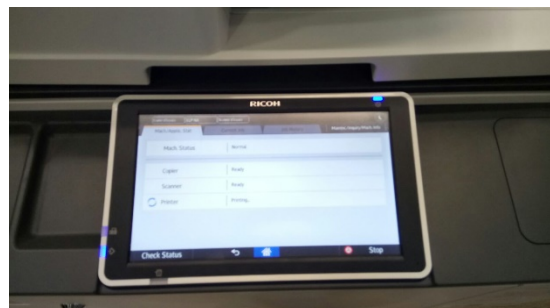


■ Paper jam

- will be shown on the touch panels.
- Please try to fix it.
- Remember to move the toner out and take the steel stick out.

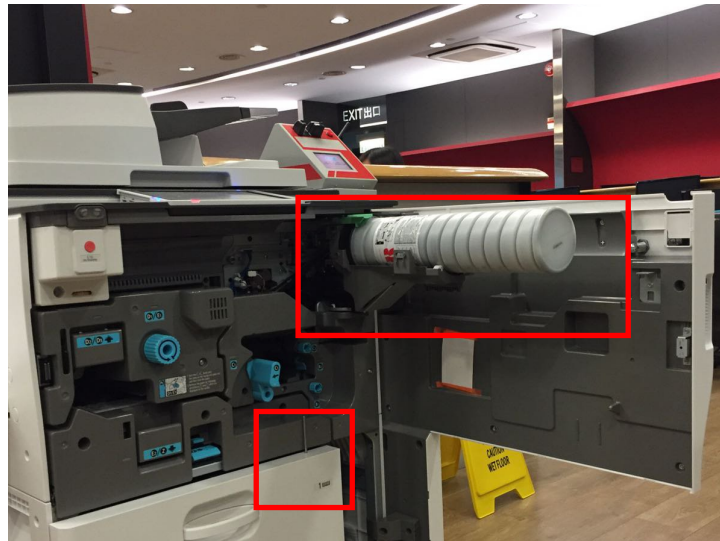


■ Refill paper


- If $\leq 50\%$, need refill.
- You can check the paper tray status without really pulling out the trays.
- Click "Check Status".

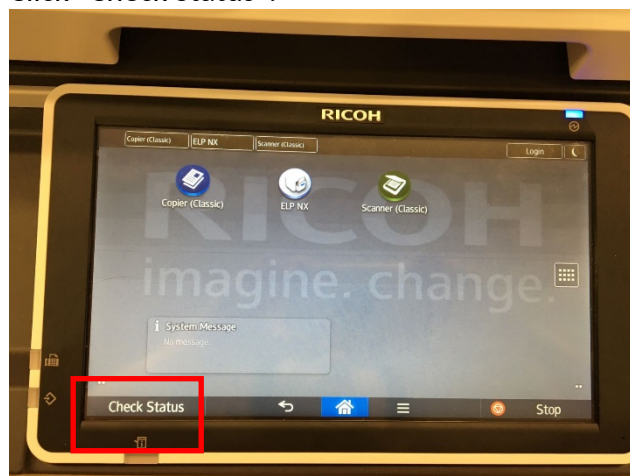


- Click "Maintnc./Inquiry/Mach Info".

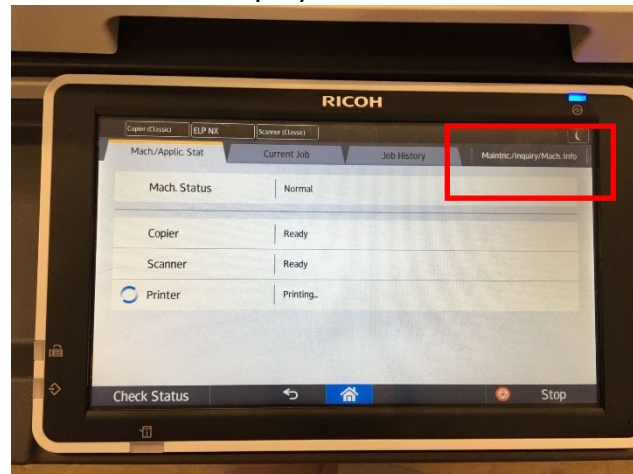

- The paper tray status is shown as follows.

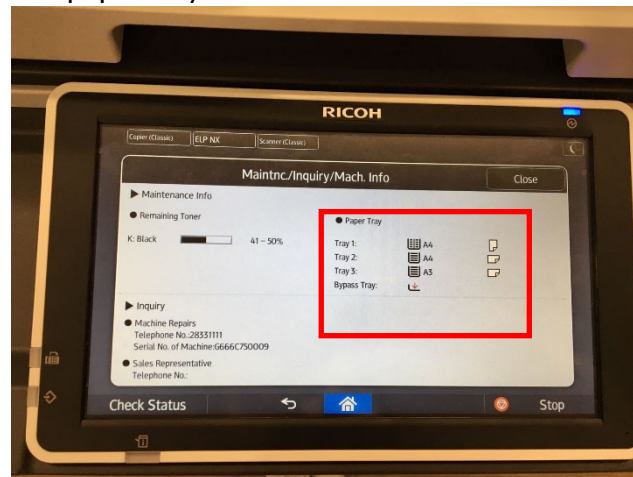

- When filling paper, never manually put paper into the right side of the tray 1.

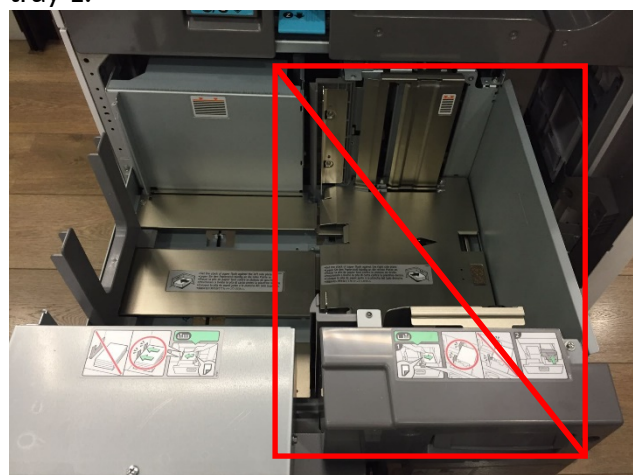


- Make sure the following lever is always at the leftmost side.



- For example, the lever in the position still fails. It's not at the leftmost.




- Please “separate” the paper at all 4 sides as follows.

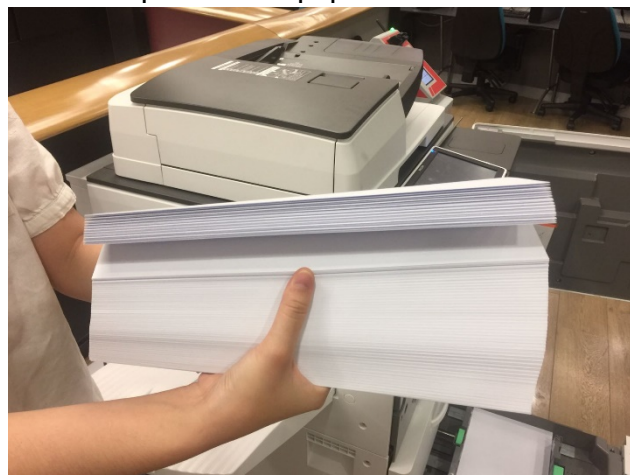

- Please put the “new” paper below the “old” paper.
- Only put paper into the left side of the tray 1.



- Do not fill higher than the “red mark”.

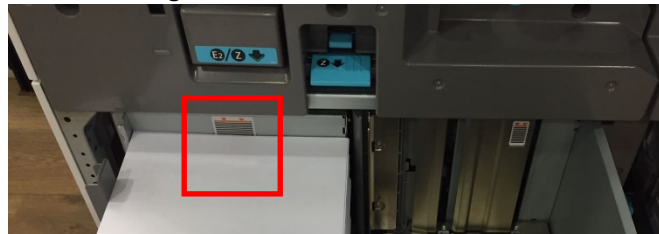


- The paper will then be relocated automatically to the right side.



- Put paper into the left side again.



- If you've fixed anything or refilled paper, remember to check the displays or touch panels again to confirm there're no further errors.

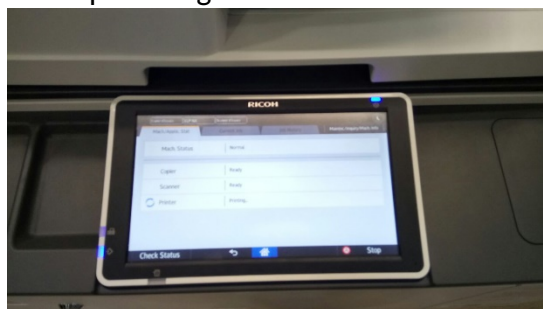

Toner

- You also need to replace them when empty.

Octopus Card Jam

- There is a pair of pliers. One stored in SEKG02 copier 01 tray 2 and another in NAB206A B/W copier tray 2, for removing Octopus card jam.
- Octopus jam
 - First try removing by shutting down and restarting the copiers. The Octopus card may be ejected automatically after reboot.
 - Otherwise, remove using the pliers in MB412/SEKG02/NAB206A.
 - Better wrap the card with thick cloth.
 - Warn users about the possibility of damaging the cards.

Scanning

- Free scanning service, by scanning to email address, is available in all copiers in our computer labs.
- Use the built-in Scanning function in copiers