


Status Input/LED

The diagram illustrates the Status Input/LED circuit for the X2 module. It features a 4-pin connector with the following connections:



- LATCHSTATUS**: Connected to a GND pin and a D1 LED.
- 12VDC**: Connected to a D2 LED.
- DOORSTATUS**: Connected to a D3 LED.
- SS35**: Connected to a D4 LED.

The LEDs are connected to a common ground. The D1 LED is labeled S\$13, D1, and R5. The D2 LED is labeled S\$4, D2, and R6. The D3 LED is labeled S\$3, D3, and R7. The D4 LED is labeled S\$15, D4, and R8. The resistors R5, R6, R7, and R8 are connected to 5VDC, 12VDC, 3.3V1, and 3.3V1 respectively.

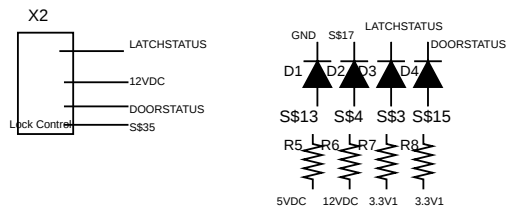

I/O and Signal Resistors (3.3V)

The diagram illustrates a circuit for I/O and signal resistors connected to a 3.3V supply. The resistors are labeled R9, R10, R11, and R12, connected to the 3.3V supply. Below these resistors are components labeled SS21, SS20, SS12, and SS8. A second row of resistors, R13, R14, R15, and R16, is shown, connected to IO26, IO6, IO5, and IO22 respectively.



POWER IN/OUT

X5

1 — GND

2 — SS14

POWER OUT

X6

1 — GND

2 — SS25

POWER IN

X9

1 — SS9

2 — GND 24V+


X8

1 — 4

2 — 5

3 — 6


SS5



POWER FUSES/PROTECTION

Diagram illustrating the power fuses and protection components:

- FH1 is connected to SS11 and SS14.
- FH2 is connected to SS5 and +24VAUX-IN3.
- FH3 is connected to SS25 and +24VAUX-IN5.



MISC CONNECTOR

X7

-PI

3 4


GND

-PI

1 2

5 VDC

SENSOR




Switch - Lock - Light

1

Switch - Lock - Light

Diagram showing the wiring for a Switch - Lock - Light system. The components and their connections are as follows:

- Transformer:** 24V-TR1, connected to the main power lines.
- Switch (S\$36):** Connected to the main power lines.
- Light (S\$63):** Connected to the main power lines through a resistor (R17).
- PTC3 (S\$35):** Connected to the main power lines.
- PTC2 (S\$22):** Connected to the main power lines.
- Switch (S\$23):** Connected to the main power lines.
- Light (S\$26):** Connected to the main power lines.

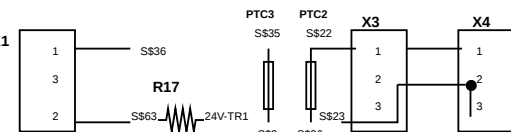

RELAYS

K1

+24VAUX-IN2

K4


24V-TR1

K3

12VDC

K2


12VDC

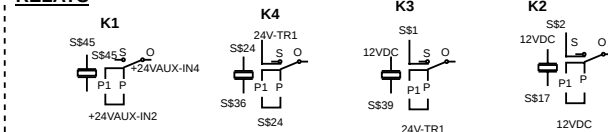

Voltage Regulators

The diagram shows four voltage regulators:


- VR1:** A 24V-TR1 transformer connected to pin 1. Pin 2 is grounded. Pin 3 outputs 12 VDC.
- VR2:** An S56 transformer connected to pin 1. Pin 2 is grounded. Pin 3 outputs +24VAUX-IN2.
- VR4:** A 24V-TR1 transformer connected to pin 1. Pin 2 is grounded. Pin 3 outputs +Vin.
- VR3:** An S540 transformer connected to pin 1. Pin 2 is grounded. Pin 3 outputs -Vin.

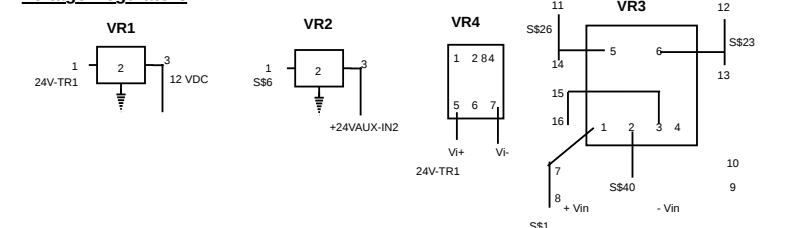

RASPBERRY - 5

The diagram shows the pinout for the Raspberry Pi 5, with 40 pins arranged in two rows of 20. The functions for each pin are as follows:

Pin	Function
1	5VDC
2	5VDC
3	GND
4	RXDREADER
5	TXDREADER
6	SS43
7	READER_ENABLE
8	SS7
9	GND
10	GPIOD25
11	GPIOD8
12	GPIOD7
13	GPIOD1
14	GND
15	GPIOD12
16	SS47
17	GPIOD16
18	GPIOD20
19	GPIOD21
20	GND
21	3V
22	GPIOD2/SDA
23	GPIOD3/SCL
24	GPIOD4
25	GPIOD17
26	GPIOD27
27	GPIOD22
28	GPIOD10
29	GPIOD9
30	GPIOD11
31	GPIOD0
32	GPIOD5
33	GPIOD6
34	GPIOD13
35	GPIOD19
36	GPIOD26
37	GND
38	3.3V1
39	SDA-PI
40	SCL-PI

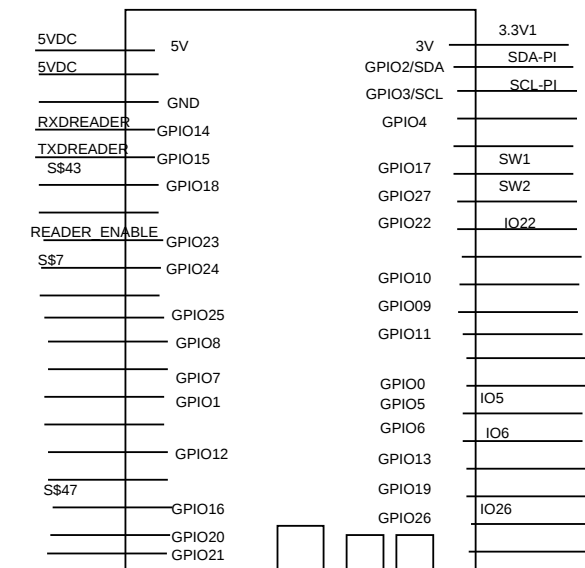


Peripheral IC

U4

Pinout diagram for U4 (Peripheral IC):

- Pin 1: N\$42
- Pin 2: N\$42
- Pin 3: N\$42
- Pin 4: N\$43
- Pin 5: N\$43
- Pin 6: N\$43
- Pin 7: S\$46
- Pin 8: Ground
- Pin 16: S\$17
- Pin 15: S\$17
- Pin 14: S\$17
- Pin 13: S\$18
- Pin 12: S\$18
- Pin 11: S\$18
- Pin 10: S\$39
- Pin 9: 12VDC

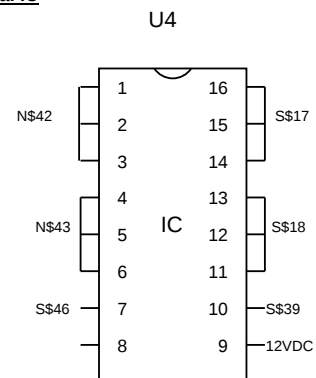


PTC Fuse(Readers)

SS24 — **PTC1** — +24VAUX-IN2

SS9 — **PTC4** — +24VAUX-IN2

SS6 — — SS16



Network Power

X10


S\$16

GND

2 3

6 5


1 4



Reader Interface

The diagram illustrates the Reader Interface, showing a vertical bus with pins numbered 1 through 16. The connections are as follows:

- Pin 1: Connected to S1
- Pin 2: Connected to S\$10
- Pin 3: Unconnected
- Pin 4: Unconnected
- Pin 5: Unconnected
- Pin 6: Unconnected
- Pin 7: Connected to RXDREADER
- Pin 8: Connected to TXDREADER
- Pin 9: Unconnected
- Pin 10: Unconnected
- Pin 11: Unconnected
- Pin 12: Unconnected
- Pin 13: Connected to 5VDC
- Pin 14: Unconnected
- Pin 15: Unconnected
- Pin 16: Connected to X1/S2

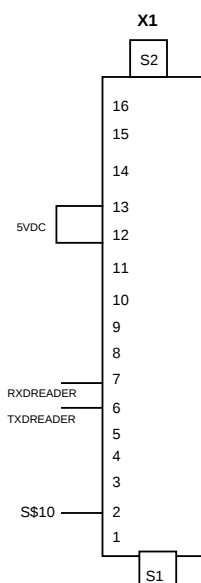

Signal Connections

R24
 READER_ENABLE — S\$10

R1
 SW2 — LATCHSTATUS

R2
 LATCHSTATUS — 3.3V1

R3
 SW1 — DOORSTATUS

R4
 DOORSTATUS — 3.3V1

R22
 S\$46 — S\$47

R23
 NS42 — S\$7

R18
 SDA-PI — 3.3V1

R19
 SCL-PI — 3.3V1

R25
 S\$40 — S\$43


R26
 S\$40 — 5VDC

R27
 GND — S\$40

D5
 +24VAUX-IN2 — 1 2 3 — +24VAUX-IN2
 S\$11

D6
 +24VAUX-IN5 — 1 2 3 — +24VAUX-IN5
 +24VAUX-IN4

D7
 +24VAUX-IN3 — 1 2 3 — +24VAUX-IN3
 S\$45

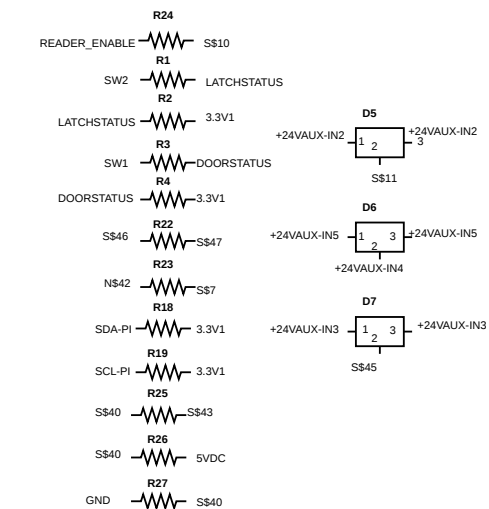

REVISION	Proprietary and Confidential the information contained in this schematic is the sole property of mobile aspects. any reproduction in part or as a whole without the written permission of mobile aspects is prohibited.	Title: Auxiliary Supply 7 schematic	Mobile Aspects Inc.
Rev. A		Created Date: 9/29/2026	PROJECT. IFRAME