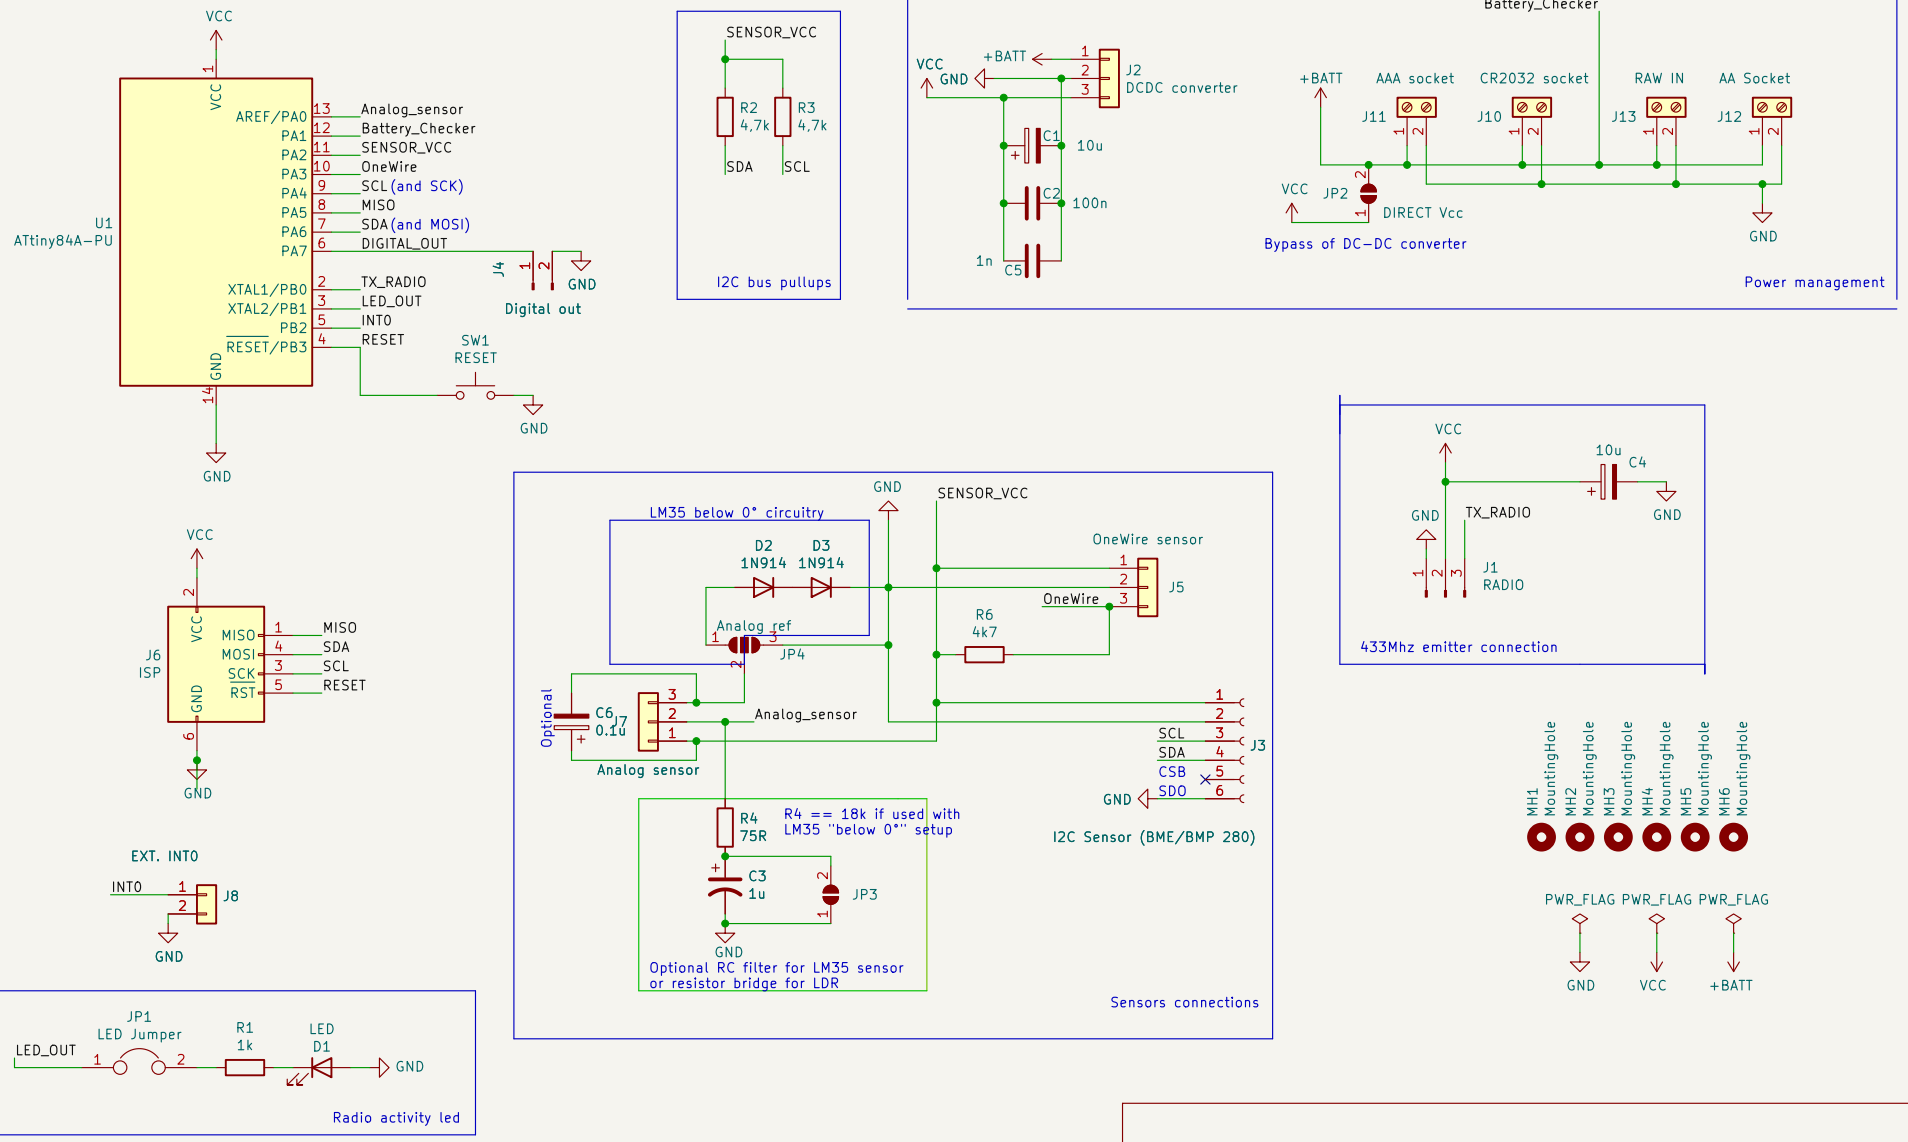

VCC
U1
ATtiny84A-PU
AREF/PA0 13 Analog_sensor
PA1 12 Battery_Checker
PA2 11 SENSOR_VCC
PA3 10 OneWire
PA4 9 SCL (and SCK)
PA5 8 MISO
PA6 7 SDA (and MOSI)
PA7 6 DIGITAL_OUT
XTAL1/PB0 2 TX_RADIO
XTAL2/PB1 3 LED_OUT
PB2 5 INT0
RESET/PB3 4 RESET
GND 14
J4
Digital out
SW1
RESET
SENSOR_VCC
R2 4,7k
R3 4,7k
SDA
SCL
I2C bus pullups
+BATT
J2
DCDC converter
C1 10u
C2 100n
C5 1n
Battery_Checker
+BATT
AAA socket
CR2032 socket
RAW IN
AA Socket
J11
J10
J13
J12
JP2
DIRECT Vcc
Bypass of DC-DC converter
Power management
J6
ISP
MISO
MOSI
SCK
RST
SDA
SCL
RESET
EXT. INT0
INT0
J8
LM35 below 0° circuitry
D2 1N914
D3 1N914
Analog ref
JP4
OneWire sensor
J5
OneWire
R6 4k7
Optional
C6 0.1u
J7
Analog sensor
Analog_sensor
R4 75R
R4 == 18k if used with LM35 "below 0°" setup
C3 1u
JP3
Optional RC filter for LM35 sensor or resistor bridge for LDR
SCL
SDA
CSB
SDO
J3
I2C Sensor (BME/BMP 280)
Sensors connections
C4 10u
TX_RADIO
J1
RADIO
433Mhz emitter connection
MH1 MountingHole
MH2 MountingHole
MH3 MountingHole
MH4 MountingHole
MH5 MountingHole
MH6 MountingHole
PWR_FLAG
PWR_FLAG
PWR_FLAG
JP1
LED Jumper
LED_OUT
R1 1k
LED D1
Radio activity led
Open Hardware
Sheet: /
File: tinySensorv1.kicad_sch
Title: TinySensor board
Size: A4
Date: 2022-10-22
Rev: 2.3
KiCad E.D.A. 10.0.7
Id: 1/1