


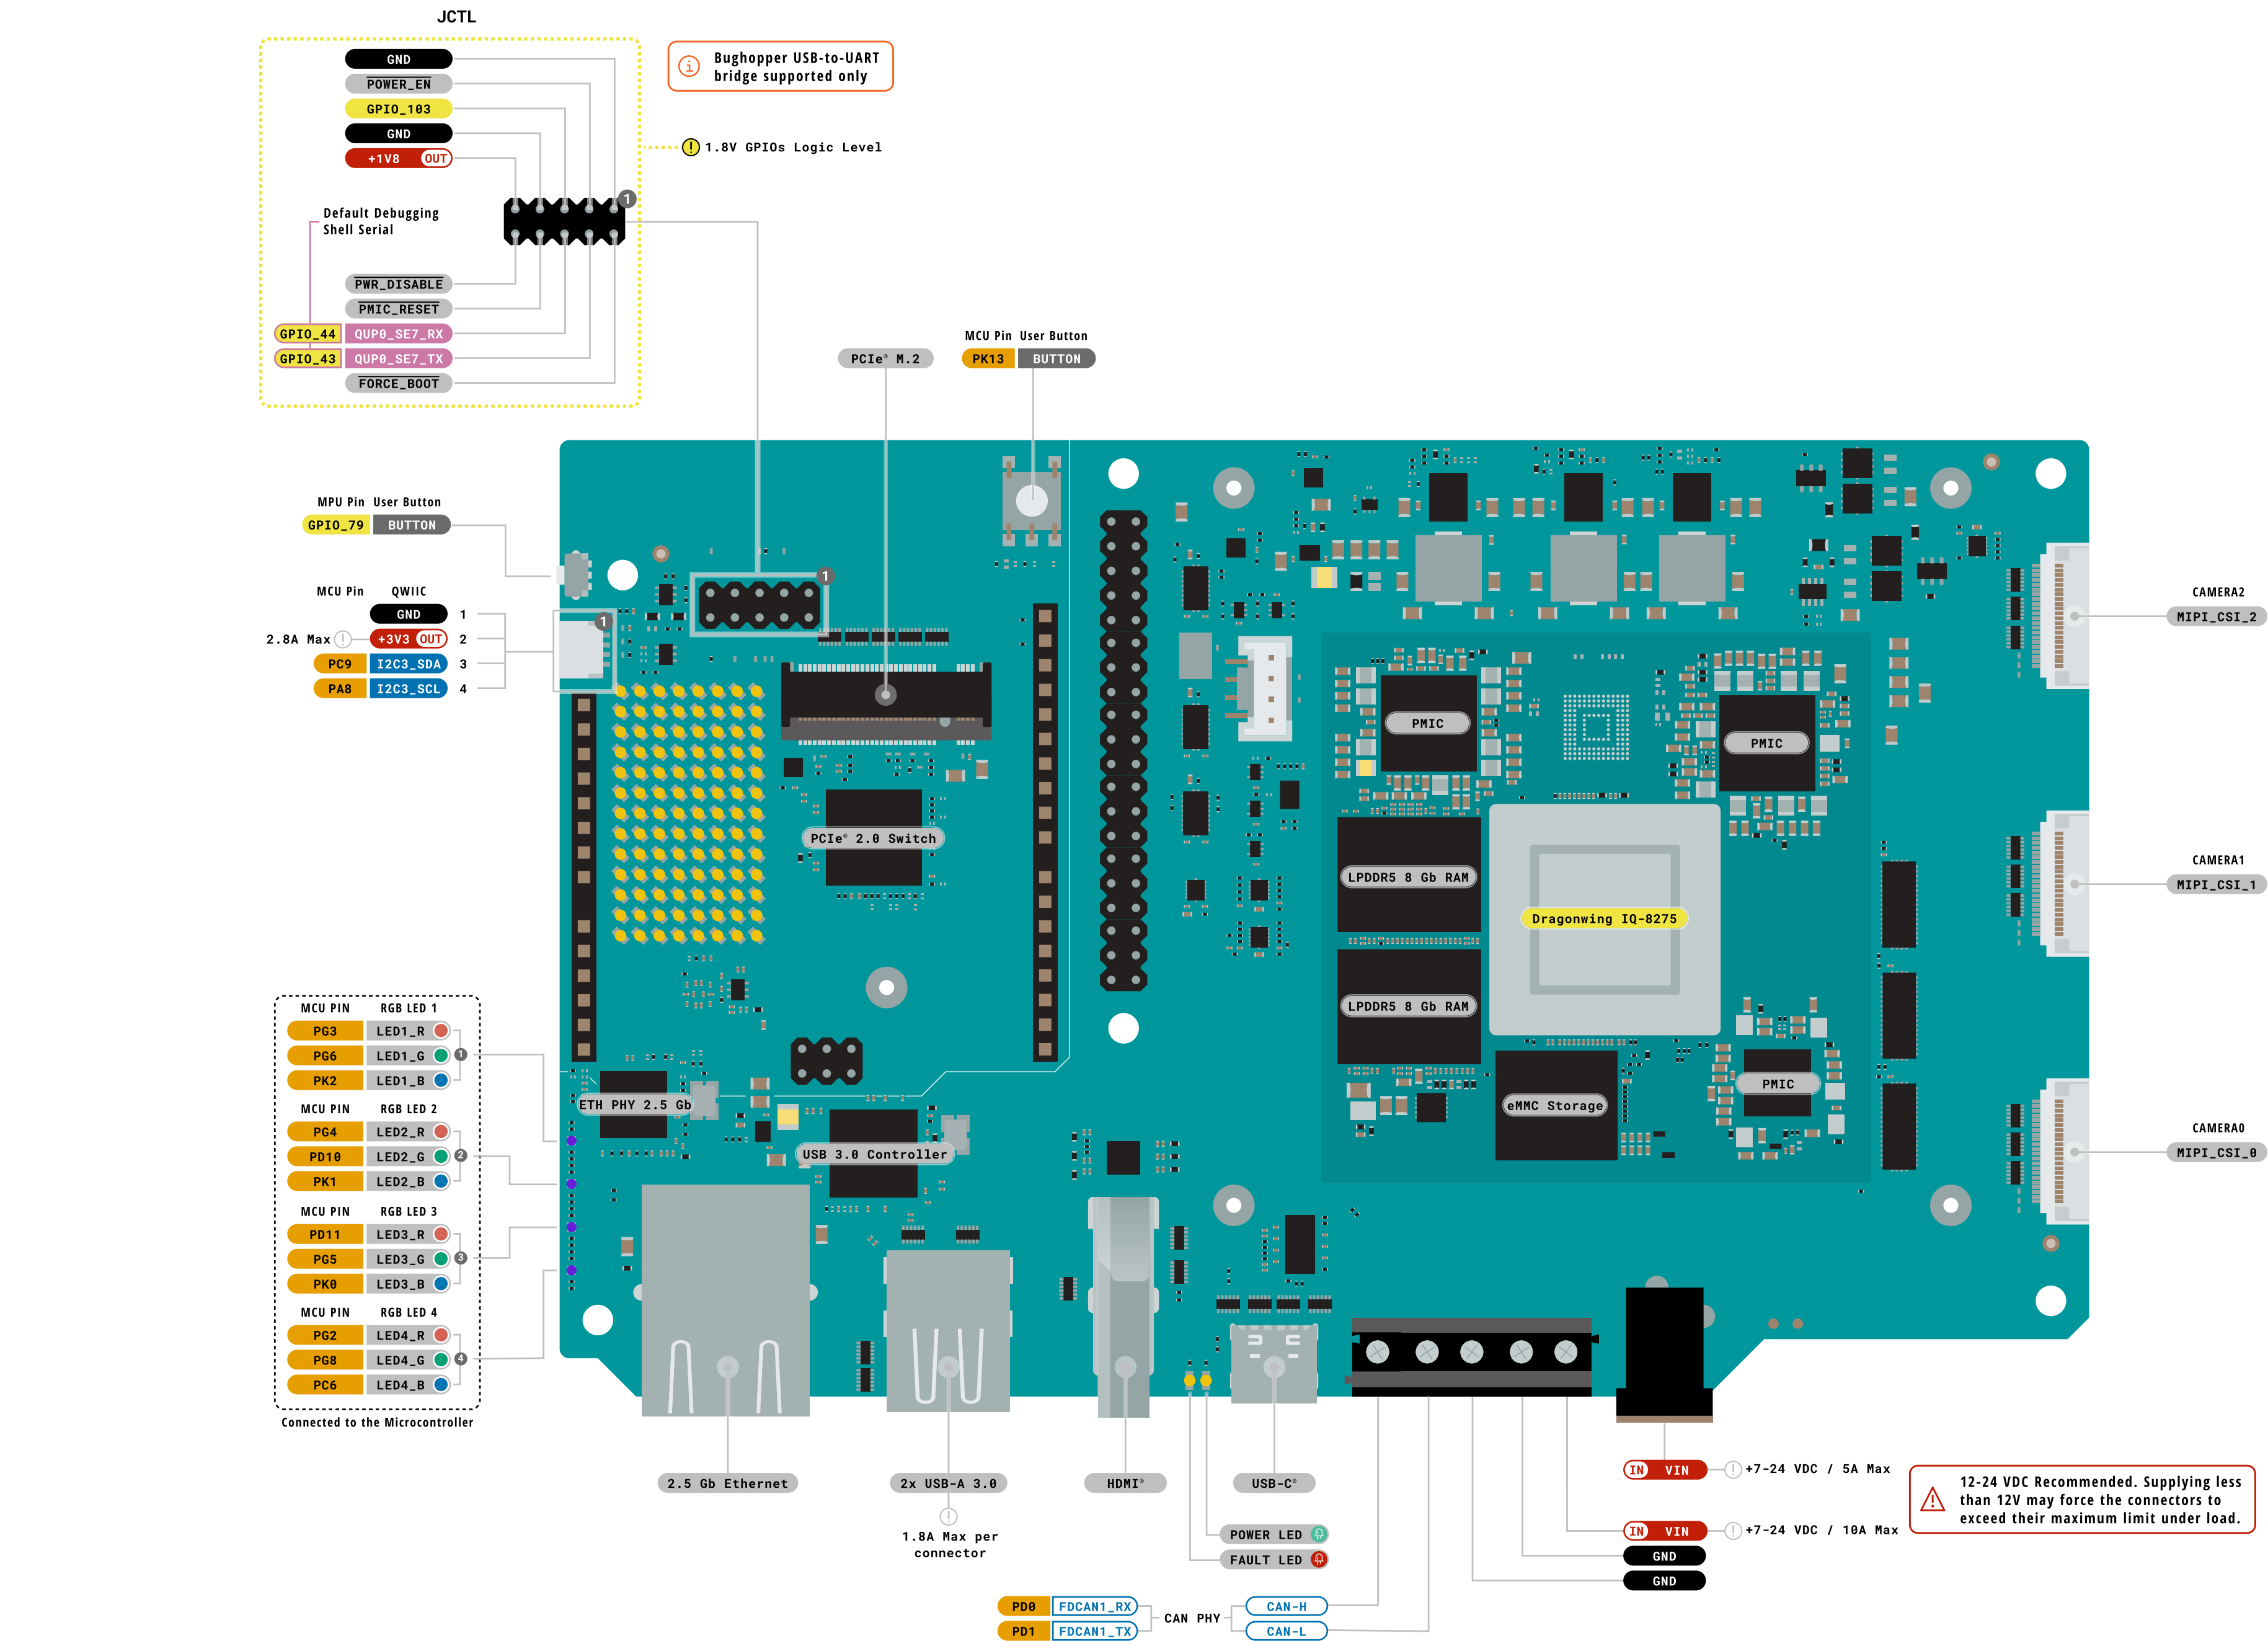

Legend:

Power

Power Input

Power Output

GPIO Digital External

Analog External

Main Part

Secondary Part

Internal Component

Other Pins (Reset, System Control, Debugging)

I2C

SPI

UART/USART

Other SERIAL

Analog

PWM/Timer

Default

Default

Default

Default

Default

LED

RGB LED

- WARNING** JCTL GPIO pins are 1.8V logic only
- WARNING** UART bridge used on JCTL must be open-drain to avoid back-powering
- +3V3 output pin on the Qwiic connector is protected by a power switch limited to 2.8 Amps



SKU code: ABX00181
Full Pinout - Page 1 of 6
Last update: 9 Oct, 2026

DOCS.ARDUNO.CC




This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

WARNING!

Advanced Section

The following information is for advanced use only and
may not be officially supported by Arduino software



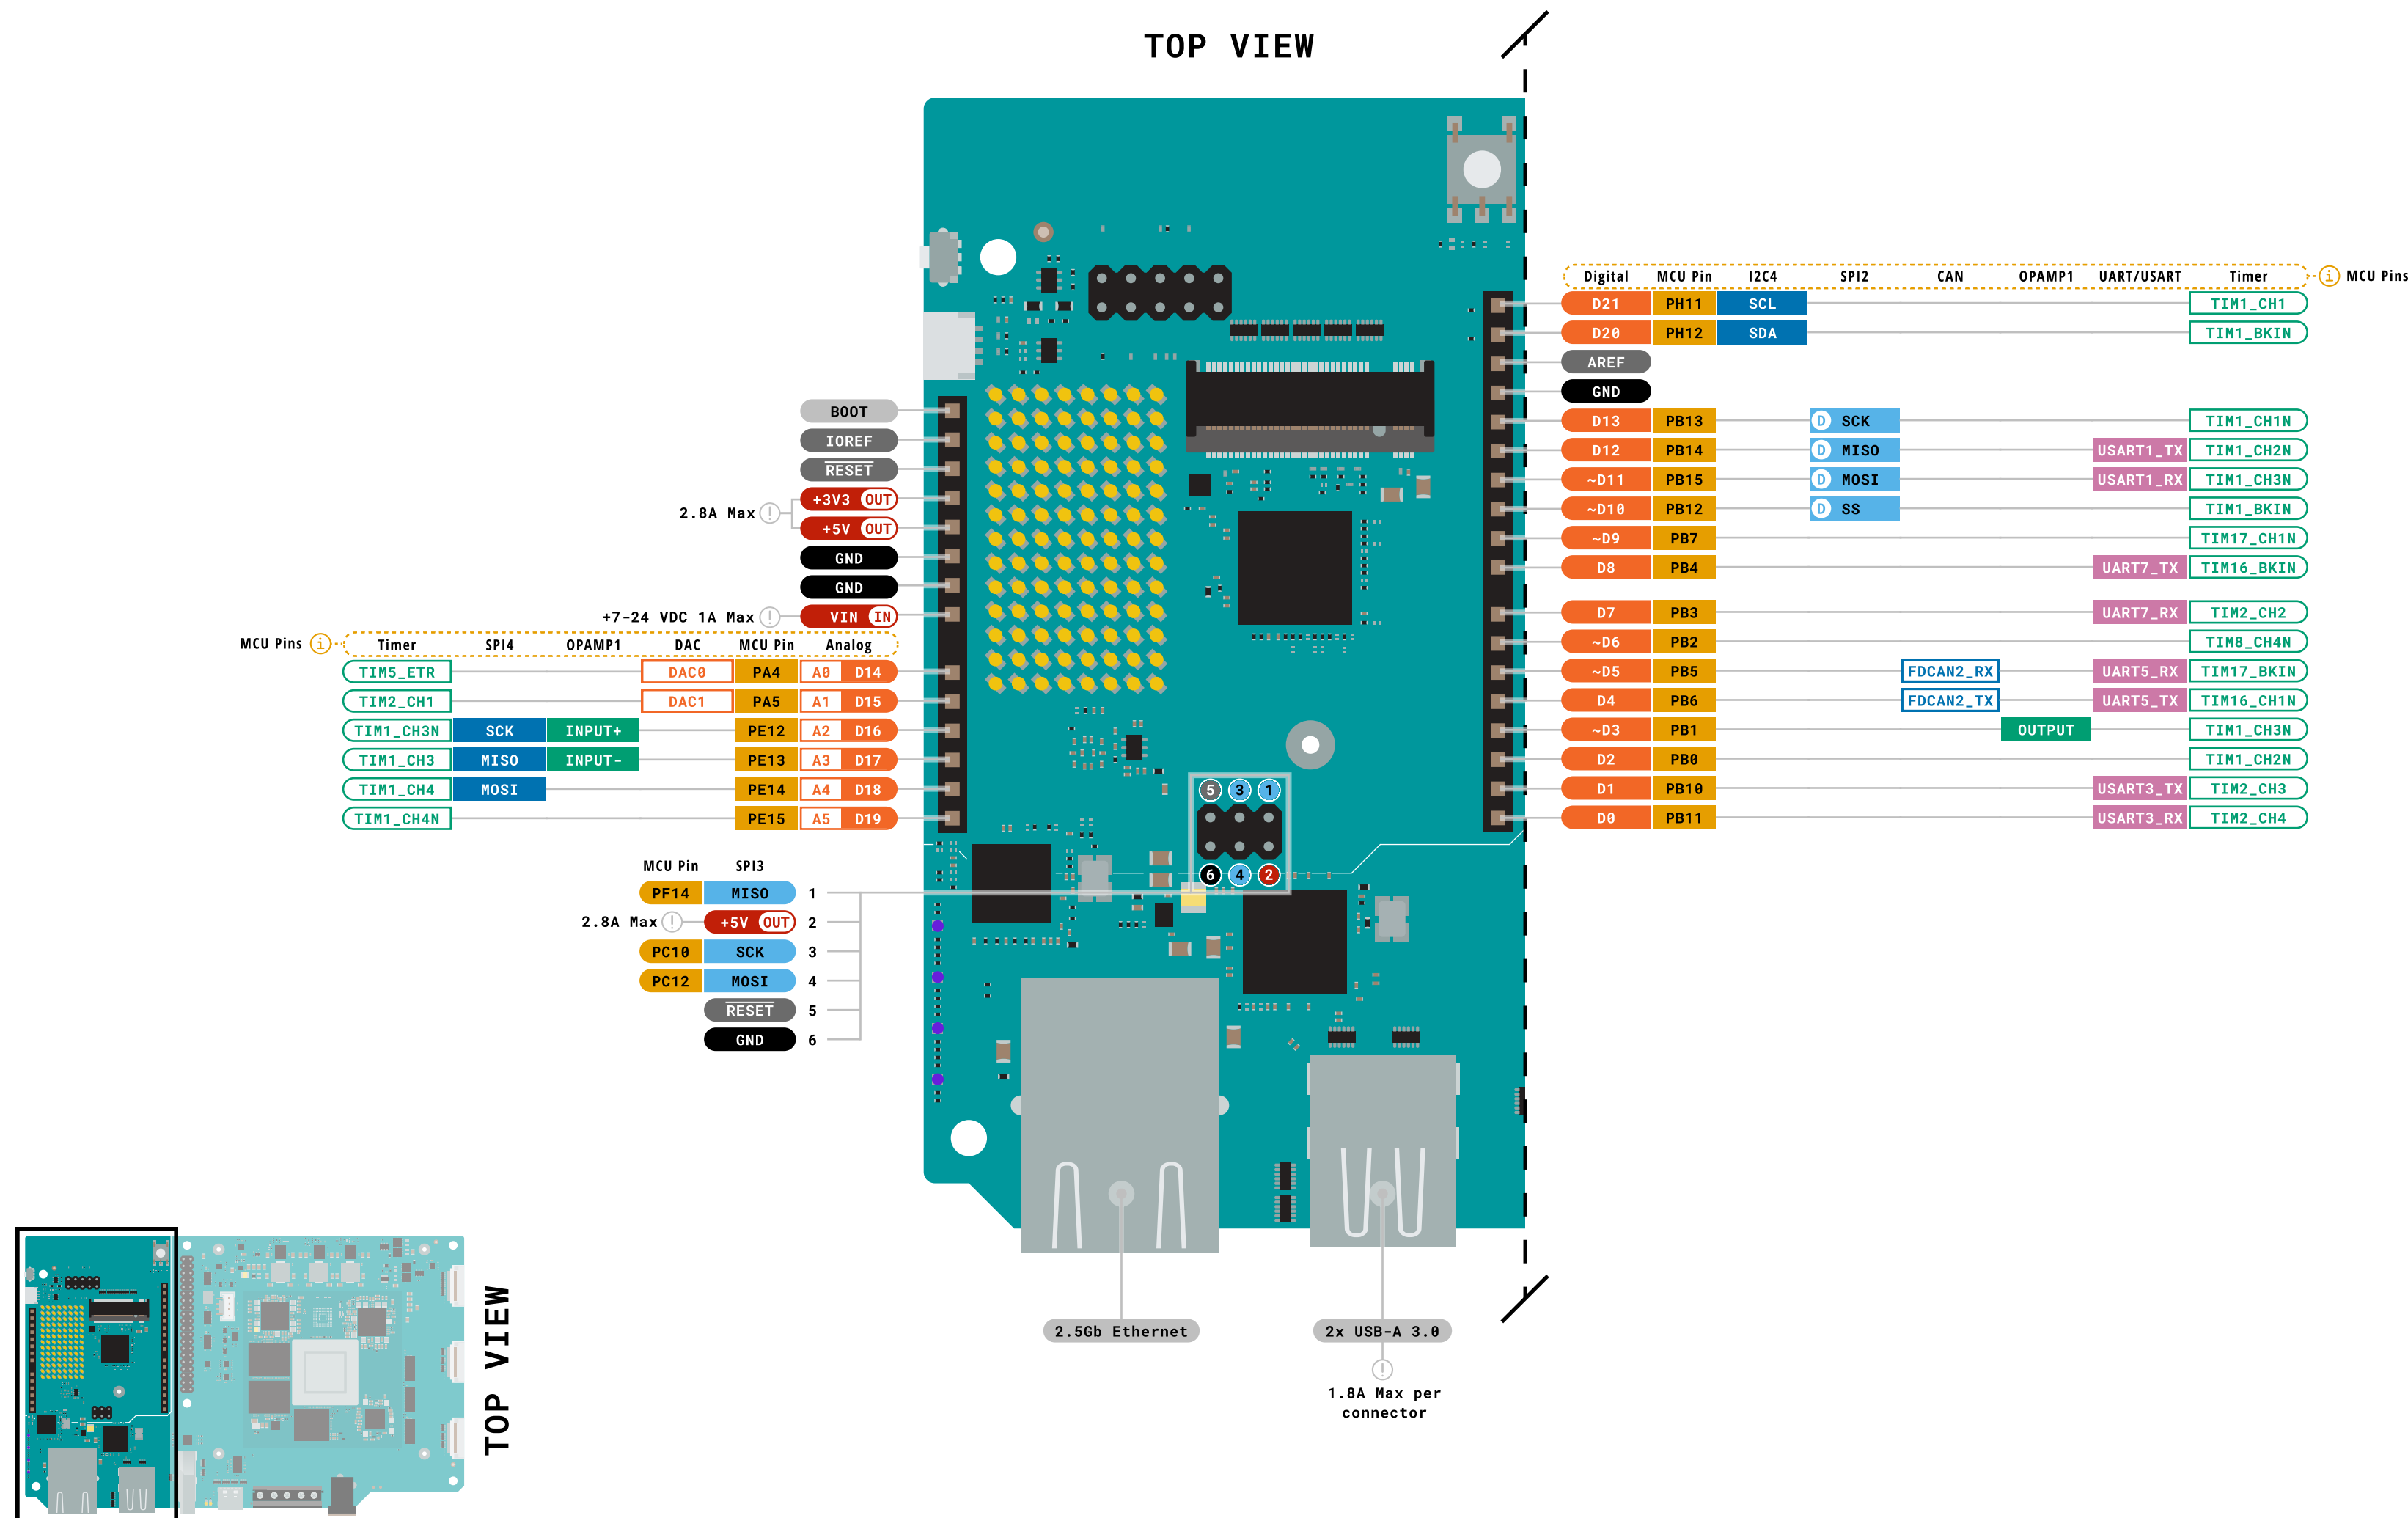

Legend:

Power

Ground

Power Input

Power Output

GPIO Digital External

Analog External

Main Part

Secondary Part

Internal Component

Other Pins (Reset, System Control, Debugging)

I2C

SPI

UART/USART

Other SERIAL

Analog

PWM/Timer

Default

Default

Default

Default

LED

RGB LED

WARNING A0 and A1 are not 5V tolerant

VIN pin on JANALOG is protected by a 1.1 Amps PTC

+3V3 and +5V output pins on JANALOG and JSPI are protected by power switches limited to 2.8 Amps

JANALOG pins A4 and A5 do not have a STM32H5F5 I2C connected to them

ARDUINO

SKU code: ABX00181


Full Pinout - Page 3 of 6


Last update: 9 Oct, 2026

DOCS.ARDUINO.CC

CC BY SA

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

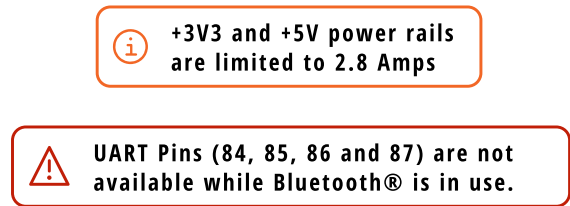

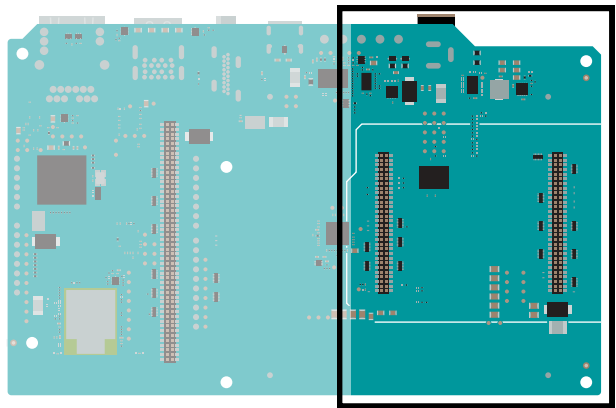

BOTTOM VIEW

JMISC

PA9	MCU_PSSI_D0	1	2	MCU_TRACE_CLK	PE2
PC7	MCU_PSSI_D1	3	4	MCU_TRACE_D0	PE3
PC8	MCU_PSSI_D2	5	6	MCU_TRACE_D1	PE4
PE1	MCU_PSSI_D3	7	8	MCU_TRACE_D2	PE5
PC11	MCU_PSSI_D4	9	10	MCU_TRACE_D3	PE6
PD3	MCU_PSSI_D5	11	12	MCU_USART2_RX	PE7
PF4	MCU_PSSI_D6	13	14	MCU_USART2_TX	PE8
PI7	MCU_PSSI_D7	15	16	MCU_I2C2_SCL	PF1
PA6	MCU_PSSI_PDCK	17	18	MCU_I2C2_SDA	PF0
PI5	MCU_PSSI_RDY	19	20	MCU_GPIO_PA0	PA0
PH8	MCU_PSSI_DE	21	22	MCU_GPIO_PA1	PA1
PA11	MCU_UART4_RX	23	24	MCU_GPIO_PA2	PA2
PA12	MCU_UART4_TX	25	26	GND	
	GND	27	28	EAR_P	
	MIC_IN+	29	30	EAR_M	
	MIC_IN-	31	32	LINEOUT_P	
	MIC_BIAS	33	34	LINEOUT_M	
	GND	35	36	HPH_L	
MISO	SOC_GPIO10_SE0	37	38	HPH_R	
MOSI	SOC_GPIO11_SE0	39	40	HPH_REF	
SCK	SOC_GPIO12_SE0	41	42	HS_DET	
CS0	SOC_GPIO13_SE0	43	44	GND	
CS2	SOC_GPIO15_SE0	45	46	SOC_GPIO120	I2S2_SCK
CS1	SOC_GPIO14_SE0	47	48	SOC_GPIO121	I2S2_WS
	SOC_GPIO173	49	50	SOC_GPIO122	I2S2_DATA0
	SOC_GPIO174	51	52	SOC_GPIO123	I2S2_DATA1
+3V3	OUT	53	54	OUT	+5V
+3V3	OUT	55	56	OUT	+5V
+1V8	OUT	57	58	GND	
MCU_VBAT	SOC_VCOIN	59	60	NC	

JMEDIA

GND	1	2	GND	
MIPI_DSI0_CLK_M	3	4	MIPI_DSI0_L1_P	
MIPI_DSI0_CLK_P	5	6	MIPI_DSI0_L1_M	
GND	7	8	GND	
MIPI_DSI0_L2_M	9	10	MIPI_DSI0_L0_P	
MIPI_DSI0_L2_P	11	12	MIPI_DSI0_L0_M	
GND	13	14	GND	
MIPI_DSI0_L3_M	15	16	SOC_CAM_MCLK0	GPIO_67
MIPI_DSI0_L3_P	17	18	SOC_CAM_MCLK1	GPIO_68
GND	19	20	GND	
CSI0_C0_LN0_M	21	22	CCI_I2C2_SDA1	GPIO_59
CSI0_B0_LN0_P	23	24	CCI_I2C2_SCL1	GPIO_60
GND	25	26	GND	
CSI0_B1_LN1_M	27	28	CSI1_B2_LN3_P	
CSI0_A1_LN1_P	29	30	CSI1_C2_LN3_M	
GND	31	32	GND	
CSI0_A0_CLK_M	33	34	CSI1_C1_LN2_P	
CSI0_NC_CLK_P	35	36	CSI1_A2_LN2_M	
GND	37	38	GND	
CSI0_A2_LN2_M	39	40	CSI1_NC_CLK_P	
CSI0_C1_LN2_P	41	42	CSI1_A0_CLK_M	
GND	43	44	GND	
CSI0_C2_LN3_M	45	46	CSI1_A1_LN1_P	
CSI0_B2_LN3_P	47	48	CSI1_B1_LN1_M	
GND	49	50	GND	
GPIO_58	CCI_I2C0_SCL1	51	CSI1_B0_LN0_P	
GPIO_57	CCI_I2C0_SDA1	53	CSI1_C0_LN0_M	
GND	55	56	GND	
VIN	IN	57	OUT	+3V3
VIN	IN	59	OUT	+3V3

1.5A Max

Legend:

Power	Power Input	GPIO Digital External	I2C	Default	LED
Ground	Power Output	Analog External	SPI	Default	RGB LED
		Main Part	UART/USART	Default	
		Secondary Part	Other SERIAL	Default	
		Internal Component	Analog	Default	
		Other Pins (Reset, System Control, Debugging)	PWM/Timer		

WARNING Except for VIN, the power rails on JMEDIA and JMISC are unprotected and have no current limiting




SKU code: ABX00181
Full Pinout - Page 5 of 6
Last update: 9 Oct, 2026

DOCS.ARDUINO.CC



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

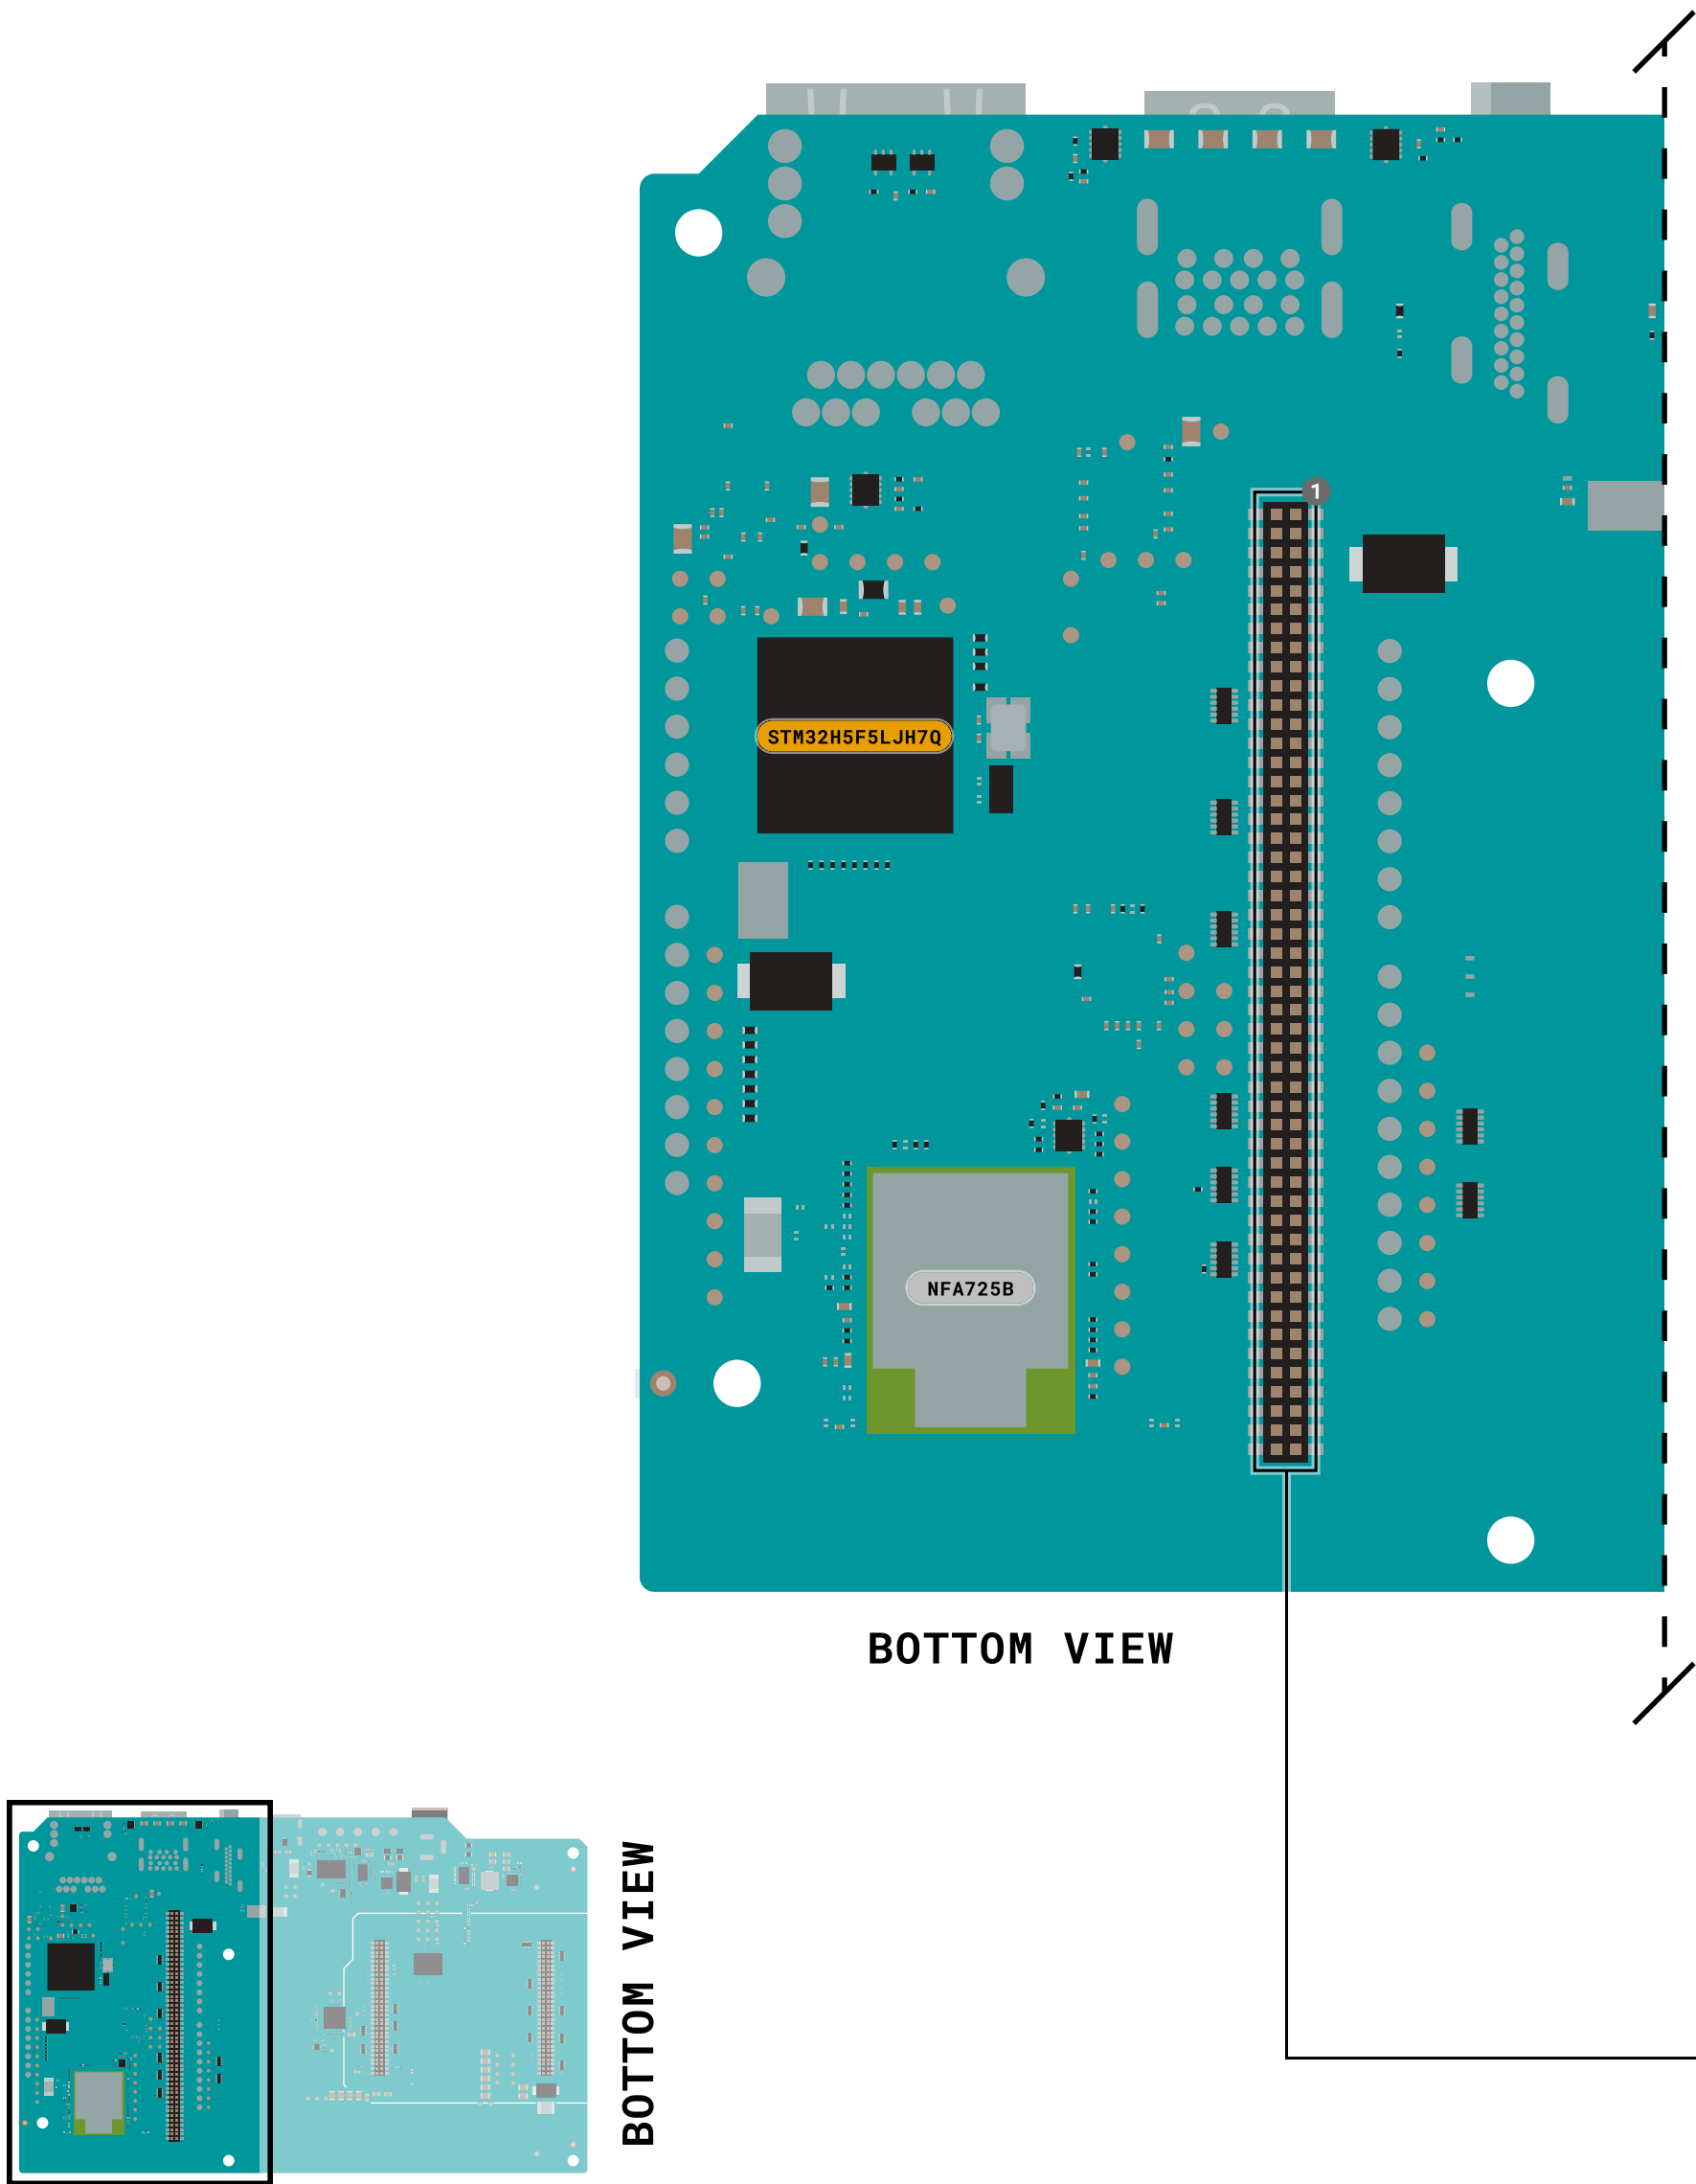

JOMEGA			
GND	2	1	IN VIN
GND	4	3	IN VIN
GND	6	5	IN VIN
GND	8	7	IN VIN
GND	10	9	IN VIN
GND	12	11	IN VIN
GND	14	13	IN VIN
GND	16	15	GND
USB1_SS_TX_P	18	17	GND
USB1_SS_TX_N	20	19	GND
GND	22	21	GND
USB1_HS_D_P	24	23	GND
USB1_HS_D_N	26	25	GND
GND	28	27	GND
USB1_SS_RX_P	30	29	GND
USB1_SS_RX_N	32	31	GND
GND	34	33	GND
USB2_SS_TX_P	36	35	GND
USB2_SS_TX_N	38	37	GND
GND	40	39	MCU_GPIO_PC0
USB2_HS_D_P	42	41	MCU_GPIO_PC1
USB2_HS_D_N	44	43	MCU_GPIO_PC2
GND	46	45	MCU_GPIO_PC3
USB2_SS_RX_P	48	47	MCU_GPIO_PD12
USB2_SS_RX_N	50	49	MCU_GPIO_PD13
GND	52	51	MCU_GPIO_PD14
USB1_PWRON	54	53	MCU_GPIO_PD15
USB1_OVERCUR	56	55	MCU_GPIO_PI2
USB2_PWRON	58	57	MIC2_IN+
USB2_OVERCUR	60	59	MIC2_IN-
GPIO_39	MISO	62	MIC2_BIAS
GPIO_40	MOSI	64	JTAG_TMS
GPIO_37	SCK	66	JTAG_TDO
GPIO_38	CS	68	JTAG_TDI
	PM_PS_HOLD	70	JTAG_TCK
GPIO_52	FORCE_USB_BOOT	72	JTAG_SRST
	POWER_EN	74	JTAG_TRST
GPIO_79	USER_BUTTON	76	GND
	PMIC_RESET	78	OUT +1V8_SPX3
	RTSS_RESET	80	OUT +1V8
	RTSS_PS_HOLD	82	OUT +1V8
	GND	84	QUP0_SE7_TX
PD5	FDCAN1_TX	86	QUP0_SE7_RX
PI9	FDCAN1_RX	88	PWR_DISABLE
	GND	90	FORCE_BOOT
PA10	FDCAN2_TX	92	OUT +3V3
PD9	FDCAN2_RX	94	OUT +3V3
	GND	96	OUT +3V3
PF6	FDCAN3_TX	98	OUT +5V
PF7	FDCAN3_RX	100	OUT +5V

Legend:

Power	IN Power Input	GPIO Digital External	I2C	Default	LED
Ground	OUT Power Output	Analog External	SPI	Default	RGB LED
		Main Part	UART/USART	Default	
		Secondary Part	Other SERIAL	Default	
		Internal Component	Analog	Default	
		Other Pins (Reset, System Control, Debugging)	PWM/Timer		

WARNING Power rails on JOMEGA are unprotected and have no current limiting

+1V8 marked pins are the recommended for powering peripherals. Avoid +1V8_SPX3



SKU code: ABX00181
Full Pinout - Page 6 of 6
Last update: 9 Oct, 2026

DOCS.ARDUINO.CC



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.