Here are the pin assignments:

GPIO 00	NA	NOT Available; but can be tapped from the D1mini
GPIO 01	Button1	DO NOT CONNECT TO TOGGLE SW; boot fails
GPIO 02	User	Broken out: Free
GPIO 03	SW1	
GPIO 04	I2C SDA	Broken out; Free
GPIO 05	I2C SCL	Broken out: Free
GPIO 12	SW2	
GPIO 13	Relay 2	
GPIO 14	Relay 1	
GPIO 15	User	Broken out: Free
GPIO 16	NA	NOT Available; but can be tapped from the D1mini
GPIO 17	ADC	Broken out: Free

Resulting Tasmota template:

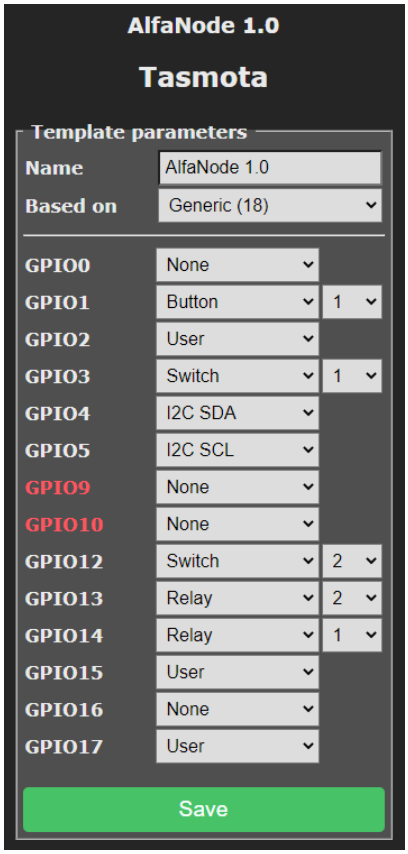

{"NAME":"AlfaNode 1.0","GPIO":[0,32,1,160,640,608,0,0,161,225,224,1,0,1],"FLAG":0,"BASE":18}