


UNO+WiFi R3 ATmega328P+ESP8266, 32Mb flash, USB-TTL CH340G, Micro-USB

RobotDyn

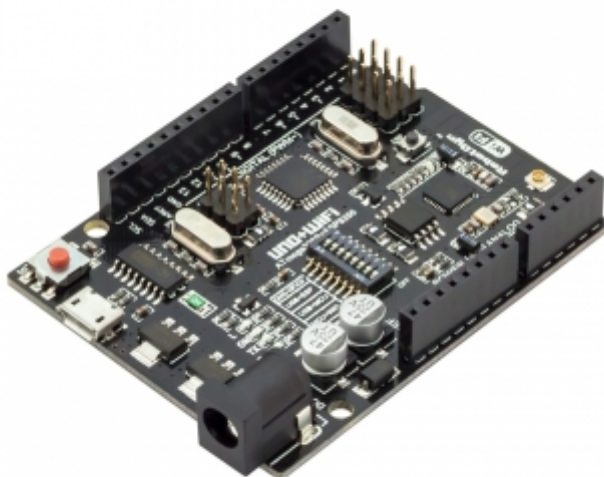

AVAILABLE

Price: \$10.49


Characteristics ▲

It is a customised version of the classic ARDUINO UNO R3 board. Full integration of microcontroller Atmel ATmega328 and IC Wi-Fi ESP8266 with 32 MB flash memory, and USB-TTL converter CH340G on one board. All modules can work together or independently.

On the board there is the switch of mode of operation with 8 positions

If you need help, we are online!






Switch status and mode selection:

	1	2	3	4	5	6	7	8
CH340 connect to ESP8266 (upload sketch)	OFF	OFF	OFF	OFF	ON	ON	ON	NoUSE
CH340 connect to ESP8266 (connect)	OFF	OFF	OFF	OFF	ON	ON	OFF	NoUSE
CH340 connect to ATmega328 (upload sketch)	OFF	OFF	ON	ON	OFF	OFF	OFF	NoUSE
Mega328+ESP8266	ON	ON	OFF	OFF	OFF	OFF	OFF	NoUSE
All modules work independed	OFF	OFF	OFF	OFF	OFF	OFF	OFF	NoUSE

After choosing the mode of the board, can proceed to setting up the IDE


It is important that when the ESP8266 module is programming, it is necessary to press the button "Mode"

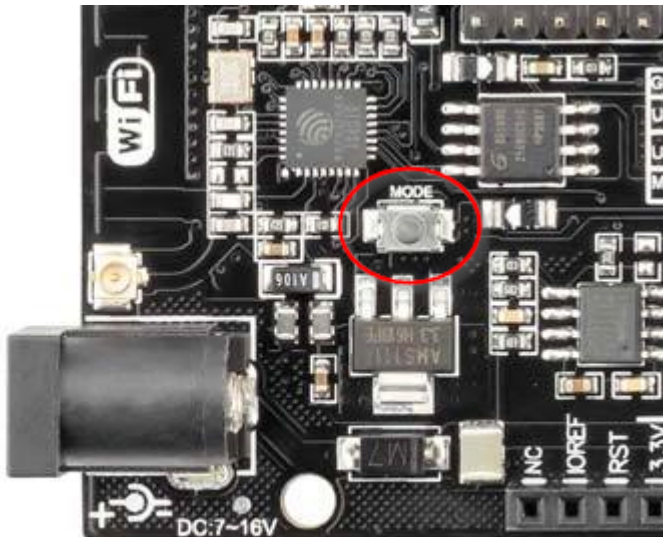


To begin open the Arduino IDE programming environment and go to settings

If you need help, we are online!



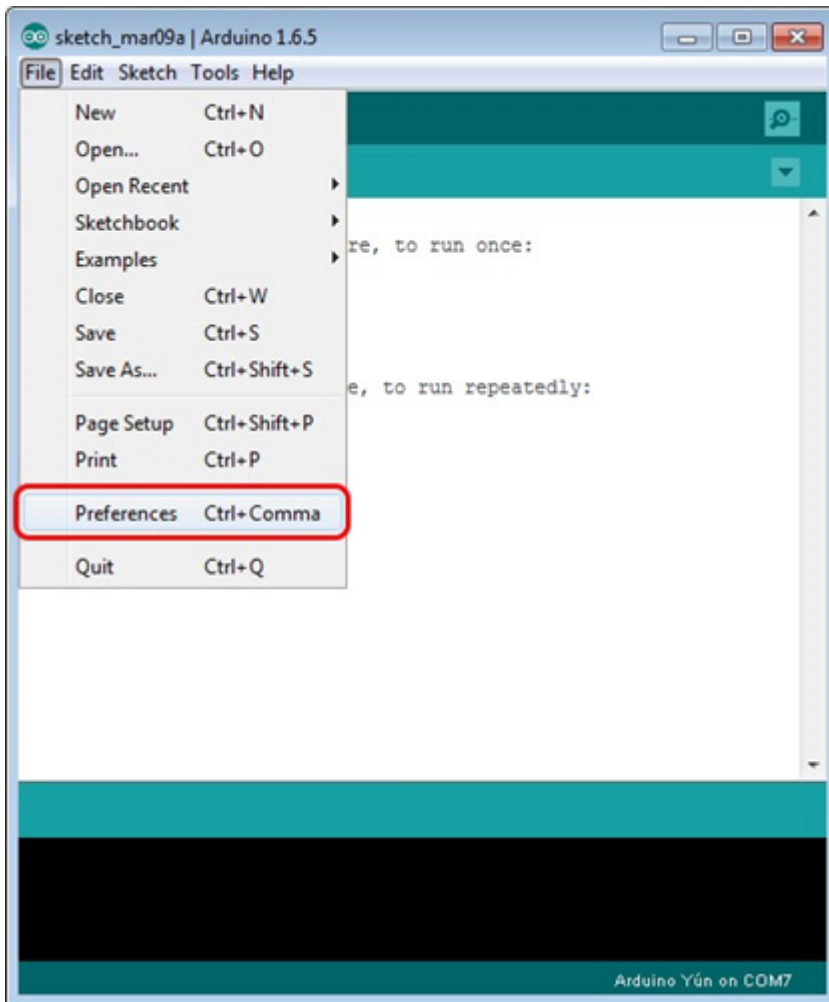


Then in the window that appears in the row Additional Boards Manager URLs (marked in red) insert http://arduino.esp8266.com/stable/package_esp8266com_index.json link for installation in Arduino IDE additional scripts that would work with the modules ESP8266, and click OK

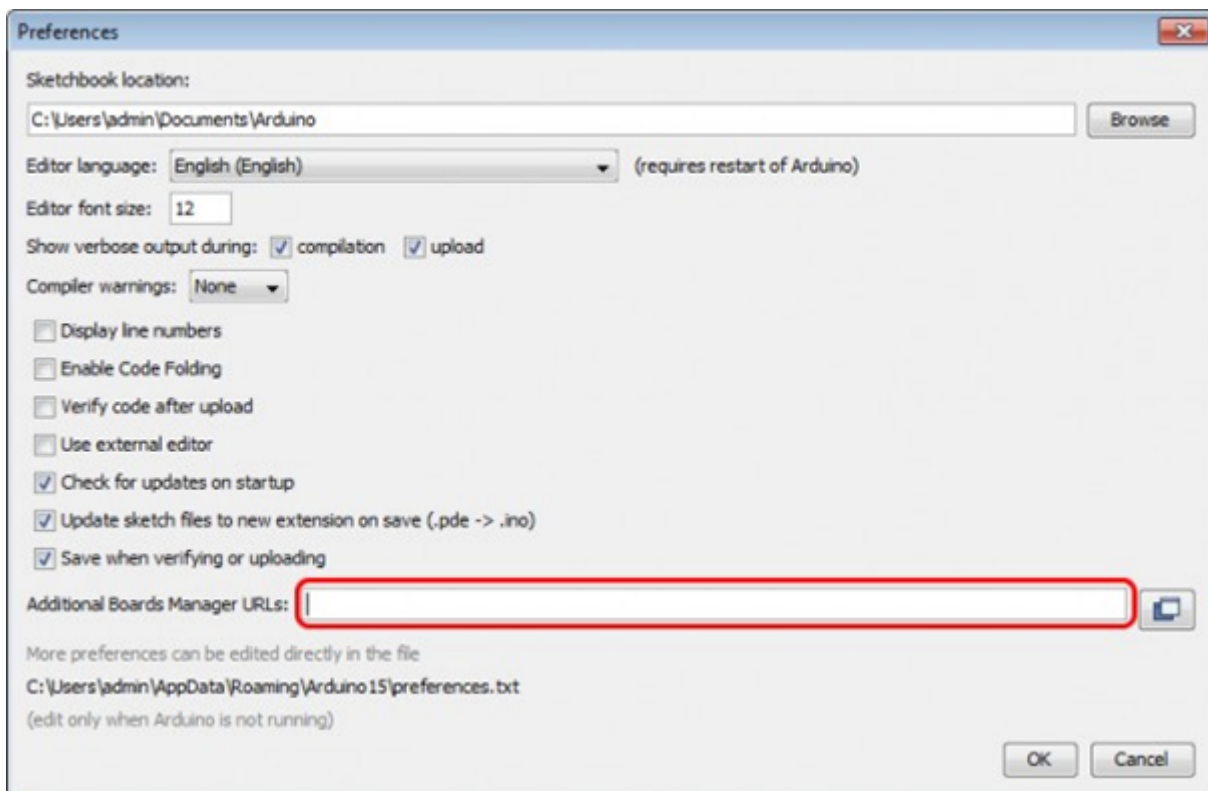


Then go to the Tools> Board> Boards Manager

If you need help, we are online!

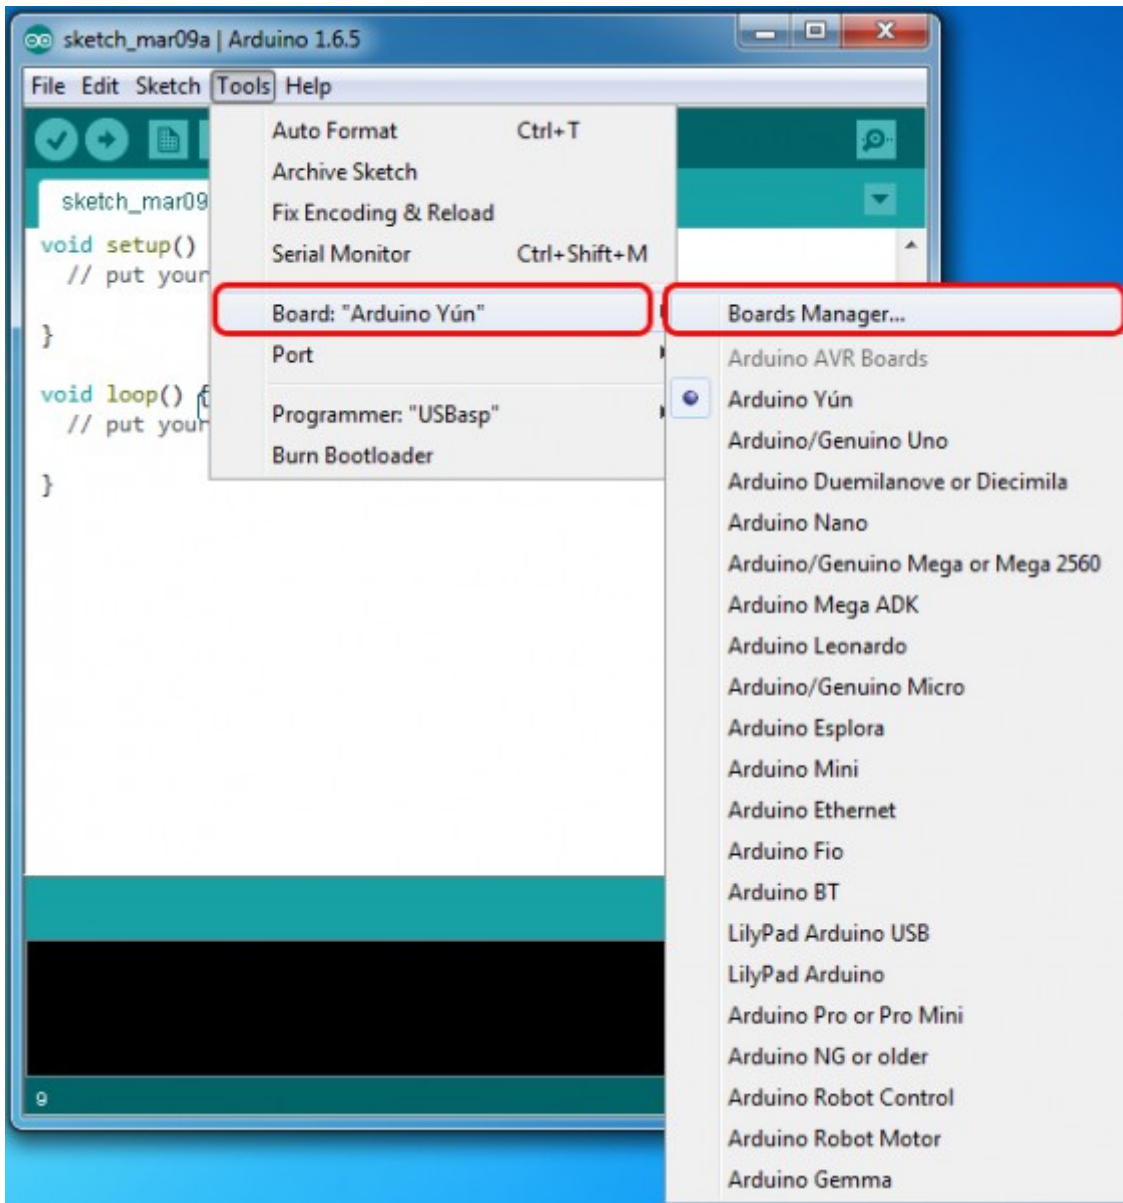


In the window that appears, scroll through the list down to the script esp8266 by ESP8266 Community and click.

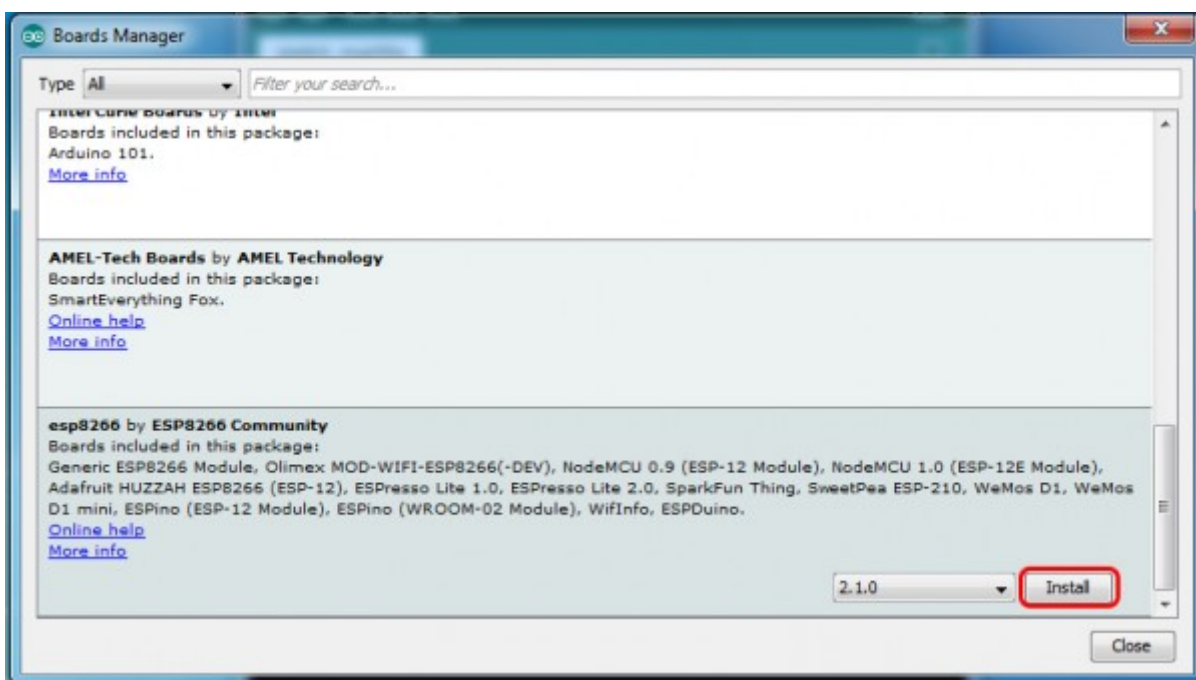


If you need help, we are online!



In the lower right corner will be able to select the version of the software, select the version 2.1.0 (the newest) and click the Install button

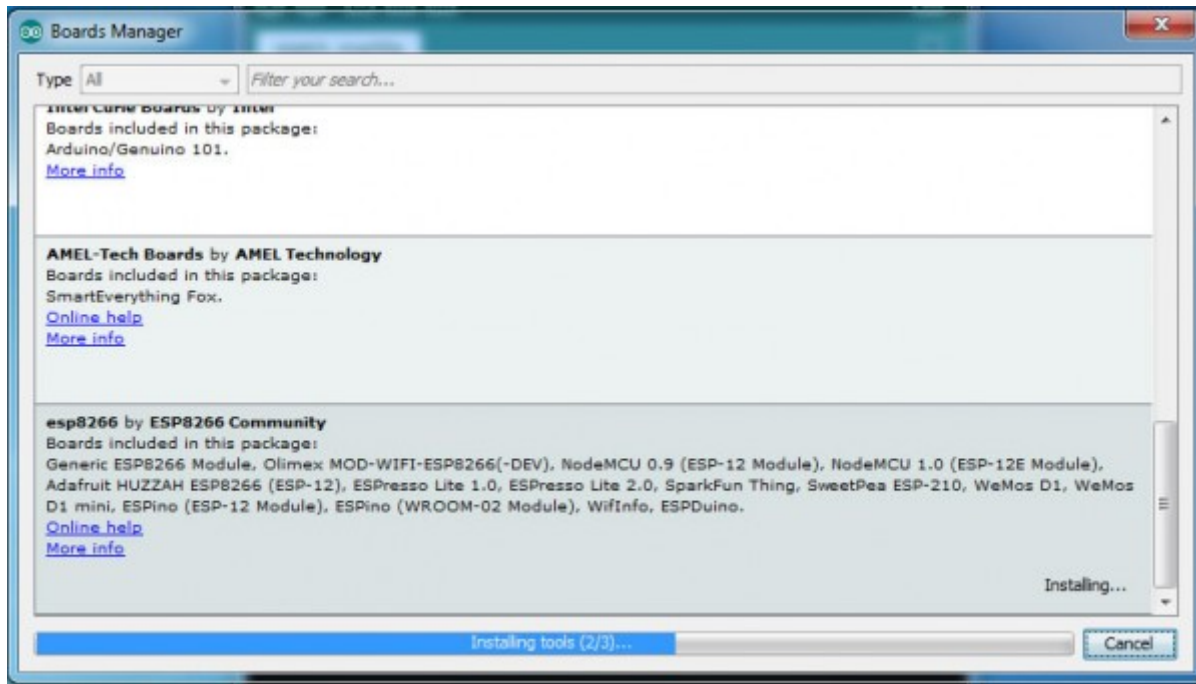


After installation, close the window and go to Tools> Board and see the list of available devices on the chip programming ESP8266

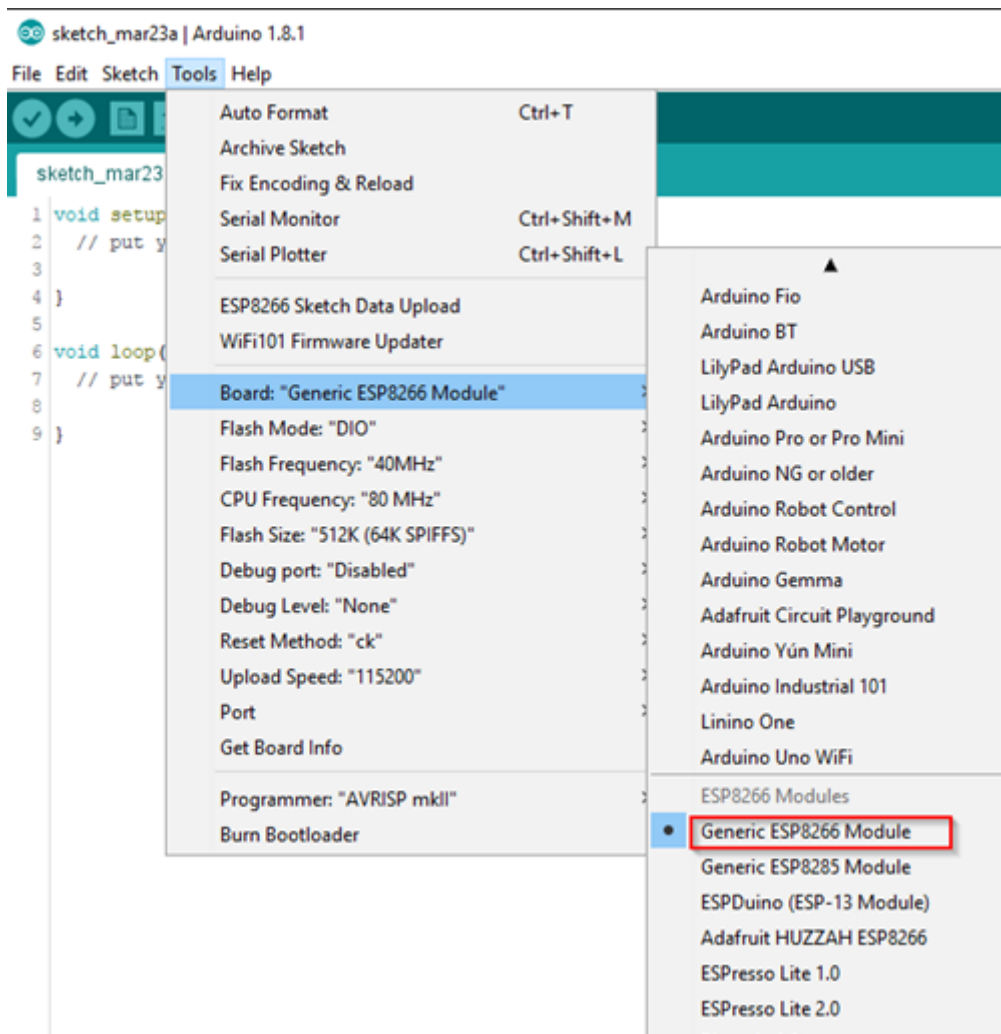


Next, you need to select the card as shown in the picture

If you need help, we are online!

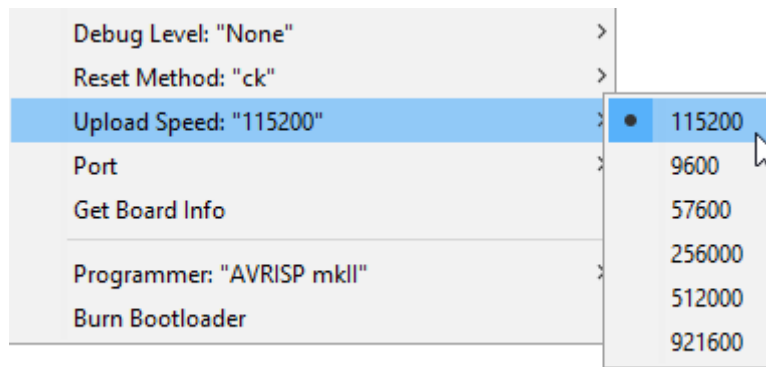

Select the upload speed - 115200

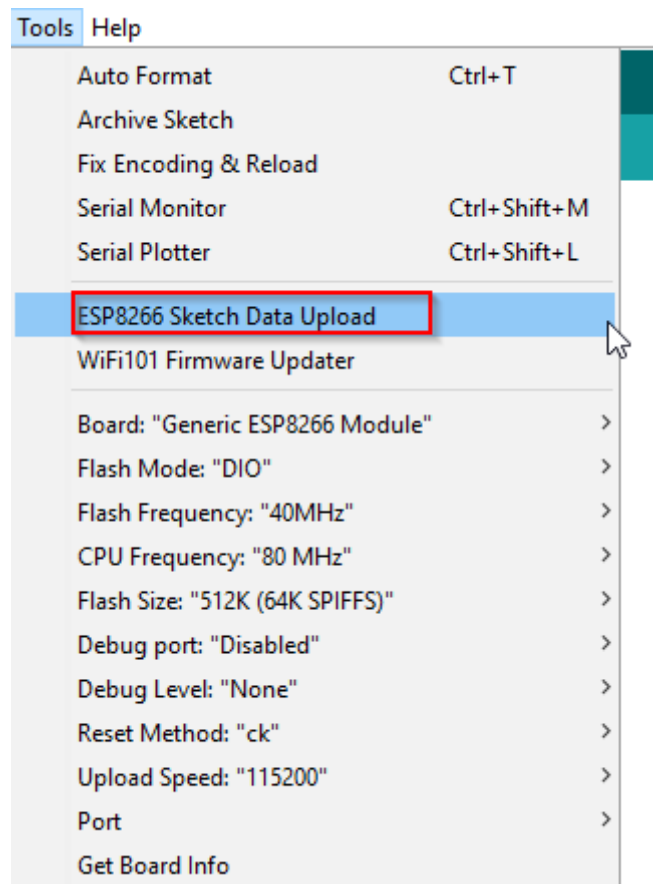

=====test sketch=====

```
void setup()
{
  Serial3.begin(115200);

  pinMode(13,OUTPUT);

  delay(500);
```

If you need help, we are online!



```
Serial3.println("AT+CIPMUX=1");

delay(2000);

Serial3.println("AT+CIPSERVER=1,5000");

delay(2000);

Serial3.println("AT+CIPSTO=3600");

delay(2000);

}

void loop()

{

while(Serial3.available())

{

char Rdata;

Rdata=Serial3.read();

if(Rdata=='A' | Rdata=='a')

{

digitalWrite(13,HIGH);

delay(50);

}

else if(Rdata=='B' | Rdata=='b')

{

digitalWrite(13,LOW);

delay(10);

digitalWrite(13,HIGH);

delay(10);

digitalWrite(13,LOW);

}

}

else
```

If you need help, we are online!

